

1-800-831-4242
www.Jameco.com

JAMECO[®]

ELECTRONICS

Catalog 111
February 2011

A large yellow crane is lifting a rescue capsule from a mine shaft. The capsule is white with a blue and red section and has "CHILE" written on it. A group of workers in hard hats and safety vests are gathered around the base of the capsule, observing the lift. The background shows the rocky interior of the mine shaft.

Humanity to the Rescue



NEW
MARKED IN PINK

Alternative Energy Kits

Designed as the "chemistry sets" of tomorrow, these kits are perfect for teaching renewable energy concepts in classrooms, science fairs, or just fun for the family. Add the software adapter (P/N 2112196) to visualize real-time fuel cell performance on your PC.

★ Web Code: NRG



2112161



2112170



2112196

Part No.	Mfr. Part No.	Description	1	5
2112161	FCJJ-11	Fuel Cell Car Science, reversible PEM fuel cell combines electrolysis & power conversion in an autonomous car	\$59.95	\$53.95
2112170	FCJJ-16	Solar Hydrogen Education, invent clean energy applications using fuel cells and renewable hydrogen	64.95	58.95
2112196	FCJJ-24	Renewable Energy Monitor w/ software, 2 line LCD displays real-time voltage, current, power, joules, resistance and RPMs Compatible with Windows® O/S and most Horizon clean energy education kits	89.95	79.95

Complete section of Alternative Energy Kits on pages 191-192



Arduino Microcontrollers, Shields, and Accessories

You asked for it! Due to the increasing popularity of the Arduino line of microcontrollers, we have expanded our offering of shields and accessories including mobile platforms. Arduino is an open-source physical computing platform based on the Atmega MCU that can read inputs from a variety of sensors to control lights, motors, or other physical outputs. Shields are expansion boards that sit atop an Arduino and broaden the functions, from motor control to prototyping.

NEW
MARKED IN PINK

★ Web Code: ARD



2124242



2124293



2124251



2124314



2124234



2124277



2124285

Part No.	Mfr. Part No.	Description	1	5
2124242	MKSP7	Ethernet Shield, adds internet connectivity, customizable MAC & IP address	\$59.95	\$56.95
2124293	MKNTD1	EZ-Expander Shield, adds 13 more output pins, soldering required	17.49	16.75
2124251	MKND01	Netduino, 32-bit MCU, .NET Micro Framework, 128K Flash, 14 digital I/O, 6 analog in, GPIO	43.95	41.75
2124314	MKAD6	ProtoShield, prototype on your Arduino, 0.1x0.1" grid, up to 20-pin DIP or 14 SOICs, ICSP header	18.95	17.95
2124234	MKPS01	PowerSwitch Tail, control a standard wall outlet with almost any microcontroller	23.95	22.75
2124277	MKSEED7	Aluminum mobile platform, 2WD, 2x 3-6VDC motors, 27.6"/sec speed (6.7"Dia.)	56.95	53.95
2124285	MKSEED8	Aluminum mobile platform, 4WD, 4x 3-12VDC motors, 35"/sec speed (7.9"L x 6.7"W x 4"H)	62.95	59.95

More Arduino products on page 197



Technic Construction Kits

With LEGO® Technic kits, your kids can create their own working construction equipment with realistic features and functions to lift and move loads. All kits can be rebuilt into another vehicle.

2117368: Ages: 10-16, 686 pcs. Over 13" long. Raise or lower, and load or unload container bin

2117376: Ages: 11-16, 1289 pcs. Telescoping arm (up to 23.5"), 4 extending outriggers, crane spins 360°, and steer all 8 wheels

2125712: Ages: 8-14, 252 pcs. Compact Excavator, working belt treads, operate the articulated arm. Cabin rotates 360° (No batteries required)

*Requires 6 AA batteries (not included, use P/N 198707, pg 149)

NEW
MARKED IN PINK

★ Web Code: LEG

Part No.	Mfr. Part No.	Description	Price
2117368	8052	Container Truck/Tipper Trailer	\$69.95
2117376	8053	Mobile Crane/Harbor Crane	99.95
2125712	8047	Compact Excavator/Material Handler	24.95
2125721	8293	Power Function Motor set	29.95

Additional Robotic products on page 192



2117368



2117376



2125712

PanelPilot: The Fastest Route into Graphic Panels



Connect to PC via USB



Choose meter style



Select colors, text and scaling

Customize your 2.4" or 2.8" PanelPilot graphic displays in seconds with the simple click of a mouse. Using Lascar's revolutionary PanelPilot software, select from a wide range of customizable meter styles (digital & analog) including touch screen applications as well as more traditional volt meter apps. Choose colors, text labels, scaling and even display your own logo on power-up. Visit www.panelpilot.com for even more downloadable apps, including touchscreen.



Part No.	Mfr. Part No.	Description	1	5
2115354	SGD-24-M	2.4", 3½-digit, bargraph & analog style meter	\$94.95	\$86.95
2125149	SGD-28-M	2.8", 3½-digit, bargraph & analog style meter	109.95	99.95

Working Together To Save Lives

The world stood in awe last October when 33 miners emerged one by one after being trapped underground for 69 days in Chile. The back story to this happy ending was one of successful technology and teamwork.

Governments and private enterprise alike contributed from around the globe with technology that ranged from odor-absorbing socks to advanced drill bits. The operation required drilling a borehole that had to navigate three curves which, at the time, seemed insurmountable.

But engineers from around the world came to the rescue as the miners' lives hung in the balance. There was no one hero, no one technology, and no one design that rescued these miners. Instead, modern engineering challenges were tackled with teamwork, cooperation, creativity and, of course, raw perspiration.

Jameco salutes everyone who played a role in this successful rescue and we've made teamwork our highest priority within Jameco. We're focused on building long-term partnerships



The cover to the shaft through which the trapped miners were hoisted, at the San Jose mine in Copiapo.

with our suppliers, being able to efficiently deliver specialized services to our customers and continually improve the quality of all facets of our business.

To be fair our efforts are not saving lives, but we never know when one of our customers is designing a life-saving solution.

Jameco thanks reader Fred Ammann who suggested the theme for the catalog cover. Send your suggestions for future covers to Management@Jameco.com.

The Jameco Difference

Eliminate the Search

This catalog is packed with more than 16,000 products but represents only a fraction of the products we carry on-line. Quickly jump from catalog to website using Jameco web codes for more products, more specs and the latest pricing and availability information.



Price Selection

Others may offer more products, but only Jameco offers three pricing tiers. We are a franchised distributor for over 150 brands and carry the brand name products you expect, but we also offer our house brands at a deep discount plus factory overrun inventory at even lower prices.

Name Brands

House Brands

Factory Overrun Inventory

Not Just a Number

We work hard to win the business of every customer. That means solving problems and going the extra mile to adapt to the unique requirements of each customer by treating them like real people. If for any reason that is not happening please write us at Management@Jameco.com. This mailbox is managed exclusively by the management team and you will get a prompt response.



Low Price Guarantee

We work hard to price our products below our competitors. That said, occasionally we miss something. If you find a lower published price for stocked products, let us know and we'll beat it right down to our cost.



Jameco has added Dollar Products to this catalog. These are products or bundles repriced below a dollar. Look for pricing marked in BLUE throughout the catalog to get your best deals.



CATALOG QUICK INDEX

Featured Products 205

ICs & Semiconductors 2-23

Analog, Discretes, Linear, Logic, Memory, MCUs, etc.

Optos & Illumination 24-39

Optoelectronic Components, LEDs, Lamps, LCDs, Displays, etc.

Passives 40-57

Capacitors, Resistors, Knobs, Potentiometers, Inductors, etc.

Wire & Cable 58-64

Bulk Wire & Cable, Assemblies, Wire & Cable Management, etc.

Interconnects 65-91

Adapters, Connectors, Terminal Blocks, Sockets, etc.

Electromechanical 92-114

Motors, Switches, Relays, Sensors, etc.

Fans & Cooling 115-120

DC Brushless and AC Tubeaxial Fans, Guards, Filters, etc.

Power Supplies & Wall Adapters 121-146

Switching Power Supplies, Wall Adapters, etc.

Batteries 147-149

Batteries, Battery Packs, Clips, Holders, Chargers, etc.

Test, Tools & Supplies 150-171

Test & Measurement, Tools, Soldering Equipment, etc.

Electronic Design 172-179

Programmers, Prototyping Systems, Breadboards, etc.

Computer Products 180-189

Cards, Storage, Memory, Networking, etc.

Educational & Hobbyist 190-198

Robotics, Solar, Educational Kits, Books, etc.

Ordering Information 199

Product & Manufacturer Indices 200-204

Prices are effective 1-3-2011.

Prices and discounts are subject to change without notice.

Jameco Electronics, ValuePro, ReliaPro, and BenchPro are trademarks of James Electronics, LTD. Other product names and logos are used for identification purposes only and are trademarks of their respective companies. ©2011 James Electronics. All rights reserved.

Our goal is to provide you with more of what you want. Let us know how we can better serve your electronic needs. Send feedback to Management@Jameco.com.

IC Index

Blue indicates Web Codes for online only products,
Enter Web Code at www.Jameco.com/more.

Product Line	Page #	Product Line	Page #	Product Line	Page #
4000 Series.....	6,42	CODEC/ENDEC.....	AEQ	MPU Supervisory.....	10
5000 Series Processors.....	7	Comparators.....	13	MUX/DEMUXs.....	RAB
6500 Series Processors.....	7	Converters.....	14	Network.....	JEQ
65LVDS Series.....	UEU	CPLDs/FPGAs.....	SAZ	Op Amps.....	14-15
6800/68000 Series Processors.....	7	CPUs/Microcontrollers.....	7	Optocouplers/Optoisolators.....	24
7400.....	3,42	CPUs/Microprocessors.....	7-8	OTP/PROM.....	9
74ABT.....	3	Dallas Semiconductors.....	10	Page Mode Flash.....	BCR
74AC.....	3	Decoder/Encoder Chips.....	13	PALS.....	10
74ACT.....	3	Delay Lines.....	EEU	PEEL.....	10
74AHC.....	AEP	Development Tools.....	BEQ	PIC Microcontrollers.....	11,179
74AHCT.....	BEP	Digital Interface.....	12	Pin Straightener.....	163
74ALS.....	3	Digital Potentiometers.....	17	Power Driver.....	REK
74ALVC.....	3	Digital Signal Converters.....	11	Power Management.....	13
74C.....	3	DIMM.....	DEQ	Pressure Sensors.....	JBV
74CBT.....	KEP	Diodes.....	43	Processors.....	10
74F.....	4	Display Drivers.....	12	Programmable Logic.....	LEQ
74FCT.....	KBE	DRAM.....	10	Propeller Chips.....	195-196
74HC.....	4	ECL Logic.....	RAK	PWM.....	MEQ
74HCT.....	4	EconoResets.....	YFE	RS-232 Drivers/Receivers.....	13
74LCX.....	NEP	Encoders/Decoders.....	13	RS-422/423/485 Drivers/Receivers.....	13
74LS.....	5-6,42	EPROMs/EEPROMs.....	8-9	SDRAMs.....	RAY
74LVC.....	TEP	Ethernet Controllers.....	LAE	Sensors.....	16
74LVT.....	REP	Extractors.....	164	Serial Adapters.....	12
74LVTH.....	SEP	Filters.....	GEQ	SIMM Memory Modules.....	10
74LVX.....	YEQ	Flash Memory.....	10	Sockets.....	18-19,43,75,84
74S.....	6	Flash Microcontrollers.....	10-11	SRAM.....	9
74VCX.....	UEP	GALs.....	10	Stepper Motor Drivers/Controllers.....	13
74VHC.....	DEW	Grab Bag.....	43	Supervisory.....	10
8000 Series.....	7	Hot Swap Controllers.....	JAX	Switching Regulators.....	DEN
A/D & D/A Converters.....	14	IC Assortments.....	3,6,16,21,23,42	Temperature Sensors.....	16
Accessories.....	9,163-164	Instrumentation Amps.....	NDA	Tiny Logic.....	12
Anti-Static Products.....	9,164	Interface Controllers.....	HAS	Transistors.....	43
Amplifiers.....	14	Interface Series.....	12	UARTs.....	8
Audio.....	14	Linear Series.....	15-16,42-43	Video.....	QEQ
BASIC Stamp/Accessories.....	12	MC14xxx Series.....	XDH	Voice Chips.....	10
Battery Management.....	YEP	Microcontrollers.....	7,10-12	Voltage References.....	TBD
Boot Block Memory.....	MEH	Microprocessors.....	8,11-12,43	Voltage Regulators.....	17-18
Buffers.....	13	Motion Controllers.....	DEU	Z80 MPUs.....	8
Clock Chips & Modules.....	7	Motor Control.....	12-13		

Package Illustrations for Pages 3 through 23

BGA 	DF 	D2PAK/DDPAK 	DIP/CDIP/ FDIP/PDIP 	DO-7/DO-15/DO-35/ DO-41/DO-201/DO-204/ DO-204AL/Case-267 	DO-201AD/DO-27A 	DO-5 	Fast-On 	GBPC/179-01/TB35 	KBP/BR8B
LCC 	LQFP/STQFP/ TQFP 	MB-35 	Micro SMD 	MQFP 	MW 	PLCC 	PWAT 	QFN 	SC70
SIP 	SMA/SMB/SMC/ DO-214AB 	S0 	SOD-123 	SOIC/SOJ/SOP 	SOT-143/SOT-363/ SuperSOT-6 	T0-218/T0-220/ T0-220AB/T0-220F 	SOT-223/SOT-89 	SOT-23/Micro-3/ SuperSOT-3 	SSOP/MSOP
Super-247 	T6L 	T0-18 	T0-22AB 	T0-225 	T0-46/T0-52 	T0-247AC 	T0-247/T0-251 	T0-252 	T0-252AA
T0-263 	T0-3 	T0-39 	T0-3P/T0-202 	T0-5 	T0-65 	T0-72 	T0-92 	TSSOP 	W0G/W0M

Please refer to data sheets at www.Jameco.com for more detailed illustrations and specifications



7400 Series

★ Web Code: XAG

Part No.	*Mfr.	Product No.	Pkg.	Description	1	10	100
48979	♦	7400N**	DIP-14	Quad 2-input pos. NAND gate	\$1.09	\$.99	\$.89
910901	TI	SN7400N	DIP-14	Quad 2-input pos. NAND gate	1.35	1.19	1.05
49007	♦	7401N	DIP-14	Quad 2-input NAND gate (O.C.)	.89	.79	.65
49015	♦	7402N*	DIP-14	Quad 2-input pos. NOR gate	1.29	1.09	.95
49040	♦	7404N**	DIP-14	Hex inverter	1.39	1.19	1.09
49074	♦	7405N*	DIP-14	Hex inverter (O.C.)	.69	.59	.45
49091	♦	7406N**	DIP-14	Hex inverter buffer/driver	.99	.89	.69
49120	♦	7407N**	DIP-14	Hex buffer/driver	.99	.89	.69
49146	♦	7408N*	DIP-14	Quad 2-input pos. AND gate	1.95	1.75	1.49
49189	♦	7410N*	DIP-14	Triple 3-input pos. NAND gate	.89	.79	.59
49402	♦	7413N	DIP-14	Dual 4-input pos. NAND gate	1.25	1.15	1.05
49437	♦	7414N*	DIP-14	Hex schmitt-trigger inverter	.89	.79	.69
49630	♦	7416N*	DIP-14	Hex inverter buffer/driver (O.C.)	1.19	1.09	.99
49728	♦	7417N*	DIP-14	Hex buffer/driver (O.C. hi-volt)	1.09	.99	.89
50008	♦	7420N*	DIP-14	Dual 4-input NAND gate	.99	.89	.75
50139	♦	7427N*	DIP-14	Triple 3-input NOR gate	.89	.79	.69
50227	♦	7430N*	DIP-14	8-input NAND gate	.99	.89	.79
50235	♦	7432N*	DIP-14	Quad 2-input pos. OR gate	1.29	1.09	.95
50315	♦	7438N*	DIP-14	Quad 2-input NAND buffer	.99	.89	.79
50374	♦	7442N	DIP-16	4 line BCD to 10 line decimal decoder	1.45	1.25	1.15
50403	♦	7445N	DIP-16	BCD-to-decimal decoder/driver	1.55	1.35	1.09
50420	♦	7447N*	DIP-16	BCD-to-7 seg. decoder/driver	2.49	2.25	1.75
50526	♦	7472N	DIP-14	AND-gated J-K master-slave flip-flop	.89	.79	.69
50534	♦	7473N	DIP-14	Dual J-K neg-edge-triggered flip-flop	1.95	1.75	1.59
50551	♦	7474N**	DIP-14	Dual D type flip-flop	.99	.89	.79
50577	♦	7475N	DIP-16	4-bit bistable latch	2.75	2.49	2.25
50593	♦	7476N	DIP-16	Dual J-K pos-edge-triggered flip-flop	2.95	2.65	2.39
50631	♦	7483N	DIP-16	4-bit binary full adder	2.95	2.65	2.39
50657	♦	7485N*	DIP-16	4-bit magnitude comparator	2.49	2.25	1.95
50665	♦	7486N	DIP-14	Quad 2-input exclusive OR gate	1.95	1.75	1.49
50681	♦	7489N	DIP-16	64-bit read/write memory	3.95	3.75	3.49
50690	♦	7490N	DIP-14	Asynchronous decade counter	2.95	2.65	2.39
50745	♦	7493N	DIP-14	4-bit binary counter	1.95	1.75	1.49
50770	♦	7495N	DIP-14	4-bit parallel-access shift register	1.45	1.25	1.15
49324	♦	74107N*	DIP-14	Dual J-K flip-flop with clear	.79	.69	.59
49322	♦	74121N*	DIP-14	Monostable multivibrator	2.75	2.39	1.95
49357	♦	74123N*	DIP-16	Dual monostable multivibrator	1.75	1.59	1.45
49373	♦	74125N	DIP-14	Tri-state quad bus buffer	1.49	1.35	1.19
49496	♦	74148N	DIP-16	8-to-3 line priority encoder	1.19	1.09	.79
49509	♦	74150N	DIP-24	1-of-16 data selector/multiplexer	2.95	2.75	2.25
49525	♦	74151N*	DIP-16	1-of-8 data selector/multiplexer	.79	.69	.45
49550	♦	74153N*	DIP-16	Dual 4-to-1 data selector/multiplexer	1.19	1.09	.79
49568	♦	74154N	DIP-24	4-to-16 line decoder/demultiplexer	2.95	2.39	2.09
49605	♦	74157N*	DIP-16	Quad 2-to-1 line data selector	.99	.89	.79
49648	♦	74160N*	DIP-16	Synchronous decade counter	.59	.55	.49
49664	♦	74161N	DIP-16	4-bit synchronous binary counter	.89	.79	.69
49672	♦	74163N	DIP-16	4-bit synchronous binary counter	.79	.69	.59
49681	♦	74164N	DIP-14	8-bit serial shift register	.89	.79	.59
49699	♦	74165N	DIP-16	8-bit serial shift register, parallel load	.49	.45	.39
49779	♦	74174N*	DIP-16	Hex D-type flip-flop with clear	.69	.59	.49
49795	♦	74175N*	DIP-16	Quad D-type flip-flop with clear	1.35	1.25	1.15
49832	♦	74180N	DIP-14	9-bit odd/even parity generator/checker	.39	.35	.25
49883	♦	74189N	DIP-16	Tri-state 64-bit RAM	2.95	2.75	2.49
49904	♦	74191N	DIP-16	Synch. 4-bit up/down binary counter	1.95	1.75	1.45
49912	♦	74192N	DIP-16	Synch. 4-bit up/down decade counter	3.95	3.75	3.49
49939	♦	74193N	DIP-16	Synch. 4-bit up/down binary counter	2.95	2.75	2.49
49955	♦	74194N	DIP-16	4-bit bi-directional shift register	1.75	1.55	1.35
49963	♦	74195N	DIP-16	4-bit parallel-access shift register	1.75	1.55	1.35
50171	♦	74279N*	DIP-16	Quad set-reset latch	1.75	1.49	1.25

*10 pcs./ **20 pcs. in 7400 series IC cabinet kit, top right

TTL Logic Data Book (1988)

Texas Instruments Contains specifications and technical information on a broad line of TTL integrated circuits including Schottky TTL circuits. (1240 pages)

• Size: 6.0" x 8.5"



Part No.	Description	Wt. (lbs.)	1	5
88225	TTL Logic Data Book	2.6	\$34.95	\$31.49

7400 Series IC Kit

Includes: 20-drawer component cabinet (319600), 20 clear plastic drawers (319601), 20 clear dividers (319611), pg 173 and 30 adhesive labels for drawers to identify parts in kit

10 each: 7402, 7405, 7408, 7410, 7414, 7416, 7417, 7420, 7427, 7430, 7432, 7438, 7447, 7485, 74107, 74121, 74123, 74132, 74151, 74153, 74157, 74160, 74174, 74175, 74279

20 each: 7400, 7404, 7406, 7407, 7474



SAVE \$200

Part No.	Description	Wt. (lbs.)	1	5
84953	350 pcs. 7400 IC kit	6.2	\$199.95	\$179.95

★ Web Code: CBA

74ABT/AC/ACT/AHC Series

Please Note: Manufacturer may vary

* Order in multiples of 10

Part No.	Product No.	Pkg.	Description	1	10	100
266159	74ACT08M	SOIC-14	Quad 2-input pos. AND gate	* \$.07	* \$.05	
211983	74ACT08N	DIP-14	Quad 2-input pos. AND gate	* \$.07	* \$.05	
264145	74AC10M	DIP-14	Triple 3-input pos. NAND gate	* \$.09	* \$.06	
238887	74AC10N	DIP-14	Triple 3-input pos. NAND gate	.29	.25	.19
212003	74ACT32N	DIP-14	Quad 2-input pos. OR gate	* \$.07	* \$.05	
212011	74ACT74N	DIP-14	Dual D type flip-flop	* \$.07	* \$.05	
238730	74AC139N	DIP-16	Dual 2-to-4 decoder/demultiplexer	* \$.09	* \$.07	
238764	74AC157N	DIP-16	Quad 2-to-1 line data selector	* \$.15	* \$.12	
239054	74ACT174N	DIP-16	Hex D-type flip-flop with clear	* \$.12	* \$.09	
211895	74AC240N	DIP-20	Octal buffer/line driver	.49	.45	.35
211908	74AC244N	DIP-20	Tri-state octal buffer/line driver	* \$.12	* \$.09	
212054	74ACT244N	DIP-20	Tri-state octal buffer/line driver	* \$.15	* \$.12	
214199	74AHC245N	DIP-20	Tri-state octal bus transceiver	* \$.15	* \$.12	
214236	74AHC574N	DIP-20	Tri-state octal D-type flip-flop	* \$.15	* \$.12	
267371	74ACT715M	SOIC-20	Programmable video sync generator	4.95	3.95	3.49
291784	74ABT2244AD	SOIC-20	Tri-state octal buffer	* \$.15	* \$.12	
291400	74ABT5402AD	SOIC-28	Tri-state 12-bit line/memory driver	2.95	2.49	1.95

74ALS/ALVC Series

Please Note: Manufacturer may vary

★ Web Code: SVC

* Order in multiples of 10

Part No.	Product No.	Pkg.	Description	1	10	100
245294	74ALS00AN	DIP-14	Quad 2-input pos. NAND gate	* \$.25	* \$.22	* \$.19
314309	74ALVC00T	TSSOP-14	Quad 2-input pos. NAND gate	* \$.15	* \$.12	
245307	74ALS04BN	DIP-14	Hex inverter	* \$.07	* \$.05	
314341	74ALVC08T	TSSOP-14	Quad 2-input pos. AND gate	* \$.15	* \$.12	
44134	74ALS32N	DIP-14	Quad 2-input pos. OR gate	* \$.07	* \$.05	
245892	74ALS74AN	DIP-14	Dual D-type flip-flop	* \$.07	* \$.05	
310295	74ALS244AM	SOIC-20	Tri-state octal buffer/line driver	* \$.09	* \$.07	
245788	74ALS258N	DIP-16	Quad 2-to-1 line data selector/multiplexer	* \$.15	* \$.12	

74C Series

★ Web Code: RAG

Part No.	*Mfr.	Product No.	Pkg.	Description	1	10	100
44222	♦	74C00N	DIP-14	Quad 2-input pos. NAND gate	* \$1.15	* \$.95	* \$.69
44231	♦	74C04N	DIP-14	Hex inverter (CD4069)	.39	.29	.25
44257	♦	74C14N	DIP-14	Hex schmitt-trigger inverter (CD40106)	.79	.69	.59
44361	♦	74C221N	DIP-16	Dual monostable multivibrator	3.75	3.15	2.49
44396	♦	74C373N	DIP-20	Octal D-type transparent latch	2.95	2.49	2.15
44409	♦	74C374N	DIP-20	Octal D-type flip-flop	1.95	1.75	1.49
44521	♦	74C912N	DIP-28	6-digit BCD display controller/driver	4.95	4.49	3.95
44564	♦	74C922N	DIP-18	16-key keyboard encoder	6.49	5.49	5.35
871869	FSC	MM74C922N	DIP-18	16-key keyboard encoder	7.95	7.49	6.95
44572	♦	74C923N	DIP-20	20-key keyboard encoder	4.95	4.25	3.95
44599	♦	74C926N	DIP-18	4-digit counter w/ 7-seg. output driver	10.95	9.95	8.95

* FSC = Fairchild Semiconductor | TI = Texas Instruments | ♦ Manufacturer Varies

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed AboveOrder by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

74F, 74HC & HCT Series

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

74F Series

Please Note: Manufacturer may vary

★ Web Code: CEN

Part No.	Product No.	Pkg.	Description	* Order in multiples of 10		
				1	10	100
286993	74F02N	DIP-14	Quad 2-input pos. NOR gate	\$.39	\$.35	\$.29
287005	74F04N	DIP-14	Hex inverter	.39	.35	.29
287013	74F08N	DIP-14	Quad 2-input pos. AND gate	.39	.35	.29
44652	74F10N	DIP-14	Triple 3-input pos. NAND gate	* .07	.05	
287654	74F14D	SOIC-14	Hex schmitt trigger inverter	* .07	.05	
287021	74F14N	DIP-14	Hex schmitt trigger inverter	.25	.22	.19
245121	74F30N	DIP-14	8-input NAND gate	* .07	.05	
287638	74F32D	SOIC-14	Quad 2-input pos. OR gate	* .07	.05	
287048	74F32N	DIP-14	Quad 2-input pos. OR gate	.39	.35	.29
245139	74F38N	DIP-14	Quad 2-input NAND buffer	* .07	.05	
287620	74F74D	SOIC-14	Dual D-type flip-flop	* .09	.07	
287056	74F74N	DIP-14	Dual D-type flip-flop	.35	.29	.25
287611	74F86D	SOIC-14	Quad 2-input exclusive OR gate	* .07	.05	
287064	74F86N	DIP-14	Quad 2-input exclusive OR gate	.45	.39	.35
287566	74F138D	SOIC-16	3-to-8 line decoder/demultiplexer	* .07	.05	
287072	74F138N	DIP-16	3-to-8 line decoder/demultiplexer	* .07	.05	
287081	74F139N	DIP-16	Dual 2-to-4 decoder/demultiplexer	* .07	.05	
245163	74F148N	DIP-16	8-to-3 line priority encoder	* .15	.12	
245171	74F157AN	DIP-16	Quad 2-to-1 line data selector	* .07	.05	
282731	74F174N	DIP-16	Hex D-type flip-flop with clear	* .07	.05	
287540	74F244D	SOIC-20	Tri-state octal buffer/line driver	* .09	.07	
287144	74F245N	DIP-20	Tri-state octal bus transceiver	.39	.35	.29
283557	74F257D	SOIC-16	Quad 2-to-1 data selector/multiplexer	* .09	.07	
287099	74F273N	DIP-20	Octal D-type flip-flop	* .07	.05	
287494	74F373D	SOIC-20	Octal D-type transparent latch	* .09	.07	
282642	74F573N	DIP-20	3-state octal D-type transparent latch	* .12	.09	
287216	74F574N	DIP-20	Tri-state octal D-type flip-flop	.35	.25	.19
287460	74F574D	SOIC-20	Tri-state octal D-type flip-flop	* .09	.07	

74HC Series

★ Web Code: SDJ

Part No.	*Mfr.	Product No.	Pkg.	Description	* Order in multiples of 10		
					1	10	100
906291	NXP	74HC00D-T	SOIC-14	Quad 2-input pos. NAND gate	* \$.09	\$.07
45161	+	74HC00N	DIP-14	Quad 2-input pos. NAND gate	.25	.22	.19
906339	NXP	74HC00N	DIP-14	Quad 2-input pos. NAND gate	* .19	.15	
835219	TI	SN74HC00N	DIP-14	Quad 2-input pos. NAND gate	.35	.29	.19
45188	+	74HC02N	DIP-14	Quad 2-input pos. NOR gate	.29	.25	.22
906531	NXP	74HC04D-T	SOIC-14	Hex inverter	* .09	.07	
45209	+	74HC04N	DIP-14	Hex inverter	.29	.25	.22
250982	TI	SN74HC04N	DIP-14	Hex inverter	.35	.29	.25
906574	NXP	74HC04N	DIP-14	Hex inverter	.29	.25	.22
906611	NXP	74HC08D-T	SOIC-14	Quad 2-input pos. AND gate	* .09	.07	
45225	+	74HC08N	DIP-14	Quad 2-input pos. AND gate	.29	.25	.22
45364	+	74HC14N	DIP-14	Hex schmitt-trigger inverter	.29	.25	.22
251045	TI	SN74HC14N	DIP-14	Hex schmitt-trigger inverter	.32	.27	.23
45583	+	74HC20N	DIP-14	Dual 4-input NAND gate	* .07	.05	
915841	TI	SN74HC27DR	SOIC-14	Triple 3-input pos. NOR gate	* .09	.07	
908799	NXP	74HC32D-T	SOIC-14	Quad 2-input pos. OR gate	* .09	.07	
45794	+	74HC32N	DIP-14	Quad 2-input pos. OR gate	.29	.25	.22
251088	TI	SN74HC32N	DIP-14	Quad 2-input pos. OR gate	.35	.29	.25
46130	+	74HC74N	DIP-14	Dual D-type flip-flop	.29	.25	.22
251097	TI	SN74HC74NE4	DIP-14	Dual D-type flip-flop	* .15	.12	
46181	+	74HC86N	DIP-14	Quad 2-input exclusive OR gate	.25	.22	.19
45292	+	74HC123N	DIP-16	Dual monostable multivibrator	.39	.35	.29
45305	+	74HC125N	DIP-14	Tri-state quad bus buffer	.29	.25	.22
380146	TI	SN74HC132PW	TSSOP-14	Quad 2-input NAND schmitt trigger	* .12	.09	
45321	+	74HC132N	DIP-14	Quad 2-input NAND schmitt trigger	.35	.29	.25
86182	+	74HC138D	SOIC-16	3-to-8 line decoder/demultiplexer	* .07	.05	
45330	+	74HC138N	DIP-16	3-to-8 line decoder/demultiplexer	.35	.29	.25
45920	+	74HC4040N	DIP-16	12 stage binary counter	.39	.35	.29

74HC Series (Continued)

★ Web Code: SDJ

Part No.	*Mfr.	Product No.	Pkg.	Description	* Order in multiples of 10		
					1	10	100
45401	+	74HC154N	DIP-24	4-to-16 line decoder (0.3" wide)	\$.79	\$.69	\$.59
45487	+	74HC164N	DIP-14	8-bit serial shift register	.29	.25	.22
251328	TI	SN74HC164N	DIP-14	8-bit serial shift register	.45	.39	.35
45495	+	74HC165N	DIP-16	8-bit parallel load shift register	.25	.22	.19
251336	TI	SN74HC165N	DIP-16	8-bit parallel load shift register	.35	.29	.25
380437	TI	SN74HC174PW	TSSOP-16	Hex D-type flip-flop with clear	* .15	.12	
45541	+	74HC192N	DIP-16	Synch. 4-bit up/down decade counter	1.49	1.39	1.25
915551	TI	SN74HC244PWR	TSSOP-20	Tri-state octal buffer/line driver	* .15	.12	
45655	+	74HC244N	DIP-20	Tri-state octal buffer/line driver	.25	.22	.19
45671	+	74HC245N	DIP-20	Tri-state octal bus transceiver	.25	.22	.19
45719	+	74HC257N	DIP-16	Quad 2-to-1 data selector/multiplexer	* .07	.05	
45743	+	74HC273N	DIP-20	Octal D-type flip-flop	.35	.29	.25
45831	+	74HC373N	DIP-20	Octal D-type transparent latch	.35	.29	.25
86254	+	74HC374D	SOIC-20	Octal D-type flip-flop	* .07	.05	
45858	+	74HC374N	DIP-20	Octal D-type flip-flop	.35	.29	.25
380998	+	74HC540T	TSSOP-20	Tri-state octal buffer/line driver	* .15	.12	
109760	+	74HC540N	DIP-20	Tri-state octal buffer/line driver	.39	.35	.29
381000	TI	SN74HC541PW	TSSOP-20	Tri-state octal buffer/line driver	* .15	.12	
46050	+	74HC541N	DIP-20	Tri-state octal buffer/line driver	.39	.35	.29
46076	+	74HC573N	DIP-20	3-st. octal D-type transparent latch	.29	.25	.22
46084	+	74HC574N	DIP-20	Tri-state octal D-type flip-flop	.35	.29	.22
46105	+	74HC595N	DIP-16	8-bit shift register w/ output latch	.35	.29	.25
911189	NXP	74HC595N	DIP-16	8-bit shift register w/ output latch	.35	.29	.25
251643	TI	SN74HC595N	DIP-16	8-bit shift register w/ output latch	.45	.39	.35
46113	+	74HC688N	DIP-20	8-bit identity comparator	* .15	.12	
45891	+	74HC4017N	DIP-16	Hi speed decade counter/divider	.39	.35	.29
45920	+	74HC4040N	DIP-16	12-bit asynch. binary counter	.39	.35	.29
272129	+	74HC4053N	DIP-16	Triple 2-ch analog multiplexer	* .15	.12	
45971	+	74HC4066N	DIP-14	Quad bilateral analog switch	.35	.29	.25
252566	TI	CD74HC4316M	SOIC-16	High speed quad analog switch	* .22	.19	

74HCT Series

Please Note: Manufacturer may vary

★ Web Code: SAG

Part No.	Product No.	Pkg.	Description	* Order in multiples of 10		
				1	10	100
246027	74HCT00M	SOIC-14	Quad 2-input pos. NAND gate	* \$.09	\$.07
44871	74HCT00N	DIP-14	Quad 2-input pos. NAND gate	.25	.22	.15
44898	74HCT04N	DIP-14	Hex inverter	.25	.22	.17
63765	74HCT05N	DIP-14	Hex inverter (O.C.)	.35	.29	.25
44901	74HCT08N	DIP-14	Quad 2-input pos. AND gate	.29	.25	.22
618046	74HCT10N	DIP-14	Triple 3-input pos. NAND gate	* .07	.05	
912296	74HCT14D-T	SOIC-14	Hex schmitt-trigger inverter	* .09	.07	
44935	74HCT14N	DIP-14	Hex schmitt-trigger inverter	.25	.22	.19
45137	74HCT74N	DIP-14	Dual D-type flip-flop	.25	.22	.19
45145	74HCT86N	DIP-14	Quad 2-input exclusive OR gate	.35	.29	.25
44927	74HCT138N	DIP-16	3-to-8 decoder/demultiplexer	.29	.25	.22
381253	SN74HCT240PW	TSSOP-20	Octal buffer/line driver	* .15	.12	
45022	74HCT244N	DIP-20	Tri-state octal buffer/line driver	.29	.25	.22
45031	74HCT245N	DIP-20	Tri-state octal bus transceiver	.29	.25	.22
45065	74HCT373N	DIP-20	Octal D-type transparent latch	.29	.25	.22
45073	74HCT374N	DIP-20	Octal D-type flip-flop	.35	.29	.25
45090	74HCT573N	DIP-20	3-st. octal D-type transparent latch	.39	.35	.29
45129	74HCT688N	DIP-20	8-bit magnitude comparator	.59	.49	.39

Sign up for the Jameco e-newsletter & receive the latest in product news, projects & special offers.

www.Jameco.com/GotMail

* NXP = NXP/Philips Semiconductor | TI = Texas Instruments | + Manufacturer Varies

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



74LS Series

*Web Code: NBS

Part No.	*Mfr.	Product No.	Pkg.	Description	1	10	100
46252	+	74LS00N**	DIP-14	Quad 2-input pos. NAND gate	\$.39	\$.29	\$.25
46253	+	74LS00N	DIP-14	Quad 2-input pos. NAND gate45	.35	.29
283725	TI	SN74LS00N	DIP-14	Quad 2-input pos. NAND gate45	.35	.29
46287	+	74LS02N**	DIP-14	Quad 2-input pos. NOR gate39	.29	.25
283741	TI	SN74LS02N	DIP-14	Quad 2-input pos. NOR gate45	.35	.29
283784	TI	SN74LS03N	DIP-14	Quad 2-input pos. NAND gate (O.C.)69	.49	.45
46316	+	74LS04N**	DIP-14	Hex inverter39	.29	.25
283792	TI	SN74LS04N	DIP-14	Hex inverter45	.35	.29
46318	+	74LS04N	DIP-14	Hex inverter45	.35	.29
46341	+	74LS05N*	DIP-14	Hex inverter (O.C.)45	.35	.29
46359	+	74LS06N	DIP-14	Hex inverter buffer/driver75	.65	.55
46367	+	74LS07N	DIP-14	Hex buffer/driver75	.65	.55
46375	+	74LS08N**	DIP-14	Quad 2-input pos. AND gate39	.29	.25
295401	TI	SN74LS08N	DIP-14	Quad 2-input pos. AND gate45	.35	.29
46391	+	74LS09N	DIP-14	Quad 2-input pos. AND gate (O.C.)45	.35	.29
46404	+	74LS10N*	DIP-14	Triple 3-input pos. NAND gate55	.39	.35
46439	+	74LS11N*	DIP-14	Triple 3-input pos. AND gate55	.39	.35
46640	+	74LS14N*	DIP-14	Hex schmitt-trigger inverter39	.29	.25
295460	TI	SN74LS14N	DIP-14	Hex schmitt-trigger inverter45	.35	.29
47095	+	74LS20N*	DIP-14	Dual 4-input NAND gate59	.49	.39
295478	TI	SN74LS20N	DIP-14	Dual 4-input NAND gate65	.55	.45
47108	+	74LS21N	DIP-14	Dual 4-input AND gate49	.39	.29
47378	+	74LS27N	DIP-14	Triple 3-input NOR gate59	.49	.39
47458	+	74LS30N*	DIP-14	8-input NAND gate29	.25	.22
47466	+	74LS32N**	DIP-14	Quad 2-input pos. OR gate35	.25	.22
295515	TI	SN74LS32N	DIP-14	Quad 2-input pos. OR gate49	.45	.39
47467	+	74LS32N	DIP-14	Quad 2-input pos. OR gate39	.29	.25
295558	TI	SN74LS37N	DIP-14	Quad 2-input pos. NAND buffer35	.25	.19
47773	+	74LS42N	DIP-14	4 line BCD to 10 line decimal decoder85	.75	.65
47790	+	74LS47N*	DIP-16	BCD-to-7 seg. decoder/driver	1.09	.89	.79
295582	TI	SN74LS47N	DIP-16	BCD-to-7 seg. decoder/driver	1.19	.99	.89
47811	+	74LS48N	DIP-16	BCD-to-7 seg. decoder/driver	3.95	3.49	2.95
47992	+	74LS73N*	DIP-14	Dual J-K neg-edge-triggered flip-flop ...	1.09	.95	.75
48004	+	74LS74N**	DIP-14	Dual D-type flip-flop49	.39	.35
295726	TI	SN74LS74AN	DIP-14	Dual D-type flip-flop55	.45	.39
48021	+	74LS75N*	DIP-16	4-bit bi-stable latch	1.15	.95	.79
295734	TI	SN74LS75N	DIP-16	4-bit bi-stable latch	1.25	1.05	.85
48039	+	74LS76N	DIP-16	Dual J-K pos-edge-triggered flip-flop ...	1.29	1.19	1.09
48063	+	74LS83N	DIP-16	4-bit binary full adder	2.19	1.99	1.79
48071	+	74LS85N*	DIP-16	4-bit magnitude comparator79	.69	.59
295742	TI	SN74LS85N	DIP-16	4-bit magnitude comparator89	.79	.65
48098	+	74LS86N*	DIP-14	Quad 2-input exclusive OR gate49	.39	.29
295751	TI	SN74LS86N	DIP-14	Quad 2-input exclusive OR gate55	.45	.35
48119	+	74LS90N*	DIP-14	Asynchronous decade counter ...	1.25	1.15	.85
295769	TI	SN74LS90N	DIP-14	Asynchronous decade counter ...	1.35	1.25	.95
48143	+	74LS92N	DIP-14	Divide-by-12 decade counter	1.49	1.29	1.09
48151	+	74LS93N*	DIP-14	4-bit binary counter	1.25	1.05	.79
295822	TI	SN74LS93N	DIP-14	4-bit binary counter	1.35	1.15	.89
46412	+	74LS107N	DIP-14	Dual J-K flip-flop with clear	1.05	.89	.69
46421	+	74LS109N	DIP-16	Dual J-K bar flip-flop85	.75	.65
46447	+	74LS112N	DIP-16	Dual J-K neg-edge-triggered flip-flop55	.45	.35
46471	+	74LS122N	DIP-14	Retriggerable monostable multivibrator89	.79	.69
46480	+	74LS123N*	DIP-16	Dual monostable multivibrator55	.45	.35
300880	TI	SN74LS123N	DIP-16	Dual monostable multivibrator59	.49	.39
46501	+	74LS125N*	DIP-14	Tri-state quad bus buffer55	.45	.35
46527	+	74LS126N	DIP-14	Tri-state quad bus buffer55	.45	.35
46551	+	74LS132N	DIP-14	Quad 2-input NAND schmitt trigger59	.49	.39

*10 pcs./ **20 pcs. in 74LS series IC cabinet kit, pg 6

74LS Series (Continued)

*Web Code: NBS

* Order in multiples of 10

Part No.	*Mfr.	Product No.	Pkg.	Description	1	10	100
46586	+	74LS136N	DIP-14	Quad 2-input exclusive OR gate	* .09	* .07	
46607	+	74LS138N**	DIP-16	3-to-8 decoder/demultiplexer49	.39	.29
301233	TI	SN74LS138N	DIP-16	3-to-8 decoder/demultiplexer65	.55	.45
46608	+	74LS138N	DIP-16	3-to-8 decoder/demultiplexer69	.59	.49
46623	+	74LS139N*	DIP-16	Dual 2-to-4 decoder/demultiplexer49	.39	.29
301268	TI	SN74LS139AN	DIP-16	Dual 2-to-4 decoder/demultiplexer55	.45	.35
46666	+	74LS145N	DIP-16	BCD-to-decimal decoder/driver59	.49	.39
301276	TI	SN74LS145N	DIP-16	BCD-to-decimal decoder/driver65	.55	.45
46682	+	74LS148N	DIP-16	8-to-3 line priority encoder95	.85	.75
46703	+	74LS151N*	DIP-16	1-to-8 data selector/multiplexer65	.55	.45
46720	+	74LS153N	DIP-16	Dual 4-to-1 data selector/multiplexer65	.55	.45
46738	+	74LS154N	DIP-24	4-to-16 line decoder/demultiplexer	4.95	4.75	4.25
46754	+	74LS155N*	DIP-16	Dual 2-to-4 line decoder/demultiplexer85	.75	.65
46771	+	74LS157N*	DIP-16	Quad 2-to-1 line data selector49	.39	.29
46800	+	74LS160N	DIP-16	Synchronous decade counter	2.49	2.25	2.05
46818	+	74LS161N	DIP-16	4-bit synchronous binary counter55	.45	.35
301647	TI	SN74LS161AN	DIP-16	4-bit synchronous binary counter59	.49	.39
46842	+	74LS163N	DIP-16	Synchronous 4-bit binary counter59	.49	.39
46851	+	74LS164N	DIP-14	8-bit serial shift register55	.45	.35
46877	+	74LS165N	DIP-16	8-bit parallel load shift register55	.45	.35
46885	+	74LS166N	DIP-16	Serial-out shift register89	.79	.69
46906	+	74LS169N	DIP-16	Synch. 4-bit binary up/down counter99	.89	.79
46922	+	74LS173N	DIP-16	4-bit D-type register w/ 3-state output89	.79	.69
46931	+	74LS174N*	DIP-16	Hex D-type flip-flop with clear69	.59	.49
46957	+	74LS175N*	DIP-16	Quad D-type flip-flop with clear59	.49	.39
46973	+	74LS181N	DIP-24	Arithmetic logic unit/function generator	2.95	2.75	2.49
46990	+	74LS190N	DIP-16	Synchronous up/down decade counter	2.95	2.75	2.49
47001	+	74LS191N	DIP-16	Synch. 4-bit up/down binary counter65	.55	.45
47010	+	74LS192N	DIP-16	Synch. 4-bit up/down decade counter	3.49	3.25	2.95
47036	+	74LS193N*	DIP-16	Synch. 4-bit up/down binary counter45	.39	.35
301831	TI	SN74LS193N	DIP-16	Synch. 4-bit up/down binary counter89	.79	.69
47052	+	74LS194N	DIP-16	4-bit bi-directional shift register89	.79	.69
301858	TI	SN74LS194N	DIP-16	4-bit bi-directional shift register99	.89	.75
47061	+	74LS195N	DIP-16	4-bit parallel-access shift register	2.05	1.95	1.75
47124	+	74LS221N	DIP-16	Dual monostable multivibrator75	.65	.55
47141	+	74LS240N*	DIP-20	Octal buffer/line driver59	.49	.39
308291	TI	SN74LS240N	DIP-20	Octal buffer/line driver65	.55	.45
47167	+	74LS241N	DIP-20	Tri-state octal buffer/line driver65	.55	.45
47183	+	74LS244N*	DIP-20	Tri-state octal buffer/line driver55	.45	.35
308312	TI	SN74LS244N	DIP-20	Tri-state octal buffer/line driver59	.49	.39
47212	+	74LS245N*	DIP-20	Tri-state octal bus transceiver65	.55	.39
308321	TI	SN74LS245N	DIP-20	Tri-state octal bus transceiver69	.59	.45
47247	+	74LS247N	DIP-16	BCD to 7-seg. decoder/driver	1.09	.99	.89
47327	+	74LS259N	DIP-16	8-bit addressable latch89	.79	.69
47360	+	74LS266N	DIP-14	Quad 2-input exclusive NOR gate (O.C.)65	.55	.45
47386	+	74LS273N*	DIP-20	Octal D-type flip-flop59	.49	.39
308398	TI	SN74LS273N	DIP-20	Octal D-type flip-flop65	.55	.45
47407	+	74LS279N	DIP-16	Quad S-R latch75	.65	.55
47423	+	74LS283N	DIP-16	4-bit binary full add w/ fast carry95	.85	.65
47554	+	74LS366N	DIP-6	Tri-state hex buffer	* .07	* .05	
47562	+	74LS367N	DIP-16	Tri-state hex buffer69	.59	.49
309278	TI	SN74LS368AN	DIP-16	6-bit buffer/line driver79	.69	.59
308460	TI	SN74LS373N	DIP-20	Octal D-type transparent latch59	.49	.39
47600	+	74LS373N*	DIP-20	Octal D-type transparent latch55	.45	.35
308478	TI	SN74LS374N	DIP-20	Octal D-type flip-flop59	.49	.39
47634	+	74LS374N*	DIP-20	Octal D-type flip-flop55	.45	.35
1944311	+	74LS375N	DIP-16	4-bit bistable latch	* .07	* .05	
47669	+	74LS377N	DIP-20	Octal D-type flip-flop85	.75	.65
47722	+	74LS390N	DIP-16	Dual 4-bit decade counter95	.85	.75
47731	+	74LS393N	DIP-14	Dual 4-bit binary counter75	.65	.55
47861	+	74LS540N	DIP-20	Tri-state octal buffer/line driver89	.79	.69
47870	+	74LS541N	DIP-20	Tri-state octal buffer/line driver75	.65	.55

*10 pcs./ **20 pcs. in 74LS series IC cabinet kit, pg 6

74LS Series continued on next page

* TI = Texas Instruments | ♦ Manufacturer Varies

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

74LS, 74S & 4000 Series

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

74LS Series (Continued)

*Web Code: NBS

Part No.	*Mfr.	Product No.	Pkg.	Description	1	10	100
308523	TI	74LS541N	DIP-20	Tri-state octal buffer/line driver ...	\$.99	\$.89	\$.79
64418	+	74LS573N	DIP-20	Tri-state octal D-type flip flop	2.19	2.05	1.95
64426	+	74LS574N	DIP-20	Tri-state octal D-type flip flop	2.19	2.05	1.95
103974	+	74LS595N	DIP-16	8-bit shift register with output latch	4.95	4.49	3.95
47950	+	74LS645N	DIP-20	Tri-state octal bus transceiver	1.09	.89	.79
47984	+	74LS688N	DIP-20	8-bit identity comparator	1.25	1.05	.85

74LS Series IC Kit

SAVE \$76

Includes: 20-drawer component cabinet (319600), 20 clear plastic drawers (319601), 20 clear dividers (319611), pg 173 and 30 adhesive labels for drawers to identify parts in kit

10 each: 74LS05, 74LS10, 74LS11, 74LS14, 74LS20, 74LS30, 74LS47, 74LS73, 74LS75, 74LS85, 74LS86, 74LS90, 74LS93, 74LS123, 74LS125, 74LS139, 74LS151, 74LS155, 74LS157, 74LS174, 74LS175, 74LS193, 74LS240, 74LS244, 74LS245, 74LS273, 74LS373, 74LS374

20 each: 74LS00, 74LS02, 74LS04, 74LS08, 74LS32, 74LS74, 74LS138

Part No.	Description	Wt. (lbs.)	1	5
84961	420 pcs. 74LS IC kit	6.7	\$149.95	\$129.95
130391	Refill for 84961 (420 pcs.)	2.0	134.95	119.95

See page 3 for our TTL Logic Data Book

74S Series

Please Note: Manufacturer may vary

*Web Code: NCK

				* Order in multiples of 10		
Part No.	Product No.	Pkg.	Description	1	10	100
48573	74S20N	DIP-14	Dual 4-input NAND gate	* \$.07	* \$.05	
48750	74S32N	DIP-14	Quad 2-input pos. OR gate.....	* .07	* .05	
48531	74S188N	DIP-16	(32 x 8) 256-bit TTL PROM (27S18)	5.95	5.49	4.95
48557	74S189N	DIP-16	(16 x 4) 64-bit RAM (27S03)	3.95	3.75	3.49
677020	74S244N	DIP-20	Tri-state octal buffer/line driver59	.45	.35
48696	74S287N	DIP-16	(256 x 4) 1024-bit TTL PROM (TBP24S10)	10.95	9.95	7.95
48717	74S288N	DIP-16	(32 x 8) 256-bit TTL PROM (TBP18S030N)	9.95	8.95	7.95
48805	74S387N	DIP-16	(256 x 4) 1024-bit TTL PROM (TBP24SA10N)	3.95	3.75	3.49
52513	74S428N★	DIP-28	System controller/bus driver (8228)	3.95	3.75	3.49
48864	74S472N	DIP-20	(512 x 8) 4096-bit TTL PROM (TBP28S42N)	12.95	11.95	10.95
48910	74S571N	DIP-16	(512 x 4) 2048-bit TTL PROM (AM27S13) ...	7.95	6.95	5.95

★ Pull = Extra Savings

4000 Series

*Web Code: WAA

					* Order in multiples of 10		
Part No.	*Mfr.	Product No.	Pkg.	Description	1	10	100
12562	✦	CD4001*	DIP-14	Quad 2-input NOR gate	\$.25	\$.22	\$.19
675964	✦	CD4002	DIP-14	Dual 4-input NOR gate29	.25	.22
12597	✦	CD4007	DIP-14	Dual complimentary pair plus inverter	.29	.25	.22
197270	✦	CD4011M	SOIC-14	Quad 2-input NAND gate	* .09	.07	
12634	✦	CD4011**	DIP-14	Quad 2-input NAND gate25	.22	.19
893283	TI	CD4011BE	DIP-14	Quad 2-input NAND gate45	.39	.29
12677	✦	CD4013**	DIP-14	Dual D-type flip-flop29	.25	.22
893443	TI	CD4013BE	DIP-14	Dual D-type flip-flop35	.25	.22
12706	✦	CD4015*	DIP-16	Dual 4-stage static shift register29	.25	.22
12722	✦	CD4016*	DIP-14	Quad bilateral switch29	.25	.22
197296	✦	CD4017M	SOIC-16	Decade counter/divider	* .09	.07	
12749	✦	CD4017*	DIP-16	Decade counter/divider35	.29	.25
893611	TI	CD4017BE	DIP-16	Decade counter/divider39	.35	.25
12773	✦	CD4018	DIP-16	Presettable divide-by-N counter49	.45	.35
12802	✦	CD4020*	DIP-16	14-stage ripple carry binary counter	.39	.35	.29
12829	✦	CD4021	DIP-16	8-stage static shift register29	.25	.22
12845	✦	CD4023*	DIP-14	Triple 3-input NAND gates29	.25	.22
12853	✦	CD4024*	DIP-14	7-stage ripple carry binary counter	.29	.25	.22
353560	✦	CD4026	DIP-16	Decade counter/divider55	.45	.39
12888	✦	CD4027*	DIP-16	Dual J-K master/slave flip-flop35	.29	.25
12909	✦	CD4028	DIP-16	BCD-to-decimal decoder29	.25	.22
12925	✦	CD4029	DIP-16	Preset up/down binary counter35	.29	.25

*10 pcs./**20 pcs. in 4000 series IC cabinet kit, right

4000 Series (Continued)

*Web Code: WAA

					* Order in multiples of 10		
Part No.	*Mfr.	Product No.	Pkg.	Description	1	10	100
12950	+	CD4040*	DIP-16	12-stage binary/ripple counter	\$.35	\$.29	\$.25
12992	+	CD4043	DIP-16	Tri-state quad NOR R/S latch39	.35	.29
13004	+	CD4044	DIP-16	Quad NAND R/S latch39	.35	.29
13012	+	CD4046*	DIP-16	Micropower phase lock loop39	.35	.29
13039	+	CD4047	DIP-14	Monostable/astable multivibrator35	.29	.25
894331	TI	CD4047BE	DIP-14	Monostable/astable multivibrator.....	*	.19	.15
13055	+	CD4049*	DIP-16	Hex inverting buffer/converter29	.25	.22
13071	+	CD4050*	DIP-16	Hex non-inverting buffer/converter ..	.29	.25	.22
13098	+	CD4051*	DIP-16	Single 8-channel analog multiplexer	.35	.29	.25
894391	TI	CD4051BE	DIP-16	Single 8-channel analog multiplexer	.39	.35	.29
13119	+	CD4052	DIP-16	Dual 4-channel analog multiplexer35	.29	.25
13127	+	CD4053	DIP-16	Triple 2-channel analog multiplexer	.35	.29	.25
818259	TI	CD4059AE	DIP-24	Programmable divide-by-N counter	1.49	1.25	1.05
13151	+	CD4060	DIP-16	14-stage ripple carry binary counter	.29	.25	.22
13186	+	CD4066**	DIP-14	Quad bilateral switch35	.29	.25
13215	+	CD4067	DIP-24	Single 16-channel analog multiplexer	1.09	.99	.89
13231	+	CD4069*	DIP-14	Hex inverters (74C04)29	.25	.22
13258	+	CD4070*	DIP-14	Quad 2-input exclusive OR gate35	.29	.25
13274	+	CD4071*	DIP-14	Quad 2-input OR gate29	.25	.22
676086	+	CD4073	DIP-14	Triple 3-input AND gate29	.25	.22
676094	+	CD4075	DIP-14	Triple 3-input OR gate39	.35	.29
676107	+	CD4077	DIP-14	Quad exclusive NOR gate35	.29	.25
676115	+	CD4078	DIP-14	8-input NOR/OR gate49	.45	.35
13354	+	CD4081*	DIP-14	Quad 2-input AND gate29	.25	.22
676123	+	CD4082	DIP-14	Dual 4-input AND gate39	.35	.29
13400	+	CD4093*	DIP-14	Quad 2-input NAND schmitt trigger	.29	.25	.22
818902	TI	CD4093BQM96Q1	SOIC-14	Quad 2-input NAND schmitt trigger ...	*	.19	.15
870807	FSC	CD4093BCN	DIP-14	Quad 2-input NAND schmitt trigger	.59	.49	.45
818873	TI	CD4093BE	DIP-14	CMOS 2-input NAND Gate45	.39	.35
13426	+	CD4094	DIP-16	8-bit shift register with latch35	.29	.25
13442	+	CD4099	DIP-16	8-bit addressable latch45	.39	.35
13485	+	CD4510	DIP-16	BCD presetable up/down counter	.39	.35	.29
13493	+	CD4511*	DIP-16	BCD-to-7 segment latch/decoder/driver	.35	.29	.25
895377	TI	CD4511BE	DIP-16	BCD-to-7 segment latch/decoder/driver	.39	.35	.29
13522	+	CD4514	DIP-24	4-bit latch/line decoder99	.89	.69
13549	+	CD4516	DIP-16	Binary up/down counter45	.35	.29
13565	+	CD4518	DIP-16	Dual BCD up counter39	.29	.25
13581	+	CD4520	DIP-16	Dual binary up counter35	.29	.25
13611	+	CD4528	DIP-16	Dual monostable multivibrator45	.39	.35
13653	+	CD4538*	DIP-16	Dual monostable multivibrator45	.35	.29
13688	+	CD4541	DIP-14	Programmable timer	*	.09	.07
13696	+	CD4543*	DIP-16	BCD to 7-segment decoder driver	.45	.35	.29
947982	FSS	MC14553BCPG	DIP-16	3-digit BCD decoder	*	1.95	1.75
13709	+	CD4553	DIP-16	3-digit BCD counter	1.75	1.59	1.45
13768	+	CD4584*	DIP-14	Hex schmitt trigger35	.29	.25
676473	+	CD40102	DIP-16	2-decade BCD 8-stage sync down counter...	*	.19	.17
44257	+	CD40106	DIP-14	Hex schmitt trigger79	.69	.59
785071	FSC	CD40106BCN	DIP-14	Hex schmitt trigger49	.45	.35
676502	+	CD40110	DIP-16	Decade up/down counter	1.25	1.05	.85

*10 pcs./**20 pcs. in 4000 series IC cabinet kit, below

4000 Series CMOS IC Kit

SAVE \$25

Includes: 20-drawer component cabinet (319600), 20 clear plastic drawers (319601), 20 clear dividers (319611), pg 173 and 30 adhesive labels for drawers to identify parts in kit

10 each: CD4015, CD4016, CD4017, CD4020, CD4023, CD4024, CD4027, CD4040, CD4046, CD4050, CD4051, CD4069, CD4070, CD4071, CD4081, CD4093, CD4511, CD4538, CD4543, CD4584

20 each: CD4001, CD4011, CD4013, CD4049, CD4066

Part No.	Description	Wt. (lbs.)	1	5
84970	300 pcs. 4000 series CMOS IC kit	6.1	\$79.95	\$69.95
130403	Refill for 84970 (300 pcs.)	1.4	64.95	59.95

*FSC = Fairchild Semiconductor | FSS = Free Scale Semiconductor | TI = Texas Instruments | + Manufacturer Varies

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



5000 Series & Clock Chips

*Web Code: RAE

Part No.	*Mfr.	Product No.	Pkg.	Description	1	10
32803	+	TCM5089N	DIP-16	Touch tone generator	\$4.95	\$4.49
26091	+	MM5321N	DIP-16	TV camera synchronous generator	3.75	3.25
26171	+	MM5450N	DIP-40	LED display driver	3.95	3.75
27422	+	LM555CN*	DIP-8	Timer	.25	.22
126797	+	LMC555CN*	DIP-8	CMOS timer	.79	.69
24328	+	LM556N*	DIP-14	Dual timer	.29	.25
95531	+	RTC72421B	DIP-18	Real time clock	8.95	7.95
25101	+	MC146818*	DIP-24	Real time clock with RAM	8.95	7.95
10567	AMD	AM9513APC*	DIP-40	Real time clock	34.95	31.95

*10 pcs./**20 pcs. in Linear series IC cabinet kit, pg 16 ★ Pull = Extra Savings

*Delay Lines Available Online — Enter Web Code EEU

*Quick Switches Available Online — Enter Web Code FAH

*EconoResets Available Online — Enter Web Code YFE

6500 Series

Please Note: Manufacturer may vary

*Web Code: NAG

Part No.	Product No.	Pkg.	Description	1	10
43191	6502★	DIP-40	CPU, 8-bit, 1MHz	\$5.95	\$5.49
43166	65C02★	DIP-40	CPU, 8-bit, 1MHz	5.95	5.49
43254	6522★	DIP-40	Versatile interface adapter, 1MHz	5.95	5.49
43297	6532★	DIP-40	RAM I/O timer, 1MHz	7.95	7.25
43318	6551★	DIP-28	Asynch. comm. interface adapter, 1MHz	3.95	3.75

★ Pull = Extra Savings



6800/68000 CMOS

*Web Code: SBP

Part No.	*Mfr.	Product No.	Pkg.	Description	1	10
248604		MC68HC11E1CFN3	PLCC-52	MCU, 8-bit, 38 I/O, 3MHz	\$9.95	\$8.95
248583		MC68HC11F1CFN3	PLCC-68	MCU, 8-bit, 30 I/O, 3MHz	10.95	9.95
108919		MC68HC705C8P	DIP-40	MCU, 8-bit, 24 I/O, 4MHz	10.95	9.95
132484		MC68HC705C8S	DIP-40	MCU, 8-bit, 24 I/O, 4MHz	9.95	8.95
132530		MC68HC705J1ACP	DIP-20	MCU, 8-bit, 14 I/O, 4MHz	3.75	3.49
248575		MC68HC711E9CFN2	PLCC-52	MCU, 8-bit, 38 I/O, 2MHz	18.95	16.95
323213		MC68HC908GR8CP	DIP-28	MCU, 8-bit, 21 I/O, 8MHz	3.95	3.49

6800/68000 N-MOS

*Web Code: PAG

Part No.	*Mfr.	Product No.	Pkg.	Description	1	10
43481	+	6800★	DIP-40	CPU, 8-bit, 5V, 2MHz	\$5.95	\$4.95
43502	+	6802★	DIP-40	CPU, 8-bit, 5V, 1MHz	9.95	8.95
43529	+	6803★	DIP-40	CPU, 8-bit, 5V, 1MHz	6.95	5.95
43537	+	6808★	DIP-40	CPU, 8-bit, 7V, 1MHz	7.95	7.25
43545	+	6809E★	DIP-40	CPU, 8-bit, 7V, 1MHz	3.95	3.49
320590	+	68B09E★	DIP-40	CPU, 8-bit, 7V, 2MHz	4.95	4.49
43561	+	6810★	DIP-24	SRAM, 1K-bit, 5V, 1MHz	2.95	2.75
43596	+	6821★	DIP-40	Peripheral inter. adptr, 8-bit, 7V, 1MHz	3.95	3.49
43414	+	68B21★	DIP-40	Peripheral inter. adptr, 8-bit, 7V, 1MHz	4.95	4.49
43617	+	6840★	DIP-28	Programmable timer, 16-bit, 5V, 6MHz	2.95	2.75
43633	+	6850★	DIP-24	Asynch. comm. int. adptr, 8-bit, 7V, 1MHz	4.49	3.95
25304	+	MC68000L8★	DIP-64	CPU, 16-bit, 7V, 8MHz	8.95	7.95
25291	+	MC68000L10★	DIP-64	CPU, 16-bit, 7V, 10MHz	9.95	8.95
25355	+	MC68701★	DIP-40	MCU, 8-bit, 29 I/O, 2MHz	14.95	12.95
25363	MOT	MC68705P3S★	DIP-28	MCU, 8-bit, 20 I/O, 4MHz	24.95	22.95
25371	MOT	MC68705U3S★	DIP-40	MCU, 8-bit, 20 I/O, 4MHz	19.95	17.95

★ Pull = Extra Savings

8000 Series

Please Note: Manufacturer may vary

Part No.	Product No.	Pkg.	Description	1	10	100
51844	8031★	DIP-40	MCU, 8-bit, 32 I/O, 8MHz	\$3.49	\$3.25	\$2.95
51676	80C31★	DIP-40	MCU, 8-bit, 32 I/O, 24MHz, CMOS	3.75	3.45	2.95

★ Pull = Extra Savings

8000 Series (Continued)

Please Note: Manufacturer may vary

Part No.	Product No.	Pkg.	Description	1	10	100
876096	P80C31BH-1	DIP-40	MCU, 8-bit, 32 I/O, 16MHz, CMOS	\$3.75	\$3.45	\$2.95
102197	8032★	DIP-40	CPU, 8-bit, 32 I/O, 12MHz	3.95	3.49	2.95
108804	80C32-1★	DIP-40	MCU, 8-bit, 32 I/O, 12MHz, CMOS	4.25	3.75	3.49
51861	8035★	DIP-40	CPU, 8-bit, 27 I/O, 11MHz	3.95	3.49	2.95
51959	8039★	DIP-40	CPU, 8-bit, 27 I/O, 6MHz	3.95	3.49	2.95
51692	80C39★	DIP-40	MCU, 8-bit, 27 I/O, 11MHz, CMOS	4.25	3.75	3.25
51983	8049★	DIP-40	CPU, 8-bit, 27 I/O, 6MHz	2.95	2.75	2.49
51991	8051AP★**	DIP-40	MCU, 8-bit, 27 I/O, 11MHz	4.95	4.49	3.95
125647	80C52BASIC	DIP-40	MCU, 8-bit, 32 I/O, 12MHz, CMOS	33.95	31.95	29.95
52046	8080A★	DIP-40	CPU, 8-bit, 32 I/O, 1MHz	5.49	4.95	4.25
52062	8085AH★	DIP-40	CPU, 8-bit, 16 I/O, 3MHz	4.95	4.49	3.25
52071	8085AH-2★	DIP-40	CPU, 8-bit, 16 I/O, 5MHz	5.49	4.95	3.95
51705	80C85A-2★	DIP-40	CPU, 8-bit, 16 I/O, 5MHz, CMOS	5.95	5.49	4.95
52100	8086-2★	DIP-40	CPU, 8-bit, 32 I/O, 8MHz	1.95	1.75	1.49
52142	8088★	DIP-40	CPU, 8-bit, 16 I/O, 5MHz	2.95	2.75	2.49
52169	8088-2★	DIP-40	CPU, 8-bit, 16 I/O, 8MHz	3.95	3.49	2.95
34358	UPD70108-8★	DIP-40	CPU, 8-bit, 16 I/O, 8MHz	9.98	8.95	6.95
52290	8155★	DIP-40	I/O port timer, 2K-bit, 3MHz	3.95	3.49	2.95
52302	8155-2★	DIP-40	Static MOS RAM, 2K-bit, 3 I/O, 5MHz	4.95	4.49	3.25
52193	81C55★	DIP-40	I/O port timer, 2K-bit, 3MHz, CMOS	4.95	4.49	3.95
52468	8212★	DIP-24	I/O port timer, 8-bit, 3MHz	5.95	5.49	4.95
52484	8216	DIP-16	Bi-directional bus driver (non-invert.)	4.95	3.95	3.49
52492	8224★	DIP-16	Clock generator/driver	3.95	3.49	2.95
52513	8228★	DIP-28	System controller/bus driver	3.95	3.75	3.49
52581	8243★	DIP-24	I/O expander, 5V, MIL. temp	5.49	4.95	3.25
52644	8251+	DIP-28	USART	2.75	2.49	2.25
52652	8251A★	DIP-28	Prog. communications interface	3.95	3.49	2.95
52370	82C51A★	DIP-28	USART, 3V to 6V, CMOS	3.95	3.49	2.95
52679	8253★	DIP-24	Prog. interval timer, 2MHz	.99	.89	.69
52687	8253-5★	DIP-24	Prog. interval timer, 5MHz	3.49	3.25	2.75
52388	82C53-5★	DIP-24	Prog. interval timer, 8MHz, CMOS	1.95	1.49	1.25
52708	8254★	DIP-24	Prog. interval timer, 8MHz	4.49	3.95	3.49
52716	8254-2★	DIP-24	Prog. interval timer, 10MHz	4.95	4.49	3.95
52396	82C54★	DIP-24	Prog. interval timer, 8MHz, CMOS	4.95	4.49	3.95
52409	82C54-2★	DIP-24	Prog. interval timer, 10MHz, CMOS	4.95	4.49	3.95
52724	8255★	DIP-40	CPU peripheral, 2MHz	4.49	3.95	3.49
52732	8255A-5★	DIP-40	CPU peripheral, 5MHz	4.75	4.25	3.75
291805	8255AC-5+	DIP-40	CPU peripheral, 4MHz	4.75	4.25	3.75
52417	82C55A★	DIP-40	CPU peripheral, 8MHz, CMOS	4.95	4.49	3.95
52425	82C55A-5★	DIP-40	CPU peripheral, 5MHz, CMOS	4.95	4.49	3.95
52759	8256★	DIP-40	Multi func. uproc. support controller	17.95	15.95	13.95
52775	8259★	DIP-28	Prog. interrupt controller	1.95	1.75	1.49
52839	8279★	DIP-40	CPU peripheral, 5MHz	10.95	9.95	7.95
52847	8279-5★	DIP-40	CPU peripheral, 5MHz	12.95	11.95	10.95
52855	8282★	DIP-20	Octal latch bus driver	4.95	4.49	3.95
52871	8284A★	DIP-18	Clock generator/driver, 8MHz	4.95	4.49	3.95
2082020	N8284A	DIP-18	Up/down counter	1.95	1.49	1.25
52898	8286★	DIP-20	Octal bus transceiver	4.95	4.49	3.95
52901	8287★	DIP-20	Octal bus transceiver	9.95	8.95	7.95
52919	8288	DIP-20	Bus controller (UPD71088)	1.95	1.75	1.55
53022	8748+	DIP-40	CPU, 8-bit, 27 I/O, 11MHz	10.95	9.95	8.95
53031	8748H+	DIP-40	CPU, 8-bit, 27 I/O, 11MHz	12.95	11.95	8.95
53057	8749H+	DIP-40	CPU, 8-bit, 27 I/O, 11MHz	15.95	14.95	12.95
53073	8751	DIP-40	MCU, 8-bit, 32 I/O, 8MHz	9.95	8.95	7.95
53081	8751H+	DIP-40	MCU, 8-bit, 32 I/O, 12MHz	15.95	14.95	12.95
52978	87C51★	DIP-40	MCU, 8-bit, 32 I/O, 33MHz, CMOS	15.95	14.95	12.95
196120	P87C51	DIP-40	MCU, 8-bit, 32 I/O, 24MHz, CMOS	4.95	4.49	3.95
53090	8755	DIP-40	EPROM with I/O	4.95	3.95	3.25

* 8049 (ROM not available for use) Tie pin 7 high to bypass the internal ROM to convert 8049 to 8039

** Tie pin 31 low to bypass the internal ROM ★ Pull = Extra Savings + Refurbished = Backed by Jameco

* AMD = Advanced Micro | MOT = Motorola | + Manufacturer Varies

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Z80 MPUs, UARTs & EPROMs

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Z80 MPUs

Please Note: Manufacturer may vary

★ Web Code: JAF

Part No.	Product No.	Pkg.	Description	1	10
35561	Z80★	DIP-40	2.5MHz CPU (MK3880N/780C)	\$1.95	\$1.75
35596	Z80A★	DIP-40	4MHz CPU (MK3880N-4/780C-1)	2.05	1.85
35609	Z80A-CTC★	DIP-28	4MHz counter timer circuit (MK3882-4)	2.49	2.25
35625	Z80A-DART★	DIP-40	4MHz dual asynchronous receiver/trans	2.49	2.25
35641	Z80A-PIO★	DIP-40	4MHz parallel I/O interf. contr. (MK3881-4)	2.05	1.85
35668	Z80A-SIO/O★	DIP-40	4MHz serial I/O, TxCB & RxCB bond. (MK3884-4)	2.49	2.25
35705	Z80B★	DIP-40	6MHz CPU (MK3880N-6)	2.49	2.25
35781	Z84C00-4★	DIP-40	4MHz CPU (Z84C0004PEC) CMOS	4.49	3.95
35799	Z8530★	DIP-40	2MHz serial communications controller49	.39
280479	Z8S18020PSC	DIP-64	Z180 MPU, MMU, DMA, UART, INTC	7.95	6.95
280516	Z84C0008PEC★	DIP-40	Z80 CPU with 3 mode int., 16 regs.	1.95	1.49
61786	Z85C3008PS★	DIP-40	Serial communications controller	2.95	2.75
281308	Z85C3016PSC	DIP-40	Serial communications controller	6.95	5.95
280436	Z8018008PSC	DIP-64	Z180 MPU, MMU, DMA, UART, INTC	3.95	3.49
280452	Z8018010PSC	DIP-64	Z180 MPU, MMU, DMA, UART, INTC	5.49	5.25

★ Pull = Extra Savings

UARTs

Please Note: Manufacturer may vary

★ Web Code: MAG

Part No.	Product No.	Pkg.	Description	1	10
43158	6402★	DIP-40	5V CMOS	\$6.95	\$5.95
27570	NS16C450N★	DIP-40	Asynch. comm. element, 5V	2.95	2.75
27596	NS16550AN★	DIP-40	Asynch. comm. element, 5V	1.95	1.25
288809	TL16C550CN	DIP-40	1-channel w/ 16-byte FIFO, 5V	3.95	3.49
288841	TL16C554FN	PLCC-68	4-channel w/ 16-byte FIFO, 5V	6.95	5.95
288876	TL16C750FN	PLCC-44	1-channel w/ 64-byte FIFO, 5V	3.95	3.49
288905	TL16C754BFL	PLCC-68	4-channel w/ 64-byte FIFO, 5V	9.95	8.95

★ Pull = Extra Savings

EPROMs

★ Web Code: XAF

Part No.	*Mfr.	Product No.	Pkg.†	Config.	Description	1	10	100
39909	♦	2708♦	DIP-24	1k x 8	450ns, 5V	\$3.95	\$3.75	\$3.49
33611	♦	TMS2716♦	DIP-24	2k x 8	450ns, 5V	2.95	2.75	2.49
40002	♦	2716♦	DIP-24	2k x 8	450ns, 5V	3.95	3.75	3.49
308662	♦	2716A-2	DIP-24	2k x 8	200ns, 5V	3.95	3.75	3.49
40011	♦	2716-1♦	DIP-24	2k x 8	350ns, 5V	4.49	3.95	3.75
33591	♦	TMS2532♦	DIP-24	4k x 8	450ns, 5V	3.95	3.75	3.49
40096	♦	2732♦	DIP-24	4k x 8	450ns, 5V	5.95	5.49	3.95
40133	♦	2732A-45♦	DIP-24	4k x 8	450ns, 5V	3.95	3.75	3.49
40125	♦	2732A-25♦	DIP-24	4k x 8	250ns, 5V	4.95	4.49	3.95
114876	♦	2732B♦	DIP-24	4k x 8	450ns, 5V	3.95	3.75	3.49
40109	♦	2732A-20♦	DIP-24	4k x 8	200ns, 5V	5.49	4.95	4.49
266001	♦	27C32-150♦	DIP-24	4k x 8	150ns, 5V	5.95	5.49	4.95
40205	♦	2764-25♦	DIP-28	8k x 8	250ns, 5V	3.95	3.75	3.49
40192	♦	2764-20♦	DIP-28	8k x 8	200ns, 5V	4.25	3.95	3.75
40248	♦	2764A-25♦	DIP-28	8k x 8	250ns, 5V	3.95	3.75	3.49
40230	♦	2764A-20♦	DIP-28	8k x 8	200ns, 5V	4.25	3.95	3.75
698322	ST	M27C64A-15F1	FDIP-28	8k x 8	150ns, 5V (±10%)	5.95	5.49	5.25
39845	♦	27C64-25♦	DIP-28	8k x 8	250ns, 5V	3.49	3.25	2.95
74608	♦	27C64-20♦	DIP-28	8k x 8	200ns, 5V	3.75	3.49	3.25
39829	♦	27C64-15♦	DIP-28	8k x 8	150ns, 5V	4.25	3.95	3.75
105304	♦	27C64-12♦	DIP-28	8k x 8	120ns, 5V	4.75	4.49	3.95
266036	♦	27C64-100	DIP-28	8k x 8	100ns, 5V	4.95	4.55	4.05
39933	♦	27128-25♦	DIP-28	16k x 8	250ns, 5V	2.95	2.25	1.75
39984	♦	27128A-25♦	DIP-28	16k x 8	250ns, 5V	3.95	3.75	3.49
39968	♦	27128A-20♦	DIP-28	16k x 8	200ns, 5V	4.25	3.95	3.55
39950	♦	27128A-15♦	DIP-28	16k x 8	150ns, 5V	4.49	4.25	3.95
39685	♦	27C128-25♦	DIP-28	16k x 8	250ns, 5V	3.75	3.49	3.25
101101	♦	27C128-20♦	DIP-28	16k x 8	200ns, 5V	3.95	3.75	3.49
39677	♦	27C128-15♦	DIP-28	16k x 8	150ns, 5V	4.25	3.95	3.75
87935	♦	27C128-12♦	DIP-28	16k x 8	120ns, 5V	4.49	4.25	3.95

♦ Refurbished = Backed by Jameco † FDIP = Ceramic frit seal

EPROMs (Continued)

★ Web Code: XAF

Part No.	*Mfr.	Product No.	Pkg.†	Config.	Description	1	10	100
266061	♦	27C128-10	DIP-28	16k x 8	100ns, 5V	\$4.75	\$4.49	\$4.25
149665	♦	27C128-70	DIP-28	16k x 8	70ns, 5V	4.95	4.75	4.49
40045	♦	27256-20♦	DIP-28	32k x 8	200ns, 5V	2.55	2.25	1.95
40037	♦	27256-15♦	DIP-28	32k x 8	150ns, 5V	3.49	3.25	2.95
39731	♦	27C256-25♦	DIP-28	32k x 8	250ns, 5V	2.35	2.15	1.85
39722	♦	27C256-20♦	DIP-28	32k x 8	200ns, 5V	2.55	2.25	1.95
39714	♦	27C256-15♦	DIP-28	32k x 8	150ns, 5V	2.75	2.49	2.25
698111	ST	M27C256B-15F1	FDIP-28	32k x 8	150ns, 5V	3.95	3.49	3.25
65904	♦	27C256-12♦	DIP-28	32k x 8	120ns, 5V	3.49	2.95	2.75
698091	ST	M27C256B-12F1	FDIP-28	32k x 8	120ns, 5V, C-temp	4.25	3.75	3.49
112740	♦	27C256-10♦	DIP-28	32k x 8	100ns, 5V	3.75	3.25	2.95
698082	ST	M27C256B-10F1	FDIP-28	32k x 8	100ns, 5V	4.49	3.95	3.59
140476	♦	27C256-70♦	DIP-28	32k x 8	70ns, 5V	4.75	4.49	3.95
266079	♦	27C256-55	DIP-28	32k x 8	55ns, 5V	4.95	4.75	4.49
40168	♦	27512-25♦	DIP-28	64k x 8	250ns, 5V	1.49	1.25	.85
40150	♦	27512-20♦	DIP-28	64k x 8	200ns, 5V	1.59	1.35	.95
39802	♦	27C512-25♦	DIP-28	64k x 8	250ns, 5V	2.25	1.95	1.75
39790	♦	27C512-20♦	DIP-28	64k x 8	200ns, 5V	2.49	2.25	1.95
39781	♦	27C512-15♦	DIP-28	64k x 8	150ns, 5V	2.75	2.49	2.25
39773	♦	27C512-12♦	DIP-28	64k x 8	120ns, 5V	2.95	2.75	2.49
698226	ST	M27C512-12F1	FDIP-28	64k x 8	120ns, 5V	3.49	3.25	3.05
131959	♦	27C512-10♦	DIP-28	64k x 8	100ns, 5V	3.25	2.95	2.75
175206	♦	27C512-90♦	DIP-28	64k x 8	90ns, 5V	3.25	2.95	2.75
203625	♦	27C512-70	DIP-28	64k x 8	70ns, 5V	3.95	3.75	3.49
203617	♦	27C512-45	DIP-28	64k x 8	45ns, 5V	3.95	3.75	3.49
203641	♦	27C1024-12	DIP-40	64k x 16	120ns, 5V	4.95	4.75	4.49
118148	♦	27C1024-15	DIP-40	64k x 16	150ns, 5V	4.49	4.25	3.95
39669	♦	27C010-20♦	DIP-32	128k x 8	200ns, 5V	1.95	1.49	.95
39651	♦	27C010-15♦	DIP-32	128k x 8	150ns, 5V	3.49	3.25	2.95
697987	ST	M27C1001-15F1	FDIP-32	128k x 8	150ns, 5V	4.95	4.75	4.49
74624	♦	27C010-12♦	DIP-32	128k x 8	120ns, 5V	2.39	2.25	1.45
697961	ST	M27C1001-12F1	FDIP-32	128k x 8	120ns, 5V	4.49	4.25	3.95
79231	♦	27C010-10♦	DIP-32	128k x 8	100ns, 5V	3.95	3.75	3.49
697944	ST	M27C1001-10F1	FDIP-32	128k x 8	100ns, 5V	4.75	4.49	4.25
137699	♦	27C010-80♦	DIP-32	128k x 8	80ns, 5V	3.95	3.75	3.49
146149	♦	27C010-70♦	DIP-32	128k x 8	70ns, 5V	4.25	3.95	3.75
698007	ST	M27C1001-70F1	FDIP-32	128k x 8	70ns, 5V	4.75	4.49	4.25
65681	♦	27C020-20♦	DIP-32	256k x 8	200ns, 5V	1.95	1.49	1.15
65699	♦	27C020-15♦	DIP-32	256k x 8	150ns, 5V	3.75	3.49	3.25
78852	♦	27C020-12♦	DIP-32	256k x 8	120ns, 5V	3.95	3.75	3.49
698031	ST	M27C2001-12F1	FDIP-32	256k x 8	120ns, 5V	5.95	5.49	4.95
156267	♦	27C020-10	DIP-32	256k x 8	100ns, 5V	4.25	3.95	3.75
698023	ST	M27C2001-10F1	FDIP-32	256k x 8	100ns, 5V	5.95	5.49	4.95
127933	♦	27C4096-12	DIP-40	256k x 16	120ns, 5V	5.95	5.49	4.95
85462	♦	27C040-15♦	DIP-32	512k x 8	150ns, 5V	4.49	4.25	3.95
698171	ST	M27C4001-15F1	FDIP-28	512k x 8	150ns, 5V	6.19	5.75	5.49
102293	♦	27C040-12♦	DIP-32	512k x 8	120ns, 5V	4.95	4.75	4.49
111780	♦	27C040-10♦	DIP-32	512k x 8	100ns, 5V	4.95	4.75	4.49
698146	ST	M27C4001-10F1	FDIP-28	512k x 8	100ns, 5V	7.95	6.95	6.25
203676	♦	27C040-80	DIP-32	512k x 8	80ns, 5V	5.75	5.25	4.75
698189	ST	M27C4001-80XF1	FDIP-28	512k x 8	80ns, 5V (±5%) ..	5.75	5.25	4.75
266124	♦	27C040-70	DIP-32	512k x 8	70ns, 5V	5.95	5.49	4.95
156275	♦	27C080-10♦	DIP-32	1M x 8	100ns, 5V	6.95	6.49	5.95
698357	ST	M27C801-100F1	FDIP-32	1M x 8	100ns, 5V (±10%) ..	7.95	6.75	6.19
203684	♦	27C080-90	DIP-32	1M x 8	90ns, 5V	7.49	6.75	6.25
265842	♦	27C800-12	DIP-42	1M x 8	120ns, 5V	5.95	4.95	3.95

♦ Refurbished = Backed by Jameco

† FDIP = Ceramic frit seal

Have A Large Volume Order That Requires Special Pricing?

Call us at 1-800-831-4242

* ST = ST Micro | ♦ Manufacturer Varies

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



OTP/PROMs

★ Web Code: WAG

Part No.	*Mfr.	Product No.	Pkg.	Config.	Description	1	10	100
48717	+	74S288	DIP-16	32 x 8	256-bit, 5V, 25ns, PROM	\$9.95	\$8.95	\$7.95
27844	+	N82S23	DIP-16	32 x 8	256-bit, 7V, 50ns, PROM	5.95	4.95	3.95
27764	+	N82S123	DIP-16	32 x 8	256-bit, 7V, 50ns, PROM	11.95	10.95	9.95
48696	+	74S287	DIP-16	256 x 4	1-kbit, 5V, 30ns, PROM	10.95	9.95	7.95
48805	+	74S387	DIP-16	256 x 4	1-kbit, 5V, 30ns, PROM	3.95	3.75	3.49
27772	+	N82S126	DIP-16	256 x 4	1-kbit, 5V, 50ns, PROM	5.95	5.25	4.75
27781	+	N82S129	DIP-16	256 x 4	1-kbit, 7V, 50ns, PROM	10.95	9.95	8.95
27799	+	N82S131	DIP-16	512 x 4	2-kbit, 7V, 50ns, PROM	7.95	6.95	5.95
27801	+	N82S137	DIP-18	1k x 4	4-kbit, 7V, 60ns, PROM	5.95	4.95	3.95
27810	+	N82S181	DIP-24	1k x 8	8-Mbit, 5V, 70ns, PROM	8.95	7.95	6.95
27828	+	N82S185	DIP-18	2k x 4	8-kbit, 7V, 100ns, PROM	2.95	2.49	1.75
27836	+	N82S191	DIP-24	2k x 8	16-kbit, 7V, 35ns, PROM	5.95	4.95	3.95
394978	ATM	AT27C256R-45JL	PLCC-32	32k x 8	256-kbit, 45ns OTP, LP, I-temp.	1.25	.95	.75
394986	ATM	AT27C256R-45PU	DIP-28	32k x 8	256-kbit, 45ns OTP, LP, I-temp.	1.25	1.15	1.05
395081	ATM	AT27C512R-70PU	DIP-28	64k x 8	512-kbit, 5V, 70ns, I-temp., OTP	1.35	1.19	1.09
203692	+	27C512-12	DIP-28	64k x 8	512-kbit, 5V, 100ns, OTP	1.35	1.19	1.09
394708	ATM	AT27C010-70PU	DIP-32	128k x 8	1-Mbit, 5V, 70ns, I-temp., OTP	2.95	2.75	2.49
267303	+	27C080-10	PLCC-32	1M x 8	8-Mbit, 5V, 100ns, OTP	3.95	3.49	3.25
267215	+	27C080-15	PLCC-32	1M x 8	8-Mbit, 5V, 150ns, OTP	2.95	2.49	1.95

EEPROMs

Please Note: Manufacturer may vary

★ Web Code: GAM

Part No.	Product No.	Pkg.	Config.	Description	1	10	100
* Order in multiples of 10							
102058	93C46	DIP-8	64 x 16	3-wire serial, 2-5V	\$2.5	\$2.2	\$1.9
276955	93C46	SOIC-8	64 x 16	3-wire serial, 2-5V	*	.12	.09
108855	93C56	DIP-8	128 x 16	3-wire serial, 2-5V	*	.19	.15
108839	24C02P	DIP-8	256 x 8	2-wire serial, 5V	*	.15	.12
200598	93C66	DIP-8	256 x 16	3-wire serial, 2-5V	.35	.29	.25
108847	24C04P	DIP-8	512 x 8	2-wire serial, 2-5V	.45	.39	.35
200547	24C08-10	DIP-8	1k x 8	2-wire serial, 2-5V	*	.15	.12
200555	24C16-10	DIP-8	2k x 8	2-wire serial, 5V	.45	.39	.35
74691	28C16A-25	DIP-24	2k x 8	Page parallel, 5V	3.95	3.75	3.49
276701	28C17	DIP-28	2k x 8	Page parallel, 5V	3.95	3.75	3.49
40416	2817A-25	DIP-28	2k x 8	Page parallel, 5V	3.95	2.95	2.25
276752	28C64	SOIC-28	8k x 8	Page parallel, 5V	1.49	1.15	.95
74827	28C64A-25	DIP-28	8k x 8	Page parallel, 5V	3.75	3.49	3.25
40475	2865A	DIP-28	8k x 8	5V with latches	5.95	5.49	4.95
276816	28C256-15SC	SOIC-28	32k x 8	Page parallel, 5V	4.95	4.49	3.95
200580	24C256-10	DIP-8	32k x 8	2-wire serial, 2-5V	1.49	1.35	1.19
74878	28C256-25	DIP-28	32k x 8	Page parallel, 5V	5.95	5.49	4.95
74843	28C256-15	DIP-28	32k x 8	Page parallel, 5V	5.49	5.25	4.49
276832	24C512	DIP-8	64k x 8	2-wire serial, 2-5V	1.95	1.75	1.49
1010868	AT24C512BN-SH-B	SOIC-8	64k x 8	2-wire serial, 1.8-3.6V	1.49	1.25	.95
276912	24C1024	DIP-8	128k x 8	2-wire serial, 2.7-5V	5.95	5.49	5.25
395372	AT28LV010-20TC	TSSOP-32	128k x 8	Page parallel, 3.3V	29.95	26.95	22.95

IC Accessories

Part No.	Product No.	Description	1	10
* Order in multiples of 10				
13864	CF2	Conductive foam (12" x 24" x .25") hard black	\$11.95	\$10.95
29516	RIC20	.300" anti-static rail for 8, 14, 16, 18, 20 & 22-pin ICs	.25	.22
29524	RIC220	.600" anti-static rail for 24, 28, 36 & 40-pin ICs	.29	.25
29583	RRS	Storage tube rubber stopper	*	.07

Additional Anti-Static Products, IC Accessories and Tools see page 164

★ PC SMBus Available Online — Enter Web Code SAS

Static RAM

★ Web Code: WAF

Part No.	*Mfr.	Product No.	Pkg.	Config.	Description	1	10
38931	+	2111-1	DIP-18	256 x 4	1-Kbit, 5V, 500ns	\$1.95	\$1.75
42198	+	5101★	DIP-22	256 x 4	1-Kbit, 5V, 450ns	7.95	6.95
38957	+	2114N	DIP-18	1k x 4	4-Kbit, 5V, 450ns	1.95	1.75
43238	+	6514	DIP-18	1k x 4	4-Kbit, 5V, 300ns	2.95	2.75
38973	+	2114N-2	DIP-18	1k x 4	4-Kbit, 5V, 200ns	2.19	1.95
38981	+	2114N-2L	DIP-18	1k x 4	4-Kbit, 5V, 450ns, LP	2.35	2.19
38738	+	2016-12	DIP-24	2k x 8	16-Kbit, 5V, 120ns	1.25	1.15
38746	+	2016-20★	DIP-24	2k x 8	16-Kbit, 5V, 200ns	1.15	1.05
114260	DAL	DS1220Y-150	DIP-24	2k x 8	16-Kbit, 5V, 150ns, NV	10.95	9.95
25911	+	MK48Z02B-15	DIP-24	2k x 8	16-Kbit, 5V, 150ns	7.95	6.95
42809	+	6116P-3★	DIP-24	2k x 8	16-Kbit, 5V, 150ns	1.75	1.55
42753	+	6116LP-3★	DIP-24	2k x 8	16-Kbit, 5V, 150ns, LP	1.85	1.65
42788	+	6116P-1★	DIP-24	2k x 8	16-Kbit, 5V, 100ns	1.85	1.65
242676	+	L6116PC10	DIP-24	2k x 8	16-Kbit, 5V, 100ns	1.49	1.19
42796	+	6116P-2★	DIP-24	2k x 8	16-Kbit, 5V, 120ns	1.49	1.25
42737	+	6116LP-1★	DIP-24	2k x 8	16-Kbit, 5V, 100ns, LP	1.95	1.75
242683	CPS	CY7C128A-45	DIP-24	2k x 8	16-Kbit, 5V, 45ns, Asynch.	2.95	2.75
242675	+	6116-70	DIP-24	2k x 8	16-Kbit, 5V, 70ns	2.25	1.95
392446	+	CY7C4235V-15ASC	STQFP-64	2k x 16	36-Kbit, 3.3V, 15ns, Synch. FIFO	13.95	11.95
242333	+	CY7C185-35	DIP-28	8k x 8	64-Kbit, 5V, 35ns, Asynch.	2.49	2.25
1927473	ALM	AS6C6264-55PCN	PDIP-28	8k x 8	64k LP, 55ns, 2.7-5.5V, C-temp	1.95	1.49
392294	CPS	CY6264-70SNC	SOIC-28	8k x 8	64-Kbit, 5V, 70ns	.99	.75
85121	+	6264LP-70	DIP-28	8k x 8	64-Kbit, 5V, 70ns, LP	3.75	3.49
42884	+	6264LP-10★	DIP-28	8k x 8	64-Kbit, 5V, 100ns, LP	2.95	2.75
42921	+	6264P-10★	DIP-28	8k x 8	64-Kbit, 5V, 100ns	2.75	2.49
42892	+	6264LP-12★	DIP-28	8k x 8	64-Kbit, 5V, 120ns, LP	2.75	2.49
42930	+	6264P-12★	DIP-28	8k x 8	64-Kbit, 5V, 120ns	2.49	2.25
114278	DAL	DS1225AB-15	DIP-28	8k x 8	64-Kbit, 5V, 150ns, NV	14.95	12.95
114307	DAL	DS1225Y-200	DIP-28	8k x 8	64-Kbit, 5V, 200ns, NV	11.95	10.95
242376	+	CY7C199P-35	DIP-28	32k x 8	256-Kbit, 5V, 35ns, LP, Asynch.	1.95	1.75
242499	DAL	DS1230Y-70	DIP-28	32k x 8	256-Kbit, 4.5V, 70ns, WP	12.95	9.95
177113	DAL	DS1230Y-100	DIP-28	32k x 8	256-Kbit, 5V, 100ns, NV	12.95	11.95
114323	DAL	DS1230Y-150	DIP-28	32k x 8	256-Kbit, 5V, 150ns, NV	11.95	10.95
41970	+	43256-10L★	DIP-28	32k x 8	256-Kbit, 5V, 100ns, LP	3.95	3.75
41988	+	43256-12L★	DIP-28	32k x 8	256-Kbit, 5V, 120ns, LP	3.75	3.49
75037	+	UM61M256K-15	DIP-28	32k x 8	256-Kbit, 5V, 15ns	3.95	3.49
82472	+	62256LP-70	DIP-28	32k x 8	256-Kbit, 5V, 70ns, LP	2.75	2.49
391793	CPS	CY62256L-70PC	DIP-28	32k x 8	256-Kbit, 5V, 70ns	2.95	2.75
391822	CPS	CY62256LL-70PC	DIP-28	32k x 8	256-Kbit, 5V, 70ns, LP	2.95	2.75
391890	CPS	CY62256LL-70SNC	SOIC-28	32k x 8	256-Kbit, 5V, 70ns, LP	1.75	1.55
42876	+	62256LP-85	DIP-28	32k x 8	256-Kbit, 5V, 85ns, LP	2.65	2.45
42833	+	62256LP-10★	DIP-28	32k x 8	256-Kbit, 5V, 100ns, LP	2.49	2.15
42850	+	62256LP-12★	DIP-28	32k x 8	256-Kbit, 5V, 120ns, LP	2.25	2.05
279831	CPS	CY7C199-25VC	SOJ-28	32k x 8	256-Kbit, 5V, 25ns	1.75	1.49
279857	+	62256S-15	SOJ-28	32k x 8	256-Kbit, 5V, 150ns	.99	.75
1927799	ALM	AS7C1026B-12JCN	SOJ-44	64k x 16	1M, 12ns, 5V, C-temp	1.95	1.49
1927457	ALM	AS6C1008-55PCN	PDIP-32	128k x 8	1M LP, 55ns, 2.7-5.5V, C-temp	3.95	3.75
391831	CPS	CY62128BLL-70SC	SOIC-32	128k x 8	1-Mbit, 5V, 70ns, LP	2.49	2.25
391996	CPS	CY62128BLL-70ZC	TSSOP-32	128k x 8	1-Mbit, 5V, 70ns, LP	1.95	1.75
131810	+	628128LP-70	DIP-32	128k x 8	1-Mbit, 5V, 70ns, LP	6.95	5.95
103982	+	628128LP-85★	DIP-32	128k x 8	1-Mbit, 5V, 85ns, LP	4.95	4.49
1927617	ALM	AS6C4008-55PCN	PDIP-32	512k x 8	4M LP, 55ns, 2.7-5.5V, C-temp	5.95	5.49
242448	+	BS62LV4006PIP-55	PDIP-32	512k x 8	4M LP, 55ns, 2.4-5.5V, I-temp	18.95	16.95
157358	+	628512LP-70	DIP-32	512k x 8	4-Mbit, 5V, 70ns, LP	17.95	15.95
280049	+	628512S-70	SOP-32	512k x 8	4-Mbit, 5V, 20ns, Asynch.	4.95	4.49
1862446	+	IS61W20488BLL-10MLL	BGA-48	2M x 8	16M, 2.4-3.6V, 10ns	24.95	21.95

★ Pull = Extra Savings

* ALM = Alliance Memory | ATM = Atmel Semiconductor | CPS = Cypress Semiconductor | DAL = Dallas Semiconductor | + Manufacturer Varies

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

DRAM

Please Note: Manufacturer may vary

Part No.	Product No.	Pkg.	Config.	Description	1	10	100
41339	4116-15	DIP-16	16k x 1	150ns (MM5290J-1R)	\$.99	\$.89	\$.79
41662	4164-150★	DIP-16	64k x 1	150ns (MCM6665-15)99	.89	.79
41574	41464-10★	DIP-18	64k x 4	100ns (HY53C464S-10)	1.69	1.59	1.45
41398	41256-120★	DIP-16	256k x 1	120ns (MB81256-12)79	.69	.59
42315	514256P-80★	DIP-20	256k x 4	80ns (UPD424256-80)99	.89	.69
93374	514256P-70★	DIP-20	256k x 4	70ns (TC514256P-70)	1.55	1.39	1.25
128688	HM514260AJ7★	SOJ-40	256k x 16	70ns	2.95	2.75	2.49
42219	511000P-10	DIP-18	1M x 1	100ns (M5M4C1000-10)	1.95	1.49	1.25

★ Pull = Extra Savings

***SDRAMs Available Online — Enter Web Code RAY**

Legacy Intel® Desktop Processors

Part No.	Description	Speed (MHz)	Package	1	10
183100	Intel Pentium® II processor	400	Slot 1	\$29.95	\$24.95
190060	Intel Pentium® II w/ heat sink	233	Slot 1	19.95	17.95
140054	Intel Pentium MMX® processor★	200	376/PGA	12.95	10.95
130841	Intel Pentium® processor	166	296/PGA	7.95	6.95

★ Pull = Extra Savings

Memory Modules

Please Note: Manufacturer may vary

***Web Code: GAG**

Part No.	Product No.	Capacity	Description	Config.	Pins	1	10
148460	8MBX36-60	32MB	60ns SIMM	8M x 36	72	\$17.95	\$14.95
75096	P362000-XX-6	8MB	60ns SIMM	2M x 36	72	8.95	7.95
130729	JEED07208	8MB	60ns SIMM EDO	2M x 32	72	1.25	.75
75133	P361000-XX-6	4MB	60ns SIMM	1M x 36	72	6.95	5.95

Flash Memory

Please Note: Manufacturer may vary

***Web Code: KAJ**

Part No.	Product No.	Pkg.	Config.	Description	1	10	100
74771	28F010-15	DIP-32	128k x 8	150ns, 5V	\$2.95	\$2.49	\$1.95
242587	29F010-120	DIP-32	128k x 8	120ns, 5V	2.95	2.75	2.49
242595	29F010-90	DIP-32	128k x 8	90ns, 5V	2.95	2.75	2.49
242608	29F010-70	DIP-32	128k x 8	70ns, 5V	3.25	2.95	2.75
74835	28F020-15	DIP-32	256k x 8	150ns, 5V	6.95	6.25	5.49
242616	29F020-12	DIP-32	256k x 8	120ns, 5V	7.95	6.95	5.95
242659	29F040-120	DIP-32	512k x 8	120ns, 5V	3.95	3.75	3.49
242667	29F040-90	DIP-32	512k x 8	90ns, 5V	4.25	3.95	3.75
1912896	S29GL128N10TR1010	TSSOP-56	16M x 8	100ns, 3.6V	5.95	4.95	3.95

***Boot Block Flash Available Online — Enter Web Code MEH**

***Page Mode Flash Available Online — Enter Web Code BCR**

Flash MCUs

Part No.	Mfr. Part No.	Pkg.	Description	1	10
280268	Z8F1601PM020SC	DIP-40	16kB ROM, 2kB RAM, 31 I/O, A/D	\$6.95	\$5.95
280292	Z8F2401PM020SC	DIP-40	24kB ROM, 2kB RAM, 31 I/O, A/D	6.95	5.95
280305	Z8F2401VN020SC	PLCC-44	24kB ROM, 2kB RAM, 31 I/O, A/D	6.95	5.95
280330	Z8F3201VN020SC	PLCC-44	32kB ROM, 2kB RAM, 31 I/O, A/D	6.95	5.95
280348	Z8F3202VS020SC	PLCC-68	32kB ROM, 2kB RAM, 46 I/O, A/D	6.95	5.95
280356	Z8F4801PM020SC	DIP-40	48kB ROM, 4kB RAM, 31 I/O, A/D	8.95	7.95
280364	Z8F4801VN020SC	PLCC-44	48kB ROM, 4kB RAM, 31 I/O, A/D	7.95	6.95
280372	Z8F4802VS020SC	PLCC-68	48kB ROM, 4kB RAM, 46 I/O, A/D	8.95	7.95

MAXIM Supervisory

***Web Code: SCT**

Part No.	Mfr. Part No.	Pkg.	Description	1	10
884897	MAX691ACPE	DIP-16	µP supervisory circuit (C-temp)	\$4.95	\$3.75

***CPLDs and FPGAs Available Online — Enter Web Code SAZ**

* ANA = Anachip | LAT = Lattice Semiconductor | ♦ Manufacturer Varies

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



Dallas Semiconductors

***Web Code: QDH**

Part No.	Mfr. Part No.	Pkg.	Description	1	10	100
866584	DS275♦	DIP-8	Line powered RS-232 transceiver chip	\$4.75	\$4.49	\$3.95
114198	DS1210	DIP-8	NV controller chip	3.75	2.95	2.25
114219	DS1213C	DIP-28	Smart socket	17.95	15.95	14.95
133410	DS1216C	DIP-28	Smart watch/RAM	25.95	22.95	17.95
114331	DS1232LP	DIP-8	Micromonitor chip	1.69	1.35	1.09
697231	DS1243Y-120+♦	DIP-28	64k NV SRAM w/ phantom clock	23.95	21.95	19.95
133444	DS1286	DIP-28	Watchdog timekeeper	19.95	17.95	15.95
76646	DS1287★	DIP-24	Real time clock chip	7.95	7.25	6.49
176778	DS1302	DIP-8	Trickle charge time keeping	2.59	2.05	1.49
780481	DS1302+♦	DIP-8	Trickle charge time keeping chip, C-temp	2.95	2.29	1.65
1194679	DS1307♦	DIP-8	5V, 64 x 8 serial I2C real time clock, C-temp	2.95	2.49	1.85
114374	DS1387★	DIP-24	RAMified real time clock	4.95	4.49	3.95
114382	DS1620	DIP-8	Digital thermometer and thermostat ..	5.25	4.49	2.95
865936	DS18B20♦	TO-92	Prog. resolution 1-wire digital thermometer ..	4.25	3.75	3.49
133452	DS12887★	DIP-24	Real time clock chip	5.95	4.95	3.75

★ Pull = Extra Savings

PALs, GALs & PEELs

***Web Code: YAD**

Part No.	*Mfr.	Product No.	Pkg.	Description	1	10
28020	♦	PAL16L8	DIP-20	Octal 16-input AND-OR-INVERT gate array	\$1.95	\$1.75
111667	♦	PAL16R6ANC	DIP-20	TTL, 32 x 64 AND array59	.35
652615	♦	GAL16V8-7	DIP-20	7ns 64 x 32 AND array	1.85	1.65
88399	♦	GAL16V8-10*	DIP-20	10ns 64 x 32 AND array	1.85	1.65
37452	♦	GAL16V8-15*	DIP-20	15ns 64 x 32 AND array	1.09	.99
37461	♦	GAL16V8-25*	DIP-20	25ns 64 x 32 AND array99	.89
876539	LAT	GAL16V8D-25LP	DIP-20	25ns 64 x 32 AND array	1.25	1.15
312995	♦	16CV8P-25	DIP-20	25ns 64 x 32 AND array, PEEL75	.55
105953	ANA	18CV8P-25	DIP-20	25ns 74 x 36 AND array, PEEL	2.75	2.45
88292	♦	GAL20V8-10**	DIP-24	10ns 64 x 40 AND array	1.49	1.19
38658	♦	GAL20V8-15**	DIP-24	15ns 64 x 40 AND array	1.59	1.45
38666	♦	GAL20V8-25	DIP-24	25ns 64 x 40 AND array	1.49	1.15
105996	ANA	22CV10AP-25	DIP-24	25ns 132 x 44 AND array, PEEL	2.95	2.75
876951	LAT	GAL22V10D-15LP	DIP-24	15ns 132 x 44 AND array	4.49	3.49
39159	♦	GAL22V10-15	DIP-24	15ns 132 x 44 AND array	3.75	3.49
39167	♦	GAL22V10-25	DIP-24	25ns 132 x 44 AND array	2.45	2.25
1247902	LAT	GAL22V10D-25LJI	PLCC-28	25ns 132 x 44 AND array	2.25	1.95
2065633	LAT	LC4128V-75TN100C	TQFP-100	333MHz 128mc 3.3V	16.75	16.19

GALs are electrically erasable, CMOS PLDs that can be reprogrammed and can be used in place of numerous PALs

* Replaces PALs: 10H8, 10L8, 10P8, 12H6, 12L6, 12P6, 14H4, 14L4, 14P4, 16H2, 16H8, 16L2, 16L8, 16P2, 16P8, 16R4, 16R6, 16R8, 16RP4, 16RP6, 16RP8, 14H8, 14L8, 14P8, 16H6, 16L6, 16P6

** Replaces PALs: 18H4, 18L4, 18P4, 20H2, 20H8, 20L2, 20L8, 20P2, 20P8, 20R4, 20R6, 20R8, 20RP4, 20RP6, 20RP8

MPU Supervisory

Please Note: Manufacturer may vary

***Web Code: PAN**

Part No.	Product No.	Pkg.	Description	1	10	100
106219	MAX690CPA	DIP-8	Watchdog timer, 4.4V	\$3.95	\$3.59	\$3.25
1802620	ADM705ANZ♦	DIP-8	Low cost microprocessor95	.75	.55
106260	MAX1232CPA	DIP-8	Watchdog timer, 4.65V - 4.75V	1.95	1.49	.85

Voice Chip

***Web Code: XAU**

Single-Chip Voice Record/Playback Device

- Manual switch or microprocessor controllable
- Directly cascadable for longer durations
- Single voltage operation: +5V (4.5V to 5.5V operating range)
- Playback can be edge or level-activated
- 28-pin DIP
- Typical 100k record cycles, 1µA standby current and 100 year message retention



Part No.	Mfr. Part No.	Description	1	10	50
141671	ISD1110P	Voice record/playback (10 sec.)	\$6.95	\$6.25	\$5.49



Microcontrollers

*Web Code: PAV

Part No.	*Mfr.	Mfr. Part No.	Pkg.	Description	1	10
145040	MCH	PIC12C508A-04/P	DIP-8	512 OTP, 4MHz, 5 I/O, C-temp	\$.95	\$.85
144258	MCH	PIC12C509A-04/P	DIP-8	1k OTP, 4MHz, 5 I/O, C-temp	.95	.85
145058	MCH	PIC12C509A/JW	DIP-8	1k EPROM, 41-bit, 4MHz, 5 I/O	8.95	7.95
193455	MCH	PIC12C671-04/P	DIP-8	1k OTP, 128-bit, 4MHz, 6 I/O	1.75	1.49
193463	MCH	PIC12C672-04/P	DIP-8	2k OTP, 128-bit, 4MHz, 6 I/O	1.75	1.49
248145	MCH	PIC12C674-10/P	DIP-8	2k OTP, 128-bit, 10MHz, 5 I/O	2.49	1.95
223790	MCH	PIC12F629-I/P	DIP-8	1k flash, 20MHz, 6 I/O, I-temp	.89	.85
223781	MCH	PIC12F675-I/P	DIP-8	1k flash, 20MHz, 6 I/O, I-temp	1.09	.99
312514	MCH	PIC12F683-I/P	DIP-8	2k flash, 20MHz, 6 I/O, I-temp	1.29	1.25
128338	MCH	PIC16C54A-04/P	DIP-18	512 OTP, 4MHz, 12 I/O, C-temp	1.39	1.29
247214	MCH	PIC16C54C-20/P	DIP-18	512 OTP, 25-bit, 20MHz, 12 I/O	1.25	.95
200416	MCH	PIC16C55A-04/P	DIP-28	512 OTP, 24-bit, 4MHz, 20 I/O	1.95	1.59
193341	MCH	PIC16C57C-04/P	DIP-28	2k OTP, 4MHz, 20 I/O, C-temp	2.09	1.95
200424	MCH	PIC16C66-04/SP	DIP-18	8k OTP, 368-bit, 4MHz, 22 I/O	4.95	4.49
247484	MCH	PIC16C67-20/P	DIP-40	8k OTP, 368-bit, 20MHz, 33 I/O	5.49	5.25
200432	MCH	PIC16C72A-04/SP	DIP-28	2k OTP, 128-bit, 4MHz, 22 I/O	3.49	2.95
247695	MCH	PIC16C72A-20/P	DIP-28	2k OTP, 128-bit, 20MHz, 22 I/O	3.95	3.55
193359	MCH	PIC16C711-04/P	DIP-18	1k OTP, 4MHz, 13 I/O, C-temp	2.25	2.15
247599	MCH	PIC16C711-20/P	DIP-18	1k OTP, 68-bit, 20MHz, 13 I/O	2.75	2.49
247601	MCH	PIC16C711-20/SO	SOIC-18	1k OTP, 68-bit, 20MHz, 13 I/O	2.75	2.49
247759	MCH	PIC16C773-I/SP	DIP-28	4k OTP, 256-bit, 20MHz, 22 I/O	4.95	4.49
145111	MCH	PIC16F84A-04/P	DIP-18	1k flash, 4MHz, 13 I/O, C-temp	3.55	3.35
145120	MCH	PIC16F84-10/P	DIP-18	1k flash, 10MHz, 13 I/O, C-temp	6.95	6.75
193332	MCH	PIC16F84A-20/P	DIP-18	1k flash, 20MHz, 13 I/O, C-temp	3.75	3.55
246861	MCH	PIC16F84A-20/P	DIP-18	1k flash, 20MHz, 13 I/O, I-temp	3.95	3.75
246887	MCH	PIC16F84A-20/SS	SSOP-20	68-bit, 1k flash, 20MHz, 13 I/O	4.95	4.49
247097	MCH	PIC16F87-I/P	DIP-18	4k flash, 20MHz, 16 I/O, I-temp	3.49	3.25
312733	MCH	PIC16F88-I/P	DIP-18	4k flash, 20MHz, 16 I/O, I-temp	3.25	2.95
193439	MCH	PIC16F627-20/P	DIP-18	1k flash, 20MHz, 16 I/O, C-temp	2.95	2.75
193447	MCH	PIC16F628-20/P	DIP-18	2K flash, 20MHz, 16 I/O, C-temp	3.25	2.95
246756	MCH	PIC16F628-20/P	DIP-18	2k flash, 20MHz, 16 I/O, I-temp	3.49	3.25
223749	MCH	PIC16F630-I/P	DIP-14	1k flash, 20MHz, 12 I/O, I-temp	1.29	1.19
247142	MCH	PIC16F648A-I/P	DIP-18	4k flash, 20MHz, 16 I/O, I-temp	2.25	1.95
223757	MCH	PIC16F676-I/P	DIP-14	1k flash, 20MHz, 12 I/O, I-temp	1.29	1.25
312590	MCH	PIC16F684-I/P	DIP-14	2k flash, 20MHz, 12 I/O, I-temp	1.59	1.49
312611	MCH	PIC16F688-I/P	DIP-14	4k flash, 20MHz, 12 I/O, I-temp	1.95	1.75
223765	MCH	PIC16F818-I/P	DIP-18	1k flash, 20MHz, 16 I/O, I-temp	2.09	1.95
247071	MCH	PIC16F819-I/SS	SSOP-20	256-bit, 2k flash, 20MHz, 16 I/O	2.15	1.95
223773	MCH	PIC16F819-I/P	DIP-18	2k flash, 20MHz, 16 I/O, I-temp	2.59	2.25
246895	MCH	PIC16F870-I/SP	DIP-28	2k flash, 20MHz, 22 I/O, I-temp	2.95	2.75
246924	MCH	PIC16F871-I/P	DIP-40	128-bit, 2k flash, 20MHz, 33 I/O	3.15	2.95
246941	MCH	PIC16F872-I/SP	DIP-28	2k flash, 20MHz, 22 I/O, I-temp	2.95	2.75
246975	MCH	PIC16F873A-I/SP	DIP-28	4k flash, 20MHz, 22 I/O, I-temp	3.95	3.75
193367	MCH	PIC16F876-20/SP	DIP-28	8k flash, 20MHz, 22 I/O, C-temp	5.95	5.75
247011	MCH	PIC16F876A-I/SP	DIP-28	8k flash, 20MHz, 22 I/O, I-temp	4.25	3.95
247046	MCH	PIC16F877A-I/L	PLCC-44	8k flash, 20MHz, 33 I/O, I-temp	5.65	5.45
176882	MCH	PIC16F877-20/P	DIP-40	8k flash, 20MHz, 22 I/O, C-temp	5.65	5.45
247038	MCH	PIC16F877A-I/P	DIP-40	8k flash, 20MHz, 33 I/O, I-temp	4.75	4.55
247880	MCH	PIC17C42A-16/L	PLCC-44	2k OTP, 232-bit, 16MHz, 33 I/O	7.95	6.95
247901	MCH	PIC17C43-25/L	PLCC-44	4k OTP, 454-bit, 25MHz, 33 I/O	9.95	8.95
247919	MCH	PIC17C44-33/P	DIP-40	8k OTP, 454-bit, 33MHz, 33 I/O	9.95	8.95
247943	MCH	PIC17C756A-33/L	PLCC-68	16k OTP, 902-bit, 33MHz, 50 I/O	11.95	10.95
247951	MCH	PIC17C762-16/L	PLCC-44	8k OTP, 678-bit, 33MHz, 66 I/O	12.95	11.95
247960	MCH	PIC17C766-33/L	PLCC-84	16k OTP, 902-bit, 33MHz, 66 I/O	14.95	12.95
200491	MCH	PIC18C242-I/SP	DIP-28	16k OTP, 512-bit, 40MHz, 23 I/O	4.95	4.25
200504	MCH	PIC18C252-I/SP	DIP-28	32k OTP, 1536-bit, 40MHz, 23 I/O	5.49	4.95
247994	MCH	PIC18F252-I/SP	DIP-28	32k flash, 40MHz, 23 I/O, I-temp	5.39	5.25

Microcontrollers (Continued)

*Web Code: PAV

Part No.	*Mfr.	Mfr. Part No.	Pkg.	Description	1	10
248081	MCH	PIC18F442-I/L	PLCC-44	768-bit, 8k flash, 40MHz, 34 I/O	\$5.95	\$5.75
312477	MCH	PIC18F448-I/L	PLCC-44	768-bit, 16k flash, 40MHz, 33 I/O	7.95	6.49
248031	MCH	PIC18F452-I/P	DIP-40	32k flash, 40MHz, 34 I/O, I-temp	5.95	5.75
248049	MCH	PIC18F452-I/L	PLCC-44	32k flash, 40MHz, 34 I/O, I-temp	5.95	4.95
248057	MCH	PIC18F458-I/P	DIP-40	32k flash, 40MHz, 33 I/O, I-temp	6.95	6.75
248129	MCH	PIC18F1320-I/SO	SOIC-18	256-bit, 4k flash, 40MHz, 16 I/O	2.49	2.25
248111	MCH	PIC18F1320-I/P	DIP-18	8k flash, 40MHz, 16 I/O, I-temp	3.95	3.49
312303	MCH	PIC18F2525-I/SP	DIP-28	48k flash, 40MHz, 25 I/O, I-temp	6.95	6.25
248330	ATM	ATMEGA8-16PI	DIP-28	8k flash, 16MHz, 23 I/O, I-temp	2.95	2.65
765302	ATM	ATTINY13-20PU	DIP-8	1k flash, 20MHz, 6 I/O, I-temp	1.95	1.75
168874	ATM	AT89C2051-24PU	DIP-20	2k flash, 24MHz, 15 I/O, C-temp	1.09	.89
204089	ATM	AT89C4051-24PC	DIP-20	4k flash, 24MHz, 15 I/O, C-temp	1.95	1.49
323133	ATM	ATMEGA16-16PU	DIP-40	6k flash, 16MHz, 32 I/O, I-temp	4.75	3.95
689039	ATM	ATTINY2313V-10PU	DIP-20	2k flash, 10MHz, 18 I/O, I-temp	2.25	1.59
1537061	ATM	ATTINY2313-20PU	DIP-20	2k flash, 20MHz, 18 I/O, I-temp	2.49	2.19
248217	ATM	ATTINY26-16PC	DIP-20	2k flash, 16MHz, 16 I/O, C-temp	2.05	1.49
323141	ATM	ATMEGA8515-16PC	DIP-40	8k flash, 16MHz, 35 I/O, C-temp	4.95	4.75
395621	ATM	ATMEGA8515L-8PC	DIP-40	8k flash, 8MHz, 35 I/O, C-temp	3.49	2.95
168911	ATM	AT89C51-24JC	PLCC-44	4k flash, 24MHz, 32 I/O, C-temp	3.95	3.49
168903	ATM	AT89C51-24PC	DIP-40	4k flash, 24MHz, 32 I/O, C-temp	3.95	3.49
168920	ATM	AT89C52-24PC	DIP-40	8k flash, 24MHz, 32 I/O, C-temp	2.95	2.49
220871	ATM	AT89S52-24JI	PLCC-44	8k flash, 24MHz, 32 I/O, I-temp	1.35	1.25
662637	ATM	AT89S52-24PC	DIP-40	8k flash, 24MHz, 32 I/O, C-temp	1.75	1.65
168946	ATM	AT89C55WD-24PC	DIP-40	20k flash, 24MHz, 32 I/O, C-temp	3.49	3.25
114403	DAL	DS80C320-MCG	DIP-40	High speed LP micro, C-temp	10.95	8.95
1951035	ATM	AT89S8253-24PU	DIP-40	12k flash, 24MHz, 32 I/O, I-temp	3.95	3.49
248663	TI	MSP430F1121AIPW	SSOP-20	16-bit MCU, flash, 8MHz 4k ROM, 14 I/O	2.49	2.15

MICROCHIP 16-Bit Digital Signal Controllers dsPIC

The dsPIC® Digital Signal Controller (DSC) from Microchip is a powerful 16-bit (data) modified Harvard RISC machine that combines the control advantages of a high-performance 16-bit microcontroller (MCU) with the high computation speed of a fully implemented digital signal processor (DSP) to produce a tightly coupled single-chip single-instruction stream solution for embedded systems design. All integrate FLASH program memory and most have EEPROM data storage.

- Memory: flash
- Speed: 40MHz

Part No.	Mfr. Part No.	Pkg.	MIPS	Program Mem. Bytes	SRAM Bytes	1	10
321787	DSPIC30F2010-20I/SOG	SOIC-28	20	12k	512	\$5.95	\$5.75
321808	DSPIC30F2010-30I/SOG	SOIC-28	30	12k	512	6.95	6.75
321816	DSPIC30F6010-20I/PF	TQFP-80	20	144k	8192	15.95	14.95
321832	DSPIC30F6011-20I/PF	TQFP-64	20	132k	6144	14.95	13.95
321859	DSPIC30F6012-20I/PF	TQFP-64	20	144k	8192	14.95	12.95
323053	DSPIC30F6013-20I/PF	TQFP-80	20	132k	6144	14.95	13.95
323061	DSPIC30F6013-30I/PF	TQFP-80	30	132k	6144	15.95	14.95
323070	DSPIC30F6014-20I/PF	TQFP-80	20	144k	8192	14.95	13.95
323088	DSPIC30F6014-30I/PF	TQFP-80	30	144k	8192	15.95	14.95


PARALLAX 50MIPS SX Microcontroller

Part No.	Mfr. Part No.	Description	1	10
162931	SX28AC/DG-GP	DIP-28 50MIPS SX microcontroller	\$4.95	\$4.49

*Our goal is to provide you with more of what you want.
Let us know how we can better serve your electronic needs.
Send feedback to Management@Jameco.com.*

* ATM = Atmel Semiconductor | DAL = Dallas Semiconductor | MCH = Microchip | TI = Texas Instruments

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above



80C52-BASIC Microcontroller

A custom-masked microcontroller with a full-featured 8k-byte ROM-resident BASIC-52 interpreter. 256 x 8-bit RAM.

- Full BASIC interpreter in ROM on a single chip
- Operates DC to 12MHz
- "Stand-alone" software development
- On-chip oscillator and clock circuit
- Interrupts can be handled by BASIC or Assembly Language

Part No.	Mfr. Part No.	Description	1	10	50
125647	80C52BASIC	40-pin CPU 8-bit CMOS w/ BASIC interpreter	\$33.95	\$31.95	\$29.95

KAE Servo Controllers

* Web Code: YBC

Controller operates from standard 8-bit serial interface (RS232 or RS485). Using RS485, any mix of up to 32 controllers may be operated from a single serial port. Complete documentation.

146472: PIC-SERVO Motion Control Chipset for DC Motors

- For DC motors with digital encoders
- 32-bit position, velocity and acceleration resolution
- PWM and direction outputs connect to servo amplifier
- Two chipset (PIC-SERVO V.4, 28-pin and PIC-ENC V.1, 18-pin)

323934: PIC-SERVO SC Servo Motion Control I.C.

- For DC motors (brush or brushless w/ incremental encoder feedback)
- Serial interface connects to RS232/485/422 communication port
- Position control, velocity control, trapezoidal profiling, plus step and direction inputs

Part No.	Mfr. Part No.	Package	1	10	50
146472	KAE-TOV4-DPS	DIP-28/18, 0.3"	\$35.95	\$32.95	\$30.95
323934	KAE-TOV10-DP	DIP-28, 0.3"	29.95	26.95	24.95

KAE Smart Serial Adapter

Serial Converter/Stand Alone Host Controller

- Supports USB or RS232 serial interface
- Up to 32 NMC PIC-SERVO, PIC-STEP, PIC-I/O modules can be controlled from a single smart serial adapter
- RS232 operation supports baud rates from 19,200 to 115,200
- Supports Windows®, LINUX, Mac® OS, and other operating systems
- May be used as a stand alone host with either the simple sequencer chip or a PIC18F2620 MCU
- On board connector for MICROCHIP MPLAB ICD2

Part No.	Mfr. Part No.	Description	1	5
1586120	KAE-SSA485-BDV2	Smart serial adapter	\$99.95	\$89.95

PARALLAX BASIC Stamp Modules

* Web Code: BSM

• 183071: BS2 OEM Kit Z

Complete specifications see www.Jameco.com

Part No.	Mfr. Part No.	Package	Speed	No. of I/O Pins	1	5
127693	BS1-IC	14-pin	4MHz	8	\$28.95	\$26.95
183071	27291	20-pin SIP	—	—	30.95	29.95
130892	BS2-IC	24-pin	20MHz	16 + 2	48.95	43.95
283047	BS2E-IC	24-pin	20MHz	16 + 2	53.95	49.95
2109641	BS2PE	24-pin	8MHz (turbo)	16 + 2	74.95	70.95
184911	BS2P24-IC	24-pin	20MHz (turbo)	16 + 2	78.95	69.95
184920	BS2P-40-IC	40-pin	20MHz (turbo)	16 + 2	88.95	79.95
2109350	BS2PX24	24-pin	32MHz (turbo)	16 + 2	78.95	69.95
159775	BS2SX-IC	24-pin	50MHz (turbo)	16 + 2	58.95	52.95

See page 195 for Parallax Boards & Kits

PARALLAX Propeller Microprocessor Chip

Designed for high-speed embedded processing while maintaining low-power and low-current consumption.

Complete specifications see www.Jameco.com

Part No.	Mfr. Part No.	Package	1	10
2007134	P8X32A-D40	DIP-40	\$12.95	\$11.95

Tiny Logic® Series

Order in multiples of 10

Part No.	Mfr. Part No.	Pkg.	Description	10	100
873830	NC7SU04M5X	SOT-23/5	Single unbuffered inverter	\$.07	\$.05
873725	NC7S08P5X	SC-70/5	Single 2-input AND gate	.09	.05
874138	NC7SZ125M5X	SOT-23/5	Buffer w/ 3-st. output	.09	.05

Interface Series

* Web Code: RBU

Part No.	*Mfr.	Product No.	Pkg.	Description	1	10
242077	+	TC428CPA	DIP-8	4.5-18V, dual MOSFET driver	\$.99	\$.89
832448	+	DS26LS32ACM/NOPB	SOIC-16	Quad differential line receiver	.59	.45
1291647	MCH	TC4420CPA	DIP-8	6A high speed MOSFET driver	1.39	1.15
313437	+	ICM7218AIJ	DIP-28	5V, 8 digit LCD driver	6.95	6.25
312160	MAX	MAX7219CNG	DIP-24	5V, 8 digit LCD driver	7.95	6.95
313322	+	ICM7228AIP	DIP-28	5V, 8 digit LCD driver	7.95	7.49
241875	+	FAN8082	DIP-8	18V, bi-directional DC motor driver	.69	.59
50884	+	SN75154N	DIP-16	5-12V, quad line receiver	.35	.25
277940	+	SN75179BP	DIP-8	5V, diff line driver/receiver	1.29	1.09
277974	+	SN75183N	DIP-14	5V, dual diff line driver	2.25	1.95
51027	+	SN75451AN	DIP-8	7V, dual peripheral AND driver	.79	.69
51131	+	SN75492P	DIP-14	5V, HEX digit driver	4.95	4.49

* Ethernet Controllers Available Online — Enter Web Code LAE

* Interface Controllers Available Online — Enter Web Code HAS



Digital Interface

* Web Code: WBB

Part No.	Mfr. Part No.	Pkg.	Description	1	10	50
171951	EDE702	DIP-18	Serial LCD interface	\$7.19	\$6.75	\$6.25
171969	EDE1144	DIP-18	Keypad encoder	5.19	4.95	4.75
141532	EDE1200	DIP-18	Unipolar stepper motor controller	6.39	6.15	5.95
157526	EDE1204	DIP-18	Bipolar stepper motor controller	6.39	6.15	5.95
321736	EDE2008	DIP-18	Pushbutton debouncer w/ 8-independent chan	4.19	3.95	3.75
321761	EDE2208/P	DIP-18	8-pushbutton momentary to toggle	4.19	3.95	3.75

Motor/Display Drivers

* Web Code: DAD

Part No.	*Mfr.	Product No.	Pkg.	Description	1	10	100
25216	ON	MC3479P	DIP-16	7.2-16.5V, stepper motor driver	\$5.95	\$5.49	\$4.95
1762681	ALL	UDN2981A-T	DIP-18	8-channel source driver	1.79	1.59	1.39
24230	NSC	LM3914N	DIP-18	25V, dot/bar display driver	2.75	2.49	2.25
300003	NSC	LM3914N-1	DIP-18	25V, dot/bar display driver	1.95	1.85	1.59
901010	NSC	LM3914N-1/NOPB	DIP-18	25V, dot/bar display driver	2.35	1.95	1.45
24256	NSC	LM3915N	DIP-18	25V, dot/bar display driver	2.75	2.49	2.25
901061	NSC	LM3915N-1	DIP-18	3dB/step, 30db range dot/bar disp. dvr	3.09	2.49	1.95
24272	NSC	LM3916N	DIP-18	3-25V, dot/bar display driver	2.75	2.49	2.25
2126299	HIT	HA13426	SP-23TA	3 phase motor driver	2.95	2.49	1.95
241824	MOT	MC14489BP	DIP-20	5V, 7-segment LED display driver	3.95	3.25	2.95



Over 5,000 SKUs Over 15 Million Parts in Stock
In Lots of up to 1000 Pieces | Priced Below a Dollar.

Look for pricing shaded in blue throughout the catalog
and for a larger selection go to:

Jameco.com/MakesCents

* ALL = Allegro | HIT = Hitachi | MAX = Maxim Semi | MCH = Microchip | MOT = Motorola | NSC = National Semi | ON = ON Semi | + Manufacturer Varies

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



Stepper Motor Drivers/Controllers

*Web Code: GDP

Part No.	*Mfr.	Product No.	Pkg.	Description	1	10	100
924545	ST	L293DD	SOIC-20	Push pull 4-ch driver w/ diodes	\$1.95	\$1.75	\$1.49
288067	ST	L297/1	DIP-20	Stepper motor controller, 5V	8.95	7.95	6.95
245403	ST	L298N	MW-15	Dual full-bridge driver, 46V	2.59	2.45	2.25
288091	ST	L6202	DIP-18	DMOS full-bridge driver, 48V	5.95	5.49	4.95
288104	ST	L6203	MW-11	DMOS full-bridge driver, 48V	6.95	6.25	5.49
1695596	INF	ICE2AS01	PDIP-8	Current mode PWM controller	.89	.79	.69

*Motion Control Available Online — Enter Web Code DEU

Encoders/Decoders

*Web Code: VAR

Part No.	*Mfr.	Product No.	Pkg.	Description	1	10	100
243408	+	TP3054N	DIP-16	U-law PCM CODEC & filter, 5V	\$1.95	\$1.49	\$1.25
296702	MOT	MC145026P	DIP-16	Encoder, 4.5-18V	2.49	2.25	2.05
296711	MOT	MC145027P	DIP-16	Decoder, 4.5-18V	2.95	2.75	2.49
123730	HOL	HT12E	DIP-18	Encoder, 2.4-12V	1.75	1.55	1.35
123748	HOL	HT12D	DIP-18	Decoder, 2.4-12V	1.65	1.45	1.25
243483	MCH	HCS512-I/P	DIP-18	Code hopping decoder, 4-6V	4.95	4.25	3.95
287945	MCH	MCP2140-I/P	DIP-18	Standard protocol stack controller, 3-5V	1.95	1.75	1.25
287970	MCH	MCP2150-I/SO	SOIC-18	Standard protocol stack controller, 3-5V	3.95	2.95	2.75
243459	MCH	MCP2150-I/P	DIP-18	Standard protocol stack controller, 3-5V	2.95	2.75	2.49

Buffer

*Web Code: WBR

Part No.	Product No.	Pkg.	Description	1	10	100
23051	LH0002CN	DIP-10	General purpose buffer	\$12.95	\$11.95	\$10.95

Power Management

*Web Code: PMT

Part No.	*Mfr.	Product No.	Pkg.	Description	1	10
312848	TI	BQ2004PN	DIP-16	NiMH/NiCd switchmode chrg mgmt w/ neg dV	\$2.95	\$2.49
312928	TI	BQ2018TS-E	TSSOP-8	Rechargeable battery power monitor	2.95	2.75
312936	TI	BQ2019PW	TSSOP-8	Rechargeable battery power monitor	2.95	2.75
312881	TI	BQ2040SN-D111	SOIC-16	Li-Ion/NiMH/NiCd gas gauge w/ smbus	4.95	4.49

RS-422/423/485 Drivers/Receivers

*Web Code: NBT

* Order in multiples of 10					1	10	100
Part No.	*Mfr.	Product No.	Pkg.	Description	1	10	100
299807	+	LTC485CN8	DIP-8	RS-485 LP xcvr, 5V	\$1.75	\$1.49	\$1.25
244195	+	MAX1487CPA	DIP-8	RS-485/422 LP xcvr, 12V	2.25	1.75	1.55
39571	+	26LS30	DIP-16	RS-422/423 line driver, 5V	2.49	2.25	1.95
39600	+	26LS32	DIP-16	RS-422/423 quad diff. line rcvr, 5V	.79	.69	.59
25232	+	MC3486P	DIP-16	RS-422/423 quad diff. line rcvr, 5V	*	.09	.07
25259	+	MC3487P	DIP-16	RS-422/423 quad line driver, 5V	.75	.65	.55
50948	+	SN75174N	DIP-16	RS-422 quad diff. line driver w/ 3 st.	.89	.79	.69
50956	+	SN75175N	DIP-16	RS-422/423 quad diff. line rcvr, 5V	.89	.79	.69
758364	TI	SN75176AP	DIP-8	RS-422 differential bus xcvr	.65	.55	.45
50964	+	SN75176BN	DIP-8	RS-422 diff. line bus xcvr, 5V	.59	.49	.45

*IEEE-1394 Available Online — Enter Web Code KEN

RS-232 Drivers/Receivers

*Web Code: EAV

Part No.	*Mfr.	Product No.	Pkg.	Description	1	10	100
142535	+	MAX202CPE	DIP-16	5V, 120kbps, w/ 0.1µF ext. caps	\$2.49	\$2.05	\$1.95
244232	+	MAX202CSE	SOIC-16	5V, 120kbps, w/ 0.1µF ext. caps	2.25	1.95	1.75
244241	+	MAX202EPE	DIP-16	5V, 120kbps, w/ 0.1µF ext. caps	2.95	2.49	2.25
282790	MAX	MAX211CAI	SSOP-28	5V, w/ 0.1µF ext. caps.	2.95	2.75	2.49
875448	INS	HIN232CP	DIP-16	5V hi spd RS-232 transmitter/rcvr	1.09	.99	.89
24811	+	MAX232CPE*	DIP-16	5V, 200kbps, multichannel	1.85	1.65	1.25
24812	+	MAX232CPE	DIP-16	5V, 200kbps, multichannel	1.95	1.75	1.35
318959	MAX	MAX232CPE	DIP-16	5V, 200kbps, multichannel	2.25	1.95	1.75
106147	+	MAX232CWE	SOIC-16	5V, 120kbps, multichannel	2.49	2.15	1.95
256401	+	MAX232DR	SOIC-16	5V, 120kbps, dual driver/rcvr	.69	.59	.49
106155	+	MAX232EPE	DIP-16	5V, 200kbps, multichannel	3.95	3.15	2.79
698576	TI	MAX232N	DIP-16	Dual EIA-232 driver/receiver, C-temp	.75	.65	.55
903277	TI	MAX232IN	DIP-16	Dual EIA-232 driver/receiver, I-temp	.75	.65	.55
106163	+	MAX233CPP	DIP-20	5V, 120kbps, multichannel	5.75	4.75	4.25
106171	+	MAX235CPG	DIP-24	5V, 120kbps, multichannel	10.95	9.95	7.95
106180	+	MAX238CNG	DIP-24	5V, 120kbps, multichannel	5.49	4.95	4.25
23157	+	DS1488N*	DIP-14	15V, quad line driver	.35	.29	.25
16379	+	DS14C89N	DIP-14	5V, quad line receiver	1.19	1.09	.95
235301	+	DS14C232CN	DIP-16	5V, LP, TIA/EIA dual driver/rcvr	1.95	1.49	1.19
23181	+	SN75189N*	DIP-14	5V, quad line receiver	.35	.29	.25
25099	+	MC145406P	DIP-16	5-12V, EIA-232-D/V.28 driver/rcvr	2.25	1.95	1.75
929207	ON	MC100EP17DWG	SOIC-20	Quad differential driver/receiver	13.95	12.95	10.95

*10 pcs. in Linear series IC cabinet kit, pg 16

Comparators

*Web Code: EBS

* Order in multiples of 10					1	10	100
Part No.	*Mfr.	Product No.	Pkg.	Description	1	10	100
311044	NSC	LM111J-8	DIP-8	Voltage comparator	\$7.95	\$6.95	\$6.25
282087	+	LM139J	CDIP-14	Low power, low offset volt quad	1.75	1.55	1.35
23528	+	LM311N*	DIP-8	Voltage comparator	.25	.22	.19
902522	TI	LM311DR	SOIC-8	Differential comparator w/ strobes	*	.12	.09
837812	NSC	LM311N/NOB	DIP-8	Voltage comparator	.89	.69	.49
143888	+	LM339AN	DIP-14	Low power quad comparator	.25	.22	.15
826742	TI	LM339N	DIP-14	Quad differential comparator	.35	.29	.25
23851	+	LM339N*	DIP-14	Quad comparator	.25	.22	.17
193594	+	LM339M	SOIC-14	Low power low offset volt quad	*	.09	.07
120900	+	LM392N	DIP-8	Low power op amp./volt comp.	1.09	.99	.89
24281	+	LM393N*	DIP-8	Dual comparator	.25	.22	.17
212177	+	LM393AN	DIP-8	Low power low offset volt quad comp.	*	.19	.15
297844	MAX	MAX902CSD	SOIC-14	Hi-speed low power precision volt comp.	5.95	5.25	4.95
312266	LTC	LT1016CS8	SOIC-8	Ultra-fast precision 10ns comparator	1.95	1.75	1.39
107238	+	LM3302N	DIP-14	Low power low offset volt quad	*	.15	.12
1944741	ST	TS3721IN	DIP-8	LP dual CMOS volt (I-temp)	*	.09	.05
277173	NSC	LMC7211AIM	SOIC-8	Comp w/ rail-to-rail input, push pull output	.75	.65	.55
277190	NSC	LMC7211BIM	SOIC-8	Comp w/ rail-to-rail input, push pull output	.75	.65	.55

*10 pcs./**20 pcs. included in Linear kit, pg 16

*65LVDS Series Available Online — Enter Web Code UEU



More Information Online

Compare products online to quickly find the products you want with the specifications and real time product availability. Purchasing products has never been easier.

www.Jameco.com

*HOL = Holtek | INF = Infineon Tech | INS = Intersil | LTC = Linear Tech | MAX = Maxim | MCH = Microchip | MOT = Motorola | NSC = National Semi | ON = ON Semi | ST = ST Micro | TI = Texas Ins. | + = Varies

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed AboveOrder by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

Amplifiers, A/D and D/A Converters & Op Amps

NAME BRANDS	4 LEVELS OF SAVINGS		
	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Audio Amps

*Web Code: MBP

Part No.	*Mfr.	Product No.	Pkg./Pins	Description	1	10	100
243678	ADI	OP275GP	DIP-8	Dual JFET audio op amplifier	\$2.25	\$1.85	\$1.49
24037	NSC	LM380N	DIP-14	2-watt, power amplifier	1.39	1.09	.75
24088	NSC	LM383T	TO-220/5	7-watt, high power	5.95	5.49	4.95
24096	NSC	LM384N	DIP-14	5-watt audio amplifier	1.65	1.45	1.05
193623	NSC	LM386M-1	SOIC-8	Low volt audio power amp.	.49	.45	.35
24125	NSC	LM386N-1*	DIP-8	Low voltage, 250mW/6V	.79	.59	.45
24126	NSC	LM386N-1A	DIP-8	Low voltage, 250mW/6V	.65	.49	.41
839826	NSC	LM386N-1/NOBP	DIP-8	Low voltage audio power amp.	.99	.79	.55
24133	NSC	LM386N-3*	DIP-8	Low voltage, 500mW/9V	.69	.59	.49
24483	NSC	LM725CN	DIP-8	Instrumentation op amplifier	1.25	.95	.79
295718	NSC	LM1203N	DIP-28	RGB video amplifier	5.95	5.49	4.95
24942	ON	MC1350P	DIP-8	Video IF amp. (12V operation)	2.95	2.75	2.49
23270	NSC	LM1875T	TO-220/5	20-watt audio power amp.	2.95	2.49	1.95
835753	NSC	LM1875T/LB03	DIP-20	20-watt audio power amp	2.49	2.25	1.85
23288	NSC	LM1877N-9	DIP-14	Dual power audio amplifier	1.95	1.75	1.49
107140	NSC	LM1881N	DIP-8	Video synchronous separator	2.49	2.25	1.59
32897	ST	TDA2002V	TO-220/5	8-watt audio high power amp.	4.95	4.49	3.95
1416999	ST	TDA2030V	PWAT-5	14-watt hi-fi audio amp.	1.95	1.75	1.49
315344	ST	TDA2040V	PWAT-5	20-watt hi-fi power	2.25	1.95	1.75
275830	TI	OPA2134PA	DIP-8	High performance audio op amp.	3.25	2.95	2.75
312063	ADI	SSM2141P	DIP-8	High common-mode rejection diff. line rec.	2.49	1.95	1.49
320670	NSC	LM3886TF	TO-220/11	68-watt high-perf., isol. pkg.	5.95	4.95	4.25
192516	NSC	LM3886T	TO-220/11	68-watt high-performance	5.95	4.95	3.95
302201	NSC	LM4752T	TO-220/7	Stereo 11-watt audio power amp.	2.95	2.75	2.49
316873	MOT	MC34119D	SOIC-8	LP audio amp. (500mW, 16VDC)	1.19	1.09	.89
316865	MOT	MC34119P	DIP-8	LP audio amp. (500mW, 16VDC)	2.25	2.05	1.85

*10 pieces included in Linear kit, pg 16

Amplifiers

Part No.	Mfr. Part No.	Pkg.	Description	1	10	100
1805943	ADXL213AE	LCC-8	5V, low cost $\pm 2g$ dual-axis accelerometer	\$16.95	\$15.95	\$14.95
1780862	AD620ANZ	DIP-8	Low cost, LP instrumentation amp	6.75	5.49	4.75
1781136	AD627AR	SOIC-8	Low cost, instrumentation amp	4.95	3.95	3.49
311132	AD811AN	DIP-8	High performance, video op amp	7.49	6.25	5.75

Instrumentation Amplifier

*Web Code: NDA

Part No.	Mfr. Part No.	Pkg.	Description	1	10	100
825934	INA126PA	DIP-8	μPower instrumentation amp.	\$2.75	\$2.49	\$2.25

A/D & D/A Converters

*Web Code: QAG

Part No.	*Mfr.	Product No.	Pkg.	Description	1	10	100
277149	MAX	MAX110ACWE	SOIC-16	A/D, 14-bit, 5V, 50sps, 2-ch	\$8.95	\$7.95	\$6.95
277131	MAX	MAX110BCPE	DIP-16	A/D, 14-bit, 5V, 50sps, 2-ch	12.95	9.95	9.49
277122	MAX	MAX110BCWE	SOIC-16	A/D, 14-bit, 5V, 50sps, 2-ch	6.95	5.95	4.95
277069	MAX	MAX197BCNI	DIP-28	A/D, 12-bit, 5V, 10Ksps, 8-ch	15.95	13.95	11.95
289545	TI	TLC540IDW	SOIC-20	A/D, 8-bit, 5V, 75Ksps	2.95	2.49	2.25
289553	TI	TLC540IFN	PLCC-20	A/D, 8-bit, 5V, 75Ksps	2.95	2.49	2.25
289596	TI	TLC541IDW	SOIC-20	A/D, 8-bit, 5V, 40Ksps	2.49	1.95	1.75
289705	TI	TLC542IFN	PLCC-20	A/D, 8-bit, 5V, 25Ksps	1.75	1.49	1.25
289713	TI	TLC545CN	DIP-28	A/D, 8-bit, 5V, 76Ksps	4.25	3.75	3.25
10145	NSC	ADC0803LCN	DIP-20	A/D, 8-bit, 5V, 9.1Ksps, 1-ch	3.95	3.25	2.95
10153	NSC	ADC0804LCN	DIP-20	A/D, 8-bit, 5V, 9.1Ksps, 1-ch	2.75	2.25	1.85
828342	NSC	ADC0804LCN/NOBP	DIP-20	A/D, 8-bit μ P compatible ($\pm 1LSB$)	2.95	2.35	2.05
10170	NSC	ADC0808CCN	DIP-28	A/D, 8-bit, 5V, 9.1Ksps, 8-ch	4.75	3.95	3.39
10188	NSC	ADC0809CCN	DIP-28	A/D, 8-bit, 5V, 9.1Ksps, 8-ch	2.59	2.39	2.25
831031	NSC	ADC0816CCN	DIP-40	A/D, 8-bit, μ P comp. ADC w/ 16-ch	9.95	8.95	7.95
10209	NSC	ADC0817CCN	DIP-40	A/D, 8-bit, 5V, 9.1Ksps, 16-ch	4.95	3.95	3.49
10225	NSC	ADC0820CCN	DIP-20	A/D, 8-bit, 5V, 1.5 μ s	3.49	3.15	2.49

A/D & D/A Converters (Continued)

*Web Code: QAG

Part No.	*Mfr.	Product No.	Pkg.	Description	1	10	100
116100	NSC	ADC0831CCN	DIP-8	A/D, 8-bit, 5V, 32 μ s	\$1.75	\$1.55	\$1.35
1252488	NSC	ADC0838CCN/NOBP	DIP-20	A/D, 8-bit serial, 5V, 32 μ s	2.75	2.25	1.75
290538	TI	TLC0832CD	SOIC-8	A/D, 8-bit, 3V, 32 μ s	2.25	1.95	1.75
288681	TI	THS1030IDW	SOIC-28	A/D, 10-bit, 3-5.5V, 30Msps	5.95	4.95	4.49
288729	TI	THS1031IPW	TSSOP-16	A/D, 10-bit, 3-5.5V, 30Msps	5.49	4.95	4.25
1748897	LTC	LTC1403AIMSE-1	MSOP-10	A/D, 14-bit, 2.8Msps samp ADC	11.95	10.95	9.95
289001	TI	TLC1541CDW	SOP-20	A/D, 10-bit, 5V, 32Ksps	4.95	4.25	3.95
289019	TI	TLC1541CN	DIP-20	A/D, 10-bit, 5V, 32Ksps	4.75	4.25	3.75
289078	TI	TLC1542CDW	SOP-20	A/D, 10-bit, 5V, 26 μ s, 11-ch	2.95	2.49	1.95
289271	TI	TLC1543QDB	SSOP-20	A/D, 10-bit, 6.5V, 5V, 26 μ s, 11-ch	3.49	2.95	2.75
289300	TI	TLC1543QDW	SOIC-20	A/D, 10-bit, 6.5V, 5V, 26 μ s, 11-ch	2.95	2.59	2.25
288593	TI	PCM1800E	SSOP-24	A/D, 20-bit, 5V, 32-48KHz, 2-ch	3.49	3.25	2.95
288622	TI	PCM1801U	SOIC-14	A/D, 20-bit, 5V, 32-48KHz, 2-ch	3.95	3.49	3.25
290634	TI	TLV2543CDW	SOIC-20	A/D, 12-bit, 3.3V, 10 μ s, 11-ch	5.95	5.49	4.95
290669	TI	TLV2543CN	DIP-20	A/D, 12-bit, 3.3V, 10 μ s, 11-ch	5.95	4.95	3.95
288016	MCH	MCP3302-CI/SL	SOIC-14	A/D, 13-bit, 2.7-5.5V, 50-100Ksps, 2-ch	2.95	2.49	2.25
288024	MCH	MCP3302-CI/ST	TSSOP-14	A/D, 13-bit, 2.7-5.5V, 50-100Ksps, 2-ch	2.49	2.35	2.15
43748	+	7106CPL	DIP-40	A/D, 3 1/2-digit LCD/LED, 9V	1.49	1.25	.95
43756	+	7107CPL	DIP-40	A/D, 3 1/2-digit LCD/LED, $\pm 5V$	2.49	2.25	1.95
875683	INS	ICL7107CPL	DIP-40	A/D, 3 1/2-digit LCD/LED, 6V	3.25	2.95	2.59
115158	ADI	AD558JN	DIP-16	D/A, 8-bit, 5-15V, 1-5-3 μ s, 1-ch	12.95	11.75	10.49
1944581	SAM	KDA0408	DIP-42	D/A, 8-bit, 5V, 60Msps, triple	.49	.39	.35
14904	NSC	DAC0800LCN	DIP-16	D/A, 8-bit, 4.5-18V, 150ns	1.49	1.19	.89
14947	NSC	DAC0808LCN	DIP-16	D/A, 8-bit, 4.5-18V, 150ns	1.65	1.25	.95
14963	NSC	DAC0830LCN	DIP-20	D/A, 8-bit, 5-15V, 1 μ s	4.95	4.25	3.49
128186	NSC	DAC0832LCN	DIP-20	D/A, 8-bit, 5-15V, 1 μ s	3.49	2.75	2.49
290781	TI	TLV5604IDW	SOIC-16	D/A, 10-bit, 2.7-5.5V, 20MHz, 4-ch	5.25	4.75	4.49
290790	TI	TLV5604IPW	TSSOP-16	D/A, 10-bit, 2.7-5.5V, 20MHz, 4-ch	4.95	4.49	3.95
290853	TI	TLV5613IPW	TSSOP-20	D/A, 12-bit, 2.7-5.5V, 3-7 μ s, 1-ch	3.75	3.49	2.95
290933	TI	TLV5614CPW	TSSOP-16	D/A, 12-bit, 2.7-5.5V, 5.5-2.0 μ s, 4-ch	9.95	8.95	7.95
296690	ADI	AD7226KN	DIP-20	D/A, 8-bit, 2-12.5V, 4 μ s, 4-ch	9.95	8.95	7.95
1783887	ADI	AD7398BRUZ	TSSOP-16	D/A, 12-bit, quad serial In	12.95	12.25	10.95
290052	TI	TLC7524CN	DIP-16	D/A, 8-bit, 5-15V, 100ns	2.75	2.49	2.05
287380	ADI	AD9760AR	SOIC-28	D/A, 10-bit, 3-5V, 125Msps	3.95	2.95	2.49

Op Amps

*Web Code: WAD


* Order in multiples of 10							
Part No.	*Mfr.	Product No.	Pkg.	Description	1	10	100
27852	+	OP07CP	DIP-8	Ultra-low offset voltage	\$7.75	\$6.65	\$5.55
252988	+	OP07DP	DIP-8	Very low offset single bipolar	.69	.59	.49
23106	+	LM10CLN	DIP-8	Low voltage (1.1 volt)	2.75	2.49	1.75
120715	+	LM10CN	DIP-8	Op amp and voltage reference	1.95	1.49	1.25
1062114	TI	TL026CP	DIP-8	Diff. high-freq. amp. w/ AGC	*	.09	.07
1807439	ADI	OP27AZ/883C	DIP-8	Low noise precision op amp	27.95	25.95	23.95
275805	TI	OPA27GP	DIP-8	Ultra-low noise precision	2.19	2.09	1.95
275784	TI	OPA27GU	SOIC-8	Ultra-low noise precision	1.95	1.59	1.25
115300	+	OP27EP	DIP-8	Low noise precision op amp	3.95	3.49	3.25
115318	+	OP27GP	DIP-8	Low noise prec. (-40° to 80°C)	2.49	1.95	1.59
1944812	ST	TL27L2IN	DIP-8	Prec. very low pwr CMOS dual	.79	.69	.59
821676	TI	TL051IP	DIP-8	Enhanced JFET low offset	*	.09	.07
213129	+	TL052ACP	DIP-8	Enh. JFET low offset op amp	1.25	.95	.85
33161	+	TL062CP	DIP-8	Low power JFET op amp	.59	.49	.45
33187	+	TL071CP	DIP-8	Low noise JFET op amp.	.29	.25	.22
213073	+	TL072ACP	DIP-8	Low noise JFET input op amp	.49	.39	.29
33195	+	TL072CP*	DIP-8	Low noise JFET dual op amp.	.25	.22	.19
33216	+	TL074CN*	DIP-14	Low noise JFET quad op amp.	.39	.35	.29
1063935	TI	TL074CDE4	SOIC-14	Low noise JFET input op amp	*	.19	.15
278328	TI	TL074CN	DIP-14	Wide-band, high-output drive	1.75	1.49	1.15
213057	+	TL081ACP	DIP-8	JFET input, low offset w/ control	.59	.49	.39
33232	+	TL081CP	DIP-8	JFET input, offset control	.35	.29	.25

*10 pcs. included in Linear cabinet kit, pg 16

Op Amps continued on next page

* ADI = Analog Devices | INS = Intersil | LTC = Linear Tech | MAX = Maxim | MCH = Microchip | MOT = Motorola | NSC = National Semi | ON = ON Semi | SAM = Samsung | ST = ST Micro | TI = Texas Instruments | + Varies

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



Op Amps (Continued)

*Web Code: WAD

Part No.	*Mfr.	Product No.	Pkg./Pins	Description	* Order in multiples of 10		
					1	10	100
214076	+	TL082ACP	DIP-8	JFET input, low offset	\$.79	\$.69	\$.49
33241	+	TL082CP*	DIP-8	JFET input dual op amplifier	.35	.29	.25
760034	TI	TL082CDR	SOIC-8	JFET input op amplifier	*	.15	.12
214084	+	TL084ACN	DIP-14	JFET input op amplifier	.45	.39	.35
193535	+	TL084CD	SOIC-14	JFET input quad op amplifier	.39	.35	.29
33267	+	TL084CN*	DIP-14	JFET input quad op amplifier	.29	.25	.22
242000	+	TLC274ACN	DIP-14	Quad precision op amp, low offset	.59	.49	.45
245665	+	LM301AH	TO-5/8	Operational amplifier	3.95	3.49	3.25
212151	+	LM301AN*	DIP-8	Operational amplifier	.39	.35	.29
245673	+	LM308AH	TO-5/8	Precision op amplifier	4.95	4.49	3.95
23464	+	LM308N*	DIP-8	Precision op amplifier	6.95	6.25	5.49
23608	NSC	LM318N	DIP-8	Precision high speed	.89	.79	.69
212169	+	LM324AN	DIP-14	Low power quad, impr. offset	.35	.29	.25
86721	+	LM324D	SOIC-14	Low power quad op amplifier	.29	.22	.19
23683	+	LM324N**	DIP-14	Low power quad op amplifier	.29	.25	.19
826671	TI	LM324NE4	DIP-14	Quad op amplifier	.29	.25	.22
22904	+	LF347N	DIP-14	Quad JFET input (wide band)	.49	.45	.35
23915	+	LM348N	DIP-14	Quad 741 op amp (UPC4741C)	.35	.29	.25
22912	+	LF351N	DIP-8	BIFET op amplifier	.39	.35	.29
22939	+	LF353N*	DIP-8	Dual BIFET (comp w/ TL082CP)	.35	.29	.25
901853	TI	LF353P	DIP-8	JFET input dual, C-temp	.59	.49	.39
22971	NSC	LF356N*	DIP-8	JFET input (wide band)	.99	.79	.59
833889	NSC	LF356N/NOPB	DIP-8	JFET input (wide band)	1.09	.89	.69
22998	+	LF357N	DIP-8	JFET input (wide band)	2.95	2.75	2.49
120862	+	LM358AN	DIP-8	Low power dual (improved 358N)	.25	.22	.19
839332	NSC	LM358AN/NOPB	DIP-8	Low power dual op amplifier	.69	.59	.49
23966	+	LM358N*	DIP-8	Low power dual op amplifier	.25	.22	.19
839367	NSC	LM358N/NOPB	DIP-8	Low power dual op amplifier	.99	.79	.59
1944732	ST	LS404CN	DIP-14	High performance quad	*	.07	.05
23018	+	LF411CN*	DIP-8	Low offset drift JFET input	.99	.89	.69
835500	NSC	LF411CN/NOPB	DIP-8	Low-offset, low-drift JFET input	1.25	.99	.79
23026	+	LF412CN*	DIP-8	Low offset drift JFET input dual	1.75	1.55	1.25
106681	+	LF442CN	DIP-8	Dual low power JFET input	1.25	1.05	.85
119992	+	LF444CN	DIP-14	Quad low power JFET input	1.75	1.49	1.05
276613	MAX	MAX474CSA	SOIC-8	Dual 10MHz single supply op amp	3.95	2.95	2.49
311239	MCH	MCP6S21-I/P	DIP-8	1-ch PGA low-gain sgle-ended rail-to-rail I/O	1.49	1.15	.95
311255	MCH	MCP6S22-I/P	DIP-8	2-ch PGA low-gain sgle-ended rail-to-rail I/O	1.59	1.39	1.19
313314	ADI	AD626AR	SOIC-8	Low-cost sgle supply diff amplifier	3.95	3.49	3.25
311221	MCH	MCP6S28-I/P	DIP-8	8-ch prog. low-gain sngl-ended rail-to-rail I/O	2.49	2.25	1.95
143976	+	LMC660CN	DIP-14	CMOS quad operational amplifier	1.75	1.45	.95
120926	+	LM675T	TO-220/5	Power op amplifier	5.49	4.75	4.25
24491	+	LM733CN	DIP-14	Differential amplifier	.89	.79	.69
24521	+	LM741CH	TO-5/8	Op amplifier	4.95	4.49	3.95
24539	+	LM741CN**	DIP-8	Op amplifier	.29	.25	.22
24540	+	LM741CN	DIP-8	Op amplifier	.25	.22	.19
840763	NSC	LM741CN/NOPB	DIP-8	General purpose op amplifier	.79	.59	.45
830522	TI	UA741CP	DIP-8	General purpose op amplifier	.29	.25	.22
830549	TI	UA741CPE4	DIP-8	General purpose op amplifier	.29	.25	.22
24563	+	LM747CN	DIP-14	Dual 741 op amplifier	.79	.69	.59
239222	+	LTC1001CN8	DIP-8	Precision op amplifier	2.75	2.49	2.09
239169	+	LT1013CP	DIP-8	Dual precision op amplifier	1.15	.95	.79
239177	+	LT1014DN	DIP-14	Quad precision op amplifier	3.75	3.25	2.59
1745688	LTC	LTC1050CN8	DIP-8	Precision zero-drift op amp w/ internal cap	4.95	4.49	4.25
23131	+	LM1458N*	DIP-8	Dual op amplifier	.35	.29	.25
903509	TI	MC1458P	DIP-8	Dual general purpose op amplifier	.39	.29	.25
823525	TI	TLC2272AIP	DIP-8	Advanced LinCMOS® rail-to-rail	1.09	.99	.89

*10 pcs./ **20 pcs. in Linear cabinet kit, pg 16

Op Amps (Continued)

*Web Code: WAD

Part No.	*Mfr.	Product No.	Pkg.	Description	* Order in multiples of 10		
					1	10	100
1085819	TI	TLC2272CP	DIP-8	Advanced LinCMOS® rail-to-rail	\$1.29	\$1.19	\$1.09
1944839	+	TLV2727CP	DIP-8	Hi slew rate r-r output, w/ shutdown	..99	.89	.79
121005	+	LM2904N	DIP-8	Low power dual op amplifier	*	.12	.09
121116	+	CA3080E	DIP-8	Op transconductance amplifier	3.95	3.75	3.49
12183	+	CA3130E	DIP-8	CMOS op amplifier	1.19	1.09	.89
12204	+	CA3140E	DIP-8	Bi-MOS op amplifier	.99	.89	.79
212193	+	MC3403N	DIP-14	Quad bipolar op amplifier	.39	.35	.29
24168	+	LM3900N	DIP-14	Quad amplifier	.75	.65	.55
278176	TI	THS4082CD	SOIC-8	175MHz LP hi-speed amplifier	3.95	3.59	3.25
29356	+	RC4136N	DIP-14	Quad op amp. (XR4136)	.89	.79	.69
251125	+	MC4558CN	DIP-8	Wide bandwidth dual bipolar	.29	.25	.22
908246	TI	RC4558DR	SOIC-8	Dual general purpose op amplifier	*	.12	.09
27385	+	NE5532*	DIP-8	Dual low noise op amplifier	.29	.25	.22
252970	+	NE5532AP	DIP-8	Dual lower noise op amplifier	.65	.55	.45
27406	+	NE5534	DIP-8	Low noise op amplifier	.65	.55	.45
302121	NSC	LM6132AIM	SOIC-8	Dual LP r-r in/out, 10MHz, lower VOS	1.95	1.75	1.49
302076	NSC	LM6134BIN	DIP-14	Quad LP r-r in/out, 10MHz	3.49	2.95	2.05
302068	NSC	LM6142AIM	SOIC-8	Dual r-r in/out, 17MHz	2.95	2.75	2.25
301874	NSC	LM6181IN	DIP-8	100mA, 100MHz current feedback	2.95	2.49	1.95
301436	NSC	LMC6442IM	SOIC-8	Dual ppwr r-r output single supply	1.25	.95	.75
301364	NSC	LMC6442IN	DIP-8	Dual ppwr r-r output single supply	1.95	1.75	1.35
126906	NSC	LMC6462AIN	DIP-8	ppwr r-r I/O CMOS op amp., lower VOS	1.95	1.59	1.35
301356	NSC	LMC6484AIN	DIP-14	CMOS quad r-r I/O, lower VOS	4.25	3.25	2.69
301751	NSC	LM7171BIM	SOIC-8	Hi speed hi output current volt feedback	1.95	1.49	1.25
804682	MAX	ICL7621DCSA	SOIC-8	Dual low power op amplifier	1.75	1.25	1.05
1789816	ADI	AD8022ARMZ	MSOP-8	Dual hi speed low noise	2.95	2.75	2.25
192532	NSC	LM13700N	DIP-16	Dual op transcon. w/ diodes/buffer	1.75	1.49	1.19
192533	NSC	LM13700N	DIP-16	Dual op transcon. w/ diodes/buffer	1.85	1.59	1.29
1944775	ON	MC33174VP	DIP-14	Single supply 3V-44V op amplifier	*	.09	.07
871586	ON	MC33204P	DIP-14	Low voltage, rail-to-rail	.79	.59	.35
251061	ON	MC34072P	DIP-8	Single supply 3V-44V op amplifier	.79	.69	.59

*10 pcs. in Linear cabinet kit, pg 16

Linear Series

*Web Code: FAD

Part No.	*Mfr.	Product No.	Pkg./Pins	Description	* Order in multiples of 10		
					1	10	100
25751	+	MF10CCN	DIP-20	Gen. purpose dual active filter	\$4.49	\$3.49	\$2.59
16301	+	DS0026CN	DIP-8	Dual MOS clk. driver (5MHz)	5.95	5.49	4.95
239281	+	DG201BDJ	DIP-16	Quad analog switch	1.29	1.19	1.09
1341966	TI	TL293DNE	DIP-16	Quad half-H drivers, l-temp	2.95	2.49	1.95
1342011	TI	TL293NE	DIP-16	Quad half-H drivers, C-temp	2.39	2.15	1.59
1950876	CAL	CWB309	DIP-16	Quad mono CMOS/DMOS analog switch	*	.09	.07
23721	+	LM331N	DIP-8	Prec volt to freq convtr (150ppm/°C)	2.25	1.75	1.39
245446	MAX	MAX301CPE	DIP-16	Precision dual hi speed analog switch	2.25	1.75	1.49
23739	NSC	LM334Z	TO-92/3	Adjust current source	.69	.59	.49
23771	NSC	LM336Z-2.5	TO-92/3	Voltage reference (2.5V)	.39	.35	.29
297676	NSC	LM336BZ-5.0	TO-92/3	5V voltage reference diode	1.29	1.09	.89
120889	+	LM385BZ-2.5	TO-92/3	Volt. ref. diode (2.5V ±1.5%)	.29	.25	.19
24117	+	LM385Z-1.2	TO-92/3	Micropwr volt. ref. diode (1.2V)	.49	.39	.29
23000	+	LF398N	DIP-8	Sample and hold circuit	1.49	1.19	.89
309833	+	DG403DJ	DIP-16	Dual SPDT & SPDT analog switch	2.95	2.75	2.49
272161	+	DG407DJ	DIP-28	Dual 8-ch multiplexer/demux.	5.49	4.95	4.49
256532	+	DG408DJ	DIP-16	1 of 8 multiplexer/demultiplexer	1.95	1.75	1.49
288243	ADI	ADG409BN	DIP-16	Dual 4-ch multiplexer/demultiplexer	2.95	2.75	2.25
243643	+	DG411DJ	DIP-16	Quad SPST (NC) analog switch	.89	.79	.59
256516	+	DG412DJ	DIP-16	Quad SPST (NO) analog switch	.79	.69	.49
279540	+	DG419DJ	DIP-8	Dual SPST (NO/NC) analog switch	1.75	1.55	1.45

Linear Series continued on next page

* ADI = Analog Devices | CAL = Calogic | LTC = Linear Tech | MAX = Maxim Semi | MCH = Microchip | NSC = National Semi | ON = ON Semi | ST = ST Micro | TI = Texas Instruments | + = Varies

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Linear Series & Temperature Sensors

NAME BRANDS	4 LEVELS OF SAVINGS		
	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Linear Series (Continued)

*Web Code: FAD

Part No.	*Mfr.	Product No.	Pkg/Pins	Description	* Order in multiples of 10		
					1	10	100
33347	+	TL431CLP	TO-92/3	Program precision reference	* .15	1.12	
1798261	ADI	ADG451BRZ	SOIC-16	Analog switch	2.49	2.25	1.95
33355	+	TL494CN	DIP-16	Contrl circuit pulse-width-modulated	.39	.29	.25
840579	NSC	LM555CN/NOPB	SOIC-8	Timer	.49	.39	.29
27422	+	LM555CN*	DIP-8	Timer (MC1455P/NE555V)	.25	.22	.17
27423	+	LM555CN	DIP-8	Timer (MC1455P/NE555V)	.25	.22	.19
840608	NSC	LM555CN/NOPB	DIP-8	Timer	1.25	.85	.65
126797	+	LMC555CN*	DIP-8	CMOS timer	.79	.69	.59
841571	NSC	LMC555CN/NOPB	DIP-8	CMOS timer	1.49	1.15	.85
890091	ST	NE555N	DIP-8	Gen. purp. single bipolar timer	.29	.25	.22
904085	TI	NE555P	DIP-8	Precision timer	.35	.25	.22
761272	TI	TLC555CP	DIP-8	LinCMOS™ timer, C-temp	.65	.55	.49
24328	+	LM556N*	DIP-14	Dual 555 timer	.29	.25	.22
24329	+	LM556N	DIP-14	Dual 555 timer	.35	.29	.25
904114	TI	NE556N	DIP-14	Dual precision timer	.49	.45	.39
27473	ST	NE564N	DIP-16	High freq. phase locked loop	2.75	2.49	2.25
24352	+	LM565N	DIP-14	Phased locked loop	2.95	2.75	2.49
24395	+	LM567CN	DIP-8	Tone decoder	.99	.89	.79
246650	NSC	LMC567CN	DIP-8	Tone decoder (CMOS)	1.49	1.25	.95
27490	ST	NE571N	DIP-16	Compander, subscriber	4.49	4.25	3.95
288155	ADI	AD584KN	DIP-8	Prog volt. ref. 11mV tol.	6.95	5.95	4.95
918436	INS	SA612AD/01	SOIC-8	Dbl balanced mixer & oscillator	1.95	1.49	1.25
115174	ADI	AD620AN	DIP-14	Low-cost instrument amp.	6.49	5.25	4.49
1798982	ADI	ADG623BRMZ	SOIC-10	Analog switch	1.25	.95	.75
1781312	ADI	AD633ANZR	DIP-8	Analog multiplier	4.95	3.95	3.25
115182	ADI	AD633JN	DIP-8	Low-cost analog multiplier	6.95	6.25	5.35
316515	MCH	TC962CPA	DIP-8	High current charge pump DC-DC con.	1.95	1.75	1.49
239265	+	LT1004CZ-2.5	TO-92	2.5V, micropower volt reference	.29	.25	.19
1805097	ADI	ADUM1201ARZ	SOIC-8	2 channel digital isolator	2.75	2.25	1.75
118578	+	MC1495L	DIP-14	Linear 4 quadrant multiplier	9.95	8.95	7.95
23211	+	LM1496N	DIP-14	Balanced mod/demodulator	.69	.59	.49
1944821	+	P1803AC	TO-220	Balanced three-chip sidactor	* .09	.07	
34278	+	ULN2003A*	DIP-16	Hi-volt/curr. darl. transistor array	.25	.22	.19
1147178	TI	ULN2003AN	DIP-16	Hi-volt/curr. darl. transistor array	.49	.45	.35
193826	+	ULN2003AD	SOIC-16	Hi-volt/curr. darl. transistor array	.45	.35	.29
34294	+	ULN2004AN	DIP-16	Hi-volt/curr. darl. transistor array	.39	.35	.29
700630	TI	ULN2004AN	DIP-16	Hi-volt/curr. darlington trans. array	.49	.45	.35
34972	EXR	XR2206CP	DIP-16	Monolithic function generator	5.49	4.95	4.49
34999	+	XR2211	DIP-14	FSK demodulator/tone decoder	1.95	1.75	1.49
280073	TI	TLE2426CLP	TO-92/3	Rail splitter prec. virtual ground	1.39	1.29	1.19
2125798	AST	AS2431	TO-92/3	Precision adjustable shunt	.39	.29	.19
34315	+	ULN2803A*	DIP-18	Hi-volt/curr. darl. transistor array	.55	.49	.45
34316	+	ULN2803A	DIP-18	Hi-volt/curr. darl. transistor array	.59	.55	.49
700664	TI	ULN2803AN	DIP-18	Darlington transistor array, I-temp	1.15	.95	.85
123625	NSC	LM2907N-8	DIP-8	Frequency to volt converter	1.75	1.35	1.09
23317	NSC	LM2907N	DIP-14	Frequency to volt converter	1.75	1.55	1.15
23350	NSC	LM2917N-8	DIP-8	Freq. to volt conv. w/ zener	1.75	1.45	1.15
23341	NSC	LM2917N-14	DIP-14	Freq. to volt conv. w/ zener	1.75	1.45	1.25
12079	+	CA3046N	DIP-14	NPN transistor array	1.09	.99	.89
12159	+	CA3086N	DIP-14	NPN transistor array	1.95	1.75	1.49
1797605	ADI	ADG3123BRUZ	TSSOP-20	8-channel CMOS logic	3.25	2.95	2.49
31974	+	SG3524N	DIP-16	Regulating pulse width modulator	.65	.55	.45
25275	+	MC4044P	DIP-14	Frequency phase detector	6.95	5.95	5.25
29372	EXR	XR4151CP-F	DIP-8	Volt to frequency converter	1.49	1.29	1.09
698509	ST	M48Z02-150PC1	DIP-24	5V, 150ns, 16k zeropower™ SRAM	4.95	4.49	4.25
1950868	CAL	CWB5341	DIP-14	Dual mono CMOS/DMOS analog sw.	* .09	.07	
1944759	NXP	SAA6579	DIP-16	Radio data system demodulator	* .07	.05	

*10 pcs. / **20 pcs. in Linear kit, right

*MUX/DEMUXs Available Online — Enter Web Code RAB

Linear Series (Continued)

*Web Code: FAD

Part No.	*Mfr.	Product No.	Pkg.	Description	* Order in multiples of 10		
					1	10	100
312135	TI	TPS6735IP	DIP-8	Fixed neg 5V 200mA invert DC/DC con	1.25	.95	.75
288163	ADI	AD7501KN	DIP-16	8 channel analog multiplexer	6.95	5.95	4.95
51140	+	75551PA	DIP-8	CMOS timer	.39	.35	.29
51174	+	7660CPA	DIP-8	CMOS volt convtr (+5 to ±5V)	.75	.59	.49
316646	+	ICL7662CPA	DIP-8	Volt convtr., 20Vin, 4.5-20V out	2.75	2.25	2.15
1083476	TI	TL7712ACP	DIP-8	Supply voltage supervisor	* .09	.07	
316531	MCH	TC9400COD	SOIC-14	Volt freq/freq volt converter	3.95	3.75	3.25
25021	ON	MC14411P	DIP-24	Bit rate frequency generator	4.95	4.49	4.25
25064	ON	MC14490P	DIP-16	Hex contact bounce eliminator	4.25	3.95	3.49
118586	ON	MC145151P	DIP-28	Parallel input PLL freq synthesizer	5.95	5.49	4.95
1054684	TI	SN754410NE	DIP-16	Quad half-H drivers	1.95	1.75	1.55

Linear IC Kit

SAVE \$66



10 each: TL072CP, TL074CN, TL082CP, TL084CN, MAX232CPE, LM301N, LM308N, LM311N, LM337T, LF353N, LF356N, LM358N, LM386N-1, LM386N-3, LM393N, LF411CN, LF412CN, LMC555CN, LM556N, LM723CN, LM1458N, DS1488N, DS1489N, ULN2003A, ULN2803A, NE5532N, 7808T, 78L12, 7815T, 7905T, 7912CT, 7915CT

20 each: LM317T, LM324N, LM339N, LM741CN, LM555CN, 7805T, 78L05, 7812T

Part No.	Description	Wt. (lbs.)	1	5
84988	480 pcs. (40 types) analog IC kit	6.0	\$189.95	\$169.95
130411	Refill for 84988 (480 pcs.)	1.3	174.95	159.95

Temperature Sensors

*Web Code: WAN

Part No.	*Mfr.	Product No.	Pkg/Pins	Description	1	10	100
107094	NSC	LM34CZ	TO-92/3	Prec temp sensor (-40° to +230°F)	\$5.95	\$5.49	\$5.25
193480	NSC	LM34DM	SOIC-8	Prec temp sensor (-55° to 300°F)	1.95	1.49	1.19
155192	NSC	LM34DZ	TO-92/3	Prec temp sensor (+32° to +212°F)	2.25	1.95	1.49
107107	NSC	LM35CZ	TO-92/3	Prec temp sensor (-40° to 110°C)	4.75	3.75	2.95
192217	NSC	LM35DT	TO-220/3	Prec temp sensor (-55° to 150°C)	2.49	1.95	1.55
155740	NSC	LM35DZ	TO-92/3	Prec temp sensor (0° to +100°C)	1.49	1.19	.89
301604	NSC	LM74CIBP-5	µSMD-5	12-bit + sign digital temp sensor	1.09	.99	.79
301621	NSC	LM74CIM-3	SOIC-8	12-bit + sign digital temp sensor	.99	.79	.69
120820	+	LM335AZ	TO-92/3	Precision temperature sensor	.79	.69	.59
23755	+	LM335Z	TO-92/3	Volt mode temperature sensor	.75	.59	.55
241939	ADI	AD590JH	TO-52/3	Two terminal IC temp transducer	6.95	6.25	5.25
1780571	ADI	AD592ANZ	TO-92/3	Two terminal IC temp transducer	4.75	3.85	3.25
313306	ADI	AD594AQ	DIP-14	Thermocouple amp for iron-constantan	11.75	10.59	10.25
313293	ADI	AD595AQ	DIP-14	Thermocouple amp for chromel-alumel	13.95	12.95	11.95
302551	DAL	DS18S20	TO-92/3	High-prec. 1-wire digital thermo	3.49	2.59	1.95



Hall Effect Sensor

*Web Code: REB

Part No.	*Mfr.	Part No.	Pkg.	Description	1	10	100
1718743	A1302EUA-T		SIP-3	Continuous-time ratiometric linear sensor	\$1.29	\$1.19	\$1.09
1871879	OH180U		SIP-3	Mono IC w/ hall linear amp & sensor	2.75	2.49	1.95

*Pressure Sensors Available Online — Enter Web Code JBV



We offer data sheets for most of the products we carry. Find them easily on the product specification page.

www.Jameco.com

* ADI = Analog Dev. | AST = Astec | CAL = Calogic | DAL = Dallas | EXR = EXAR | LTC = Linear Tech | INS = Intersil | MCH = Microchip | NSC = National | NXP = NXP/Philip | ON = ON Semi | ST = ST Micro | TI = Texas Ins.

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



Digital Potentiometers

*Web Code: JBP

Part No.	*Mfr.	Product No.	Pkg.	Description	1	10	100
1778367	ADI	AD5282BRU200	TSSOP-16	Dual, 256 position	\$2.75	\$2.49	\$1.95
2044373	MAX	MAX5402EUA	8uMAX	256-Tap, uPot, low drift	1.25	.99	.75
241744	MCH	MCP41010-I/P	DIP-8	10k Ω , 256 steps, SPI	1.75	1.65	1.55
241752	MCH	MCP42010-I/P	DIP-14	10k Ω , 256 steps, 2-ch SPI	2.09	1.95	1.59
1777604	ADI	AD5204BN100	DIP-24	100k Ω , 256 steps, 4-ch SPI	3.95	2.75	2.49

Voltage Regulators

*Web Code: TAC

* Order in multiples of 10					1	10	100
Part No.	*Mfr.	Product No.	Pkg./Pins	Description	1	10	100
23499	+	LM309K	TO-3/2	5V, 1A (0°C to +125°C)	\$5.95	\$5.49	\$4.95
192268	NSC	LM317AT	TO-220/3	3-terminal adj. (1.2V-37V)	1.49	1.25	.89
837898	NSC	LM317AT/NOPB	TO-220/3	3-term. 1.5A output adj pos, I-temp	1.55	1.35	.95
898359	NSC	LM317EMP	SOT-223/4	3-term 1A output adj pos C-temp	.99	.89	.79
192276	NSC	LM317HVT	TO-220/3	3-terminal adj. (1.2V-57V)	2.25	1.75	1.35
837927	NSC	LM317HVT/NOPB	TO-220/3	3-term. 1A output adj pos, C-temp	2.75	2.25	1.75
23544	+	LM317K	TO-3/2	1.5A adj. positive (1.2V-37V)	2.65	2.39	2.05
23552	+	LM317LZ	TO-92/3	100mA adj. positive (1.2V-37V)	.29	.25	.22
898543	NSC	LM317LZ/NOPB	TO-92/3	Adjustable, 100mA positive	.69	.59	.49
23579	+	LM317T*	TO-220/3	1.5A adj. positive (1.2V-37V)	.29	.25	.22
23580	+	LM317T	TO-220/3	1.5A adj. positive (1.2V-37V)	.35	.29	.25
898800	NSC	LM317T/NOPB	TO-220/3	Adjustable, 1.5A positive	1.25	1.05	.85
23667	+	LM323K	TO-3/2	5V, 3A positive	3.95	3.75	3.49
23798	+	LM337K	TO-3/2	1.5A/3 term adj. neg. reg.	1.95	1.75	1.49
296841	+	LM337LZ	TO-92/3	3-terminal adj. neg.	.99	.79	.59
23819	+	LM337T*	TO-220/3	1.5A/adj. neg. (-1.2V-37V)	.45	.35	.29
899520	NSC	LM337T/NOPB	TO-220/3	1.5A adjustable negative	.75	.65	.45
23835	+	LM338K	TO-3/2	5A adj. positive (1.2V-32V)	5.95	5.49	4.95
192284	NSC	LM338T	TO-220/3	5A adjustable	1.95	1.49	1.25
838621	NSC	LM338T/NOPB	TO-220/3	5A adjustable positive	2.25	1.75	1.35
900017	NSC	LM340T-5.0	TO-220/3	5V, 1A positive, I-temp	1.25	1.05	.85
23931	+	LM350K	TO-3/2	3A/3 term. adj. pos. (1.2V-33V)	5.49	4.95	3.95
23940	+	LM350T	TO-220/3	3A adjustable power	.69	.59	.49
276517	MAX	MAX637ACSA	SOIC-8	Preset/adj output CMOS invert switch reg	2.95	2.49	2.25
24467	+	LM723CN*	DIP-14	Voltage regulator (2V-37V)	.35	.29	.25
301719	+	LM723H	TO-5/10	2V - 37V, 150mA adj.	4.49	3.95	3.75
298071	MAX	MAX755CSA	SOIC-8	-5V/adj. output. invert current mode PWM reg	1.49	1.09	.89
107166	NSC	LM2936Z-5.0	TO-92/3	Ultra-low quiescent current 5V	2.25	1.75	1.39
51246	+	7805K	TO-3/2	5V, 1A positive (LM340K-5)	2.49	2.25	1.95
51262	+	7805T**	TO-220/3	5V, 1A positive (LM340T-5)	.29	.25	.19
51263	+	7805T	TO-220/3	5V, 1A positive (LM340T-5)	.29	.25	.22
924570	ST	L7805ACV	TO-220/3	5V, 1.5A positive	.29	.25	.22
1130069	TI	UA7805CKCS	TO-220/3	5V, 1.5A positive	.79	.69	.59
924633	ST	L7805CV	TO-220/3	5V, 1.5A positive	.45	.35	.29
902071	NSC	LM7805CT	TO-220/3	5V, 1A positive	1.09	.99	.89
786138	FSC	LM7805CT	TO-220/3	5V, 1A positive, I-temp	.35	.29	.25
876221	ON	MC7805CT	TO-220/3	5V, 1A positive, C-temp	.45	.39	.35
876248	ON	MC7805CTG	TO-220/3	5V, 1A positive, C-temp	.35	.29	.25
51182	+	78L05**	TO-92/3	5V, 100mA positive	.25	.22	.17
51183	+	78L05	TO-92/3	5V, 100mA positive	.25	.22	.19
889428	ST	L78L05ACZ	TO-92/3	5V, 100mA positive	.35	.25	.19
973831	FSC	LM78L05ACZ	TO-92/3	5V, 100mA positive, I-temp	*	.19	.15
1303290	NSC	LM78L05ACZ/NOPB	TO-92/3	3-terminal 5V, 100mA positive	.69	.55	.45
192233	+	78M05	TO-220/3	5V, 500mA positive	.25	.22	.19
51297	+	7806T	TO-220/3	6V, 1A positive (LM340T-6)	.35	.29	.25
51300	+	7808T*	TO-220/3	8V, 1A positive (LM340T-8)	.35	.29	.25

*10 pcs./ **20 pcs. included in Linear kit, pg 16

Voltage Regulators (Continued)

*Web Code: TAC

* Order in multiples of 10					1	10	100
Part No.	*Mfr.	Product No.	Pkg./Pins	Description	1	10	100
876352	ON	MC7809CT	TO-220/3	9V, 1A pos., C-temp	\$2.29	\$2.25	\$2.22
192225	+	78L09ACZ	TO-92/3	9V, 100mA positive	.25	.22	.17
51318	+	7812K	TO-3/2	12V, 1A pos. (LM340K-12)	2.15	1.95	1.75
51334	+	7812T**	TO-220/3	12V, 1A pos. (LM340T-12)	.25	.22	.19
51335	+	7812T	TO-220/3	12V, 1A pos. (LM340T-12)	.35	.29	.25
889305	ST	L7812CV	TO-220/3	12V, 1.5A positive	.29	.25	.22
902127	NSC	LM7812CT	TO-220/3	12V, 1A positive	1.05	.95	.85
51203	+	78L12*	TO-92/3	12V, 100mA positive	.25	.22	.17
902389	NSC	LM78L12ACZ	TO-92/3	3-terminal 12V positive	.35	.25	.19
192241	+	78M12	TO-220/3	12V, 500mA positive	.29	.25	.22
51369	+	7815K	TO-3/2	15V, 1A pos. (LM340K-15)	2.49	2.25	1.95
2125384	NEC	PC7815HF	TO-220/3	15V, 500mA positive	.25	.22	.19
51377	+	7815T*	TO-220/3	15V, 1A pos. (LM340T-15)	.29	.25	.22
902151	NSC	LM7815CT	TO-220/3	3-terminal 15V	1.49	1.29	1.19
51414	+	7824T	TO-220/3	24V, 1A positive (LM340T-24)	.25	.22	.19
51457	+	7905T*	TO-220/3	-5V, 1A neg. (LM320T-5)	.29	.25	.22
51422	+	79L05	TO-92/3	-5V, 100mA negative	.25	.22	.17
51481	+	7912T*	TO-220/3	-12V, 1A neg. (LM320T-12)	.29	.25	.22
51431	+	79L12	TO-92/3	-12V, 100mA neg., volt reg	*	.12	.09
51502	+	7915T*	TO-220/3	-15V, 1A neg. (LM320T-15)	.29	.25	.22
316945	MOT	MC34063AP1	DIP-8	1.5 step-up/down invert sw reg	.49	.39	.35
260259	NTE	NTE960	TO-220	+5V, 1A, fixed	.75	.65	.45

*10 pcs./ **20 pcs. included in Linear kit, pg 16

Simple Switcher Voltage Regulators

*Web Code: VAX

Part No.	*Mfr.	Product No.	Pkg./Pins	Description	1	10
1742524	LTC	LT1959CS8#PBF	SOIC-8	4.5A, 500kHz step-down, C-temp	\$4.95	\$3.95
156566	+	LM2574N-5	DIP-8	5V step-down regulator	1.49	1.25
279638	NSC	LM2575HVT-5.0	TO-220/5	1A step-down V-reg, hi Vin range	2.25	1.95
894817	NSC	LM2576T-5.0/LB03	TO-220/5	Simple switcher 3A step down, I-temp	1.49	1.09
192381	NSC	LM2576HVT-5.0	TO-220/5	3A step down V-reg, high Vin range	5.49	4.49
192372	NSC	LM2576HVT-ADJ	TO-220/5	3A step-down V-reg, high Vin range	4.95	4.49
245569	+	LM2576T-5.0	TO-220/5	3A step-down voltage regulator	2.25	1.75
120977	+	LM2576T-ADJ	TO-220/5	3A step-down voltage regulator	1.45	1.05
300898	NSC	LM2586S-12	TO-263/7	3A flyback regulator with shutdown	3.95	3.49
300871	NSC	LM2586S-5.0	TO-263/7	3A flyback regulator with shutdown	3.95	3.49
300821	NSC	LM2586S-ADJ	TO-263/7	3A flyback regulator with shutdown	3.75	3.49
300919	NSC	LM2586T-ADJ	TO-220	3A flyback regulator with shutdown	3.75	3.25
300732	NSC	LM2592HVT-3.3	TO-220	2A step down voltage regulator	2.95	2.49
300695	NSC	LM2594N-3.3	DIP-8	0.5A step down voltage regulator	1.75	1.49
310391	NSC	LM2596S-5.0	TO-263/5	3A step down voltage regulator	1.75	1.49
300265	NSC	LM2595S-ADJ	TO-263/5	1A step down voltage regulator	1.49	1.25
290642	NSC	LM2596T-5.0	TO-220/7	3A step down voltage regulator	2.25	1.95
290394	NSC	LM2599S-ADJ	TO-263/7	3A step down voltage regulator	2.75	2.25
290749	NSC	LM2651MTC-3.3	TSSOP-16	1.5A high eff. synch switching reg	2.25	1.75
312389	NSC	LM2653MTC-ADJ	TSSOP-16	1.5A high eff. synch switching reg	2.25	1.95
290888	NSC	LM2674M-ADJ	SOIC-8	Adj voltage high eff. switcher	1.75	1.49
291012	NSC	LM2675N-ADJ	DIP-8	1A step down voltage reg power conv	2.25	1.95

Helping You Find What You Need

Can't find the product you're looking for?

Call us at 1-800-831-4242.



*ADI = Analog Devices | FSC = Fairchild | LTC = Linear Tech | MAX = Maxim | MCH = Microchip | MOT = Motorola | NEC = NES Corp | NSC = National | NTE = NTE Elec. | ON = ON Semi | ST = ST Micro | TI = Texas Ins.

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

NAME BRANDS	4 LEVELS OF SAVINGS
HOUSE BRANDS	FACTORY OVERRUN
DOLLAR SALE	

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

Voltage Regulators & IC Sockets

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Low Drop-Out Voltage Regulators

* Web Code: MBT

* Order in multiples of 10

Part No.	*Mfr.	Product No.	Pkg./Pins	Description	1	10	100
299743	NSC	LM1084IT-ADJ	TO-220/3	5A low dropout adj. pos.	\$2.49	\$1.95	\$1.59
299735	NSC	LM1084IT-3.3	TO-220/3	5A low dropout 3.3V pos.	2.49	1.95	1.59
2100523	+	AMS1085CD	TO-252	3A low dropout adj. pos.	.49	.39	.19
282757	+	LT1085CT	TO-220/3	3A low dropout adj./fixed pos.	1.25	.95	.75
192305	+	LM1086CT-3.3	TO-220/3	1.5A low dropout pos. (3.3V)	1.15	.85	.65
192313	+	LM1086CT-5.0	TO-220/3	1.5A low dropout pos. (5V)	1.75	1.49	1.25
251782	NSC	LM1117MPX-ADJ	SOT-223/3	800mA low dropout linear	.89	.69	.59
242114	+	LM1117T-3.3	TO-220/3	800mA, 3.3V, LDO	.89	.79	.69
242115	NSC	LM1117T-3.3/NOBP	TO-220/3	800mA, 3.3V, LDO	1.45	1.19	.85
897188	NSC	LM2937ET-3.3	TO-220/3	500mA, 3.3V LDO, I-temp	1.75	1.45	1.09
297810	NSC	LM2937ET-5.0	TO-220/3	500mA, 5V LDO	1.75	1.45	.95
107182	+	LM2940CT-5	TO-220/3	5V LDO reg. (max. 45Vin)	1.35	1.05	.75
897381	NSC	LM2940CT-5.0/NOBP	TO-220/3	1A, 5V LDO positive	1.55	1.25	.95
192495	NSC	LM2940CT-12	TO-220/3	12V LDO reg. (max. 45Vin)	1.45	1.15	.85
837505	NSC	LM2940T-5.0/NOBP	TO-220/3	1A, 5V LDO, I-temp	1.45	1.15	.85
121064	+	LM2941CT	TO-220/5	1A LDO adjustable (45Vin)	1.65	1.39	1.15
1944880	+	LP2950ACN	TO-92/3	100mA 5V LDO reg.	.39	.35	.29
1323397	NSC	LP2950ACZ-3.3/NOBP	TO-92	3.3V μ pwr volt. reg., I-temp	.89	.79	.69
121101	+	LP2950ACZ-5.0	TO-92/3	Low power LDO 5V low % reg.	.69	.59	.49
266757	+	LP2950CZ-5.0	TO-92/3	100mA low pwr. LDO	.69	.59	.49
121110	+	LP2951ACP	DIP-8	Adjustable μ power volt-reg.	.59	.49	.35
1315492	ON	LP2951CN-3.0	DIP-8	3V, 100mA LP LDO (I-temp)	*	.09	.07
192524	+	LM3940IT-3.3	TO-220/3	1A LDO for 5V to 3.3V	1.75	1.45	1.05
1326133	NSC	LP2985IMS-5.0/NOBP	SOP-5	150mA, 5V μ pwr low noise ultra reg.	.35	.29	.25
1119791	TI	TPS75701KTTT	TO-263	Fast transient response 3A, I-temp	3.49	2.95	2.49
700496	TI	TPS78625KTTT	TO-263	Ultra low noise, hi-PSRR 1.5A	2.25	1.95	1.75

* Power Drivers & Modules Available Online — Enter Web Code REK

* Switching Regulators Available Online — Enter Web Code DEN

AMP DIP Low-Profile IC Sockets

* Web Code: QAF

Economy Ladder Style

- Housing: glass filled thermoplastic, black
- Dual wipe
- Contacts: phosphor bronze tin plating
- A: 15 μ " gold
- B: 60 μ " tin



683104



526205



683198


Order in multiples of 10

Part No.	*Mfr. Part No.	Pos.	Plating	Width (ins.)	10	100	500
683091	1-390261-1	6	B	0.3	.13	.10	.09
526299	390261-2	8	B	0.3	.12	.09	.07
683104	1-390261-2	8	B	0.3	.13	.10	.08
837679	2-640463-4	8	A	0.3	.69	.59	.49
526192	390261-3	14	B	0.3	.12	.09	.08
683112	1-390261-3	14	B	0.3	.13	.10	.09
526205	390261-4	16	B	0.3	.17	.11	.09
683121	1-390261-4	16	B	0.3	.19	.12	.10
524584	2-640358-4	16	A	0.3	.79	.69	.49
526213	390261-5	18	B	0.3	.15	.14	.10
683139	1-390261-5	18	B	0.3	.16	.15	.11
526221	390261-6	20	B	0.3	.16	.15	.13
683147	1-390261-6	20	B	0.3	.17	.16	.14
683163	1-390261-8	24	B	0.3	.22	.20	.17
683198	1-390262-1	24	B	0.6	.25	.21	.19
526248	390261-9	28	B	0.3	.24	.22	.20
683171	1-390261-9	28	B	0.3	.25	.23	.21
526256	390262-2	28	B	0.6	.22	.19	.17
683201	1-390262-2	28	B	0.6	.24	.22	.19
526272	390262-5	40	B	0.6	.32	.29	.25
683227	1-390262-5	40	B	0.6	.35	.33	.27

Dual Wipe Solder Tail Low-Profile IC Sockets

* Web Code: WAP

- Contact current: 1A
- Contact resistance: less than 5m Ω
- Dielectric withstanding voltage: 300V
- Insulation resistance: greater than 1000M Ω
- Thru-hole lead length: .140" (A) • Body height: .188" (B)



112222


Order in multiples of 10

Part No.	*Mfr.	Product No.	Pins	Width (ins.)	10	100	1000
112193	JVP	6LPD	6	0.3	.13	.10	.08
51571	+	8LPD	8	0.3	.12	.09	.07
112206	JVP	8LPD	8	0.3	.13	.10	.08
37162	+	14LP*	14	0.3	.12	.09	.08
689936	+	ED14DT	14	0.3	.12	.09	.08
112214	JVP	14LPD	14	0.3	.13	.10	.09
37372	+	16LP*	16	0.3	.10	.08	.06
37373	JVP	16LPD	16	0.3	.17	.11	.09
112222	JVP	16LPD	16	0.3	.19	.12	.10
38113	+	18LP*	18	0.3	.14	.12	.09
689952	+	ED18DT	18	0.3	.14	.12	.09
112231	JVP	18LPD	18	0.3	.16	.15	.11
38607	+	20LP*	20	0.3	.12	.10	.08
112248	+	20LPD	20	0.3	.16	.15	.13
38608	JVP	20LPD	20	0.3	.17	.16	.14
112256	+	22SLPD	22	0.3	.12	.09	.07
39132	JVP	22LPD	22	0.4	.17	.16	.14
39378	+	24SLPD	24	0.3	.21	.19	.16
112282	JVP	24SLPD	24	0.3	.22	.20	.17
112264	+	24LPD	24	0.6	.23	.19	.17
112266	JVP	24LPD	24	0.6	.25	.21	.19
689961	+	ED28DT	28	0.3	.24	.22	.20
112299	+	28SLPD	28	0.3	.24	.22	.20
112300	JVP	28SLPD	28	0.3	.25	.19	.15
40300	+	28LP*	28	0.6	.17	.13	.11
112272	+	28LPD	28	0.6	.22	.19	.17
40301	JVP	28LPD	28	0.6	.24	.22	.19
137621	JVP	32SLPD	32	0.3	.25	.22	.15
689979	+	ED32DT	32	0.6	.19	.17	.15
112301	JVP	32LPD	32	0.6	.29	.25	.22
41111	+	40LPD	40	0.6	.32	.29	.25
112311	JVP	40LPD	40	0.6	.35	.33	.27
137622	+	42LPD	42	0.6	.25	.22	.15
112326	JVP	64LDP	64	0.9	.29	.19	.15

* Single wipe

2 & 3 Level Wire Wrap IC Sockets

- Contact plating/leads: gold (WW) or tin (TWW); dual wipe
- Contact current: 1A • Contact resistance: <5m Ω
- Sleeve material: brass
- Dielectric withstanding voltage: 300V
- Material: beryllium copper or phosphor bronze
- Insulation resistance: greater than 1000M Ω
- Insulator: glass-filled polyester or glass-filled polyphenylene sulfide
- Thru-hole lead length: .438" (L2); .638" (L3) • Body height: .300" (A)




37234

Part No.	*Mfr.	Product No.	Pins	Width (ins.)	1	10	100
37218	CA	14TWW2	14	0.3	\$2.25	\$1.95	\$1.75
37234	CA	14WW2	14	0.3	3.25	2.95	2.75
196841	+	14TWW3	14	0.3	1.95	1.75	1.25
37437	CA	16TWW2	16	0.3	2.75	2.49	2.25
37480	CA	16WW2	16	0.3	3.49	3.25	2.95
75380	CA	20TWW2	20	0.3	3.49	3.25	2.95
38675	CA	20WW2	20	0.3	3.49	3.25	2.95
75416	CA	24TWW2	24	0.6	2.95	2.65	2.39
39395	CA	24WW2	24	0.3	2.95	2.65	2.39
40353	CA	28WW2	28	0.6	5.95	5.39	4.75
41180	CA	40TWW2	40	0.6	6.95	5.95	4.95


* CA = Circuit Assembly | JVP = Jameco ValuePro | NSC = National Semiconductor | ON = ON Semi | TI = Texas Instruments | + Manufacturer Varies

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



Machine Tooled Solder Tail Low-Profile IC Sockets

- Contact plating: gold
- Contact resistance: less than 5mΩ
- Dielectric withstanding voltage: 300V_{RMS}
- Insulation resistance: greater than 1000MΩ
- Material: beryllium copper or phosphor bronze
- Thru-hole lead length: .177" (A)
- Contact current: 3A
- Tin-plated leads
- Body height: .117" (B)



★ Web Code: GBA


Part No.	*Mfr.	Product No.	Pins	Width (in.)	1	10	100
167004	JVP	6MLPT	6	0.3	.39	.29	.19
51626	JVP	8MLP	8	0.3	.49	.45	.29
37197	JVP	14MLP	14	0.3	.65	.55	.39
37402	JVP	16MLP	16	0.3	.75	.59	.45
65585	JVP	18MLP	18	0.3	.89	.75	.55
38623	JVP	20MLP	20	0.3	.85	.69	.49
192209	+	22SMLP	22	0.4	1.25	1.09	.89
39386	+	24SMLP	24	0.3	.95	.79	.59
39387	JVP	24SMLP	24	0.3	.99	.85	.65
39351	JVP	24MLP	24	0.6	1.09	.89	.65
652359	+	24MLP-GOLD	24	0.6	1.09	.89	.65
114412	JVP	28SMLP	28	0.3	1.09	.89	.65
40328	+	28MLP	28	0.6	1.19	.95	.69
40329	JVP	28MLP	28	0.6	1.25	.99	.75
223002	+	324SMLP	32	0.4	.69	.49	.29
105381	JVP	32MLP	32	0.6	1.35	1.09	.89
662629	+	40MLP	40	0.6	1.35	1.09	.89
41136	JVP	40MLP	40	0.6	1.69	1.39	.95
42059	+	48MLP	48	0.6	1.89	1.59	1.29
200707	+	64MLP	64	0.9	2.95	2.49	1.95

3 Level Machine Tooled Wire Wrap IC Sockets

- Contact plating: gold
- Contact resis.: <5mΩ
- Tin-plated leads
- Material: beryllium copper or phosphor bronze
- Dielectric withstanding voltage: 300V_{RMS}
- Insulation resistance: greater than 1000MΩ
- Body height: .115" (A)
- Thru-hole lead length: .586" (L)
- Insulator: glass-filled polyester or glass-filled polyphenylene sulfide
- Sleeve material: brass

JAMECO
EXCLUSIVE

★ Web Code: FAL



Part No.	Cross Ref. No.	Pins	Width (in.)	1	10	100
94474	8MSWW3	8	0.3	1.49	1.35	1.19
62051	14MSWW3	14	0.3	1.75	1.55	1.39
37411	16MSWW3	16	0.3	2.25	1.95	1.75
94482	18MSWW3	18	0.3	2.25	1.95	1.75
38632	20MSWW3	20	0.3	2.49	2.25	1.95
185324	22MSWW3	22	0.3	1.25	.95	.75
105372	24MSWW3	24	0.3	2.75	2.49	2.25
313656	24MSWW3	24	0.6	2.75	2.49	2.25
94491	24MSWW3	24	0.6	2.95	2.75	2.49
200716	28MSWW3	28	0.3	3.25	2.95	2.75
40337	28MSWW3	28	0.6	3.25	2.95	2.75
117058	32MSWW3	32	0.6	3.49	3.19	2.79
94503	40MSWW3	40	0.6	3.95	3.55	3.19
200723	48MSWW3	48	0.6	1.95	1.49	1.25

Wire Wrap IC Socket I.D. Markers

- Material: plastic
- Can easily write location, part number or function
- Quick identification of pin numbers
- Slips onto socket before wrapping

JDV



Part No.	*Mfr. Part No.	Pins	Width (in.)	1	10	100
51561	ID-8-100	8	0.3	.59	.49	.39
37145	ID-14-100	14	0.3	.69	.59	.45
38586	ID-20-50	20	0.3	.95	.75	.49
40299	ID-28-25	28	0.6	1.09	.89	.55

* AUG = Augat | JVP = Jameco ValuePro | OST = On Shore Technology | + Manufacturer Varies

★ For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

PLCC Thru-Hole Sockets

★ Web Code: YAH

- Solder tail allows through-hole board patterns in .100" grid
- Thru-hole lead length: .125"
- Accepts JEDEC type "A" plastic lead chip (0.05" centers)

JAMECO
EXCLUSIVE

71969



Part No.	Cross Ref. No.	Pins	Body Height (in.)	1	10	100
71263	G1P428	28	.375	.65	.55	.49
71811	G1P32	32	.375	.69	.59	.55
71618	G1P444	44	.375	.75	.65	.59
71619	G1P444	44	.375	.79	.69	.65
72442	G1P452	52	.375	.85	.75	.69
71969	G1P468	68	.375	.89	.79	.75
71977	G1P484	84	.375	.95	.85	.79

PLCC SMT Sockets

★ Web Code: EAR

- Housing: high temp. thermoplastic, UL94V-0
- Contacts: phosphor bronze/tin lead
- Contact resis.: 200MΩ max.
- Insulation resis.: 5000MΩ min.

152688



Part No.	*Mfr.	Product No.	Pins	Voltage Rate	1	10	100
2004822	+	850-20SMT-T	20	250V, 1A	.29	.19	.15
2005286	+	850-28SMT-T	28	250V, 1A	.29	.25	.15
2004831	+	850-32SMT-T	32	250V, 1A	.49	.39	.29
2125270	AUG	165-200005-11	40	250V, 1A	.75	.59	.49
152688	JVP	850-44-PPST	44	250V, 1A	.79	.69	.65
2005294	+	850-52SMT-T	52	250V, 1A	.39	.35	.25
1954771	+	850-68SMT-T	68	250V, 1A	.29	.25	.15
307951	JVP	850-68-PPST	68	250V, 1A	.39	.35	.25
152696	OST	ED068PLCZ-SM-N	68	250V, 1A	.39	.35	.25
2004849	+	850-84SMT-T	84	250V, 1A	.29	.25	.22

AMP PGA Socket

- Intel Celeron, PIII chip compatibility
- LCP cover material, UL94V-0 natural
- Open frame style
- Low profile
- 19 x 19 grid
- Contacts: copper alloy/gold



Part No.	*Mfr. Part No.	Pins	1	10	100
838735	2-916783-2	370	\$3.95	\$2.95	\$2.25

SIMM Vertical Sockets

★ Web Code: WAL

- Locking tabs
- Tinned contacts
- Memory module sockets
- Keyed mounting posts



Part No.	*Mfr.	Product No.	Description	1	10	100
100302	JVP	2000-1X30S	Single x 30-pin, vertical	1.49	1.35	1.19
1954754	+	ES1533	Single x 72-pin, vertical	1.95	1.75	1.49
1954746	+	ES1538	Dual x 30-pin, vertical	.29	.25	.22
1954762	+	ES1536	Dual x 72-pin, vertical	.99	.79	.39

molex .050" (1.27mm) Pitch SIMM Sockets

- 72 positions
- Contact: phosphor bronze
- PCB retention: press-fit plastic peg
- Contact plating (plating thickness): gold (0.76μm; 30μ")
- Left polarization
- Tin/lead (5μm; 200μ")



669791

Part No.	*Mfr. Part No.	Description	1	10
669791	15-82-0778	Vertical	\$1.95	\$1.49
670784	15-82-1538	Right angle	1.95	1.49

IC Sockets & Transistors

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

molex® .050" (1.27mm) DDR DIMM Socket

- 25° low profile
- Voltage key: 2.5V, left
- Plating tail: tin, lead free
- Contact: copper alloy
- Contact plating: .38µm (15µ") gold

Part No.	Mfr. Part No.	Position	1	10
668511	87623-2001	184	\$2.95	\$2.25

molex® .050" (1.27mm) DIMM Sockets

- 168 positions
- Contact: phosphor bronze
- Contact plating: gold over palladium nickel
- 662813/662830/662848: Beveled metal pin, forklock PCB retention
- 668529/668537: Press-fit plastic peg PCB retention

Part No.	Mfr. Part No.	Description	1	10
662813	71736-0001	DRAM, 3.3V	\$2.25	\$1.95
662830	71736-0005	Unbuffered, 5.0V	1.95	1.49
662848	71736-0006	SDRAM, 3.3V	1.95	1.49
668529	71251-0001	DRAM, 3.3V	1.95	1.49
668537	71251-0016	SDRAM, 3.3V	1.95	1.49

* Voltage References Available Online — Enter Web Code TBD

* Hot Swap Controllers Available Online — Enter Web Code JAX

Transistors

* Web Code: FEN

* Order in multiples of 10									
Part No.	*Mfr.	Product No.	Pkg.	Desc.	V _{ceo}	Min. (h _{FE} @ Ic)	1	10	100
26462	+	MPSA06	TO-92	NPN	80	100k @ .01A	\$.05	\$.04	
26489	+	MPSA13*	TO-92	NPN	30	5k @ .01A	.06	.05	
210593	+	MPSA14	TO-92	NPN	30	20k @ .10A	.05	.04	
210681	+	MPSA18	TO-92	NPN	45	500 @ .001A	.07	.06	
33021	+	TIP29A	TO-220	NPN	60	15 @ 1A	.35	.29	.25
33048	+	TIP31A*	TO-220	NPN	60	10 @ 3A	.29	.25	.22
179354	FSC	TIP31C	TO-220	NPN	100	10 @ 3A	.29	.25	.22
890568	ST	TIP35C	TO-218	NPN	100	25 @ 1.5A	1.09	.99	.89
33081	+	TIP41A	TO-220	NPN	60	15 @ 3A	.45	.39	.35
179371	+	TIP41C	TO-220	NPN	100	15 @ 3A	.35	.29	.25
178546	+	MPSA42	TO-92	NPN	30	40 @ .03A	.07	.06	
288631	+	TIP48	TO-220	NPN	300	30 @ .3A	\$.15	\$.12	
32977	+	TIP102*	TO-220	NPN	100	1k @ 3A	.39	.35	.29
179240	FSC	TIP102	TO-220	NPN	100	1k @ 3A	.45	.39	.35
1094723	FSC	TIP102	TO-220	NPN	100	1k @ 3A	.49	.45	.39
32993	+	TIP120*	TO-220	NPN	60	1k @ 3A	.35	.29	.25
32994	+	TIP120	TO-220	NPN	60	1k @ 3A	.39	.35	.29
179291	FSC	TIP120	TO-220	NPN	60	1k @ 3A	.39	.35	.29
120416	+	TIP122	TO-220	NPN	100	1k @ 3A	.35	.25	.22
179303	FSC	TIP122	TO-220	NPN	100	1k @ 3A	.39	.29	.25
260558	NTE	NTE123AP	TO-92	NPN	40	—	1.19	1.09	.99
890445	ST	TIP142	TO-218	NPN	100	1k @ 0.5A	1.05	.95	.85
273199	NTE	NTE272	TO-202	NPN	—	—	7.95	6.95	5.95
254810	+	BC337	TO-92	NPN	45	100 @ .10A	.07	.05	
261091	NTE	NTE473	TO-39	NPN	—	—	2.95	2.59	1.95
254801	+	BC547B	TO-92	NPN	45	330 @ .002A	.07	.06	
254799	+	BC547C	TO-92	NPN	45	600 @ .002A	.05	.04	
254781	+	BC548B	TO-92	NPN	30	110 @ .002A	.09	.07	
784790	FSC	BC549B	TO-92	NPN	30	110 @ 2mA	\$.05	\$.03	
916238	NXP	BC686T/R	SOT-89	NPN	20	85 @ 500mA	.12	.09	
800568	MOT	MPS918	TO-92	NPN	15	20 @ .003A	.08	.07	
38228	+	2N2219A	TO-39	NPN	40	100 @ .15A	.45	.39	.35
26446	+	MPQ2222	DIP-14	NPN	40	100 @ .15A	2.95	2.75	2.49
28628	+	PN2222*	TO-92	NPN	30	100 @ .15A	.07	.06	
38236	+	2N2222A	TO-18	NPN	40	100 @ .15A	.45	.39	.35
38237	+	2N2222A	TO-18	NPN	40	100 @ .15A	.49	.45	.39
213938	+	MMBT2222A	SOT-23	NPN	40	100 @ .15A	.07	.05	
210673	+	MPS2222A	TO-92	NPN	40	40 @ .50A	.05	.04	
2125448	PAN	2SC3526H	TO-92L	NPN	50	20 @ .10A	.99	.89	.69

*10 pcs./**100 pcs. in Transistor cabinet kit, pg 21

Transistors (Continued)

* Web Code: FEN

* Order in multiples of 10									
Part No.	*Mfr.	Product No.	Pkg.	Desc.	V _{ceo}	Min. (h _{FE} @ Ic)	1	10	100
178511	+	PN2222A	TO-92	NPN	40	100 @ .15A	\$.05	\$.03	
178512	+	PN2222A	TO-92	NPN	40	100 @ .15A	.07	.05	
803268	ON	PN2222AG	TO-92	NPN	40	50 @ .001A	.09	.07	
38295	+	2N3053*	TO-39	NPN	40	25 @ .15A	.55	.49	.45
38308	+	2N3055*	TO-3	NPN	60	15 @ 10A	.89	.79	.69
211406	+	2N3055A	TO-3	NPN	60	20 @ 4A	1.75	1.45	1.15
211385	+	TIP3055	TO-218	NPN	60	5 @ .001A	.85	.75	.69
25857	+	MJE3055T	TO-220	NPN	60	20 @ 4A	.39	.35	.29
194415	+	2N3439	TO-39	NPN	350	40 @ .02A	.75	.65	.55
209242	+	2N3771	TO-3	NPN	40	15 @ 15A	1.95	1.75	1.49
140151	+	2N3773	TO-3	NPN	140	15 @ 8A	1.95	1.75	1.49
38359	+	2N3904*	TO-92	NPN	40	100 @ .01A	.05	.03	
38360	+	2N3904	TO-92	NPN	40	100 @ .01A	.05	.03	
178597	FSC	2N3904	TO-92	NPN	40	100 @ .01A	.05	.03	
783421	FSC	2N3904	TO-92	NPN	40	100 @ .01A	.05	.03	
94967	+	MMBT3904	SOT-23	NPN	40	100 @ .01A	.06	.04	
1944927	FSC	PN4275	TO-92	NPN	15	35 @ .01A	.04	.02	
38421	+	2N4401*	TO-92	NPN	40	100 @ .15A	.05	.04	
211490	+	2N4923	TO-225	NPN	—	80 @ 1A	.45	.39	.35
1201380	FSC	PN4953	TO-92	NPN	30	150 @ .01A	.05	.04	
310666	+	2N5038	TO-3	NPN	150	20 @ 12A	4.75	4.49	3.95
140373	+	2N5179	TO-72	NPN	12	25 @ .003A	1.09	.99	.89
1945081	FSC	2N5306	TO-92	NPN	25	7000 @ .002A	.05	.03	.02
194600	+	2N6059	TO-3	NPN	100	750 @ 6A	1.95	1.75	1.49
924300	ST	2N6284	TO-3/2	NPN	100	750 @ 10A	3.25	2.95	2.59
140353	+	2N6488	TO-220AB	NPN	80	20 @ 5A	.79	.65	.49
1945031	FSC	MPS6515	TO-92	NPN	25	250 @ .002A	.05	.03	
194618	+	2N6547	TO-3	NPN	400	12 @ 5A	4.49	4.25	3.75
194626	+	2N6678	TO-3	NPN	400	8 @ 15A	6.95	6.25	5.49
33030	+	TIP30A	TO-220	PNP	60	15 @ 1A	.39	.35	.29
33064	+	TIP32A*	TO-220	PNP	60	10 @ 3A	.35	.29	.25
181841	+	TIP32C	TO-220	PNP	100	10 @ 3A	.29	.25	.22
890592	ST	TIP36C	TO-218	PNP	100	25 @ 1.5A	1.05	.95	.85
33101	+	TIP42A	TO-220	PNP	60	15 @ 3A	.39	.35	.29
139580	+	TIP42C	TO-220	PNP	100	15 @ 3A	.35	.29	.25
32985	+	TIP106	TO-220	PNP	80	1k @ 3A	.35	.29	.25
179258	+	TIP107	TO-220	PNP	100	1k @ 3A	.45	.39	.35
288526	+	TIP115	TO-220	PNP	60	1k @ 1A	.35	.29	.25
288542	+	TIP117	TO-220	PNP	100	1k @ 1A	.29	.25	.19
33013	+	TIP125	TO-220	PNP	60	1k @ 3A	.29	.25	.22
179320	+	TIP127	TO-220	PNP	100	1k @ 3A	.35	.29	.25
890488	ST	TIP147	TO-218	PNP	100	1k @ 5A	1.49	1.39	1.25
260611	NTE	NTE159	TO-92	PNP	80	—	1.25	1.05	.95
1215986	+	BC327	TO-92	PNP	-45	100 @ .10A	.15	.12	
1085500	FSC	MPS750RL	TO-92	PNP	40	75 @ .05A	.05	.03	
194378	+	2N2905A	TO-39/3	PNP	60	100 @ .15A	.45	.39	.35
924297	ST	2N2907	TO-39/3	PNP	-40	75 @ .01A	.59	.49	.45
26454	+	MPQ2907	DIP-14	PNP	40	100 @ .15A	1.95	1.75	1.49
28644	+	PN2907*	TO-92	PNP	40	100 @ .15A	.05	.03	
211342	+	MPS2907A	TO-92	PNP	60	100 @ .15A	.07	.06	
178520	+	PN2907A	TO-92	PNP	60	100 @ .15A	.05	.03	
38279	+	2N2907A*	TO-18	PNP	60	100 @ .15A	.45	.39	.35
211502	+	MJ2955	TO-3	PNP	60	20 @ 4A	.99	.89	.79
25831	+	MJE2955T	TO-220	PNP	60	20 @ 4A	.39	.35	.29
1944986	FSC	PN3644	TO-92	PNP	45	100 @ .01A	.04	.02	
38375	+	2N3906*	TO-92	PNP	40	100 @ .01A	.05	.03	
178618	FSC	2N3906	TO-92	PNP	40	100 @ .01A	.05	.04	
1944943	FSC	PN4122	TO-92	PNP	40	150 @ 1mA	.05	.03	
1944951	FSC	PN4355	TO-92	PNP	60	100 @ 1mA	.05	.03	
38447	+	2N4403*	TO-92	PNP	40	100 @ .15A	.05	.04	
2095411	+	—	Transistor mtg. pads	TO-92/98/18/72	—	—	.05	.04	

*10 pcs./**100 pcs. in Transistor cabinet kit, pg 21

Transistors continued on next page

* FSC = Fairchild Semiconductor | MOT = Motorola | NTE = NTE Electronics | NXP = NXP/Philips | ON = ON Semi | PAN = Panasonic | ST = ST Micro | + Manufacturer Varies

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



Transistors (Continued)

* Web Code: FEN

* Order in multiples of 10									
Part No.	*Mfr.	Product No.	Pkg.	Desc.	V _{CEO}	Min. (h _{FE} @ I _C)	1	10	100
1944935	FSC	PN4917	TO-92	PNP	30	150 @ 1mA *	\$.05	\$.03
210649	+	2N5401	TO-92	PNP	150	60 @ .01A *	.11	.09
253438	+	2N5884	TO-3	PNP	80	4 @ 25A 2.75	2.49	1.75
194571	+	2N6042	TO-220	PNP	100	1k @ 3A45	.35	.25
194597	+	2N6052	TO-3	PNP	100	750 @ 6A 2.49	2.25	1.95
261121	NTE	NTE6410	TO-92	PNP	30	— 4.95	4.49	3.95
885697	ON	2N6520RLRA	TO-92	PNP	350	20 @ 1mA *	.09	.07

Transistor Assortment Cabinet Kit

Includes: 20 drawer component cabinet (319600), 20 clear plastic drawers (319601), 20 clear dividers (319611), pg 173 and 30 adhesive labels for drawers to identify parts in kit

10 each: 2N2222A, 2N2907A, 2N3053, 2N3055, 2N4401, 2N4403, 2N5951, 2N7000, MJE3055T, MPF102, MPSA06, MPSA13, TIP31A, TIP32A, TIP102, TIP120
100 each: 2N3904, 2N3906, PN2222, PN2907

Part No.	Description	Wt. (lbs.)	1	5
82595	560 pcs. (20 types) NPN, PNP transistor kit	5.1 \$69.95	\$59.95
130374	Refill for 82595 (560 pcs.)	0.4 54.95	49.95

J-FETs

Please Note: Manufacturer may vary

* Web Code: JAD

* Order in multiples of 10									
Part No.	Product No.	Pkg.	Channel	BV _{GS} @ I _g (μA)	I _{SS} (mA) @ V _{DS}	10	100	1000	
26403	MPF102*	TO-92	N	-25 @ -10	2 @ 15 \$1.10	\$.09	\$.055	
210622	2N3819	TO-92	N	-25 @ -1	20 @ 1509	.07	.06	
1945006	PN4093	TO-92	N	-40 @ 1	15 @ 2005	.03	.015	
253948	2N5457	TO-92	N	-25 @ -10	1 @ 1508	.07	.05	
253921	2N5458	TO-92	N	-25 @ -10	2 @ 1509	.07	.06	
38527	2N5951*	TO-92	N	-30 @ -1	7 @ 1509	.07	.06	
253913	2N5460	TO-92	P	40 @ 10	-1 @ -1513	.11	.09	

* 10 pcs. in Transistor cabinet kit, above

N-Channel & P-Channel MOSFETs

* Web Code: GCI

* Order in multiples of 10									
Part No.	*Mfr.	Product No.	Pkg.	Channel	BV _{DS}	Min. On-St. DS Current	1	10	100
669871	+	IRFZ24N	TO-220AB	N	55	17A \$8.89	1.79	\$5.59
669927	+	IRFBG30	TO-220AB	N	1000	3.1A 1.59	1.39	1.19
669935	+	IRFZ34N	TO-220AB	N	55	26A85	.75	.65
669943	+	IRLZ34N	TO-220AB	N	55	30A79	.69	.59
669951	+	IRFZ44N	TO-220AB	N	55	49A95	.85	.75
669978	+	IRFZ46N	TO-220AB	N	55	53A99	.89	.79
669986	+	IRFZ48N	TO-220AB	N	55	64A 1.05	.95	.85
256031	+	BS170	TO-92	N	60	0.5A (max.) *	.10	.08
670071	+	IRFR220N	TO-252AA	N	200	5A35	.25	.19
670098	+	IRFP250N	TO-247AC	N	200	30A 1.75	1.35	1.15
670101	+	IRFP260N	TO-247	N	200	50A 3.49	2.75	2.25
871092	FSC	FDV303N	SOT-23	N	25	0.5A† *	.12	.09
871017	FSC	FDN337N	SuperSOT-3	N	30	10A39	.35	.29
670135	+	IRFP450	TO-247	N	500	14A 2.05	1.85	1.65
670143	+	IRFP460	TO-247	N	500	20A 2.49	2.25	1.85
209234	+	IRF510	TO-220	N	100	5.6A79	.59	.45
209226	+	IRF520	TO-220	N	100	10A89	.79	.69
209058	+	IRL520N	TO-220	N	100	10A65	.55	.45
210500	+	IRF530	TO-220	N	100	14A79	.69	.59

† DMOS FET

N-Channel & P-Channel MOSFETs (Continued)

* Web Code: GCI

* Order in multiples of 10									
Part No.	*Mfr.	Product No.	Pkg.	Channel	BV _{DS}	Min. On-St. DS Current	1	10	100
670151	+	IRF530N	TO-220AB	N	100	17A \$0.85	\$.75	\$.65
670160	+	IRL530N	TO-220AB	N	100	17A89	.79	.69
210518	+	IRF540	TO-220	N	100	27A75	.65	.55
670178	+	IRF540NS	D2PAK	N	100	33A49	.39	.29
670194	+	IRL540N	TO-220AB	N	100	30A 1.25	1.15	.95
210526	+	IRF620	TO-220	N	200	6.0A45	.39	.35
210534	+	IRF630	TO-220	N	200	9.0A45	.39	.35
210542	+	IRF640	TO-220	N	200	18A79	.69	.59
670223	+	IRF640NS	D2PAK	N	200	18A45	.35	.29
670231	+	IRF644	TO-220AB	N	250	14A79	.69	.59
210551	+	IRF730	TO-220	N	400	5.5A75	.65	.55
210569	+	IRF740	TO-220	N	400	10A65	.55	.45
210577	+	IRF820	TO-220	N	500	4.0A59	.49	.45
210585	+	IRF830	TO-220	N	500	4.5A55	.45	.39
184719	+	IRF840	TO-220	N	500	8.0A85	.75	.65
787798	FSC	RFP12N10L	TO-220AB	N	100	12A69	.59	.45
670282	+	IRF1405	TO-220AB	N	55	169A 2.45	2.15	1.95
279460	+	VN2222LL	TO-92	N	60	0.75A35	.29	.25
874875	FSC	NDT3055L	SOT-223	N	60	10A49	.39	.35
1559640	INR	IRF3205PBF	TO-220	N	55	110A 1.75	1.55	1.35
618089	+	IRF3205	TO-220	N	55	110A 1.55	1.35	1.15
670354	+	IRF3415	TO-220AB	N	150	43A 1.75	1.55	1.35
618071	+	IRL3705	TO-220	N	55	89A 1.25	1.15	1.05
670371	+	IRFPS37N50A	Super-247	N	500	36A 6.25	5.49	4.75
255038	+	SI4420DY	SOIC-8	N	30	30A69	.59	.49
875051	FSC	RFP50N06	TO-220AB	N	60	50A 1.25	1.09	.95
119423	+	2N7000	TO-92	N	60	0.3A *	.07	.05
178669	FSC	2N7000*	TO-92	N	60	0.2A *	.08	.06
783594	FSC	2N7000	TO-92	N	60	0.75A09	.07	.05
140169	+	2N7002	SOT-23	N	60	0.5A *	.07	.05
670397	+	IRF7401	SOIC-8	N	20	10A39	.35	.25
256057	+	BS250	TO-92	P	-45	0.25A (max.)49	.45	.39
871113	FSC	FDV304P	SOT-23	P	-25	-1A† *	.09	.07
1944901	+	ZVP3306A	TO-92	P	-60	-0.4A†39	.29	.25
870971	FSC	FDC640P	Super-SOT-6	P	-20	-20A *	.15	.12
670442	+	IRF4905	TO-220AB	P	-55	-74A 1.49	1.35	1.25
1559851	INR	IRF4905PBF	TO-220AB	P	-55	-74A 1.75	1.55	1.45
670477	+	IRF5210	TO-220AB	P	-100	-40A 1.75	1.55	1.35
670485	+	IRF5305	TO-220AB	P	-55	-31A99	.89	.79
670531	+	IRF7404	SOIC-8	P	-20	-7.7A *	.15	.12
670549	+	IRF7416	SOIC-8	P	-30	-10A35	.25	.19
670581	+	IRF9234N	TO-220AB	P	-55	-1.8A89	.79	.69
670629	+	IRF9520	TO-220AB	P	-100	6A65	.55	.45
670741	+	IRF9530	TO-220AB	P	-100	-12A 1.15	1.05	.95
670637	+	IRF9530N	TO-220AB	P	-100	-14A99	.89	.79
670645	+	IRF9540N	TO-220AB	P	-100	-23A 1.25	1.05	.95
670653	+	IRF9640	TO-220AB	P	-200	-11A 1.15	.95	.85
255089	+	SI4963DY	SOIC-8	Dual P	20	-20A69	.59	.49
670661	+	IRF7103	SOIC-8	Dual N	50	3A29	.25	.19
670670	+	IRF7303	SOIC-8	Dual N	30	5.3A *	.19	.15

* 10 pcs. in Transistor cabinet kit, above left † DMOS FET

Enter web codes online for additional product listings and specifications. Look for the web code box on the home page.

www.Jameco.com/More

* FSC = Fairchild Semiconductor | INR = International Rectifier | NTE = NTE | ON = ON Semiconductor | + Manufacturer Varies

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

MOSFETs, Diodes, Suppressors, Triacs & Rectifiers

NAME BRANDS	4 LEVELS OF SAVINGS		DOLLAR SALE
	HOUSE BRANDS	FACTORY OVERRUN	

Hexfet Power MOSFETs * Web Code: HDU									
* Order in multiples of 10									
Part No.	Mfr. Part No.	Pkg.	Channel	Min. On-St. BV _{DS}	DS Current	1	10	100	
1563147	IRFZ44NPBF	TO-220AB	N	55	49A	\$.99	\$.89	\$.79	
1951334	IRF530NS	D2-PAK	N	100	17A	.29	.25	.19	
1560051	IRF540NPBF	TO-220AB	N	100	33A	1.75	1.45	1.29	
1563690	IRLM5203TRPBF	Micro-3	P	-30	-3A	*	.15	.12	
1559965	IRF5305PBF	TO-220AB	P	-55	-31A	1.05	.95	.85	
1561619	IRF9640PBF	TO-220AB	P	-400	-11A	1.15	.95	.85	

Zener Diodes * Web Code: LAF

* Order in multiples of 10									
Part No.	*Mfr.	Product No.	Pkg.	V _{Znom}	Pwr Dissipation	1	10	100	
178773	VSH	1N4732A	DO-41	4.7V	1W	\$.07	\$.05	\$.05	
36097	♦	1N4733A*	DO-41	5.1V	1W	\$.05	.04	.04	
36118	♦	1N4734A	DO-41	5.6V	1W	\$.07	.05	.05	
36126	♦	1N4735A	DO-41	6.2V	1W	\$.05	.04	.04	
178837	♦	1N4739A	DO-41	9.1V	1W	\$.05	.04	.04	
36169	♦	1N4742A*	DO-41	12V	1W	\$.05	.04	.04	
36185	♦	1N4744A	DO-41	15V	1W	\$.07	.05	.05	
782911	FSC	1N4748ATR	DO-41	22V	1W	\$.05	.03	.03	
782922	FSC	1N4749ATR	DO-41	24V	1W	\$.04	.02	.02	
782962	FSC	1N4752ATR	DO-41	33V	1W	\$.05	.03	.03	
743488	FSC	1N5226B	DO-35	3.3V	0.5W	\$.05	.03	.03	
179039	♦	1N5230B	DO-35	4.7V	0.5W	\$.05	.04	.04	
179047	♦	1N5231B	DO-35	5.1V	0.5W	\$.06	.04	.04	
743541	♦	1N5237B	DO-35	8.2V	0.5W	\$.05	.04	.04	
179135	♦	1N5250B	DO-35	20V	0.5W	\$.05	.03	.03	
804818	ON	1N5352BG	Surmetic-40	15V	5W	.35	.29	.25	
804914	ON	1N5359BG	Surmetic-40	24V	5W	.29	.25	.22	

* 10 pcs. in Diode/Rectifier cabinet kit, pg 23

Diodes * Web Code: PAK

* Order in multiples of 10									
Part No.	*Mfr.	Product No.	Pkg.	Description	1	10	100		
1559164	INR	HFA08TB60PBF	TO-220AC	600VBR, 8A (Ultrafast)	\$1.09	\$.99	\$.89		
915323	NXP	BAS40-04T/R	SOT-23	40V _R , 120mA (Schottky)	*	.05	.03		
915972	NXP	BAV99ST/R	SOT-363	85V _{RRM} , 0.5A (Switching)	*	.07	.05		
35941	♦	1N270*	DO-7	80PRV (Germanium)	.99	.89	.79		
1538865	DDI	B340A-13F	SMA	40V _{RRM} , 3A (Schottky)	*	.15	.12		
313402	♦	MMBD914	SOT-23	100V _{RRM} , 0.2A (Switching)	\$.04	.02	.02		
312101	♦	MBR1100	DO-41	100PRV, 1.0A (Schottky)	.25	.22	.19		
1556650	AVT	HSMS-2802-BLKG	SOT-23	RF schottky barrier series, 70V	.39	.29	.25		
1556879	AVT	HSMS-2825-BLKG	SOT-143	RF schottky barrier series, 15V	.45	.35	.29		
1585240	AVT	HSMS-2860-BLKG	SOT-23	Forward voltage 350mV	.45	.39	.35		
787940	FSC	RURP3020	TO-220AC	200V _{RRM} , 30A (Ultrafast)	2.75	2.49	2.25		
743285	FSC	1N4148	DO-35	75PRV, 0.01A (Switching)	*	.06	.03		
36038	♦	1N4148**	DO-35	75PRV, 0.01A (Switching)	*	.05	.02		
151247	♦	1N4148T	DO-35	75PRV, 0.01A (tape/reel)	*	.05	.01		
179215	VSH	1N4148	DO-35	100PRV (Switching)	*	.05	.01		
743710	ST	1N6263	DO-35	60V _{RRM} , 50mA (Schottky)	*	.15	.09		
1558946	INR	80SQ045	DO-204	40V _{RRM} , 8A (Schottky)	.99	.89	.79		

* 10 pcs./** 100 pcs. in Diode/Rectifier cabinet kit, pg 23

Small Signal Diodes * Web Code: JDQ

Order in multiples of 10									
Part No.	*Mfr.	Product No.	Pkg.	Description	10	100	1000		
655613	♦	BAY73	DO-35	125V _{RRM} , 0.5A	\$.02	\$.01	\$.009		
36311	♦	1N914**	DO-35	75PRV, 0.01A	.05	.02	.015		
179207	VSH	1N914	DO-35	100PRV	.05	.02	.015		
655269	♦	1N914A	DO-35	100V _{RRM} , 0.2A	.05	.03	.02		
655285	♦	1N916	DO-35	100V _{RRM} , 0.2A	.05	.01	.007		

** 100 pcs. in Diode/Rectifier cabinet kit, pg 23

Transient Voltage Suppressors * Web Code: QBQ

* Order in multiples of 10									
Part No.	Product No.	Watt	Pkg.	Min. Brkdw Volt. (V _{BR})	Stand-Off Voltage	1	10	100	
255847	P6KE24CA	600	DO-15	22.8	20.5	\$.12	\$.09	\$.09	
255775	P6KE33CA	600	DO-15	31.4	28.2	.15	.12	.12	
255741	P6KE39CA	600	DO-15	37.1	33.3	\$.09	.07	.07	
255951	P6K150CA	600	DO-15	143.0	128	\$.09	.07	.07	
255839	P6K250CA	600	DO-15	237.0	214	.12	.09	.09	
313234	SMCJ10CA	1500	DO-214AB	11.1	10	.29	.25	.19	
313082	SMCJ58CA	1500	DO-214AB	64.4	58	.29	.25	.19	
618118	1N5908	1500	DO-41	6.0	—	.15	.12	.12	

Triacs * Web Code: PAE

* Order in multiples of 10									
Part No.	*Mfr.	Product No.	Pkg.	Rating	1	10	100		
160098	♦	HT-32	DO-35	27.37 V _{BO} , 2A	\$.25	\$.22	\$.19		
31819	♦	SC146B	TO-220	200 V _{DRM} , 10A (2N6342)	1.49	1.35	1.19		
31827	♦	SC146M	TO-220	600 V _{DRM} , 10A (2N6344)	1.95	1.75	1.49		
1165690	BNS	TIC201M	TO-220	600 V _{DRM} , 2.5A	.49	.39	.25		
160207	TEC	Q4008L4	TO-220AB	400 V _{DRM} , 8A	1.19	1.09	.89		
220492	TEC	Q4008R4	TO-220AB	400 V _{DRM} , 8A	.89	.79	.69		
139336	TEC	Q4015L5	TO-220AB	400 V _{DRM} , 15A	1.29	1.19	1.09		
160143	TEC	Q4025L6	TO-220AB	400 V _{DRM} , 25A	2.49	2.25	1.95		
160215	TEC	Q6008L5	TO-220AB	600 V _{DRM} , 8A	1.09	.99	.89		
160231	TEC	Q6015L5	TO-220AB	600 V _{DRM} , 15A	1.75	1.49	1.35		
220505	TEC	Q6025R6	TO-220AB	600 V _{DRM} , 25A	1.75	1.55	1.35		
220521	TEC	Q6035P5	TO-3	600 V _{DRM} , 35A	7.95	6.95	5.95		
140425	♦	2N6071A	TO-225AA	200 V _{DRM} , 4A	.39	.35	.29		

SanRex® Fast-On Package Triac * Web Code: PCH

Part No.	Mfr. Part No.†	Pkg.	Rating (X _{DRM} , I _{T(RMS)})	1	10	100
658275	TG35F60	Fast-On	Isolated 35A, 600V	\$8.95	\$7.95	\$6.95

† For cross-references to Littelfuse, ST, and ON Semi products refer to datasheets @ Jameco.com.

Rectifiers * Web Code: LBD

* Order in multiples of 10									
Part No.	*Mfr.	Product No.	Pkg.	Rating	1	10	100	1000	
177754	TAT	T6A05L	T6L	50 PIV, 6A	\$.39	\$.35	\$.29	\$.25	
177762	TAT	T6A10L	T6L	100 PIV, 6A	.49	.45	.39	.35	
177818	TAT	T6A100L	T6L	1000 PIV, 6A	.69	.59	.49	.45	
618062	♦	40CPQ060	TO-247AC	60 V _{RRM} , 40A (Schottky)	1.75	1.49	1.25	1.15	
879991	ON	MURS140T3	SMB	400 @ 1A (Ultrafast)	*	.09	.07	—	
1645097	GI	1N645-1	DO-35	225 PRV, .15A	*	.09	.07	.05	
35924	♦	1N1188	DO-5	400 PRV, 35A	4.25	3.75	3.35	3.15	
618100	♦	MBR745	TO-220	35V _{RRM} , 7.5A	*	.19	.15	—	
618097	♦	MBR2535CT	TO-220	35 V _{RRM} , 30A	.29	.25	.19	.17	
35975	♦	1N4001*	DO-41	50 PRV, 1A	*	.05	.02	.015	
1537862	DDI	1N4001G-T	DO-41	50V _{RRM} , 1A	*	.04	.03	.025	
76961	♦	1N4002	DO-41	100 PRV, 1A	*	.05	.02	.015	
76962	♦	1N4002	DO-41	100 PRV, 1A	*	.06	.03	.025	
1537889	DDI	1N4002-T	DO-41	100 V _{RRM} , 1A	*	.06	.04	.02	
76970	♦	1N4003	DO-41	200 PRV, 1A	*	.05	.02	.015	
35991	♦	1N4004**	DO-41	400 PRV, 1A	*	.05	.02	.015	
879094	ON	MRA4004T3	SMA	400 @ 1A	*	.07	.05	.04	
76988	♦	1N4005	DO-41	600 PRV, 1A	*	.05	.03	.02	
76996	♦	1N4006	DO-41	800 PRV, 1A	*	.05	.02	.015	
36011	♦	1N4007*	DO-41	1000 PRV, 1A	*	.05	.02	.015	
36012	♦	1N4007	DO-41	1000 PRV, 1A	*	.05	.02	.015	
1537951	DDI	1N4007-T	DO-41	1000 V _{RRM} , 1A	*	.06	.05	.03	
1304778	ON	1N4933RLG	DO-41	50 V _{RRM} , fast recovery	*	.05	.04	.03	
36249	♦	1N5401	DO-201AD	100 PIV, 3A	*	.10	.08	.07	
77083	♦	1N5402	DO-27A	200 PRV, 3A	*	.10	.08	.07	
36265	♦	1N5404*	DO-27A	400 PRV, 3A	*	.10	.08	.07	
36273	♦	1N5408*	DO-27A	1000 PRV, 3A	*	.10	.08	.07	

* 10 pcs./ ** 100 pcs. in Diode/Rectifier cabinet kit, pg 23

Rectifiers continued on next page

* AVT = Avago | BNS = Bourns | FSC = Fairchild | DDI = Diodes Inc. | GI = General Instru. | INR = International Rectifier | NXP = NXP/Philips | ON = ON Semi | ST = ST Micro | TAT = Taitron | TEC = Teccor | VSH = Vishay

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



Rectifiers (Continued)

* Web Code: LBD

Part No.	Mfr.	Product No.	Pkg.	Rating	* Order in multiples of 10			
					1	10	100	1000
36274	+	1N5408	DO-27A	1000 PRV, 3A	...	* .11	\$.09	\$.08
177949	+	1N5817	DO-204AL	20 PIV, 1A	...	* .10	.08	.07
177957	+	1N5818	DO-204AL	30 PIV, 1A	...	* .10	.08	.07
177965	+	1N5819	DO-204AL	40 PIV, 1A	...	* .10	.08	.07
1538419	DDI	1N5819HW-7-F	SOD-123	40 V _{RRM} , 1A (Schottky)	...	* .09	.07	.05
177973	+	1N5820	DO-201AD	20 PIV, 3A	...	* .09	.07	.05
177981	+	1N5821	DO-201AD	30 PIV, 3A	...	* .15	.12	.10
177990	+	1N5822	DO-201AD	40 PIV, 3A25	.22	.13
743701	ON	1N5822RLG	DO-201AD	40 PIV, 3A25	.22	.19
2126310	ST	BYW80-50	TO-220AC	50 PIV, 8A69	.59	.39

Bridge Rectifiers

* Web Code: MBD

Part No.	Mfr.	Product No.	Pkg.	Rating	* Order in multiples of 10			
					1	10	100	
1540421	+	HD04-T	Mini DIP-4	400 V _{RRM} , 0.8A	...	* .15	\$.12	
178001	+	DF005M	DF	50 V _{RRM} , 1A29	.25	.22
103000	+	DF01M	DF	100 V _{RRM} , 1A29	.25	.22
103042	+	DF02M	DF	200 V _{RRM} , 1A29	.25	.22
102971	+	DF04M	DF	400 V _{RRM} , 1A35	.29	.25
103034	+	DF06M	DF	600 V _{RRM} , 1A29	.25	.22
256575	+	DF08M	DF	800 V _{RRM} , 1.5A35	.29	.25
103026	+	DF10M	DF	1000 V _{RRM} , 1A29	.25	.22
145429	+	KBP02M	KBP	200 V _{RRM} , 1.5A35	.29	.25
119562	+	KBP04M	KBP	400 V _{RRM} , 1.5A39	.35	.29
279494	+	W005G	WOG	50 V _{RRM} , 1.5A45	.39	.29
103018	+	W02G	WOG	200 V _{RRM} , 1.5A49	.45	.39
102980	+	W04G	WOG	400 V _{RRM} , 1.5A49	.45	.39
179469	+	W08G	WOG	800 V _{RRM} , 1.5A49	.45	.39
279515	+	W10G	WOG	1000 V _{RRM} , 1.5A55	.49	.45
178132	+	W01M	WOM	100 V _{RRM} , 1.5A25	.22	.19
178141	+	W02M	WOM	200 V _{RRM} , 1.5A25	.22	.19
178183	TAT	BR805D	BR8D	50 PIV, 2A49	.45	.39
178247	TAT	BR810D	BR8D	1000 PIV, 2A29	.25	.19
253260	+	2KBP06M	KBP	600 V _{RRM} , 2A45	.35	.29
253286	+	2KBP10M	KBP	1000 V _{RRM} , 2A49	.39	.35
1545416	+	KBU8B	KBU	100 V _{RRM} , 8A99	.89	.79
299874	+	GBPC1206	GBPC	600 V _{RRM} , 12A	...	2.49	2.25	1.95
299866	+	GBPC1206W	GBPC-W	600 V _{RRM} , 12A	...	1.75	1.45	1.25
179477	+	GBPC25-01	GBPC	100 V _{RRM} , 25A	...	1.95	1.49	1.25
179485	+	GBPC25-02	GBPC	200 V _{RRM} , 25A	...	1.95	1.49	1.25
178280	+	MB254	MB35	400 V _{RRM} , 25A	...	2.49	2.15	1.75
178431	+	MB358	MB35	800 V _{RRM} , 35A	...	2.95	2.75	2.49
178335	TAT	TB252	TB35	200 PIV, 25A	...	1.49	1.25	.95
25574	+	MDA990-3	179-01	200 PIV, 30A	...	3.75	3.49	3.25
25591	+	MDA990-6	179-01	600 PIV, 30A	...	3.95	3.75	3.49
178503	TAT	TB3510	TB35	1000 PIV, 35A	...	3.49	3.25	2.95

* 10 pcs. in Diode/Rectifier cabinet kit, below

† DF/KBP/WOG/WOM/179-01 – plastic case; GBPC/TB35 – plastic case, metal base; MB35 – metal case

Diode/Rectifier Assortment Cabinet Kit

420 pcs. (15 types) Diodes, Zener Diodes, Switching and Silicon Rectifiers

Includes: 20 drawer component cabinet (319600), 20 clear plastic drawers (319601), 20 clear dividers (319611), pg 173 and 30 adhesive labels for drawers to identify parts in kit.

10 each: 1N270, 1N751A, 1N4001, 1N4007, 1N4150, 1N4733A, 1N4735A, 1N4742A, 1N5404, 1N5408, C106B1, KBP04M

100 each: 1N914, 1N4004, 1N4148

Part No.	Description	Wt. (lbs.)	1	5
82587	420 pcs. (15 types) diode kit	5.0	\$39.95	\$34.95
130366	Refill for 82587 (420 pcs.)	0.3	29.95	26.95



Silicon Controlled Rectifiers (SCRs)

* Web Code: BAB

Part No.	Mfr.	Product No.	Pkg.	Rating	* Order in multiples of 10			
					1	10	100	
14859	+	C38M	TO-65	600 PRV, 35A (2N3899)	...	\$6.95	\$6.25	\$5.49
14736	+	C106B1	TO-202	200 PRV, 4A (2N6239)†69	.59	.49
14752	+	C122B	TO-220	200 PRV, 8A	...	1.29	1.19	.99
14761	+	C122M	TO-220	600 PRV, 8A	...	1.35	1.25	1.05
160119	+	T106D1	TO-202AB	400 PRV, 4A59	.49	.45
119802	+	2N5060	TO-92	25 PRV, 0.8A	...	*	.12	.10
211422	+	2N5061	TO-92	60 PRV, 0.8A	...	*	.12	.10
160135	TEC	S6025L	TO-220AB	600 V _{DRM} , 25A	...	1.49	1.39	1.29
140417	+	2N6507	TO-220AB	400 PRV, 25A	...	1.19	1.09	.95
885654	ON	2N6509	TO-220AB	800 V _{DRM} , 25A	...	1.29	1.15	.95

† Isolated * 10 pcs. in Diode/Rectifier cabinet kit, below left

Heat Sinks

* Web Code: JAB



- Material: black anodized aluminum (except for P/N 107297 – light weight alum.)
- P/N 42622 can be mounted vertically with solderable mounting tabs

Part No.	Mfr.	Product No.	Type	Hole	Size (L" x W" x H")	1	10	100
2077335	AVD	501200B00	DIP-14/16	0	0.73 x 0.25 x 0.19	\$.49	\$.45	\$.39
151547	JVP	635-125B2	TO-3	4	1.83 x 1.40 x 1.25	1.49	1.39	1.25
189835	AVD	501303B00000G	TO-3	4	1.90 x 1.40 x 0.50	.89	.79	.69
16513	JVP	DUDE4	TO-3	4	4.75 x 1.50 x 1.25	3.75	3.25	2.75
326757	JVP	529801B02500	TO-218	3	1.64 x 1.00 x 1.50	1.19	.99	.85
696626	AVD	530002B02500	TO-220	1	2.52 x 1.65 x 1.00	1.95	1.75	1.39
696714	AVD	577002B00000G	TO-220	1	0.52 x 0.25 x 0.75	.29	.25	.22
158051	AVD	577102B00000G	TO-220	1	0.52 x 0.36 x 0.75	.29	.25	.22
696722	AVD	581002B02500G	TO-220	1	0.64 x 0.64 x 1.00	1.49	1.39	1.29
326596	JVP	507302B000000	TO-220	1	0.75 x 0.38 x 0.75	.29	.25	.22
70658	JVP	THM6073	TO-220	1	0.75 x 0.36 x 0.75	.29	.25	.22
40504	WKF	291-H-36AB	TO-220	1	1.00 x 0.36 x 0.86	.85	.75	.65
107297	+	PSC2-U (cup-style)	TO-220	0	1.00 x 0.42 x 0.80	.49	.45	.35
42622	AVD	563002B000000	TO-220	1	1.18 x 1.00 x 0.50	.35	.29	.25
129242	JVP	THM6106	TO-220	1	1.18 x 1.00 x 0.50	.65	.55	.45
70915	JVP	THM6106	TO-220	2	1.18 x 1.00 x 0.50	.69	.59	.49
326693	JVP	531002B05200	TO-220	2	1.38 x 0.50 x 1.00	.89	.79	.69
326713	JVP	531102B02500	TO-220	3	1.38 x 0.50 x 1.50	.99	.79	.65
326765	JVP	531302B02500	TO-220/202	3	2.50 x 1.38 x 0.50	1.25	1.09	.89
2033463	AVD	573300D00010G	TO-263	0	1.03 x 0.50 x 0.40	.69	.59	.49
1115310	AVD	576802B03100G	TO-220	0	0.75 x 0.50 x 0.52	.39	.29	.25
1115643	AVD	577202B00000G	TO-220	1	0.52 x 0.50 x 0.75	.35	.29	.25
1116460	AVD	7128DG	TO-220	0	0.86 x 0.38 x 1.18	.59	.49	.45
326684	JVP	566010B03400	TO-218	0	1.00 x 0.50 x 1.22	.49	.29	.25
891464	AVD	593002B03400G	TO-220	1	1.00 x 0.50 x 1.18	.79	.69	.59
2039099	AVD	7023B-MTG	TO-220	3	1.90 x 1.95 x 0.95	.99	.89	.79
2028162	AVD	7173DG	TO-220	1	0.75 x 0.75 x 0.38	.39	.29	.25
696765	AVD	7109DG	TO-263	0	0.76 x 1.00 x 0.45	.79	.65	.55
1115432	AVD	576802B03900G	TO-220	0	0.50 x 0.50 x 0.75	.39	.35	.29
2033009	AVD	7136DG	TO-220	0	0.52 x 0.52 x 0.85	.59	.49	.45
129226	JVP	For 486 CPUs (adhesive back)		0	1.58 x 1.58 x 0.39	2.95	2.49	2.25

* AVD = Aavid Thermalloy | COM = Comair Rotron | DDI = Diodes Inc. | JVP = Jameco ValuePro | ON = On Semiconductor | TAT = Taitron | TEC = Teccor | WKF = Wakefield | + Varies

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Heat Sink Mounting Kits, Compounds & Accessories

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

--	--	--	--	--	--	--	--

Heat Sink Compounds


*Web Code: YBA

Part No.	*Mfr.	Product No.	Description	1	10	100
169252	TSP	1978DP	Silicon free compound 4 oz. tube	\$23.95	\$21.95	\$20.95
615304	GCE	10-8106	Zinc-oxide filled silicon compound 1 lb. can	29.95	26.95	23.95
615312	GCE	10-8108	Zinc-oxide filled silicon compound 6.5g tube	2.95	2.65	2.39
615321	GCE	10-8109	Zinc-oxide filled silicon compound 1 oz. tube	7.95	7.25	6.55
167249	AVD	THM250	Silicon based compound 2 oz. tube	8.95	7.95	6.95
236823	JVP	54114	Silicon based compound 1 oz. tube	4.95	4.49	3.95

Heat Sink Mounting Kits

- TO-3 and TO-220 heat sink insulator assemblies
- 10 kits per pack

Part No.	Type	Description	1	10	100
34121	TO-220	5 pcs per kit	\$3.95	\$3.59	\$3.25
34139	TO-3	12 pcs per kit	3.95	3.59	3.25



Look for pricing shaded in blue throughout the catalog and for a larger selection go to:

Jameco.com/MakesCents

Optoisolators & Optocouplers

Optoisolators

*Web Code: CAG

* Order in multiples of 10						
Part No.	*Mfr.	Product No.	Pkg.	Description	1	10 100
40985	+	4N25	DIP-6	NPN phototransistor output	.25	.22 .19
41005	+	4N26	DIP-6	NPN phototransistor output	.25	.22 .19
41013	+	4N28	DIP-6	NPN phototransistor output	.25	.22 .19
41021	+	4N32	DIP-6	NPN photodarlington output	.25	.22 .19
41030	+	4N33	DIP-6	NPN photodarlington output	.25	.22 .19
41056	+	4N35	DIP-6	NPN phototransistor output	.25	.22 .19
671832	+	4N35S	SOIC-6	General purpose phototransistor	*.09	.07
1628828	INF	ILQ74	DIP-16	Quad-channel phototransistor	2.25	1.95 1.75
138069	+	ISP817-3	DIP-4	Low power transistor output	.35	.25 .19
2099948	OPT	OPI2151	DIP-6	Single NPN phototransistor	*.09	.07
320653	+	PS2501-1	DIP-4	Single NPN phototransistor output	.29	.25 .22
320661	+	PS2501-2	DIP-8	Dual NPN phototransistor output	.89	.79 .69
160338	+	PS2501-4	DIP-16	Quad NPN phototransistor output	1.49	1.35 1.19
320688	+	PS2502-1	DIP-4	Darlington photocoupler	.55	.45 .39
320696	+	PS2502-2	DIP-8	Dual NPN photodarlington output	1.45	1.29 1.15
160362	+	PS2502-4	DIP-16	Quad NPN photodarlington output	2.25	1.95 1.75
320717	+	PS2505-2	DIP-8	High isolation voltage photocoupler	1.49	1.29 1.09
320725	+	PS2505-4	DIP-16	Quad NPN phototransistor output	2.25	1.95 1.25
320805	+	PS2532-4	DIP-16	Quad hi collector to emitter voltage	2.49	2.25 1.95
26278	+	MOC3010	DIP-6	Bilateral sw. non-zero crossing triac	.39	.35 .29
698912	FSC	MOC3010M	DIP-6	Random phase, triac driver output	.39	.35 .25
95020	+	MOC3011	DIP-6	Random phase, triac driver output	.45	.39 .35
277780	+	MOC3020	DIP-6	Bilateral sw. non-zero crossing triac	.49	.45 .39
95038	+	MOC3021	DIP-6	Random phase, triac driver output	.55	.49 .45
277819	+	MOC3023	DIP-6	Random phase, triac driver output	.49	.45 .39
113953	+	MOC3032	DIP-6	Zero-crossing, triac driver output	.79	.69 .59
277827	+	MOC3033	DIP-6	Zero-crossing, triac driver output	.59	.49 .39
277835	+	MOC3041	DIP-6	Zero-crossing, triac driver output	.79	.69 .59
277843	+	MOC3043	DIP-6	Zero-crossing, triac driver output	.89	.79 .69
277894	+	MOC3052	DIP-6	Random phase, triac driver	.49	.45 .35
133874	+	MOC3063	DIP-6	Zero-crossing, triac driver output	.75	.65 .55
320629	+	MOC3082	DIP-6	Zero-crossing, triac driver output	.59	.45 .39
320611	+	MOC3083	DIP-6	Zero-crossing, triac driver output	.45	.35 .29
2006414	LTO	LTR-5986D	SIP-3	NPN phototransistor/detector	.25	.22 .15
273607	NTE	NTE3221	DIP-16	4-channel, NPN transistor output	1.95	1.75 1.49

Optocouplers

*Web Code: NAK

* Order in multiples of 10						
Part No.	*Mfr.	Product No.	Pkg.	Description	1	10 100
277510	+	6N135	DIP-8	Hi-speed photodetector transistor	\$.75	\$.65 \$.55
42471	+	6N136	DIP-8	Hi-speed phototransistor output	.65	.55 .45
113911	+	6N137	DIP-8	Hi CMR, hi-speed logic gate output	.69	.59 .49
42489	+	6N138	DIP-8	Hi-speed photodarlington output	.69	.59 .49
113929	+	6N139	DIP-8	Hi-speed photodarlington output	.35	.25 .19
18825	+	H11AA1	DIP-6	AC input/phototransistor	.59	.49 .45
320434	+	H11AA2	DIP-6	AC input phototransistor optocoupler	.59	.49 .35
320451	+	H11AA4	DIP-6	AC input phototransistor optocoupler	.69	.59 .49
938365	FSC	H11AA4SVM	DIP-6	AC input phototransistor (w/ SMD)	.29	.25 .19
113988	+	H11L1	DIP-6	µPROC compatible Schmitt trigger	.79	.69 .59
871341	FSC	H11L1M	DIP-6	Logic output	.85	.75 .65
1549441	AVT	HCPL-060L-000E	SOIC-8	Hi-speed LVTTTL compatible 3.3V opto	1.25	1.05 .85
1549644	AVT	HCPL-063N	SOIC-8	Dual ch. high CMR, 10MBd, HCMOS compat.	3.75	3.49 2.95
1549530	AVT	HCPL-0630-000E	SOIC-8	Dual ch. high CMR, hi-spd TTL compat. opto.	2.49	2.25 1.95
1549732	AVT	HCPL-0710	SOIC-8	40ns propagation delay, CMOS	2.75	2.49 2.25
1549741	AVT	HCPL-0710-000E	SOIC-8	40ns propagation delay, CMOS	2.75	2.49 2.25
1549839	AVT	HCPL-0731	SOIC-8	Dual ch. low input current, high gain	2.25	1.95 1.49
1550047	AVT	HCPL-2232	DIP-8	Dual ch. very high CMR, wide Vcc logic gate	4.95	4.49 3.95
785821	FSC	HCPL2631S	SOIC-8	Dual ch. high speed 10mbit/s logic gate	1.25	.95 .75
1584221	AVT	HCPL-7710-000E	DIP-8	40ns propagation delay, CMOS	2.49	2.25 1.95
1584239	AVT	HCPL-7710-300E	DIP-8	40ns propagation delay, CMOS	2.49	2.25 1.95
1584247	AVT	HCPL-7800-300	SOIC-8	Isolation amplifier optocoupler	4.75	4.25 3.75
1584255	AVT	HCPL-7800A#300	DIP-8	Isolation amplifier optocoupler	4.95	4.49 3.95
24918	+	MCT6	DIP-8	High density NPN phototransistor	.59	.49 .45
672317	+	MCT61	DIP-8	Dual channel NPN phototransistor	.35	.25 .19
672325	+	MCT62	DIP-8	Dual channel NPN phototransistor	.59	.49 .39
2006385	LTO	LTV-814H	DIP-4	Phototransistor output, AC input	.25	.22 .19
1996330	LTO	LTV-824S	SOIC-8	Opto phototransistor	*.15	.12
790735	LTO	LTV-824	DIP-8	Opto phototransistor	.39	.29 .25
878286	LTO	LTV-847	DIP-16	Quad ch. phototransistor output	.79	.69 .59
1583156	CLA	PD2401	SOIC-16	AC solid st. sw. w/ dual pwr SCR output	5.75	5.25 4.49
1583199	CLA	TS117S	DIP-8	1-Form-A relay optocoupler	1.49	1.25 .95
1583228	AVT	5962-8876901PC	DIP-8	2-ch., low IF, wide Vcc, logic gate	49.95	44.95 39.95

SIEMENS

Slotted Optical Switches

2078282



2126301



*Web Code: XAP

Part No.	*Mfr.	Product No.	Pkg.	Description	1	10 100
2078282	SIE	IRLA075	4-pin w/ tab	Single channel, 50mA (Ic)	\$.99	\$.89 \$.79
2126301	ISO	ISTS150	8-pin w/ tab	Dual channel, 20mA (Ic)	.89	.79 .59

* AVD = Aavid Thermalloy | AVT = Avago | CLA = Clare | GCE = GC Elec. | INF = Infineon | ISO = Isocom | JVP = ValuePro | LTO = Lite On | NTE = NTE Elec. | OPT = Optek | SIE = Siemens | TSP = Tech Spray | WKF = Wakefield

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

1.90mm (.075") Subminiature LEDs

Flat-Top or Dome Style



Fig. 1

* Web Code: SML



Fig. 2

* Order in multiples of 10

Part No.	Mfr. Part No.	*Mfr.	Fig.	Emitting Color	Lens/Feature Description	Typical Vf @ If	Iv Typical mcd @ mA	Wavelength (nm)	Viewing Angle°	Pricing			
										1	10	100	500
1555690	HLMP-P205-F0011	AVT	1	Hi-eff. Red	Non-diffused, untinted	1.8 @ 10	8 @ 10	635	125	\$.29	\$.25	\$.22	\$.19
1555817	HLMT-PH00-P0011	AVT	1	Red Orange	Non-diffused, untinted	2 @ 20	120 @ 20	621	125	.29	.25	.22	.19
1555711	HLMP-P505-G0011	AVT	1	Hi-perf. Green	Non-diffused, untinted	2.1 @ 10	6.3 @ 10	565	125	.29	.25	.22	.19
1584976	HLMP-Q156-H0021	AVT	2	Red	Non-diffused, untinted	1.6 @ 0.5	7 @ 0.5	654	15	.39	.35	.29	.25
1584968	HLMP-Q106-R0011	AVT	2	Red	Non-diffused, untinted	1.9 @ 20	400 @ 10	654	15	.39	.35	.29	.25
1584802	HLMP-7019	AVT	2	Yellow	Diffused, tinted	2 @ 10	0.6 @ 2	583	90	.29	.25	.22	.19
334406	LY9033	JVP	2	Yellow	Water clear	1.7 @ 20	30 @ 10	585	20	.29	.25	.19	.15
1555059	HLMP-6500-F0010	AVT	2	Hi-perf. Green	Diffused, tinted (right angle housing)	2.1 @ 10	7 @ 10	565	90	.29	.25	.22	.19
1555104	HLMP-6505-L0021	AVT	2	Hi-perf. Green	Non-diffused, untinted	2.1 @ 10	40 @ 10	565	28	*	.19	.15	.12
1584790	HLMP-6820	AVT	2	Hi-perf. Green	Diffused, with resistor	5 @ 4	2 @ 5	565	90	.35	.29	.25	.22




Fig. 3




Fig. 4




Fig. 5

Fig. 6



Fig. 7



Fig. 8



Fig. 9




Fig. 10



Fig. 11



Fig. 12

Fig. 13

Standard-Output LEDs

See page 30 for LED Mounting Hardware

* Web Code: FAF

* Order in multiples of 10

Part No.	Product No.	*Mfr.	Fig.	Emitting Color	Lens/Feature Description	LED Size	Diameter inch/mm	Dimensions		Lead Spacing	Typical Vf	Typical mcd	Wavelength nm	Viewing Angle°	Pricing			
								A"	B"						1	10	100	1000
26745	MCDL-170EC	MCD	1	Red	Water clear	T 3/4	0.065/1.7	0.06	0.35	—	2.0	7	635	100	\$.39	\$.35	\$.29	\$.25
1869437	MPG2262SS	STA	1	Green	Green diffused	T 3/4	0.065/1.7	0.06	0.35	—	2.1	16	567	60	.39	.35	.29	.25
202471	MVL-301HR	UNI	2	Red	Red diffused	T1	0.119/3	0.14	1.12	0.10	2.0	9.0	640	40	*	.10	.08	.06
253278	HLMP-1301	FSC	2	Red	Red diffused	T1	0.119/3	0.19	1.00	0.10	1.9	5.4	635	60	*	.11	.09	.07
152785	LT0341R-41	LED	2	Red	Red diffused	T1	0.119/3	0.20	0.89	0.10	2.1	15.5	635	56	*	.12	.10	.08
333851	UT6371-41-M1	JVP	2	Red	Red diffused	T1	0.119/3	0.17	0.98	0.10	1.7	63	660	47	*	.12	.10	.08
94529	LH2040	JVP	2	Red	Red diffused (XC209RB)	T1	0.119/3	0.18	1.04	0.07	2.3	4.5	697	36	*	.12	.10	.08
136282	LA44B/21	JVP	3	Red	Red diffused (right angle) .60" LDS	T1	0.119/3	0.38	0.17	0.10	1.7	12	635	50	.35	.29	.25	.19
1554099	HLMP-1700-B0002	AVT	2	Red	Red tinted/diffused	T1	0.119/3	0.19	0.95	0.10	1.7	0.8	635	50	*	.15	.12	.09
1554110	HLMP-1700-B00A2	AVT	4	Red	Red tinted/diffused (right angle)	T1	0.119/3	0.19	0.95	0.10	1.7	0.8	635	50	.39	.32	.25	.22
152751	LT0344R-41	LED	2	Red	Red clear	T1	0.119/3	0.20	0.89	0.10	2.1	52.9	635	36	*	.12	.10	.08
2081991	XLUR40W	◆	5	Red	Water clear	T1	0.119/3	0.197	1.063	0.10	1.9	59	627	50	*	.10	.08	.06
333171	HLMP-K155-JV	JVP	5	Red	Red clear	T1	0.119/3	0.19	1.04	0.10	1.6	3.0	660	45	*	.12	.10	.08
333260	LHR2643	JVP	2	Red	Water clear	T1	0.119/3	0.13	0.98	0.10	1.5	300	660	40	*	.12	.10	.08
114673	LH2043	JVP	2	Red	Water clear (BR209)	T1	0.119/3	0.14	0.98	0.07	2.3	12	697	30	*	.12	.10	.08
206498	LHR2041	JVP	2	Red	Red transparent	T1	0.119/3	0.17	0.69	0.08	2.0	350	660	30	*	.15	.12	.10
697565	LTL-4211N	LTO	2	Bright Red	Red diffused	T1	0.118/3	0.175	1.00	0.10	2.1	4.4	697	60	*	.12	.10	.08
697590	LTL-4221N	LTO	2	Hi-eff Red	Red diffused	T1	0.118/3	0.175	1.00	0.10	2.0	8.7	635	60	*	.10	.08	.06
2006713	LTL-161CE	LTO	2	Hi-eff Red	Red diffused, flanged	T1	0.118/3	0.21	1.07	0.10	2.0	12.6	621	60	*	.12	.10	.08
2081932	BVL-300E5D	◆	5	OrangeRed	Red diffused	T1	0.119/3	0.17	1.00	0.10	2.1	18	622	45	*	.09	.06	.05
94553	LHG2062	JVP	2	Red/Green	White diffused bi-color/bi-state ¹	T1	0.119/3	0.18	1.06	0.08	2.3	3 & 15	697/565	36	*	.19	.15	.12
1766366	4301F1/5	CML	5	Red/Green	White diffused bi-color	T1	0.119/3	0.175	1.00	0.10	2.1	13/4	660/565	60	.59	.55	.49	.45
156946	LT0362-25-D61	LED	6	Red/Green	White diffused bi-color/tri-state	T1	0.119/3	0.16	0.87	0.08	2.1	2.7/13.3	700/567	50	.39	.35	.29	.25
235424	LA45B/21	JVP	3	Red/Red	Red diffused (right angle)	T1	0.119/3	0.40	0.18	0.10	1.7	12	630	50	.35	.29	.25	.19
235416	LA45B/2G	JVP	7	Green/Green	Green diffused (dual)	T1	0.119/3	0.40	0.18	0.10	1.7	15	565	50	*	.19	.15	.12
156937	LT0331-41	LED	2	Yellow	Yellow diffused	T1	0.119/3	0.20	0.95	0.10	2.1	11	585	56	*	.12	.10	.08
333219	LY12340	JVP	2	Yellow	Yellow diffused	T1	0.119/3	0.13	0.98	0.10	1.7	6.5	585	112	*	.12	.10	.08
697688	LTL-4251N	LTO	5	Yellow	Yellow diffused	T1	0.118/3	0.175	1.00	0.10	2.1	5.6	585	60	*	.12	.10	.08
202489	MVL-301Y	UNI	5	Yellow	Yellow diffused	T1	0.118/3	0.20	1.10	0.10	2.1	9.0	585	40	*	.12	.10	.08
34657	LY2040	JVP	2	Yellow	Yellow diffused (XC209Y)	T1	0.119/3	0.16	0.68	0.08	2.3	15	585	36	*	.12	.10	.08
334211	LA16BY	JVP	4	Yellow	Yellow diffused (right angle)	T1	0.119/3	0.29	0.18	0.10	1.7	12	585	50	*	.10	.08	.06
2006721	LTL-14CDJLDL	LTO	2	Yellow/Green	White diffused bi-color, flanged	T1	0.119/3	0.19	1.35	0.10	2.1	8.7/12.6	585/565	80	*	.19	.15	.12
2125464	VX4SUGY91M	SLD	8	Yellow/Green	White diff. bi-color, quad-level	T1	0.119/3	0.47	0.20	0.10	2.1/2.2	24/6	590/565	130	.99	.89	.79	.65
2125472	PZ1LUY2LUG32D	SLD	9	Yellow/Green	Yellow/green diffused, tri-level	T1	0.119/3	0.60	0.17	0.10	1.95/2.0	8/15	590/565	40	.99	.89	.79	.65
2006705	LTL-1CHYE	LTO	2	Yellow	Water clear, flanged	T1	0.119/3	0.21	1.07	0.10	2.1	40	585	45	*	.08	.06	.045
2082003	XLUY40W	◆	5	Yellow	Water clear	T1	0.119/3	0.197	1.063	0.10	1.95	19	590	50	*	.10	.08	.06
206480	LVY2041	JVP	2	Yellow	Yellow transparent	T1	0.119/3	0.17	0.69	0.08	2.3	450	595	30	*	.12	.10	.08

*10 pcs./ **100 pcs. in LEDs & LED Mounting Hardware cabinet kit, pg 30 ¹ Reverse polarity to change color

Standard Output LEDs continued on next page

* AVT = Avago | CML = CML Innovative | FSC = Fairchild Semi | JVP = ValuePro | LED = Ledtech | LTO = Lite On | MCD = MCD Elec. | STA = Stanley | SLD = Sunled Corp | UNI = Unity Opto | ◆ Varies

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

Standard-Output LEDs

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Standard-Output LEDs (Continued)

NEW
MARKED IN PINK

Figure images on previous page

★ Web Code: FAF

* Order in multiples of 10

Part No.	Product No.	*Mfr.	Fig.	Emitting Color	Lens/Feature Description	LED Size	Diameter inch/mm	Dimensions		Lead Spacing	Typical Vt	Typical mcd	Wavelength nm	Viewing Angle°	Pricing			
								A"	B"						1	10	100	1000
2006676	LTL-42DINMHDP	LTO	3	Green/Yellow	Gr/Yel diffused (rt. angle) .13" LDS	T1	0.119/3	0.38	0.17	0.10	2.1	12/6	565/585	60	*	\$.15	\$.12	\$.10
333201	LG12340	JVP	2	Green	Green diffused	T1	0.119/3	0.13	0.98	0.10	1.7	9.6	565	112	*	.12	.10	.08
253631	HLMP-1503	FSC	2	Green	Green diffused	T1	0.119/3	0.19	1.00	0.10	2.1	1.0	565	60	*	.12	.10	.08
156930	LT0321-41-HE	LED	2	Green	Green diffused	T1	0.118/3	0.16	0.88	0.10	2.1	32	567	56	*	.15	.12	.10
211086	LTL-4231N-022	LTO	5	Green	Green diffused	T1	0.119/3	0.13	1.10	0.10	2.1	12.6	565	40	*	.10	.08	.06
1956602	LTL4231N	LTO	2	Green	Green diffused	T1	0.118/3	0.175	1.00	0.10	2.1	12.6	565	60	*	.10	.08	.06
697637	LTL-4231N	LTO	5	Green	Green diffused	T1	0.118/3	0.175	1.00	0.10	2.1	12.6	565	60	*	.12	.10	.08
34606	LSG2040 *	JVP	2	Green	Green diffused (XC209G)	T1	0.119/3	0.13	1.05	0.08	2.2	15	560	50	*	.15	.12	.10
2120401	LMG32D-12V-B	SLD	1	Green	Green diff. (12V internal resistor)	T1	0.119/3	0.13	1.05	0.08	1.7	19	565	60		.29	.25	.19
136274	LA44B/2G	JVP	3	Green	Green diffused (rt. angle) .60" LDS	T1	0.119/3	0.38	0.17	0.10	2.3	15	565	50		.39	.35	.25
1554144	HLMP-1790-A0002	AVT	2	Green	Green tinted/diffused	T1	0.119/3	0.19	0.95	0.10	1.9	2.3	565	50		.29	.25	.19
175679	LVG2041	JVP	2	Green	Green transparent	T1	0.119/3	0.17	0.69	0.08	2.2	129	565	30	*	.15	.12	.10
253665	HLMP-1540	FSC	2	Green	Water clear	T1	0.119/3	0.19	1.00	0.10	45	2.2	565	45	*	.12	.10	.08
2081983	XLUG40W	JVP	2	Green	Water clear	T1	0.119/3	0.197	0.63	0.10	2.0	69	565	50	*	.10	.08	.06
333315	MV7441-JV	JVP	2	Green	Water clear	T1	0.119/3	0.13	0.98	0.10	1.7	120	565	40	*	.12	.10	.08
114681	LVG2043 *	JVP	2	Green	Water clear (BG209)	T1	0.119/3	0.14	0.98	0.07	2.2	129	565	30	*	.12	.10	.08
137411	LVB2040	JVP	2	Blue	Blue diffused	T1	0.119/3	0.21	0.98	0.10	4.8	10	430	50		.89	.79	.69
334457	LSBI2640	JVP	5	Blue	Blue diffused	T1	0.119/3	0.17	0.98	0.10	3.8	50	430	40		.89	.79	.69
333383	UT63B1-41-M1A2	JVP	5	Blue	Blue diffused	T1	0.119/3	0.17	0.98	0.10	3.8	50	466	54		.49	.45	.35
242844	LT1811-81	LED	2	Red	Red diffused	T1 1/2	0.197/5	0.30	0.88	0.10	2.1	4.1	700	44	*	.12	.10	.08
333973	UT1871-81-M1	JVP	2	Red	Red diffused	T1 1/2	0.197/5	0.34	0.98	0.10	1.7	75	660	25	*	.12	.10	.08
334035	UT1871-81-UR-P18	JVP	2	Red	Red diffused	T1 1/2	0.197/5	0.334	0.94	0.10	1.9	250	660	25	*	.15	.12	.10
2125309	LS5469FH	SIE	2	Super Red	Red diffused	T1 1/2	0.20/5.1	0.31	1.10	0.10	1.8	5	635	50	*	.09	.08	.07
253753	HLMP-3301	FSC	2	Red	Red diffused	T1 1/2	0.197/5	0.36	1.00	0.10	2.4	5.4	635	60	*	.15	.12	.10
302033	LT1814-81	LED	2	Red	Red clear	T1 1/2	0.197/5	0.34	0.88	0.10	2.1	10	650	10	*	.10	.08	.06
333489	LUR3330/HO/A	JVP	2	Red	Red diffused	T1 1/2	0.197/5	0.34	0.98	0.10	1.5	380	660	40	*	.19	.15	.12
94511	LH3330	JVP	2	Red	Red diffused (XC556RB)	T1 1/2	0.197/5	0.31	0.81	0.08	2.3	3	697	36	*	.15	.12	.10
104248	LA93B/H-1 *	JVP	10	Red	Red diffused (XC410R)	T1 1/2	0.197/5	0.35	0.89	0.08	2.3	6.5	697	46		.25	.21	.19
34690	LFH3360 *	JVP	2	Red	Red diff. blinking (XC5410) 2	T1 1/2	0.197/5	0.30	0.94	0.07	3-12	2.8	697	—		.39	.35	.29
1554865	HLMP-4700-C00B2	AVT	10	Red	Red tinted/diffused	T1 1/2	0.197/5	0.36	1.05	0.10	1.7	2.3	626	50		.59	.55	.49
34745	LH3333	JVP	2	Red	Water clear (XC554R)	T1 1/2	0.197/5	0.30	1.00	0.08	2.3	7.5	697	20	*	.15	.12	.10
2006756	LTL-5224	LTO	2	Hi-eff Red	Water clear, low profile, flanged	T1 1/2	0.197/5	0.24	1.01	0.10	2.0	29	623	44	*	.12	.10	.08
334378	UT1841R-81	JVP	2	Hi-eff Red	Red diffused	T1 1/2	0.197/5	0.34	0.98	0.10	2.1	23.1	630	44	*	.12	.10	.08
697602	LTL-4223	LTO	2	Hi-eff Red	Red diffused	T1 1/2	0.197/5	0.34	1.00	0.10	2.0	19	635	36	*	.11	.09	.07
697522	LTL-307E	LTO	5	Hi-eff Red	Red diffused	T1 1/2	0.197/5	0.34	0.90	0.10	2.0	19	635	50	*	.12	.10	.08
2006692	LTL-10224WHCR	LTO	7	Hi-eff Red	Red diffused w/ plastic case	T1 1/2	0.197/5	0.44	0.49	0.10	2.0	60	635	30	*	.15	.12	.09
790081	LTL-10223W	LTO	5	Hi-eff Red	Red diffused, flangeless	T1 1/2	0.187/4.75	0.283	1.00	0.10	2.0	60	623	60	*	.12	.10	.08
2006730	LTL-307E-3 *	LTO	2	Hi-eff Red	Red diffused, flanged	T1 1/2	0.197/5	0.34	0.87	0.10	2.0	12.6	635	40	*	.10	.08	.06
334271	LA93B/L	JVP	10	Hi-eff Red	Red diffused PCB mnt indicators	T1 1/2	0.197/5	0.36	0.15	0.10	1.7	25	635	46		.29	.25	.19
697611	LTL-4224	LTO	2	Hi-eff Red	Red transparent	T1 1/2	0.197/5	0.34	1.00	0.10	2.0	90	635	16	*	.10	.08	.06
697573	LTL-4213	LTO	2	Bright Red	Red diffused	T1 1/2	0.197/5	0.34	1.00	0.10	2.1	3.7	697	36	*	.11	.09	.07
790225	LTL-307P	LTO	5	Bright Red	Red diffused	T1 1/2	0.197/5	0.34	0.90	0.10	2.1	5.6	697	50	*	.12	.10	.08
334174	LH13360	JVP	6	Red/Orange	Red diffused bi-color/solid state 1	T1 1/2	0.197/5	0.34	0.98	0.10	1.7	2 & 3	697/635	30	*	.19	.15	.12
34711	LEG3362 *	JVP	2	Red/Green	White diffused bi-color/bi-state 1	T1 1/2	0.197/5	0.30	1.01	0.09	2.3	7.5	635/565	30	*	.19	.15	.12
334182	LGH3362	JVP	6	Red/Green	White diff. bi-color/solid state 1	T1 1/2	0.197/5	0.34	0.98	0.10	1.7	2 & 8	697/565	30	*	.19	.15	.12
34673	LHG3392 *	JVP	6	Red/Green	White diff. bi-color/tri-state 1	T1 1/2	0.197/5	0.30	1.02	0.03	2.3	3 & 12	697/565	70	*	.19	.15	.12
1554831	HLMP-4000	AVT	6	Hi-eff Red/Gm	White diffused, bi-color	T1 1/2	0.2/5.08	0.36	1.00	0.10	1.9/2.2	2.1/4.2	635/568	65		.29	.25	.19
1584773	HLMP-4000S010	AVT	10	Hi-eff Red/Gm	White diff. bi-color (right angle)	T1 1/2	0.2/5.08	0.36	1.00	0.10	1.9/2.2	2.1/4.2	635/568	65		.79	.69	.59
697557	LTL-30EFJ	LTO	6	Bright Red/Gm	White diffused, bi-color	T1 1/2	0.197/5	0.41	0.945	0.10	2.1/2.1	5.6/19	697/565	30		.39	.35	.29
152857	LT1841R-81-R	LED	2	Orange Red	Red diffused	T1 1/2	0.197/5	0.34	0.89	0.10	2.1	23	635	44	*	.15	.12	.10
210825	BVU-5M10N1	BVO	5	Orange Red	Red diffused	T1 1/2	0.197/5	0.30	1.00	0.10	2.1	465	615	30	*	.10	.08	.06
107393	LE3330	JVP	2	Orange Red	Orange diffused (XC556A)	T1 1/2	0.197/5	0.30	1.02	0.08	2.3	12	635	36	*	.12	.10	.08
697696	LTL-4253	LTO	2	Yellow	Yellow diffused	T1 1/2	0.197/5	0.34	1.00	0.10	2.1	19	585	36	*	.12	.10	.08
334108	UT1831-81-S	JVP	2	Yellow	Yellow diffused	T1 1/2	0.197/5	0.34	0.98	0.10	2.1	16.4	589	44	*	.12	.10	.08
333622	LHY3330/HO	JVP	2	Yellow	Yellow diffused	T1 1/2	0.197/5	0.34	0.98	0.10	1.7	350	595	40	*	.15	.12	.10
2125288	LY5469FH	SIE	2	Yellow	Yellow diffused	T1 1/2	0.20/5.1	0.31	1.10	0.10	2.0	5	586	50	*	.09	.08	.07
697549	LTL-307Y	LTO	5	Yellow	Yellow diffused	T1 1/2	0.197/5	0.34	0.90	0.10	0.1	29	585	50	*	.12	.10	.08
34825	LY3330	JVP	2	Yellow	Yellow diffused (XC556Y)	T1 1/2	0.197/5	0.30	0.82	0.07	2.3	12	585	36	*	.15	.12	.10
104264	LA93B/Y-1 *	JVP	10	Yellow	Yellow diffused (XC410Y)	T1 1/2	0.197/5	0.35	0.89	0.08	2.3	25	585	46		.25	.21	.19
1995927	LTL-10253	LTO	2	Yellow	Yellow diffused, flanged	T1 1/2	0.187/4.75	0.283	1.00	0.10	2.1	12.6	585	60	*	.10	.08	.06
790381	LTL-553-11	LTO	10	Yellow	Yellow diffused, right angle PCB	T1 1/2	0.189/4.8	0.37	0.32	0.10	2.1	12.6	585	60		.29	.25	.19
152831	LT1831-81-UR	LED	2	Bright yellow	Yellow diffused	T1 1/2	0.197/5	0.34	0.89	0.10	2.0	424	593	41		.39	.29	.25
1554603	HLMP-3401-E00B2	AVT	10	Amber	Amber diffused	T1 1/2	0.197/5	0.36	1.05	0.10	2.0	5.7	583	60		.49	.45	.39

*10 pcs./**100 pcs. in LEDs & LED Mounting Hardware cabinet kit, pg 30 1 Reverse polarity to change color 2 Volt. shown is operating volt. range; no current limiting resistor required. Continued on next page

* AVT = Avago Tech | BVO = BV Optotech | FSC = Fairchild Semi | JVP = Jameco ValuePro | LED = Ledtech | LTO = Lite-On | SIE = Siemens | SLD = Sunled Corp | ♦ Varies

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



Standard-Output LEDs (Continued)

Figure images on page 25

★ Web Code: FAF

* Order in multiples of 10

Part No.	Product No.	*Mfr.	Fig.	Emitting Color	Lens/Feature Description	LED Size	Diameter inch/mm	Dimensions		Lead Spacing	Typical Vf	Typical mcd	Wavelength n m	Viewing Angle°	Pricing			
								A"	B"						1	10	100	1000
697653	LTL-4233	LTO	2	Green	Green diffused	T1 ¾	0.197/5	0.40	1.00	0.10	2.1	19	565	36	*	\$.12	\$.10	\$.08
693901	MCDL-5013GD	MCD	2	Green	Green diffused	T1 ¾	0.197/5	0.34	1.04	0.10	2.1	12.5	565	60	*	.10	.08	.06
697531	LTL-307G	LTO	2	Green	Green diffused	T1 ¾	0.197/5	0.34	1.00	0.10	2.1	19	565	50	*	.12	.10	.08
152822	LT1821-81-HE	LED	2	Green	Green diffused	T1 ¾	0.197/5	0.34	0.89	0.10	2.1	96	567	41	*	.19	.15	.12
2125296	LG5469FH	SIE	2	Green	Green diffused	T1 ¾	0.20/5.1	0.31	1.10	0.10	1.9	5	565	50	*	.09	.08	.07
253833	HLMP-4740	FSC	2	Green	Green diffused	T1 ¾	0.197/5	0.36	1.00	0.10	2.2	2.3	565	50	*	.15	.12	.10
334086	LG13740	JVP	2	Green	Green diffused	T1 ¾	0.197/5	0.34	0.98	0.10	1.7	20	565	68	*	.10	.08	.06
34761	LG3330	JVP	2	Green	Green diffused (XC556G)	T1 ¾	0.197/5	0.31	0.79	0.09	2.3	12	565	36	*	.15	.12	.10
104256	LA93B/G-1	JVP	10	Green	Green diffused (XC410G)	T1 ¾	0.197/5	0.35	0.89	0.08	2.3	30	565	46	*	.19	.15	.12
790090	LT-10233W	LTO	2	Green	Green diffused, flangeless	T1 ¾	0.187/4.75	0.28	1.0	0.10	2.1	40	569	60	*	.15	.12	.10
94561	LFG3360	JVP	2	Green	Green diffused blinking (XC5408)	T1 ¾	0.197/5	0.30	1.05	0.08	3-12	17	565	20	.39	.35	.29	.25
1554881	HLMP-4740-A00B2	AVT	10	Green	Green tinted/diffused	T1 ¾	0.197/5	0.36	1.05	0.10	1.9	2.3	569	50	.49	.45	.39	.35
175687	LT0524-81	LED	2	Green	Green transparent	T1 ¾	0.197/5	0.24	1.07	0.07	2.1	44	567	30	*	.10	.08	.06
697661	LTL4234	LTO	2	Green	Green transparent	T1 ¾	0.197/5	0.34	1.00	0.10	2.1	60	565	16	*	.10	.08	.06
2100232	LTL-10234WHC	LTO	6	Green	Green clear with plastic case	T1 ¾	0.197/5	0.44	0.49	0.10	2.1	60	565	30	*	.19	.15	.12
333956	LG3331	JVP	2	Green	Green transparent	T1 ¾	0.197/5	0.34	0.98	0.10	1.7	150	565	20	*	.10	.08	.06
11359	LG3333	JVP	2	Green	Water clear (BG5704)	T1 ¾	0.197/5	0.30	1.04	0.07	2.3	100	565	20	*	.10	.08	.06
790321	LTL4238	LTO	2	Green	Water clear	T1 ¾	0.197/5	0.34	1.00	0.10	2.1	90	565	16	*	.12	.10	.08
333227	LG13530	JVP	5	Hi-eff green	Green diffused (flangeless)	T1 ¾	0.197/5	0.34	0.98	0.10	1.7	25	565	70	*	.10	.08	.06
138691	LVB3330	JVP	2	Blue	Blue diffused	T1 ¾	0.197/5	0.34	0.98	0.10	4.8	10	430	36	.99	.89	.75	.69
2006764	LTL-2R3CBD3	LTO	2	Blue	Blue diffused, flanged	T1 ¾	0.197/5	0.34	0.87	0.10	3.5	50	468	45	.49	.39	.29	.25
119634	LHR3930	JVP	2	Red	Red diffused Jumbo (LT9952L)	T2 ½	0.315/8	0.44	0.84	0.07	2.0	100	660	44	*	.19	.15	.12
138683	LHR3630	JVP	5	Red	Red diffused XJumbo (XC10R)	T3 ¼	0.394/10	0.40	1.04	0.10	2.0	100	660	32	.29	.25	.19	.15
98984	LVG3630	JVP	2	Green	Green diffused XJumbo (XC10G)	T3 ¼	0.394/10	0.40	1.07	0.08	2.3	40	565	32	.29	.25	.19	.15
104889	LEG5292	JVP	11	Red/Green	White diff. bi-color rectangular ¹	2x5mm	—	0.27	1.02	0.08	2.3	6/6	695/565	116	.29	.25	.19	.15
790356	LTL-433G	LTO	11	Green	Green diffused, rectangular	2x5mm	—	0.30	1.00	0.10	2.1	3.7	565	140	*	.12	.10	.08
320282	566-0306	DIA	12	Yellow	Yellow diffused, rectangular	2x5mm	15x4x7mm	0.28	0.11	0.10	2.1	3.5	583	110	*	.19	.15	.12
320274	566-0206	DIA	12	Green	Green diffused, rectangular	2x5mm	15x4x7mm	0.28	0.11	0.10	2.2	4	565	110	*	.19	.15	.12
320291	566-0406	DIA	12	Red	Red diffused, rectangular	2x5mm	15x4x7mm	0.28	0.11	0.10	2.0	7.4	635	140	*	.19	.15	.12
2005737	LJT-811Y	LTO	13	Yellow	Sphere lens (12-pin)	20mm dome	0.8/20	0.91	0.53	0.60	2.1	25	565	30	.49	.45	.35	.29

*10 pcs. in LEDs & LED Mounting Hardware cabinet kit, pg 30

¹ Reverse polarity to change color




Fig. 1




Fig. 2

* Order in multiples of 10

Medium-Output LEDs

★ Web Code: MBW

Part No.	Product No.	*Mfr.	Fig.	Emitting Color	Lens/Feature Description	LED Size	Diameter inch/mm	Dimensions		Lead Spacing	Typical Vf	Typical mcd	Wavelength n m	Viewing Angle°	Pricing			
								A"	B"						1	10	100	1000
156954	LT0373-41	LED	1	Red Super Bright	Water clear	T1	0.119/3	0.21	1.07	0.08	1.7	600	660	46	*	\$.19	\$.15	\$.12
333340	LHE2643	JVP	1	Orange	Water clear	T1	0.119/3	0.13	0.98	0.10	1.7	700	620	40	*	.19	.15	.12
333307	LUY2643-1	JVP	1	Yellow	Water clear	T1	0.197/5	0.13	0.98	0.10	1.7	900	595	40	.35	.29	.25	.19
98968	QLMP-LB98	AVT	2	Blue	Blue clear (oval)	T1	0.119/3	0.28	0.94	0.10	3.2	550	470	70	.35	.29	.25	.19
334749	UT63B3-41-UR33	JVP	1	Blue	Water clear	T1	0.119/3	0.17	0.94	0.10	3.2	900	470	45	.79	.69	.59	.49
2115688	NSPB346BST	NCH	2	Blue	Blue diffused (oval)	T1	0.119/3	0.28	0.94	0.10	3.6	720	470	30	.49	.45	.39	.35
334764	CMD204UWC-JV	JVP	1	White	Water clear	T1	0.119/3	0.20	1.00	0.10	3.7	900	475	30	.99	.89	.75	.65
11797	QLMP-D141	FSC	1	Red	Water clear	T1 ¾	0.197/5	0.29	1.05	0.07	2.0	350	660	8	*	.19	.15	.12
333497	LSR13233	JVP	1	Red	Water clear	T1 ¾	0.197/5	0.35	0.98	0.10	1.5	720	660	18	*	.19	.15	.12
1995978	LTL-353CKRH4	LTO	2	Red	Water clear	T1 ¾	0.197/5	0.35	1.00	0.10	1.8	1000	660	12	*	.19	.15	.12
2077052	HLMP-ED31	AGT	2	Red	Water clear	T1 ¾	0.197/5	0.34	0.94	0.10	2.0	1000	630	30	*	.15	.12	.09
206519	LHR3331	JVP	1	Red	Red transparent	T1 ¾	0.197/5	0.24	1.07	0.07	2.0	660	550	20	*	.19	.15	.12
152864	BVU501SR4	JVP	1	Red Super Bright	Water clear	T1 ¾	0.197/5	0.34	0.89	0.10	1.9	600	660	20	*	.12	.10	.08
351089	MCDL-517URD-F	JVP	1	Super Red	Red diffused blinking	T1 ¾	0.197/5	0.34	1.00	0.10	1.8	500	660	120	.49	.45	.39	.35
333631	LUE13733	JVP	1	Orange	Water clear	T1 ¾	0.197/5	0.34	0.98	0.10	1.7	700	620	25	.29	.25	.21	.19
203553	HLMP-4100	AGT	1	Orange Red	Water clear	T1 ¾	0.197/5	0.32	1.00	0.10	1.8	750	642	8	.29	.25	.19	.15
152792	LT1833-81-M1	LED	1	Yellow	Water clear	T1 ¾	0.197/5	0.34	0.89	0.10	2.1	1040	593	19	.29	.25	.19	.15
206501	LVY3331	JVP	1	Yellow	Yellow transparent	T1 ¾	0.197/5	0.24	1.07	0.07	2.2	700	595	20	*	.19	.15	.12
153154	LVG3333	JVP	1	Green	Water clear (HLMP-8509)	T1 ¾	0.197/5	0.36	0.90	0.10	2.3	500	565	20	*	.15	.12	.10
156962	LT1823-81-HE	LED	2	Green	Water clear	T1 ¾	0.197/5	0.34	0.87	0.10	2.1	500	567	19	*	.12	.10	.08
333551	LVG13233	JVP	1	Green	Water clear	T1 ¾	0.197/5	0.35	0.98	0.10	1.7	600	565	18	*	.19	.15	.12
134333	383UBC/H2	JVP	1	Blue	Water clear	T1 ¾	0.197/5	0.34	1.00	0.10	3.8	630	428	30	1.49	1.35	1.19	1.09
334465	LDBK3331/HO	JVP	1	Blue	Blue transparent	T1 ¾	0.197/5	0.34	0.98	0.10	3.5	900	470	26	.89	.79	.65	.59

*10 pcs. in LEDs & LED Mounting Hardware cabinet kit, pg 30

* AGT = Agilent | AVT = Avago Technology | DIA = Dialight | FSC = Fairchild Semi | JVP = Jameco ValuePro | LED = Ledtech | LTO = Lite-On | MCD = MCD Electronics | NCH = Nichia | SIE = Siemens

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

4 LEVELS OF SAVINGS		
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN
		DOLLAR SALE

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

High-Output LEDs

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

High-Output LEDs

• Typical DC forward current 20mA



Fig. 1




Fig. 2



Fig. 3
(Piranha)



Fig. 4

* Web Code: RBJ

* Order in multiples of 10

Part No.	Product No.	*Mfr.	Fig.	Emitting Color	Lens/Feature Description	LED Size	Diameter inch/mm	Dimensions		Lead Spacing	Typical Vf	Typical mcd	Wavelength nm	Viewing Angle°	Pricing			
								A"	B"						1	10	100	1000
98950	QLMP-LM98	AVT	1	Green	Green clear (oval)	T1	0.119/3	0.28	0.94	0.10	3.2	2400	525	70	*	\$.19	\$.15	\$.12
217525	MCDPW-3004C-R	JVP	1	White	Water clear	T1	0.119/3	0.18	1.00	0.10	3.8	3000	—	30	1.39	1.25	1.09	.99
197641	BVT-529TT8E	JVP	1	Yellow	Yellow clear (oval)	T1 ½	0.178/4.5	0.29	1.09	0.08	2.3	3600	592	70	.59	.49	.39	.35
2006801	LTL-2H3VAKNT-R	LTO	2	Red	Water clear, flanged	T1 ¾	0.197/5	0.34	0.87	0.10	2.0	3400	621	15	.29	.25	.19	.15
2125413	TLHK5800	VSH	1	Red	Water clear	T1 ¾	0.197/5	0.35	0.98	0.10	1.9	2500	630	40	.25	.21	.19	.15
334423	UT9C13-86-UDC2-R	JVP	2	Red	Water clear	T1 ¾	0.197/5	0.34	0.98	0.10	1.9	2700	630	18	.25	.21	.19	.16
333518	LUR13233-R	JVP	2	Red	Water clear	T1 ¾	0.197/5	0.35	0.98	0.10	1.5	2400	660	18	*	.19	.15	.12
333526	LUR3833-R	JVP	2	Red	Water clear	T1 ¾	0.197/5	0.35	0.98	0.10	1.5	2700	660	12	.25	.21	.19	.16
1586189	UT1813-83-UJEI	LED	2	Red	Water clear	T1 ¾	0.197/5	0.34	1.00	0.10	2.1	5500	632	25	.39	.35	.29	.19
1584917	HLMP-EG08-Y2000-R	AVT	2	Red	Red untinted/non-diffused	T1 ¾	0.197/5	0.34	1.20	0.10	1.9	9300	635	6	.49	.39	.35	.29
261622	LT1873-81-UR-P22	LED	1	Red	Water clear	T1 ¾	0.197/5	0.34	0.89	0.10	1.9	1200	660	25	.25	.21	.19	.16
333447	UT1873-81-UR-P22-R	JVP	1	Super Red	Water clear	T1 ¾	0.197/5	0.34	0.89	0.10	1.9	1600	660	25	.25	.21	.19	.16
2095171	RL50-PR543	JVP	1	Ult. Bright Red	Water clear	T1 ¾	0.197/5	0.30	1.02	0.10	1.7	8000	635	20	.39	.29	.19	.15
334482	UT1813-86-UC9T-P27-R	JVP	2	Ult. Bright Red	Water clear	T1 ¾	0.197/5	0.34	0.94	0.10	2.2	3500	630	15	.49	.45	.35	.29
197683	BVT-5E1QT4ER	JVP	2	Orange Red	Water clear	T1 ¾	0.197/5	0.29	1.08	0.08	2.3	4650	634	15	.59	.55	.45	.39
2006799	LTL-2R3VYKNT-R	LTO	2	Orange	Water clear, flanged	T1 ¾	0.197/5	0.34	0.87	0.10	2.0	1300	595	30	*	.15	.12	.10
333665	LEF3833-R	JVP	2	Orange	Water clear	T1 ¾	0.197/5	0.34	0.98	0.10	1.7	1700	620	12	.25	.22	.19	.15
333649	LHE3333-R	JVP	2	Orange	Water clear	T1 ¾	0.197/5	0.34	0.98	0.10	1.7	1800	620	20	*	.19	.15	.12
333657	LUE3333-R	JVP	1	Orange	Water clear	T1 ¾	0.197/5	0.34	0.94	0.10	2.1	3400	620	20	.39	.35	.25	.19
333673	LUE3833-R	JVP	1	Orange	Water clear	T1 ¾	0.197/5	0.34	0.94	0.10	2.1	5000	620	12	.45	.39	.29	.25
333577	LUY3333-R	JVP	2	Yellow	Water clear	T1 ¾	0.197/5	0.34	0.98	0.10	1.7	2700	587	20	.35	.29	.25	.19
333614	LUY3833H-R	JVP	2	Yellow	Water clear	T1 ¾	0.197/5	0.34	0.98	0.10	1.7	5000	590	12	.45	.39	.29	.25
333569	LUY3333/A-R *	JVP	2	Yellow	Water clear	T1 ¾	0.197/5	0.35	1.00	0.10	1.7	1500	595	20	*	.15	.12	.10
333593	LUY13533-R	JVP	2	Yellow	Water clear	T1 ¾	0.197/5	0.35	1.00	0.10	1.7	1500	595	20	.29	.25	.19	.15
333606	LHY3833-R	JVP	1	Yellow	Water clear	T1 ¾	0.197/5	0.34	0.94	0.10	2.1	2700	595	12	.29	.25	.19	.15
197675	BVT-5E1TT4E-R	JVP	1	Yellow	Water clear	T1 ¾	0.197/5	0.34	1.00	0.10	2.3	7800	592	15	.45	.39	.35	.29
2095189	RL50-PY543	JVP	1	Ultra Yellow	Water clear	T1 ¾	0.197/5	0.30	1.02	0.10	1.7	8000	595	20	.39	.29	.19	.15
2006772	LTL-2H3VYKNTJ1-R	LTO	2	Amber/Yellow	Water clear, flanged	T1 ¾	0.197/5	0.34	0.87	0.10	2.0	3400	595	15	*	.15	.12	.10
2006781	LTL-2R3SYKS	LTO	2	Amber	Water clear, flanged	T1 ¾	0.197/5	0.34	0.87	0.10	2.2	2800	594	30	.39	.35	.25	.19
334473	LDGL3333/H0-R	JVP	2	Green	Water clear	T1 ¾	0.197/5	0.34	0.98	0.10	3.5	3400	502	22	.79	.69	.65	.59
183214	MCDPG-503PC1-R	JVP	2	Green	Water clear	T1 ¾	0.197/5	0.30	1.04	0.08	3.5	2200	515	10-15	1.49	1.35	1.19	1.09
1586197	UT4123-4D-UBC	LED	2	Green	Water clear	T1 ¾	0.197/5	0.32	1.00	0.10	3.0	2500	500	28	.45	.39	.35	.29
2077079	HLMP-CM39-UVCDD	AGT	1	Green	Untinted/non-diffused	T1 ¾	0.197/5	0.34	0.94	0.10	3.2	5000	535	30	.49	.45	.39	.35
183222	MCDL-513SBC4-R	JVP	2	Blue	Water clear	T1 ¾	0.197/5	0.29	1.02	0.08	3.6	3000	470	25	1.39	1.25	1.09	.99
334502	LWK3333-R	JVP	2	White	Water clear	T1 ¾	0.197/5	0.34	0.98	0.10	3.5	5000	—	16	.89	.79	.65	.59
334773	UT18W3-86-UAF1-P22-R	JVP	2	White	Water clear	T1 ¾	0.197/5	0.34	1.00	0.10	3.6	2900	—	25	1.35	1.25	1.09	.99
183231	BVU-5C14WK4-B	JVP	2	White	Water clear	T1 ¾	0.197/5	0.30	1.06	0.08	3.5	3000	—	10	1.35	1.25	1.09	.99
142894	BVU-5E1WK4-B-R	JVP	2	White	Water clear	T1 ¾	0.197/5	0.34	0.79	0.08	3.5	3700	—	15	1.35	1.25	1.09	.99
1870796	MV8W00	FSC	2	White	Water clear	T1 ¾	0.197/5	0.33	1.00	0.10	3.8	2500	—	20	2.49	2.29	2.09	1.95
320531	MCDL-5013UWC-R	JVP	2	White	Water clear	T1 ¾	0.197/5	0.30	1.00	0.10	3.8	5000	—	15	.99	.89	.75	.65
2077061	EM-503QWC-R12	JVP	1	White	Water clear	T1 ¾	0.197/5	0.34	1.00	0.10	4.5	5000	—	25	.99	.89	.75	.65
2115493	UTSHW3-4D-URC3-4861-R	LED	2	White	Water clear	T1 ¾	0.197/5	0.30	1.00	0.10	4.0	7000	—	30	1.19	1.09	.95	.79
2005702	LTL912VEKSA-R	LTO	3	Red	Water clear (7.62mm sq.)	3mm dome	0.119/3	0.30	0.30	0.20	2.1	1200	632	50	.49	.45	.35	.29
1952222	LTL912SEKSA-R	LTO	3	Hi-Eff Red	Water clear (7.62mm sq.)	3mm dome	0.119/3	0.30	0.30	0.20	2.5	3750	628	60	.49	.45	.35	.29
664413	MCDL-1870UEC-TL-R	JVP	3	Hi-Eff Red	Water clear (7.62mm sq.)	3mm dome	0.119/3	0.30	0.30	0.20	2.0	4200	625	40	.85	.75	.59	.55
2005690	LTL911VYKSA	LTO	3	Amber	Water clear (7.62mm sq.)	3mm dome	0.119/3	0.30	0.30	0.20	2.1	600	595	70	.29	.25	.19	.15
2005729	LTL9145YKS	LTO	3	Amber	Water clear (7.62mm sq.)	3mm dome	0.119/3	0.30	0.30	0.20	2.5	2000	596	70	.59	.55	.45	.39
404603	MCDL-1860UGC-TL-R	JVP	3	Green	Water clear (7.62mm sq.)	3mm dome	0.119/3	0.30	0.30	0.20	3.5	3500	525	75	1.35	1.25	1.09	.99
404591	MCDL-1860UBC-15C-R	JVP	3	Blue	Water clear (7.62mm sq.)	3mm dome	0.119/3	0.30	0.30	0.20	3.5	2500	470	75	1.49	1.35	1.19	1.09
664368	MCDL-1870UBC-TL-R	JVP	3	Blue	Water clear (7.62mm sq.)	3mm dome	0.119/3	0.30	0.30	0.20	3.5	2300	470	40	1.35	1.25	1.09	.99
664341	MCDL-1870UWC-15C-R	JVP	3	White	Water clear (7.62mm sq.)	3mm dome	0.119/3	0.30	0.30	0.20	3.5	6500	—	40	1.69	1.55	1.39	1.29
404582	MCDL-1860UWC-15C-R	JVP	3	Ultra White	Water clear (7.62mm sq.)	3mm dome	0.119/3	0.30	0.30	0.20	3.5	3500	—	75	1.69	1.55	1.39	1.29

* 10 pcs. in LEDs & LED Mounting Hardware cabinet kit, pg 30

3-Color High-Output LED


Part No.	Product No.	*Mfr.	Fig.	Emitting Color	Lens/Feature Description	LED Size	Diameter inch/mm	Dimensions		Lead Spacing	Typical Vf	Typical mcd	Wavelength nm	Viewing Angle°	Pricing			
								A"	B"						1	10	100	1000
2125181	MCDL-5T8R6G5B6C-R	JVP	4	Red/Green/Blue	Water clear	T1 ¾	0.197/5	0.34	1.11	0.028	2.25/3.5/3.5	3500/4000/2000	624/525/470	20	\$1.89	\$1.69	\$1.49	\$1.35

* AGT = Agilent | AVT = Avago Technology | FSC = Fairchild Semiconductor | JVP = Jameco ValuePro | LED = Ledtech | LTO = Lite-On | VSH = Vishay

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



Surface Mount LEDs

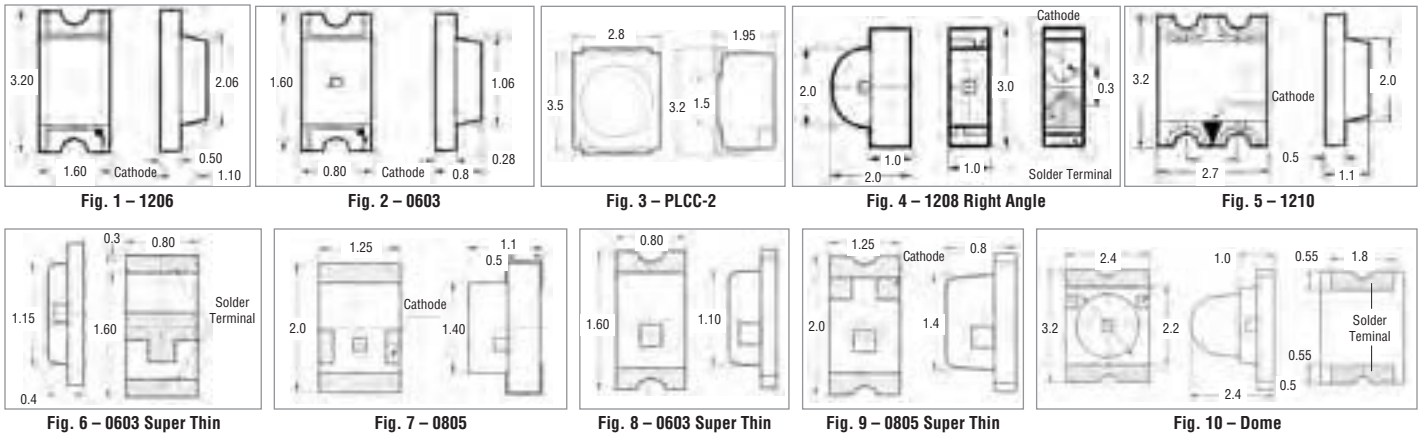

Standard Surface Mount LEDs

* Web Code: SSM

* Order in multiples of 10

Part No.	Mfr. Part No.	*Mfr.	Fig.	Emitting Color	Lens/Feature Description	Typical Vf (V)	If Max. (mA)	Iv Typical mcd @ mA	Peak Wavelength (nm)	Viewing Angle (2x Theta)	Pricing			
											1	10	100	1000
1556414	HSMH-C150	AVT	1	Red	Water clear	1.8	20	17 @ 20	630	130	*	\$.10	\$.08	\$.06
697733	LTST-C150CKT	LTO	1	Red	Water clear	1.8	40	25 @ 20	660	130	*	.09	.07	.06
1556422	HSMH-C170	AVT	1	Red	Water clear	1.8	20	17 @ 20	660	170	*	.10	.08	.06
1260357	LTST-C190CKT	LTO	2	Red	Water clear	1.8	40	10 @ 10	660	130	*	.07	.05	.03
1556431	HSMH-C190	AVT	2	Red	Water clear	1.8	20	17 @ 20	610	170	*	.10	.08	.06
658321	HSL-204DR	UNI	3	Red	Water clear	1.8	20	50 @ 20	657	130	*	.19	.15	.12
1557054	HSMH-C660	AVT	4	Red	Water clear	1.9	20	5 @ 20	639	155	*	.19	.15	.12
334318	LG-150E-DT	JVP	1	Orange	White diffused	2.1	20	5 @ 20	635	150	*	.10	.08	.06
1556300	HSMF-C155	AVT	5	Hi-eff Red/Green	Water clear	2.1/2.2	20/20	10/15 @ 20	630/570	170/170	*	.19	.15	.12
1260365	LTST-C150EKT	LTO	2	Red Orange	Water clear	2.0	30	2 @ 10	630	130	*	.06	.04	.03
1996111	LTST-C150YKT	LTO	1	Yellow	Water clear	2.1	20	6 @ 10	585	130	*	.07	.05	.03
334351	YT95531/TRI	JVP	3	Yellow	Water clear	1.7	20	7 @ 10	585	84	*	.12	.10	.08
334289	LG150E-CT	JVP	1	Orange	Water clear	1.7	20	6 @ 20	635	150	*	.10	.08	.06
697741	LTST-C150GKT	LTO	1	Green	Water clear	2.1	30	6 @ 10	565	130	*	.10	.08	.07
334369	LVG9553/TRI	JVP	3	Green	Water clear	1.7	20	9 @ 10	565	84	*	.15	.12	.10
1556406	HSMG-C660	AVT	4	Green	Water clear	2.2	20	9 @ 20	570	155	.29	.25	.19	.15
2046441	LTST-C150CBKT	LTO	1	Blue	Water clear	3.7	20	20 @ 20	468	130	.39	.35	.25	.19
334781	LG-150DBK-CT	JVP	1	Blue	Water clear	3.5	20	40 @ 20	470	150	.49	.45	.39	.35
2047945	LTST-C191TBKT	LTO	5	Blue	Water clear	3.4	20	30 @ 20	468	130	.29	.19	.15	.12
2033164	LTV-C193TS5	LTO	6	White	Water clear	2.95	20	78 @ 5	—	130	*	.19	.15	.12
334756	LT5KW3-AA-UAE3	JVP	3	White	Water clear	3.2	20	750 @ 20	—	120	.59	.49	.39	.35
658347	HSL-204MMW	UNI	3	White	Water clear	3.5	20	400 @ 20	—	130	.69	.59	.49	.39

Ultra-Bright AlInGaP Surface Mount LEDs

* Web Code: UBA

* Order in multiples of 10

Part No.	Mfr. Part No.	*Mfr.	Fig.	Emitting Color	Lens/Feature Description	Typical Vf (V)	If Max. (mA)	Iv Typical mcd @ mA	Peak Wavelength (nm)	Viewing Angle (2x Theta)	Pricing			
											1	10	100	1000
658304	MSL-174DR	UNI	3	Red	Water clear	1.8	20	22.5 @ 20	660	130	*	\$.09	\$.07	\$.06
658291	MSL-194DR	UNI	2	Red	Water clear	1.8	20	22.5 @ 20	660	130	*	.10	.08	.06
697750	LTST-C150KRKT	LTO	1	Super Red	Water clear	2.0	30	54 @ 20	639	130	*	.12	.10	.08
1557020	HSMH-C150	AVT	1	Hi-eff Red	Water clear	2.1	20	10 @ 20	595	130	*	.12	.10	.08
1557046	HSMH-C190	AVT	2	Hi-eff Red	Water clear	2.1	30	10 @ 20	630	130	*	.12	.10	.08
1557071	HSMY-C150	AVT	1	Yellow	Water clear	2.1	20	8 @ 20	589	130	*	.12	.10	.08
697792	LTST-C170KYKT	LTO	7	Yellow	Water clear	2.0	20	50 @ 20	595	130	*	.10	.08	.07
1556369	HSMG-C150	AVT	1	Green	Water clear	2.2	20	15 @ 20	570	170	*	.12	.10	.08
2039902	LTST-C150FKT	LTO	1	Green	Water clear	2.1	20	14.2 @ 20	565	130	*	.15	.12	.10
697776	LTST-C170KGKT	LTO	7	Green	Water clear	2.0	30	35 @ 20	574	130	*	.12	.10	.08
1556385	HSMG-C190	AVT	2	Green	Water clear	2.2	20	15 @ 20	570	130	*	.12	.10	.08
1556211	HSMC-A100-Q00J1	AVT	3	Red	Water clear	1.9	20	100 @ 20	635	120	*	.15	.12	.10
1585101	HSMC-A100-R00J1	AVT	3	Red	Water clear	3.9	20	140 @ 20	639	120	*	.19	.15	.12
658339	MSL-204UYL	UNI	3	Yellow	Water clear	2.0	20	120 @ 20	592	120	*	.19	.15	.12
1585055	HSMC-A100-Q00J1	AVT	3	Yellow Amber	Water clear	2.1	20	100 @ 20	592	120	*	.10	.09	.08
1556342	HSMG-A100-J02J1	AVT	3	Yellow Green	Water clear	2.2	20	18 @ 20	565	120	*	.10	.09	.08

* AVT = Avago Technology | JVP = Jameco ValuePro | LTO = Lite-On | UNI = Unity Opto Technology

Ultra-Bright AlInGaP SMT LEDs continued on next page

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

Surface Mount LEDs (Continued)

Ultra-Bright AllInGaP Surface Mount LEDs (Continued)

Figure images on previous page Fig. 11

* Web Code: UBA

* Order in multiples of 10

Part No.	Mfr. Part No.	*Mfr.	Fig.	Emitting Color	Lens/Feature Description	Typical V _f (V)	If Max. (mA)	Iv Typical mcd @ mA	Peak Wavelength (nm)	Viewing Angle (2x Theta)	Pricing			
											1	10	100	500
1585063	HSMA-A101-S3WJ1	AVT	3	Amber	Water clear	2.1	20	220 @ 20	592	120	*	\$.15	\$.12	\$.10
692537	MSL-204G	UNI	3	Green	Water clear	2.1	20	120 @ 20	570	120	*	.13	.12	.10
658355	MSL-204MB	UNI	3	Blue	Water clear	3.5	20	120 @ 20	468	120	*	.49	.45	.39
2075671	LTST-C191AKT	LTO	8	Orange	Water clear	2.1	20	2 @ 10	610	130	*	.05	.04	.03
2075680	LTST-C191KSKT	LTO	8	Yellow	Water clear	2.1	20	4.5 @ 10	585	130	*	.07	.06	.05
2075612	LTST-C171KEKT	LTO	9	Red	Water clear	2.0	20	50 @ 20	632	130	*	.07	.06	.05
2075639	LTST-C171KSKT	LTO	9	Yellow	Water clear	2.0	30	60 @ 20	588	130	*	.07	.06	.05
2075621	LTST-C171KYKT	LTO	9	Amber Yellow	Water clear	2.0	30	50 @ 20	595	130	*	.07	.06	.05
2075663	LTST-C190KFKT	LTO	9	Amber	Water clear	2.0	30	60 @ 20	611	130	*	.05	.04	.03
2075701	LTST-C930KAKT	LTO	10	Red Orange	Water clear	2.0	30	1050 @ 10	621	25	*	.07	.06	.05
2081967	LAW57B-GX-2	+	11	Amber*	Water clear	2.2	400	6500 @ 400	614	120	*	.95	.85	.75

* Heat sink required; use P/N 326596 heat sink, P/N 236823 compound

Conxrite Locking Header

This locking header provides positive locking between PCB and cable assembly.

* Web Code: KAL

Part No.	Mfr. Part No.	Description	1	10	100	500
417682	CNXH03NTP	Horizontal 3-pin	\$.25	\$.22	\$.19	\$.17

T1 3/4 Cliplite® LED Lens Mounts

Standard CLF280 and low profile CLB300 provide 180° viewing angle. Colors: red and clear.

* Web Code: UAK

Part No.	Mfr. Part No.	Size	Color	1	10	100	1000
417818	SML190RTP	T1	Red	*	\$.15	\$.12	\$.09
29612	CLF280RTP	T1 3/4	Red	.29	.25	.21	.19
14277	CLF280CTP	T1 3/4	Clear	.29	.25	.19	.16
124927	CLB300CTP	T1 3/4	Clear	.29	.25	.21	.19

Panel Lens for PCB Mounted T1 3/4 LED

T1-3/4 size low-profile panel lenses provide 180° viewing angle.

* Web Code: UAK

Part No.	Mfr. Part No.	Size	Color	Length	1	10	100	1000
143132	CMC321CTP	T1 3/4	Clear	.33"	\$.29	\$.25	\$.21	\$.19

PHILIPS Xitanium LED Driver Module

Xitanium drivers from Advance deliver solid performance and reliability for 12V lighting system.

- UL and CSA class 2 rated
- Low temperature -40°C
- UL IP66 rated for outdoor use
- High temperature +60°C

Part No.	Description	1	5	25
2120233	12VDC/1A LED driver	\$19.95	\$17.95	\$15.95

Ledtech 1" x 1.56" LED Backlight

- IC compatible
- D.C. forward current: 30mA
- Peak wavelength: 567nm @ 20mA
- View angle: 52°
- Forward voltage: (typical) 4.2V @ 20mA; (max) 6.0V @ 20mA
- Luminous intensity: (min) 14.9mcd @ 20mA; (typical) 24.8mcd @ 20mA

Part No.	Mfr. Part No.	LED Material	Emitting Color	Lens Color	1	10	100
302535	LT1F24-A2-S8	GaP	Green	G.C.	\$1.49	\$1.25	\$.95

2-150mA T1 & T1 3/4 LED Tester

Plug any leaded LED into any 2 rows of sockets. 13.1" spaced positions test T1/T1 3/4 LEDs from 2 to 30mA; 13.2" spaced positions test larger footprint (high flux) LEDs from 20 to 150mA. Uses 9V battery (P/N 198731 - sold separately)

Part No.	Description	Size (L x W x H)	1	5	25
355805	LED tester	3.1" x 2.2" x 0.9"	\$9.95	\$8.95	\$7.95

Conxrite Pre-Wired Solderless LED Interconnect

Designed to replace labor-intensive hard-wiring of panel-mounted LEDs to PCB.



* Web Code: UAK

For complete specifications see www.Jameco.com

Part No.	Mfr. Part No.	LED Size	Termination (leads)	Length	1	10	100
417391	CNXBE2124	T1 (3mm)	2-pin connector	24"	\$1.75	\$1.59	\$1.39
417501	CNXGE2112	T1 3/4 (5mm)	Stripped leads (2)	12" ...	1.49	1.35	1.19
143037	CNXCE2108	T1 3/4 (5mm)	2-pin connector	8" ...	1.95	1.75	1.59
417463	CNXGE2112	T1 3/4 (5mm)	2-pin connector	12" ...	1.49	1.25	.99
143053	CNXGE2118	T1 3/4 (5mm)	2-pin connector	18" ...	2.49	2.25	1.95
673820	CNX440-X02-4-1-08	T1 3/4 (5mm)	2-pin conn. (twist fit)	8" ...	1.95	1.75	1.49
417607	CNXDX2612	T1 3/4 (5mm)	Stripped leads (3)	12" ...	1.09	.99	.89
417615	CNXDX2618	T1 3/4 (5mm)	Stripped leads (3)	18" ...	1.09	.99	.89
417535	CNXDF2604	T1 3/4 (5mm)	3-pin connector	4" ...	1.25	1.09	.99
417560	CNXDF2618	T1 3/4 (5mm)	3-pin connector	18" ...	1.39	1.25	1.09
417578	CNXDF2624	T1 3/4 (5mm)	3-pin connector	24" ...	1.45	1.29	1.17

T1 & T1 3/4 LED Mounting Hardware

* Web Code: KAL

- Color: black

- Order in multiples of 10

95513 23077 95521 379815

Part No.	Mfr. P/N	Mfr.	Description	Mounting Hole Dia.	Panel Thickness	Pricing		
						10	100	1000
95513	LMH100	LIG	T1 snap-in	.185"	up to .070"	\$.12	\$.10	\$.08
23077	LMH200	LIG	T1 3/4 ring/clip	.257"	up to .125"	.15	.14	.12
95521	LMH250	LIG	Rect. snap in	.306" x .202"	up to .092"	.09	.08	.07
379815	MCD-10MM	JVP	10mm snap in	.539"	up to .1025"	.25	.21	.15

T1 & T1 3/4 LEDs & LED Mounting Hardware Kit (560 pcs.)

- Includes:**
- 20-drawer component cabinet (319600), 20 clear plastic drawers (319601), 20 clear dividers (319611), pg 173 and labels
 - 10 ea. standard-output LEDs (34657, 114673), pg 25, 114681, 34606, 34825, 34711, 104248, 34690, 34673, pg 26 & (34761, 104256, 11359), pg 27 and LED lens mount (14277), left
 - 100 ea. LEDs (202471), pg 25 & 2006730, pg 26
 - 100 ea. LED mounting hardware (95513, 23077), above

SAVE \$14

Part No.	Description	Wt. (lbs.)	1	5
84996	560-piece LEDs & LED hardware kit	5.0	\$69.95	\$59.95

LED & LED Hardware Assortment Kit (139 pcs.)

Allows you to mount LEDs for different applications and designs. Eliminates soldering, shrink tubing and terminal crimping.

- 139-piece hardware assortment kit for T1 and T1 3/4 LEDs
- Clear plastic case w/ dividers
- Size: 8.5"L x 4.5"W x 1.5"H


Part No.	Description	Wt. (lbs.)	1	10
418731	Design Engineer's LED hardware kit	0.4	\$19.95	\$17.95

* AVT = Avago | JVP = Jameco ValuePro | LIG = Ligitek | LTO = Lite-On | UNI = Unity Opto Tech. | + Manufacturer Varies

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

Litepipes For Standard and Surface-Mount LEDs

Designed to produce 160° viewing angle of transmitted light from PCB mounted LEDs. Accommodates both 0.119" (3mm) and surface mount LEDs. Litepipes are able to display single color devices or mix multi-colored LEDs into a single color. Sizes from 0.200" (5.08mm) to 2.00" (50.80mm). Use RTN grommet for sizes 0.20" thru 0.50" and RTN spring clip for sizes 0.50" to 2.00" (50.80mm).

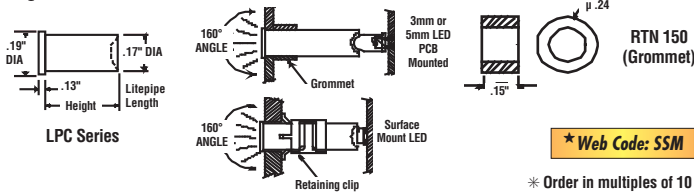

* Web Code: SSM

* Order in multiples of 10

Part No.	Height	1	10	100	Part No.	Height	1	10	100
418108	0.20"	*	\$.19	\$.15	418255	0.50"	*	\$.19	\$.15
418116	0.22"	*	.19	.15	418263	0.56"	*	.19	.15
418132	0.26"	*	.19	.15	418301	0.76"	*	.19	.15
418141	0.28"	*	.19	.15	418327	0.86"	*	.19	.15
418159	0.30"	*	.19	.15	418271	0.60"	*	.19	.15
418167	0.32"	*	.19	.15	418298	0.70"	*	.19	.15
418183	0.36"	*	.19	.15	418343	0.96"	*	.19	.15
418191	0.38"	*	.19	.15	418360	1.25"	*	.19	.15
418212	0.42"	*	.19	.15	418378	1.50"	*	.19	.15
418239	0.46"	*	.19	.15	418386	1.60"	*	.19	.15
418247	0.48"	*	.19	.15	418394	2.00"	*	.19	.15

Order in multiples of 10

Part No.	Mfr. Part No.	Description	10	100	1000
418407	RTN150	Grommet	\$.05	\$.04	\$.03

Power LED Driver Modules

- Delivers accurate constant current required by most high power LEDs
 - Input voltage: 6-12VAC/9-18VDC
 - Power consumption: 650mA max.
 - High efficiency due to switch mode principle
 - Size: 1.8"L x 1.2"W x 0.64"H
 - Short-circuit protected
 - Built-in rectifier for easy connection to AC source
 - Also suited as fixed current NiCd/NiMH battery charge circuit
 - Constant current source:
- 2006924:** 700mA, compatible with up to 3 L-HP3P series power LEDs
2006932: 350mA or 700mA

Part No.	Mfr. Part No.	Description	1	5
2006924	VM143/3W	3-watt module	\$35.95	\$32.35
2006932	K8071	1-watt/3-watt module kit	15.95	14.49

Dual CCFL Kits

* Web Code: CCF

This kit is a dual CCFL that comes with an inverting power supply (12VDC @ 5mA input; 620V output), wire harnesses and connectors for easy set-up.

- Lamp diameter: 3mm (protected inside a clear acrylic tube) • Length per lamp: 300mm (12")
- Average lifespan: 30,000 hours
- Brightness: 30,000cd • Supply voltage: 620V
- Lamp current: 5mA

Part No.	Mfr. Part No.	Color	1	5
2006975	CCFL2W	White	\$14.95	\$13.49
2006983	CCFL2R	Red	13.95	12.49
2007003	CCFL2UV	Ultra violet	14.95	13.49
2007011	CCFL2BU	Blue	14.95	13.49

See page 191 for Flashing LED Kits

MCD

High Power LEDs


- Superior high-flux output and high luminance
 - ESD protection
 - We offer the Lambertian or 'High Dome' LED that has a high hemispherical dome with a wider 140° viewing angle.
- The high dome series project a wider but clearer light beam

Part No.	Mfr. Part No.	Power (W)	Color	Volt. @ Current (Vf @ If)	Luminous Flux (lm)	Viewing Angle (°)	Pricing		
2006895	L-HP1PW	1	White	3.2 @ 350mA	40	90	\$7.95	\$7.25	\$6.49
2096780	MCDL-L20-350HPCW	1	White	3.2 @ 350mA	90	140	6.95	6.25	5.49
2096843	MCDL-L20-350HPCWS	1	White	3.2 @ 350mA	90	140	6.95	6.25	5.49
2096798	MCDL-L20-350HPWW	1	Warm white	3.2 @ 350mA	86	140	6.95	6.25	5.49
2096851	MCDL-L20-350HPWWS	1	Warm white	3.2 @ 350mA	86	140	7.95	6.95	6.25
2096819	MCDL-L20-350HPUY	1	Yellow	3.2 @ 350mA	40	140	5.95	5.49	4.95
2096886	MCDL-L20-350HPVYS	1	Yellow	3.2 @ 350mA	40	140	6.95	6.25	5.49
2096827	MCDL-L20-350HPPG	1	Green	3.6 @ 350mA	70	140	6.95	6.25	5.49
2096974	MCDL-L20-350HPPGS	1	Green	3.6 @ 350mA	70	140	7.95	6.95	6.25
2006908	L-HP3PW	3	White	3.2 @ 1A	120	90	14.95	13.49	11.95

† Represents Star form factor with heat sink

LED PCB Standoffs for 2 & 3-Lead Components

Designed for PCB mounting of multi-lead devices (e.g. LEDs, resistors, capacitors, diodes and IR emitter/detector lamps). Provide lead separation, retention and lateral stability, and height control. Standoffs vary in height from 0.12" to 1.00". Standoffs are UL94V0 material.

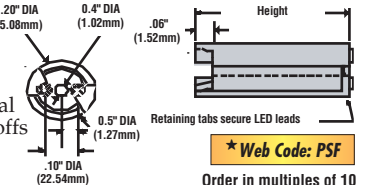

* Web Code: PSF

Order in multiples of 10

Part No.	Height	10	100	1000	Part No.	Height	10	100	1000
418458	0.18"	\$.05	\$.04	\$.03	418618	0.48"	\$.05	\$.04	\$.03
418474	0.22"	.05	.04	.03	418626	0.50"	.05	.04	.03
418503	0.26"	.05	.04	.03	418642	0.60"	.05	.04	.03
418511	0.28"	.05	.04	.03	418651	0.65"	.05	.04	.03
418520	0.30"	.05	.04	.03	418677	0.75"	.05	.04	.03
418546	0.34"	.05	.04	.03	418685	0.80"	.05	.04	.03
418554	0.36"	.05	.04	.03	418693	0.85"	.05	.04	.03
418589	0.42"	.05	.04	.03	418706	0.90"	.05	.04	.03
418597	0.44"	.05	.04	.03	418714	0.95"	.05	.04	.03
					418722	1.00"	.05	.04	.03

3 & 10W Constant Current LED Drivers

- Type: AC – DC
- Input volt.: 100-240VAC @ 50-60Hz
- 3-watt LED drivers can drive 2 to 8 1W LEDs or 1 to 3 3W LEDs
- 10-watt LED drivers can drive 3 to 8 1W LEDs
- Operating temp. range: -20°C to 40°C
- NM2006861: 20AWG, 3.9"L wires
- 2006879/2006887: Plug in type, 7ft. cable w/ 2.1mm x 5.5mm center positive

Part No.	Mfr. Part No.	Description	Output Volt./Curr.	1	5
2006861	LD-CU7021AF	3-watt LED driver	3-21VDC @ 700mA	\$18.95	\$16.95
2006887	LD-PI7021AF	3-watt LED driver	3-21VDC @ 700mA	18.95	16.95
2006879	LD-PI3536AF	10-watt LED driver	3-36VDC @ 350mA	17.95	15.95

BlinkM Programmable Smart LEDs

NEW MARKED IN PINK

Prototyping, experimenting and hacking with light is easier than ever with smart LEDs from ThingM. Choose virtually any color, fade between two colors, or make your own blinking sequence with open source software, then install it into your project and illuminate! No knowledge of programming or electronics required.

Part No.	Mfr. P/N	Description	1	5
2123653	LinkM	USB programmer, 4-pin 0.1" I2C, driverless	\$24.95	\$23.49
2123645	BlinkM	8000 mcd, 140° FOV, 3.6-5V op. volt, 60mA max	13.95	12.95
2123637	MinM	6000 mcd, 120° FOV, 3.6-5V op. volt, 60mA max	13.95	12.95
2123629	MaxM	445,000 mcd, 30° FOV, 5-24V op. volt, 3A max	29.95	27.95

2123653

2123629

LED Modules & Flexible Cable LED Strips

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Digitron

Ultra Brite LED Modules with Built-In LED Drivers

*Web Code: LEM

An all-in-one solution to your high power LED lighting needs! With its built-in LED Drivers, the module can be connected directly to any 8-30V battery or power supply without the need for an external LED Driver Module. Adding to its versatility, on-board current regulation circuitry allows the module to operate flawlessly without the need of a heat sink. Compact in size at 1" x 1.25" and linkability (up to 30 modules) make it ideal for unlimited home, commercial, industrial, and hobby project applications.




Part No.	Mfr. Part No.	#Leds	Power	Volt	Color	Viewing Angle	Im	1	5
2113025	LHA-02B30-N-00	2	120mA	8-30	White	120°	29	\$8.95	\$7.95
2113033	LHA-02B30-G-00	2	120mA	8-30	Green	120°	22	8.95	7.95
2113041	LHA-06B30-N-00	6	360mA	8-30	White	120°	87	11.95	10.95
2113050	LHA-06B30-R-00	6	360mA	8-30	Red	120°	29	11.95	10.95
2113068	LHA-06B30-B-00	6	360mA	8-30	Blue	120°	17	12.95	11.49
2113076	LHA-06B30-G-00	6	360mA	8-30	Green	120°	65	12.95	11.49

Silicone Sealed Flexible LED Strips

Sealed in silicone gel, this ultra flexible, waterproof, and extra durable super bright LED strip can be bent to any shape and angle to fit your ideal lighting application. For indoor and outdoor use, this can be used for lighting up signs, light boxes, boats, motorcycles, automobiles, airplanes, under cabinets, hallways, architectural lighting, and much more.

- Input volt.: 12V @ 640mA (P/N 2006887)
- 96 LEDs on each 37.7" long strip
- Color: white translucent silicone gel casing
- Simple to install and clean



Part No.	Mfr. Part No.	Color	Brightness (mcd)	Wavelength (nm)	1	5	25
2112671	FS-Red	Red	500	630	\$24.95	\$22.95	\$20.95
2112698	FS-Blue	Blue	750	427	24.95	22.95	20.95
2112719	FS-White	White	3500	—	29.95	26.95	23.95

LED Light Strip Modules

- Applications: running light or light source for under cabinets, closets, RVs & enclosures

Part No.	Mfr.	Mfr. Part No.	Color	Viewing Angle	1	5	25
683235	ValuePro	LS1255-150A112	Yellow	100°	\$9.95	\$8.95	\$7.95
1586171	Ledtech	UY19209-627	White	120°	21.95	19.95	17.95

Inspired LED

Integrated LED Modules

*Web Code: INS

Inspired LED features an economical modular designed product line that is easy to install and expand. The LED strips are light weight and low profile, so they are perfect for under kitchen cabinets, backlighting flat screen TVs, retail display cases, restaurant and bar lighting, or accent lighting for art, shelving, and moldings. These LEDs last up to 10 years and use a fraction of the energy as incandescent bulbs.

- Ultra low power consumption
 - Lasts up to 25 times longer than conventional lighting
 - Power up to 150 LEDs with a 1A power supply
 - Cool White LED option provides additional light output without the blue light tint, perfect for office or study task lighting and display cases
 - All products are interchangeable.
- Mix and match, connect, power-up, make a custom system, or purchase an easy-to-assemble kit



Power Supplies, Switches, Cables and Accessories

Part No.	Mfr. P/N	Description	1	10	100
2119829	4840	12V power supply, 1A, mini 1.8"L x 1.3"W x 0.95"H	\$9.95	\$8.95	\$7.95
2119837	4841	12V power supply, 1A, standard	9.95	8.95	7.95
2119945	4822	12V power supply, 2A, standard	19.95	17.95	15.95
2119845	4775	Switch (inline) 2.6"L x 0.7"W x 0.5"H	4.95	4.49	3.95
2119853	4833	Switch, inline dial dimmer (white)	19.95	17.95	15.95
2119861	4821	Switch, inline 4-position dimmer (black)	19.95	17.95	15.95
2119870	4804	4' cable 22 AWG, 1.3mm female connector	2.95	2.49	2.25
2119888	4771	3' cable 22 AWG, 1.3mm female connector	3.95	3.49	2.95
2119896	4772	6' cable 22 AWG, 1.3mm female connector	4.95	4.49	3.95
2119934	4773	12' cable 22 AWG, 1.3mm female connector	5.95	5.49	4.95
2119942	4777	4' cable extender (with 2 male connectors)	3.95	3.49	2.95
2119959	4774	Cable clamps for flex strips (10/pkg.)	2.95	2.49	2.25

JKL

Festoon LEDs – 12V & 24V

*Web Code: FES

- Voltage and current: LE-0603-02; ±12VDC @ 20mA; LE-0603-04; ±24VDC @ 12mA
- Low heat
- Low power consumption with high intensity
- Scratch and shock resistant glass encapsulated
- Size: 43mm (1.7") L x 10.5mm (0.41") Dia.



Shown with Socket (sold separately)

Lamps

Part No.	Mfr. Part No.	Voltage @ Current	Color	Lumens	1	10	50
2113308	LE-0603-02R	12VDC @ 20mA	Red	2.0	\$2.75	\$2.49	\$2.25
2113359	LE-0603-04R	24VDC @ 12mA	Red	2.0	2.75	2.49	2.25
2113295	LE-0603-02Y	12VDC @ 20mA	Yellow	2.0	2.75	2.49	2.25
2113341	LE-0603-04Y	24VDC @ 12mA	Yellow	2.0	2.75	2.49	2.25
2113287	LE-0603-02G	12VDC @ 20mA	Green	9.0	4.95	4.49	3.95
2113332	LE-0603-04G	24VDC @ 12mA	Green	9.0	4.95	4.49	3.95
2113279	LE-0603-02B	12VDC @ 20mA	Blue	2.0	4.95	4.49	3.95
2113324	LE-0603-04B	24VDC @ 12mA	Blue	2.0	4.95	4.49	3.95
2113261	LE-0603-02W	12VDC @ 20mA	White	10.0	4.95	4.49	3.95
2113316	LE-0603-04W	24VDC @ 12mA	White	10.0	4.95	4.49	3.95

Socket

Part No.	Mfr. Part No.	Description	1	10	50
2113367	2910F-47	Socket	\$0.69	\$0.59	\$0.55

Flexible Cable RGB LED Strips

This flexible cable LED strip contains 75 surface mount LEDs that have 3 colors in the same LED red, green and blue. The strip can be cut into 3 LED sections to fit your lighting application. Typical applications are architectural lightings, interior lighting, hallways, under cabinet lighting, boats, automobiles and many other applications. With the LED strip connected to the RGB controller, you can provide different lighting modes such as flashing mode (fast or slow), slow fade out, and color change mode.



- Total strip length: 8 feet (P/N 2112647)
- 75 surface mount LEDs in red, green, blue color outputs
- Current requirement: 3A
- Input voltage 12V @ 3 Amps (P/N 1708625)

Part No.	Mfr. Part No.	Description	1	5	25
2112647	VLS05060RGB150-8FT	75 LED's, 8 feet LED strip ..	\$64.95	\$58.95	\$52.95
2112655	RGB-Connect	RGB cable, 12" wire	1.95	1.75	1.59
2112663	RGB-Controller	RGB controller with remote	49.95	44.95	39.95

LED Panels

- 9 LED size: 10.5"L x .75"W x .38"H
- 21 LED size: 8.5"L x .63"W x .30"H

Part No.	Mfr. P/N	Description	1	5	25
2119967	4819	1W - 9 LED under cabinet light panels, warm white	\$9.95	\$8.95	\$7.95
2119975	4820	1W - 9 LED under cabinet light panels, cool white	9.95	8.95	7.95
2119983	4823	2W - 21 LED display panel, warm white	12.95	11.49	9.95
2119991	4824	2W - 21 LED display panel, cool white	12.95	11.49	9.95
2119785	4829	Warm white under cabinet kit, ten 21 LED panels	159.95	144.95	129.95
2119793	4830	Cool white under cabinet kit, ten 21 LED panels	159.95	144.95	129.95

Flexstrips

Part No.	Mfr. P/N	Description	1	5	25
2119801	4794-01	Super bright warm white flexstrip, 1 ft	\$14.95	\$13.49	\$11.95
2119805	4794-05	Super bright warm white flexstrip, 5 ft	28.95	25.95	22.95
2119810	4794-10	Super bright warm white flexstrip, 10 ft	47.95	45.49	43.25
2119901	4795-01	Super bright cool white flexstrip, 1 ft	14.95	13.49	11.95
2119905	4795-05	Super bright cool white flexstrip, 5 ft	28.95	25.95	22.95
2119910	4795-10	Super bright cool white flexstrip, 10 ft	59.95	54.95	49.95
2120001	4796-01	Bright warm white flexstrip, 1 ft	11.95	10.95	9.95
2120005	4796-05	Bright warm white flexstrip, 5 ft	23.95	21.49	18.95
2120010	4796-10	Bright warm white flexstrip, 10 ft	37.95	33.95	29.95
2120101	4797-01	Bright cool white flexstrip, 1 ft	11.95	10.95	9.95
2120105	4797-05	Bright cool white flexstrip, 5 ft	23.95	21.49	18.95
2120110	4797-10	Bright cool white flexstrip, 10 ft	37.95	33.95	29.95

Actual lengths are ±1" to allow for connector * Use 2 amp power supply

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

Infrared & Visible Light Emitters & Detectors

- Use for remote control and/or for fiber optics

*Web Code: VAP



Fig. 1



Fig. 2




Fig. 3



Fig. 4




Fig. 5

* Order in multiples of 10

Part No.	Product No.	*Mfr.	Fig.	Description	Size	Diameter inch/mm	Dimensions (inches)				Vt @ If	nm	mWatts	Pricing		
							A	B	C	D				1	10	100
2099403	PS5022	STA	1	Phototransistor	Dome	0.06/1.7	0.13	0.35	0.35	—	5.0 @ 20mA	880	1	*	\$.15	\$.12
790057	LTE-302	LTO	2	Infrared emitter diode (GaAs) side look	Dome	0.06/1.5	0.23	0.63	0.63	0.18	1.2 @ 20mA	940	40	*	.19	.15
112150	LIR2043	LIG	3	Infrared emitter diode (GaAs)	T1	0.125/3	0.18	0.95	0.98	0.03	1.2 @ 20mA	940	5	*	.19	.15
372710	UT0383-41-940	JVP	3	Infrared emitter diode (GaAs)	T1	0.125/3	0.16	0.88	0.94	0.04	1.3 @ 50mA	940	13	.29	.25	.19
1950825	L-34F3CS	◆	3	Infrared emitter diode (GaAs)	T1	0.125/3	0.20	1.00	1.06	0.04	1.2 @ 20mA	940	80	.39	.35	.29
112176	LPT2023	LIG	3	Infrared phototransistor	T1	0.12/3	0.18	0.95	0.98	0.03	30 @ 0.1A	940	100	.39	.35	.29
2125261	TSHA4400	VSH	3	Infrared emitter diode (GaAlAs) water clear	T1	0.114/2.9	0.13	0.90	1.00	0.04	1.5 @ 100mA	875	20	.39	.35	.29
2120410	RPT-38PB3F	RHM	3	Phototransistor	T1	0.125/3	0.18	0.95	0.98	0.03	5 @ 30mA	800	150	.25	.19	.15
1872265	OP505A	OPT	3	Infrared silicon phototransistor	T1	0.125/3.2	0.20	0.50	0.50	0.03	30VBRCE0 @100µA	850	100	.79	.65	.59
1950649	BPV22NF(L)	OPT	4	High speed photo diode	T1 ¼	0.195/5	0.24	1.00	1.00	—	1.0 @ 50mA	940	215	.65	.59	.49
1623349	SFH484-2	SYL	3	Infrared emitter diode	T1 ¼	0.197/5	0.30	0.50	1.14	1.07	1.5 @ 100mA	880	25	.79	.69	.59
372737	UT1883-81-880	JVP	3	Infrared emitter diode (GaAs) water clear	T1 ¼	0.200/5	0.30	0.88	0.94	0.04	1.5 @ 50mA	880	16	.35	.29	.25
372745	UT1885-81-880	JVP	3	Infrared emitter diode (GaAs) blue clear	T1 ¼	0.200/5	0.30	0.88	0.94	0.04	1.5 @ 50mA	880	16	.39	.35	.29
1872151	OP290A	OPT	3	Infrared emitter diode	T1 ¼	0.195/5	0.30	0.75	1.00	0.04	4.0 @ 1.5A	890	333	1.09	.89	.69
106526	LVIR3333	LIG	3	Infrared emitter diode (GaAs)	T1 ¼	0.200/5	0.34	0.78	0.84	0.04	1.2 @ 20mA	940	8	*	.19	.15
372762	UT1883-81-940	JVP	3	Infrared emitter diode (GaAs)	T1 ¼	0.200/5	0.30	0.88	0.94	0.04	1.3 @ 50mA	940	16	.35	.29	.19
1950622	TSHA5502	VSH	3	Infrared emitter diode (GaAlAs)	T1 ¼	0.200/5	0.30	0.97	1.04	0.04	1.5 @ 1mA	870	210	.59	.49	.39
2100224	LTE-3371LT	LTO	3	Infrared emitter diode (GaAlAs)	T1 ¼	0.197/5	0.30	0.98	1.02	0.04	1.25 @ 50mA	940	150	.39	.35	.29
373001	UT1893-91-0125	JVP	3	Infrared phototransistor	T1 ¼	0.200/5	0.34	0.88	0.94	0.04	30 @ 0.1A	870	20	.29	.25	.19
112169	UT1893-82-0125-R	LED	3	Infrared phototransistor	T1 ¼	0.200/5	0.31	1.05	1.10	0.04	30 @ 0.1A	940	20	.35	.29	.25
1872441	OP999	OPT	3	PIN silicon photodiode	T1 ¼	0.205/5.3	0.31	0.69	0.75	0.04	1.2 @ 1mA	200	100	.99	.89	.79
120221	BPW77NA	◆	5	NPN phototransistor	TO-18	0.18/4.69	0.24	0.19	0.52	0.01	70VCEO @ 50mA	850	250	1.95	1.75	1.49

7, 14 & 16-Segment LED Displays

*Web Code: PBW

Soldering:

- Soldering bath: not more than 5 seconds @ 260°C
- Soldering iron: not more than 3 seconds @ 300°C under 30W



Single Digit RHDP
(334984)



Single Digit RHDP (14-seg.)
(2076703)



2-Digit RHDP
(2005358)



2-Digit RHDP
(1955933)



3-Digit RHDP
(1956493)



10-Bar Graph
(697477)

Single Digit 7-Segment Numeric LED Displays

Part No.	Manufacturer	Product No.	Character Height	Illuminated Color	Bus Polarity*	Pins/Leads	Typical Vt @ If (mA)	Typical mcd @ mA	Wavelength nm	Decimal Point #	Pricing		
											1	10	100
24732	MCD	GNS-3011BH-11	0.30"	Red	CA	10	1.9 @ 20	0.3 @ 20	697	LHDP/RHDP	\$.89	\$.79	\$.65
24783	MCD	GNS-3011CH-11	0.30"	Red	CC	10	2.1 @ 20	2.5 @ 20	697	LHDP/RHDP	.89	.79	.65
24782	Ligitek	LSD3211-11	0.30"	Red	CC	10	2.1 @ 20	2.5 @ 20	697	LHDP/RHDP	.99	.89	.75
24740	Ligitek	LSD3221-11	0.30"	Red	CA	11	2.1 @ 20	2.5 @ 20	697	LHDP/RHDP	.99	.89	.75
334984	ValuePro	UA3051-12	0.30"	Red	CA	11	2.1 @ 20	0.8 @ 10	700	RHDP	.89	.79	.65
334800	ValuePro	UC3051-11	0.30"	Red	CC	10	2.1 @ 20	0.8 @ 10	700	RHDP	.85	.75	.65
2125237	QT Opto	MANC3940	0.30"	Hi-eff Red	CC	10	2.0 @ 20	5.4 @ 20	635	RHDP	.99	.85	.69
1548027	Avago	5082-7611	0.30"	Hi-eff Red	CA	11	2.1 @ 20	0.8 @ 5	635	RHDP	2.75	2.49	2.25
789953	Lite-On	LSHD-7501	0.30"	AllnGap Red	CA	10	2.1 @ 20	12 @ 10	632	RHDP	.99	.89	.79
2082265	ValuePro	MAN3620A	0.30"	Orange	CA	11	2.5 @ 20	3.3 @ 10	630	LHDP	.69	.59	.45
335011	ValuePro	UA3041-12	0.30"	Orange	CA	11	2.1 @ 20	3.3 @ 10	635	RHDP	.79	.69	.55
320469	ValuePro	UA3031-16-EWRN	0.30"	Yellow	CA	11	3.0 @ 20	2.3 @ 10	585	LHDP/RHDP	.89	.79	.65
2079226	Ligitek	LSD3352-20/RP4	0.32"	Green	CC	14	2.1 @ 20	3.5 @ 10	565	RHDP	.89	.79	.69
2075698	Ligitek	LSD3362-20/RP4	0.32"	Green	CA	14	2.1 @ 20	3.5 @ 10	565	RHDP	.89	.79	.69
1955714	Lite-On	LTS-367R	0.36"	Red	CC	10	1.7 @ 20	0.5 @ 10	655	RHDP	.89	.79	.65
1955722	Lite-On	LTS-4801R	0.40"	Red	CA	10	1.7 @ 20	0.5 @ 10	655	RHDP	.89	.79	.65
2125245	Vishay	TDSR3163-G	0.40"	Red	CC	10	1.6 @ 30	0.18 @ 30	660	RHDP	.75	.65	.55
1955731	Lite-On	LTS-4301R	0.40"	Red	CC	10	1.7 @ 20	0.5 @ 10	655	RHDP	.89	.79	.65
334844	ValuePro	UC4041R-11	0.40"	Hi-eff Red	CC	10	2.1 @ 20	3.3 @ 10	635	RHDP	.89	.79	.65
2005411	Lite-On	LTS-4980AHR	0.40"	Hi-eff Red	CC	14	2.1 @ 20	2.2 @ 10	635	RHDP	.59	.49	.39
335038	ValuePro	UA4021-11	0.40"	Green	CA	10	2.1 @ 20	2.9 @ 10	567	RHDP	.79	.69	.55
1996081	Lite-On	LTS-4510AG	0.40"	Green	CA	14	2.1 @ 20	2.2 @ 10	565	RHDP	.89	.79	.65
2075719	Ligitek	LSD4012-20A	0.40"	Green	CC	14	2.1 @ 20	2.5 @ 10	565	RHDP	.89	.79	.65
2075727	Ligitek	LSD401SBKS-20A	0.40"	Blue	CC	14	3.5 @ 20	12.8 @ 10	460	RHDP	2.59	2.35	2.09
17209	MCD	GNS-5011BH-11	0.50"	Red	CA	10	2.1 @ 20	0.9 @ 20	697	RHDP	1.09	.99	.89

* CA-Common Anode/CC-Common Cathode # LHDP-Left Hand Decimal Point/RHDP-Right Hand Decimal Point

7-Segment Numeric LED Displays continued on next page

* JVP = Jameco ValuePro | LED = Ledtech | LIG = Ligitek | LTO = Lite-On | OPT = Optek | RHM = Rohm | STA = Stanley | SYL = Sylvania | VSH = Vishay | ◆ Manufacturer Varies

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

7, 14 & 16-Segment LED Displays

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

--	--	--	--	--

7, 14 & 16-Segment LED Displays (Continued)

Single Digit 7-Segment Numeric LED Displays (Continued)

See Page 33 for photos

★ Web Code: PBW

Part No.	Manufacturer	Product No.	Character Height	Illuminated Color	Bus Polarity*	Pins/Leads	Typical Vf @ If (mA)	Typical mcd @ mA	Wavelength nm	Decimal Point #	Pricing		
											1	10	100
17187	Ligitek	LSD5051-11	0.50"	Red	CC	10	2.1 @ 20	0.9 @ 20	697	RHDP	\$1.09	\$.99	\$.89
1955749	Lite-On	LTS-5301AR	0.56"	Red	CA	10	1.7 @ 20	0.6 @ 10	655	RHDP	.99	.89	.79
335090	ValuePro	UA5651-11	0.56"	Red	CA	10	2.1 @ 20	0.8 @ 10	700	RHDP	1.09	.99	.89
1955765	Lite-On	LTS-6760P	0.56"	Bright Red	CA	10	2.1 @ 20	0.95 @ 10	697	RHDP	1.19	1.09	.99
334896	ValuePro	UC5641R-11	0.56"	Hi-eff Red	CC	10	2.1 @ 20	3.3 @ 10	635	RHDP	.99	.89	.79
335101	ValuePro	UA5641R-11	0.56"	Hi-eff Red	CA	10	2.1 @ 20	3.3 @ 10	635	RHDP	.99	.89	.79
1584335	Avago	HDSP-5501-GH000	0.56"	Hi-eff Red	CA	10	2.1 @ 20	2.8 @ 10	635	RHDP	1.95	1.75	1.49
104213	Ligitek	LS5124-10	0.56"	Orange Red	CA	10	2.0 @ 20	2.4 @ 20	635	RHDP	.99	.89	.79
335312	ValuePro	UA5641-11-EWRN	0.56"	Orange	CA	10	2.1 @ 20	3.3 @ 10	635	RHDP	.99	.89	.79
334880	ValuePro	UC5641-11-EWRN	0.56"	Orange	CC	10	2.1 @ 20	3.3 @ 10	635	RHDP	.99	.89	.79
1955773	Lite-On	LTS-6680E	0.56"	Orange	CC	10	2.1 @ 20	2.4 @ 10	630	RHDP	.99	.89	.79
1955790	Lite-On	LTS-6860Y	0.56"	Yellow	CA	10	2.1 @ 20	2.4 @ 10	585	RHDP	.99	.89	.79
335127	ValuePro	UA5621-11	0.56"	Green	CA	10	2.1 @ 20	2.9 @ 10	562	RHDP	.99	.89	.79
334862	ValuePro	UC5621-11	0.56"	Green	CC	10	2.1 @ 20	2.9 @ 10	567	RHDP	.99	.89	.79
2075735	Ligitek	LS5122-20/A	0.56"	Green	CA	10	2.1 @ 20	4.5 @ 10	565	RHDP	.99	.89	.79
2075751	Ligitek	LS5112-20/A	0.56"	Green	CC	10	2.1 @ 20	4.5 @ 10	565	RHDP	.99	.89	.79
2075760	Ligitek	LS5125BKS-20	0.56"	Blue	CA	10	3.5 @ 20	12.8 @ 10	460	RHDP	2.49	2.25	1.95
1955829	Lite-On	LTS-3403AP	0.80"	Red Gap	CC	18	2.1 @ 20	0.95 @ 10	697	LHDP/RHDP	1.09	.99	.89
18753	Ligitek	LS8151-10	0.80"	Red	CC	13	2.1 @ 20	1.0 @ 20	697	RHDP	1.25	1.15	.99
1955811	Lite-On	LTS-3401LC	0.80"	Red Gap	CA	18	1.8 @ 20	8.0 @ 10	660	LHDP/RHDP	1.09	.99	.89
18737	Ligitek	LS8164-20	0.80"	Orange Red	CA	13	1.6 @ 20	0.9 @ 20	655	RHDP	1.25	1.15	.99
2005462	Lite-On	LTS-3401LE	0.80"	Yellow	CA	18	2.1 @ 20	2.4 @ 10	630	LHDP/RHDP	1.25	1.15	.99
1955837	Lite-On	LTS-3403LY	0.80"	Yellow	CC	18	2.1 @ 20	2.4 @ 10	585	LHDP/RHDP	1.25	1.15	.99
2005489	Lite-On	LTS-3401LG	0.80"	Green	CA	18	2.1 @ 20	2.4 @ 10	565	LHDP/RHDP	1.25	1.15	.99
176559	Re Fac	C8021-1	0.80"	Green	CC	13	2.0 @ 20	0.9 @ 20	568	RHDP	1.25	1.15	.99
97172	Ligitek	LS10061-10	1.0"	Red	CA	10	2.1 @ 20	2.0 @ 20	697	RHDP	1.75	1.49	1.25
308161	Ledtech	LA2541-24EWRN	1.0"	Orange	CA	10	4.2 @ 20	5.2 @ 10	635	RHDP	1.75	1.49	1.25
97199	Ligitek	LS23265-10	2.24"	Red	CA	10	1.7 @ 20	21 @ 20	660	RHDP	4.49	3.95	3.59
97201	Ligitek	LS23255-10	2.24"	Red	CC	10	1.7 @ 20	21 @ 20	660	RHDP	4.49	3.95	3.59
105591	Ligitek	LS40054-20	4.00"	Orange Red	CC	10	2.0 @ 20	18 @ 20	635	RHDP	8.95	7.95	7.15

Single Digit 14 & 16-Segment Alphanumeric LED Displays

Part No.	Manufacturer	Product No.	Character Height	Illuminated Color	Bus Polarity*	Pins/Leads	Typical Vf @ If (mA)	Typical mcd @ mA	Wavelength nm	Decimal Point #	Pricing		
											1	10	100
2076703	Ligitek	LS3E62-20/A	0.39"	Green	CA	16	2.1 @ 20	3.05 @ 10	565	RHDP	\$1.69	\$1.39	\$1.19
2076691	Ligitek	LS3E65BKS-20/A	0.39"	Blue	CA	16	3.5 @ 20	7.2 @ 10	475	RHDP	3.95	3.59	3.19
308152	Ledtech	LA5041R-11BRRN	0.50"	Orange	Alphanumeric	18	2.1 @ 20	7.4 @ 10	635	RHDP	1.95	1.75	1.49
2125253	King Bright	PSC05-11HWA	0.50"	Bright Red Gap	CC	18	2.0 @ 20	1.9 @ 10	700	RHDP	2.95	2.75	2.49

2-Digit 7-Segment Numeric LED Displays

Part No.	Manufacturer	Product No.	Character Height	Illuminated Color	Bus Polarity*	Pins/Leads	Typical Vf @ If (mA)	Typical mcd @ mA	Wavelength nm	Decimal Point #	Pricing		
											1	10	100
1955781	Lite-On	LTD-2701WC	0.28"	Red	CC	10	1.8 @ 20	3.1 @ 5	660	RHDP	\$1.25	\$1.09	\$.99
1955845	Lite-On	LTD-383E-R2	0.30"	Red Orange	CA	16	2.0 @ 20	1.6 @ 10	630	RHDP	1.25	1.09	.99
1955853	Lite-On	LTD-482P-YQ	0.40"	Bright Red	CA	16	2.1 @ 20	0.8 @ 10	697	RHDP	1.25	1.09	.99
2075786	Ligitek	LDD4062-20/A	0.40"	Green	CA	16	2.1 @ 20	3.05 @ 10	565	RHDP	1.49	1.35	1.15
1955861	Lite-On	LTD-432GC	0.40"	Green	CC	16	2.1 @ 20	1.1 @ 10	565	No DP	1.49	1.35	1.15
2005340	Lite-On	LTD-4608B	0.40"	Blue	CA	10	3.8 @ 20	3.6 @ 10	428	RHDP	3.95	3.59	3.39
200379	Rohm	LB602VAGI	0.56"	Red	CA	18	2.0 @ 10	16 @ 10	650	RHDP	1.25	1.09	.99
24715	Ligitek	LDD5121-20	0.56"	Red	CA	18	2.1 @ 20	0.8 @ 20	697	RHDP	1.59	1.39	1.19
2125481	China Semi	SD-525R	0.56"	Red	CC	18	1.7 @ 20	1.0 @ 20	655	RHDP	1.49	1.25	.99
24723	Ligitek	LDD5111-11	0.56"	Red	CC	18	2.1 @ 20	0.8 @ 20	697	RHDP	1.59	1.39	1.19
24694	Ligitek	LDD5124	0.56"	Orange Red	CA	18	2.0 @ 20	2.4 @ 20	635	RHDP	1.59	1.39	1.19
24707	Ligitek	LDD5114-20	0.56"	Orange Red	CC	18	2.0 @ 20	2.4 @ 20	635	RHDP	1.59	1.39	1.19
790031	Lite-On	LTD-6940HR	0.56"	Hi-eff Red	CC	18	2.0 @ 20	2.4 @ 10	623	RHDP	1.69	1.49	1.25
200539	Arctic	ELD556YWA	0.56"	Yellow	CA	18	2.0 @ 20	1.9 @ 10	590	RHDP	1.25	1.09	.99
790022	Lite-On	LTD-6410AG	0.56"	Green	CA	18	2.1 @ 20	2.4 @ 10	565	RHDP	1.59	1.39	1.19
2005358	Lite-On	LTD-5623BG	0.56"	Green	CC	18	2.1 @ 20	2.4 @ 10	565	RHDP	1.59	1.39	1.19
2005366	Lite-On	LTD-6440G	0.56"	Green	CC	18	2.1 @ 20	2.4 @ 10	570	RHDP	1.59	1.39	1.19
2075794	Ligitek	LDD5125BKS-20/A	0.56"	Blue	CA	18	3.5 @ 20	58 @ 10	475	RHDP	4.95	4.49	3.95

* CA-Common Anode/CC-Common Cathode # LHDP-Left Hand Decimal Point / RHDP-Right Hand Decimal Point † 5 diodes per segment § 14 segment ‡ 16 segment

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

7, 14 & 16-Segment LED Displays (Continued)

[See Page 33 for photos](#)

★ Web Code: PBW

3-Digit 7-Segment Numeric LED Displays

Part No.	Manufacturer	Product No.	Character Height	Illuminated Color	Bus Polarity*	Pins/Leads	Typical Vf @ If (mA)	Typical mcd @ mA	Wavelength nm	Decimal Point #	Pricing		
											1	10	100
335055	ValuePro	UN4043-13 EWRS	0.40"	Orange	CA	12	2.1 @ 20	3.3 @ 10	635	RHDP	\$2.49	\$2.25	\$1.95
1956493	Lite-On	LTC561R	0.56"	Red	CA	12	1.7 @ 20	0.6 @ 10	665	RHDP	2.49	2.25	1.95
2125229	Ledtech	LN5643R-11	0.56"	Orange	CA	12	2.1 @ 20	4.5 @ 10	630	RHDP	1.95	1.75	1.49
308224	Ledtech	LM5643R-11RRRN	0.56"	Orange	CC	12	2.1 @ 20	7.4 @ 20	630	RHDP	2.49	2.25	1.95
225963	ValuePro	KW3-562A2B	0.56"	Green	CA	28	2.2 @ 20	15 @ 20	568	RHDP	2.49	2.25	1.95

2-Digit 14 & 16-Segment Alphanumeric LED Displays

2005382	Lite-On	LTP-4323P†	0.40"	Bright Red	CC	20	2.1 @ 20	0.75 @ 10	697	RHDP	\$1.95	\$1.75	\$1.49
2005391	Lite-On	LTP-4323JD†	0.40"	AllnGap Hyper Red	CC	20	2.1 @ 20	0.65 @ 10	650	RHDP	2.49	2.25	1.95
1955870	Lite-On	LTP-4323G†	0.40"	Green	CC	20	2.1 @ 20	2.0 @ 10	569	RHDP	2.49	2.25	1.95
1955896	Lite-On	LTP-3786S-03\$	0.54"	AlGaAs Red	CA	18	1.8 @ 20	4.0 @ 10	660	RHDP	2.49	2.25	1.95
1955909	Lite-On	LTP-3785E-01\$	0.54"	Red Orange	CA	18	2.0 @ 20	2.0 @ 10	630	RHDP	2.95	2.49	2.19
1955933	Lite-On	LTP-8647AP\$	0.54"	Bright Red	††	18	12 @ 8.5	0.9 @ 0.4	697	RHDP	2.95	2.49	2.19
1955917	Lite-On	LTP-3785G-01\$	0.54"	Green	CA	18	2.1 @ 20	2.0 @ 10	565	RHDP	1.95	1.75	1.49
335222	ValuePro	UA5422-11 EWRS\$	0.54"	Green	CA	18	2.1 @ 20	2.9 @ 10	567	RHDP	2.49	2.25	1.95
2075807	Ligitek	LDD525SBKS-20/A\$	0.56"	Blue	CC	18	3.5 @ 20	10.5 @ 10	460	RHDP	8.95	7.95	6.95

4-Digit 7-Segment Numeric LED Displays

2006810	Ligitek	LFD2121-20/A-PF	0.28"	Red	CA	12	2.1 @ 20	0.8 @ 10	697	RHDP	\$2.95	\$2.49	\$2.19
1956549	Lite-On	LTC-2623G	0.28"	Green	CA	16	2.1 @ 20	2.0 @ 10	575	RHDP	2.95	2.49	2.19
2006828	Ligitek	LFD4161-20/A-PF	0.40"	Red	CA	16	2.1 @ 20	0.8 @ 10	697	RHDP	2.95	2.49	2.19
1956506	Lite-On	LTC-5837E	0.52"	Red Orange	CA	40	2.0 @ 20	2.2 @ 10	630	RHDP	2.95	2.49	2.19
2006836	Ligitek	LFD5221-20/A-PF	0.56"	Red	CA	12	2.1 @ 20	1.0 @ 10	697	RHDP	2.95	2.49	2.19
2005711	Lite-On	LTC-5653G-01	0.56"	Green	CA	12	2.1 @ 20	2.4 @ 10	565	RHDP	2.49	2.25	1.95
1956573	Lite-On	LTC-5848G	0.56"	Green	CA	36	2.1 @ 20	2.4 @ 10	565	RHDP##	2.95	2.49	2.19
335194	ValuePro	UM5624-11-EWRS	0.56"	Green	CC	12	2.1 @ 20	2.9 @ 10	567	RHDP	2.95	2.49	2.19
11360	Lite-On	LTC-5851Y	0.56"	Yellow	CA	36	2.1 @ 20	2.1 @ 10	585	RHDP##	2.95	2.49	2.19

* CA-Common Anode/CC-Common Cathode # LHDP-Left Hand Decimal Point / RHDP-Right Hand Decimal Point ## 1st & 2nd digits only † 16 segment †\$ 14 segment †† Built in M5450 MOS IC driver

LED Bar Graph Arrays (10 Elements)

★ Web Code: LBW

Part No.	Manufacturer	Product No.	Character Height	Illuminated Color	Number of Elements	Pins/Leads	Typical Vf @ If (mA)	Typical mcd @ mA	Wavelength nm	Pricing		
										1	10	100
697477	Lite-On	LTA-1000HR	0.20"	Hi-eff. Red	10	20	2.0 @ 20	2.0 @ 10	635	\$1.05	\$0.85	\$0.69
334529	ValuePro	UL10000-HR-RRAK	0.20"	Red	10	20	2.1 @ 20	1.6 @ 10	635	1.29	1.09	.89
334537	ValuePro	UL10000-Y-EWAK	0.20"	Yellow	10	20	2.1 @ 20	1.1 @ 10	585	1.19	.99	.79
2115531	Ledtronics	LBG1000G3B	0.20"	Hi-eff Green	10	20	2.1 @ 10	5 @ 10	565	1.29	1.19	.89
697469	Lite-On	LTA-1000G	0.20"	Green	10	20	2.1 @ 20	2.0 @ 10	565	1.19	.99	.79
334511	ValuePro	UL10000-E-EWAK	0.20"	Green	10	20	2.1 @ 20	1.4 @ 10	567	1.19	.99	.79
1551402	Avago	HDSP-4832	0.20"	Hi-eff. Red, Yellow, Green	10	20	2.1/2.2 @ 20; 2.1 @ 10	3.5/1.9/1.9 @ 10	635/583/566	6.95	6.25	5.59

Light Bars

Fig. 1

Fig. 2

Fig. 3

Fig. 4

Fig. 5

★ Web Code: LTB

Part No.	Manufacturer	Product No.	Illuminated Color	Light Emitting Area	Package Fig.	Pins/Leads	Typical Forward Volt	Typical Luminosity	Wavelength nm	Pricing		
										1	10	100
1954965	Lite-On	LTL-2600HR	Hi-eff Red	.350" x .150" (2)	1	8	2.1 @ 20	4200	635	\$0.89	\$0.75	\$0.59
1954973	Lite-On	LTL-2800G	Green	.350" x .150" (2)	1	8	2.1 @ 20	4200	565	.89	.75	.59
790188	Lite-On	LTL-2620HGR	Hi-eff Red	.350" x .150" (4)	2	16	2.1 @ 20	4200	635	.89	.75	.59
1955001	Lite-On	LTL-2720Y	Yellow	.350" x .150" (4)	2	16	2.1 @ 20	4200	585	.99	.85	.69
334650	ValuePro	UB3541R-11-NRAK	Orange	.350" x .350" (1)	3	16	2.1 @ 20	7800	635	.99	.85	.69
334668	ValuePro	UB3531R-11-NYAK	Yellow	.350" x .350" (1)	3	16	2.1 @ 20	5500	585	1.09	.89	.75
334676	ValuePro	UB3521R-11-NGAK	Green	.350" x .350" (1)	3	16	2.1 @ 20	6800	567	1.25	.99	.89
2005315	Lite-On	LTL-2350HR	Hi-eff Red	.750" x .150" (1)	4	8	2.1 @ 20	800	635	1.09	.89	.79
790153	Lite-On	LTL-2450Y	Yellow	.750" x .150" (1)	4	8	2.1 @ 20	800	585	.99	.85	.69
2005323	Lite-On	LTL-2685HR	Hi-eff Red	.350" x .750" (1)	5	16	2.1 @ 20	1600	635	1.49	1.25	1.09
2005331	Lite-On	LTL-2885G	Green	.350" x .750" (1)	5	16	2.1 @ 20	1600	565	1.49	1.25	1.09

LED Dot Matrix with Decoder Driver (4x7 & 5x7 Arrays) Alphanumeric & Hexadecimal

• Supply voltage: 5V

★ Web Code: HAV



5x7 Alpha Character



4x7 Hex Character

Part No.	Manufacturer	Product No.	Character Height	Illuminated Color	No. of Characters	Array Polarity	Pins/Leads	Typical mcd	Wavelength nm	Pricing		
										1	10	100
1551269	Avago	HDSP-2532	0.18"	Hi-efficiency Red	8 (1x8)	5 x 7 Alpha	30	7.5	635	\$32.95	\$31.95	\$29.95
1551251	Avago	HDSP-2531	0.18"	Yellow	8 (1x8)	5 x 7 Alpha	30	7.5	583	32.95	31.95	29.95
1584301	Avago	HDSP-2111	0.20"	Yellow	8 (1x8)	5 x 7 Alpha	28	7.5	583	32.95	31.95	29.95
1551120	Avago	HDLG-2416	0.20"	Green	4 (1x4)	5 x 7 Alpha	18	5.6	568	19.95	18.95	17.95
32951	Texas Instruments	TIL311	0.27"	Red	1	4 x 7 Hex	11	0.1	660	19.95	17.95	15.95
1551189	Avago	HDSP-0762	0.29"	Hi-efficiency Red	1	4 x 7 Hex	8	0.14	635	27.95	26.95	25.95

★ For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Dot Matrix Displays & LED Replacement Lamps

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

JAMECO ValuePro	Marktech	LITEON
------------------------	-----------------	---------------

LED Dot Matrix Displays (5x7, 5x8 & 8x8 Arrays)

5 x 7
Dot Matrix



5 x 8
Dot Matrix



8 x 8
Dot Matrix



*Web Code: HAV

Part No.	Manufacturer	Product No.	Character Height	Illuminated Color	Array Polarity*	Pins/Leads	Typical Vf @ If (mA)	Typical mcd @ mA	Wavelength nm	Pricing		
										1	10	100
218843	Various	CSM57041T-11	0.7"	Red	5 x 7 CC/AR	12	1.8 @ 20	8.0 @ 20	660	\$1.95	\$1.49	\$1.25
118906	Lite-On	LTP747R	0.7"	Hi-efficiency Red	5 x 7 AC/CR	12	2.0 @ 20	2.0 @ 80	655	2.25	1.75	1.49
2005420	Lite-On	LTP-747C	0.7"	AlGaAs Red	5 x 7 AC/CR	12	1.8 @ 20	5.8 @ 80	660	2.49	1.95	1.75
2005454	Lite-On	LTP-747E	0.7"	Orange	5 x 7 AC/CR	12	2.0 @ 20	2.0 @ 80	630	1.95	1.49	1.25
2005497	Lite-On	LTP-757G	0.7"	Green	5 x 7 CC/AR	12	2.1 @ 20	2.0 @ 80	565	1.95	1.49	1.25
1955061	Lite-On	LTP-1457AHR	1.2"	Hi-efficiency Red	5 x 7 AC/CR	14	2.0 @ 20	4.0 @ 80	635	2.95	2.49	2.25
1955079	Lite-On	LTP-1557AHR	1.2"	Hi-efficiency Red	5 x 7 CC/AR	14	2.1 @ 20	4.0 @ 80	565/630	3.49	2.95	2.49
2005518	Lite-On	LTP-1557AKA	1.2"	AllnGaP Red Orange	5 x 7 CC/AR	14	2.05 @ 20	3.8 @ 80	621	2.95	2.49	1.95
1955087	Lite-On	LTP-1257AA-01	1.2"	Green/Red Orange	5 x 7 AC/CR	20	2.1/2.0 @ 20	4.0 @ 80	565/630	2.95	2.49	1.95
1955095	Lite-On	LTP-1057AE	1.24"	Red Orange	5 x 7 AC/CR	14	2.0 @ 20	4.0 @ 80	630	2.95	2.49	1.95
2005745	Lite-On	LTP-1057AGNB	1.24"	Green	5 x 7 AC/CR	14	2.1 @ 20	4.0 @ 80	565	2.95	2.49	1.95
1955108	Lite-On	LTP-1057AHR	1.54"	Hi-efficiency Red	5 x 7 AC/CR	14	2.0 @ 20	4.0 @ 80	635	3.95	3.25	2.59
308144	Ledtech	LT5763-M1EWRN	1.54"	Red/Green	5 x 7 AC/CR	20	1.7/2.1 @ 20	10.8/20 @ 10	660/567	3.95	3.25	2.25
1955132	Lite-On	LTP-2157AHR-RD	2.0"	Hi-efficiency Red	5 x 7 CC/AR	14	2.0 @ 20	4.8 @ 80	635	3.95	3.35	2.89
2005753	Lite-On	LTP-2057AE	2.0"	Orange	5 x 7 AC/CR	14	2.0 @ 20	4.8 @ 80	630	3.95	3.35	2.89
1955116	Lite-On	LTP-2157AE	2.0"	Orange	5 x 7 CC/AR	14	2.0 @ 20	4.8 @ 80	630	2.95	2.49	1.95
335290	ValuePro	UJ2041-21 EWRN	2.0"	Orange	5 x 7 CC/AR	14	2.1 @ 20	6.0 @ 10	630	2.95	2.49	1.95
206560	Lite-On	LTP-2157AG	2.0"	Green	5 x 7 CC/AR	14	2.1 @ 20	4.8 @ 80	565	2.95	2.49	1.95
2077351	Lite-On	LTP-2657AA	2.0"	Green/Red Orange	5 x 7 AC/CR	28	2.1/2.0 @ 20	4.8 @ 80	565/630	3.95	3.35	2.89
1955159	Lite-On	LTP-2757AA	2.0"	Green/Red Orange	5 x 7 CC/AR	28	2.1/2.0 @ 20	4.8 @ 80	565/630	2.95	2.49	1.95
2005761	Lite-On	LTP-3057AC	3.0"	AlGaAs Red	5 x 7 AC/CR	14	3.6 @ 20	20 @ 80	660	3.95	3.49	2.95
1955167	Lite-On	LTP-4157AE	4.0"	Orange	5 x 7 CC/AR	14	4.0 @ 20	96 @ 80	630	4.95	4.19	3.59
1955175	Lite-On	LTP-4157AG	4.0"	Green	5 x 7 CC/AR	14	4.2 @ 20	96 @ 80	565	3.95	3.49	2.95
1955183	Lite-On	LTP-2158AHR	2.3"	Hi-efficiency Red	5 x 8 CC/AR	14	2.1 @ 20	4.0 @ 48	635	2.95	2.49	1.95
1955191	Lite-On	LTP-2158AY	2.3"	Yellow	5 x 8 CC/AR	14	2.1 @ 20	4.8 @ 80	585	3.95	3.59	2.75
1955204	Lite-On	LTP-2458AAR-NB	2.3"	Green/Red Orange	5 x 8 AC/CR	28	2.1/2.0 @ 20	4.8 @ 80	565/630	3.95	3.59	2.75
1955212	Lite-On	LTP-2558AA	2.3"	Green/Red Orange	5 x 8 CC/AR	28	2.1/2.0 @ 20	4.8 @ 80	565/630	3.95	3.59	2.75
1955221	Marktech	MTAN6385-AHRG	0.85"	Hi-efficiency Red	8 x 8 AC/CR	24	2.1 @ 20	7.4 @ 20	635	3.95	3.59	2.75

* AC-Anode Column / AR-Anode Row / CC-Cathode Column / CR-Cathode Row

Multi-Chip, Bayonet and Cluster Based

LED Replacement Lamps

*Web Code: KBZ

585 Series Non-Polarized

- Low current draw – 90% less energy than incandescent • No heat generated
- Long life – up to 100k hours
- Mounts directly into industry standard socket

Multi-Chip Based

Bayonet Based



392702

394476

394493

Multi-Chip Based LED T1 - Midget Flange

Part No.	Product No.	Color	Nominal Voltage	Forward Current (mA) typ.	Intensity (mcd) typ.	Wavelength (nm)	Pricing		
							1	10	100
392690	585-4125	Yellow	14	20	530	630	\$2.49	\$2.19	\$1.79
392702	585-1225	Red	28	4.5	350	625	2.49	2.19	1.79

Bayonet Based LED T3

394476	585-4123	Red	14	20	550	630	\$2.95	\$2.59	\$1.95
394493	585-4125	Red	28	14	350	630	2.95	2.59	1.95

Cluster-Based LED T3 - Miniature Bayonet (BA9s)

- Replaces incandescent lamp numbers: 44, 47, 313, 755, 1815, 1819, 1847, 1850, 1866, 1889, 1891, 1892, 1893, and 1895



392585

392593

392552	585-5223	Red	14	20	7000	630	\$4.95	\$4.49	\$3.95
392585	585-5523	Yellow	14	20	7000	588	4.95	4.49	3.95
392593	585-5225	Red	28	15	6500	630	4.95	4.49	3.95
392607	585-5325	Green	28	15	6000	525	4.95	4.49	3.95
392622	585-5525	Yellow	28	15	6000	588	4.95	4.49	3.95
392632	585-5256	Red	120VAC	5.5	6500	625	4.95	4.49	3.95
392649	585-5356	Green	120VAC	5.5	7000	525	4.95	4.49	3.95

JKL

Wedge Base LEDs & Holders

NEW
MARKED IN PINK

Wedge LEDs can replace filament bulbs commonly found in automotive and water craft applications. The LEDs feature an integrated diode for reserve voltage protection and a current limiting resistor.



2123346
Lamps

2123371

2123389

2123397

2123400

2123434

Part No.	Product No.	Volt. @ Current	Color	Wavelength	Lumens	1	10	100
2123338	LE-0509-01W	24VDC @ 15mA	White	X=0.3; Y=0.29	2	\$1.49	\$1.35	\$1.19
2123346	LE-0509-01B	24VDC @ 15mA	Blue	470	1	1.49	1.35	1.19
2123371	LE-0503-03W	12VDC @ 15mA	White	X=0.3; Y=0.29	2.5	1.25	1.09	.99
2123389	LE-0503-03B	12VDC @ 15mA	Blue	470	0.7	1.25	1.09	.99
2123397	LE-0509-02R	24VDC @ 20mA	Red	630	0.7	.95	.79	.69
2123400	LE-0509-02Y	24VDC @ 20mA	Yellow	595	0.7	.95	.79	.69

Sockets

• T1 3/4: 95° FOV

• T3 1/4: 20° FOV

Part No.	Product No.	Description	1	10	100
2123434	2948-6G	T1 3/4, push-in type with 6" green leads	\$.95	\$.85	\$.75
2123442	2964-8B	T3 1/4, push-in type with 8" leads	1.25	1.09	.95



Electroluminescence Wire

*Web Code: ELW


Imagine the possibilities of transforming ordinary objects with high tech visual effects. Wrap this fluorescent wire around any object such as musical instruments, models, science projects & presentation boards. Super charge your projects w/ brilliant color.

- Powered by 2 AA batteries

Part No.	Mfr. Part No.	Color	Length	1	5	25
263484	NWRB15	Blue	4.5'	\$22.95	\$19.95	\$17.95
263492	NWRR15	Red	4.5'	22.95	19.95	17.95

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.


Thin Film Transistor Modules & Parallel LCD Displays



Color TFT (Thin Film Transistor) Modules

★ Web Code: GCG

- White LED backlight
 - Transmissive TFT
 - Wide viewing angle
 - High brightness LED backlights
- 2118715:** Recommend NHD-FFC37 adapter P/N 2122731 (see web)
2118723: Recommend NHD-COG14-36 adapter P/N 2122749 (see web)
2118731: Recommend NHD-FFC20-1 adapter P/N 2122757 (see web),
 NHD-3.5-320240MF-20, P/N 2122765 controller board (see web),
 digital RGB interface (6.5MHz)
2118740: 16-bit digital input data, touch panel type, recommend
 NHD-4.3-480272MF-20 controller board P/N 2122773 (see web)
2118758: Recommends NHD-FFC20-1 adapter P/N 2122757 (see web)

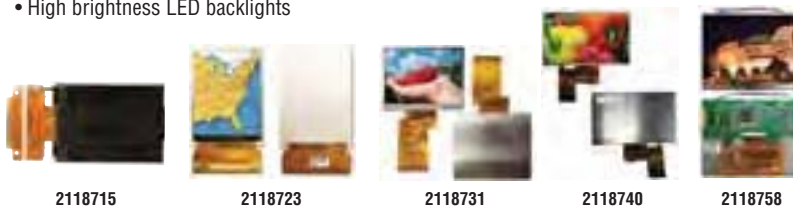


Part No.	Mfr.	Mfr. Part No.	Pixels (Portrait Mode)	Diagonal View	Input Data (Parallel)	Input Voltage (V @ mA)	Built-In Controller	Module Size (W" x H" x D")	Display Size (W" x H")	Pricing		
										1	5	25
2118715	Newhaven	NHD-1.8-128160ZF-CTXL# <i>R</i>	128 x 160	1.8"	8-bit	2.8 @ 25.5	IL9163	1.4 x 1.9 x 0.10	1.10 x 1.40	\$17.95	\$16.95	\$15.95
2118723	Newhaven	NHD-2.4-240320SF-CTX# <i>R</i>	240 x 320	2.4"	8-bit or 16-bit	2.8 @ 7	IL9328	1.7 x 2.4 x 0.10	1.50 x 1.90	29.95	27.95	25.95
2118731	Newhaven*	NHD-3.5-320240MF-ATXL#-1 <i>R</i>	320 x 240	3.5"	24-bit	3.3 @ 8.6	—	3.0 x 2.5 x 0.11	2.80 x 2.10	33.95	31.95	29.95
2118740	Newhaven	NHD-4.3-480272MF-ATXL#-T-1 <i>R</i>	480 x 272	4.3"	24-bit	3.3 @ 32	—	4.2 x 2.7 x 0.15	3.70 x 2.10	48.95	45.95	42.95
2118758	Newhaven*	NHD-5.7-640480WF-CTXL#-T <i>R</i>	640 x 480	5.7"	24-bit	3.3 @ 190	SSD1963	4.9 x 3.9 x 0.15	4.50 x 3.40	139.95	134.95	129.95

* Landscape mode

Parallel LCD Displays

★ Web Code: GCG

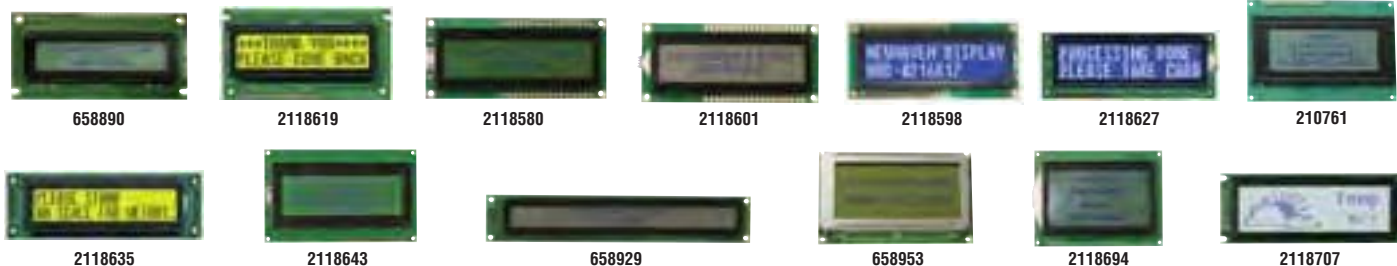

Part No.	Mfr.	Mfr. Part No.	Characters x Lines	Character Font	Input Data	Input Voltage	Letters-Backlight	Notes†	Module Size (W" x H" x D")	Display Size (W" x H")	Pricing		
											1	5	25
137373	Varitronix	MDLS16166D	16 x 1	5 x 8	8-bit	5.0V @ 0.6mA	Black-None	2, 3	3.1 x 1.4 x 0.4	2.5 x 0.5	\$8.95	\$7.95	\$6.95
1939571	Hitachi	LM071L	16 x 2	5 x 7	8-bit	5.0V @ 1.0mA	Black-None	—	3.1 x 1.4 x 0.4	2.5 x 0.5	8.95	7.95	6.95
618003	Hantronix	HDM716216H-5-3005	16 x 2	5 x 7	8-bit	5.0V @ 1.25mA	Black-None	—	3.2 x 1.4 x 0.3	2.5 x 0.5	8.95	7.95	6.95
658988	Hantronix	HDM716216L-7-8C0	16 x 2	5 x 7	8-bit	5.0V @ 2.0mA	Black-Yellow	3	4.8 x 1.7 x 0.6	3.9 x 0.9	11.95	10.95	8.95
658890	Hantronix	HDM716216H-B-P00P	16 x 2	5 x 7	8-bit	5.0V @ 2.2mA	Black-None	3	3.3 x 1.7 x 0.4	2.4 x 0.6	9.95	8.95	7.95
658881	Hantronix	HDM716216H-4-H0AF	16 x 2	5 x 7	8-bit	5.0V @ 2.2mA	Black-None	3	4.8 x 1.7 x 0.4	3.9 x 0.9	9.95	8.95	7.95
171716	ValuePro	AC-162A <i>R</i>	16 x 2	5 x 8	8-bit	5.5V @ 1.5mA	Black-Yellow/Green	2, 3	3.4 x 1.2 x 0.5	2.5 x 0.7	19.95	17.95	15.95
1946068	Goldentek	C-1602A-1YN	16 x 2	5 x 8	8-bit	5.0V @ 1.0mA	Black-Yellow/Green	—	2.8 x 1.4 x 0.4	2.6 x 0.6	9.95	8.95	7.95
2118619	Newhaven	NHD-021682-FL-YBW <i>R</i>	16 x 2	5 x 8	4-bit or 8-bit	5.0V @ 1.5mA	Blue-Yellow/Green	5, 6	3.3 x 1.7 x 0.5	2.5 x 0.6	9.95	8.95	7.95
1585979	Tinsharp	TC1602B-B	16 x 2	5 x 8	8-bit	5.0V @ 1.3mA	Black-Blue	—	3.1 x 1.4 x 0.4	2.5 x 0.4	15.95	13.95	11.95
2118580	Newhaven	NHD-0216K1Z-FL-YBW <i>R</i>	16 x 2	5 x 8	4-bit or 8-bit	5.0V @ 1.5mA	Blue-Yellow/Green	5, 6	3.2 x 1.4 x 0.5	2.5 x 0.6	9.95	8.95	7.95
2118601	Newhaven	NHD-0216K1Z-FS-(RGB)-FBW <i>R</i>	16 x 2	5 x 8	4-bit or 8-bit	5.0V @ 1.5mA	Black-RGB	5, 6	3.2 x 1.4 x 0.5	2.5 x 0.6	13.95	12.95	11.95
2118598	Newhaven	NHD-0216K1Z-NSW-BBW-L <i>R</i>	16 x 2	5 x 8	4-bit or 8-bit	5.0V @ 1.5mA	White - Blue	5, 6	3.2 x 1.4 x 0.5	2.5 x 0.6	10.95	9.95	8.95
1954674	Tinsharp	TC1602B-W	16 x 2	5 x 8	8-bit	5.0V @ 1.3mA	White-Black	—	3.1 x 1.4 x 0.4	2.5 x 0.4	14.95	13.49	11.95
2118627	Newhaven	NHD-0216SZ-NSW-BBW <i>R</i>	16 x 2	5 x 8	4-bit or 8-bit	5.0V @ 1.5mA	White-Blue	5, 6	4.8 x 1.7 x 0.5	3.9 x 0.9	21.95	20.49	18.95
365982	PicVue	PVC160206QYL04	16 x 2	5 x 8	8-bit	5.0V @ 1.6mA	Black-Yellow/Green	—	3.3 x 1.2 x 0.5	2.4 x 0.6	13.95	12.49	10.95
2081166	Optrex	DMC16249	16 x 2	5 x 8	4-bit or 8-bit	5.0V @ 3.0mA	Black-Grey -None	—	3.1 x 1.4 x 0.4	2.5 x 0.5	9.95	8.95	7.95
210761	Various	UC-16401 (Samsung)	16 x 4	5 x 8	4-bit or 8-bit	6.5V @ 2.2mA	Black-None	1, 3	3.4 x 2.4 x 0.3	2.4 x 1.0	24.95	22.49	19.95
2115469	Hantronix	HDM20216H-3-VHOP	20 x 2	5 x 7	8-bit	5.0V @ 2.2mA	Yellow-White-None	—	4.6 x 1.5 x 0.4	3.3 x 0.7	12.95	11.49	9.95
171724	ValuePro	AC-202A <i>R</i>	20 x 2	5 x 8	8-bit	5.0V @ 1.7mA	Black-Yellow/Green	2, 3	4.6 x 1.5 x 0.4	3.3 x 0.7	24.95	22.49	20.25
2118635	Newhaven	NHD-0220DZ-FL-YBW <i>R</i>	20 x 2	5 x 8	4-bit or 8-bit	5.0V @ 1.5mA	Blue-Yellow/Green	5, 6	4.6 x 1.5 x 0.4	3.3 x 0.7	17.95	16.95	15.95
2118643	Newhaven	NHD-0420DZ-FL-YBW <i>R</i>	20 x 4	5 x 8	4-bit or 8-bit	5.0V @ 3.5mA	Blue-Yellow/Green	5, 7	3.9 x 2.4 x 0.6	3.0 x 1.0	21.95	20.49	18.95
658831	Hantronix	HDM402162H-4-S90P	40 x 2	5 x 7	8-bit	5.0V @ 2.2mA	Black-None	3	7.2 x 1.3 x 0.4	6.1 x 0.6	7.95	6.95	6.25
658929	Hantronix	HDM40216H-4-S9RP	40 x 2	5 x 7	8-bit	5.0V @ 2.2mA	Black-None	3	7.2 x 1.3 x 0.4	6.1 x 0.6	9.95	8.95	7.95
658937	Hantronix	HDM40216L-4-LCWF	40 x 2	5 x 7	8-bit	5.0V @ 3.0mA	Black-Yellow/Green	3	7.2 x 1.3 x 0.6	6.1 x 0.6	20.95	18.95	16.95
652332	Seiko Inst.	DMC4024	40 x 4	5 x 8	8-bit	5.0V @ 12mA	Black-None	—	7.5 x 2.1 x 0.4	5.5 x 0.9	22.95	19.95	16.95
658953	Hantronix	HDM64GS12L-4-N31S	128 x 64	128 x 64	8-bit	5.0V @ 2.0mA	Black-None	4	3.0 x 2.1 x 0.4	2.4 x 1.3	19.95	17.95	15.95
2118694	Newhaven	NHD-12864AZ-FSW-GBW-VZ <i>R</i>	128 x 64	128 x 64	8-bit	5.0V @ 3.5mA	Blue - White	5, 8	3.7 x 2.8 x 0.5	2.8 x 1.6	25.95	24.95	23.95
2118707	Newhaven	NHD-24064CZ-FSW-GBW-VZ <i>R</i>	240 x 64	240 x 64	8-bit	5.0V @ 7.0mA	Blue -White	5, 9	4.6 x 1.8 x 0.5	3.8 x 1.2	49.95	48.95	47.95

†1. Control LSI HD44780 & column driver MSM5259 or equivalents 2. Controller KS0066U or equivalent

3. Recommended power supply P/N 164101, pg 123

4. Dot Graphic LCD display

5. Recommended power supply P/N 252701, pg 121

6. Controller SPLC780D or equivalent

7. Controller SPLC780D-01 or equivalent

8. Controller KSO108B

9. Controller RA6963

★ For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Serial LCD Displays & Incandescent Lamps

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE


Serial LCD Displays

• For detailed specification sheets, please visit www.Jameco.com. • One-year warranty



Scott Edwards Electronics, Inc.

* Web Code: QAW




150990



2118651



2118678




157323



281391



174182



694381

Part No.	Manufacturer	Mfr. Part No.	Characters x Lines	Input Data	Input Voltage (V @ mA)	Letters - Backlight	Notes†	Module Size (W" x H" x D")	Display Size (W" x H")	Pricing		
										1	5	25
150990	Scott Edwards	ILM-216L	16 x 2	1200-9600	4.8-5.5 @ 5	Black-Yellow/Green	1,2,5	3.2 x 2.0 x 0.5	2.8 x 1.0	\$49.95	\$44.95	\$41.95
2118651	Newhaven	NHD-0216K3Z-FL-GBW	16 x 2	9600 (default)	5.0V @ 125mA	Blue-Yellow/Green	—	3.2 x 1.4 x 0.5	2.5 x 0.6	18.95	16.95	14.95
2118660	Newhaven	NHD-0126K3Z-FS(RGB)-FBW	16 x 2	9600 (default)	5.0V @ 18mA	Black-RGB	—	3.2 x 1.4 x 0.5	2.5 x 0.6	23.95	21.49	18.95
2081975	Crystal Fonz	CFA632-NFA-KS	16 x 2	2400-19,200	5.0V @ 9	Black-None	5	4.3 x 1.7 x 0.6	3.3 x 0.9	19.95	17.95	15.95
133129	Scott Edwards	BPI-216N	16 x 2	2400 or 9600	4.8-5.5 @ 3	Black-None	1,2,11	3.1 x 1.4 x 0.7	2.8 x 1.0	55.95	49.95	44.95
174166	Matrix Orbital	LK162-12R	16 x 2	1200-19,200	5.0 @ 9	Black-Yellow/Green	1,3,4,6	3.2 x 1.5 x 0.8	2.5 x 0.7	59.95	56.95	53.95
2118678	Newhaven	NHD-0220D3Z-FL-GBW	20 x 2	9600 (default)	5.0V @ 245mA	Blue-Yellow/Green	—	4.6 x 1.5 x 0.5	3.3 x 1.1	21.95	19.95	17.95
174174	Matrix Orbital	LK202-25R	20 x 2	1200-19,200	5.0 @ 9	Black-Yellow/Green	1,7,10	4.6 x 1.5 x 1.1	3.1 x 0.7	44.95	42.95	39.95
158166	Scott Edwards	SGX-120L	20 x 4 w/ graphics	2400 or 9600	4.8-5.5 @ 15	Yellow-None	1,2,5	3.1 x 1.9 x 0.8	2.6 x 1.1	119.95	109.95	99.95
150957	Matrix Orbital	LCD2041	20 x 4	1200-19,200	5.0 @ 10	Black-Yellow/Green	1,3,4,6	3.9 x 2.4 x 0.7	3.0 x 1.0	69.95	66.49	62.95
2118686	Newhaven	NHD-0420D3Z-FL-GBW	20 x 4	9600 (default)	5.0V @ 245mA	Blue-Yellow/Green	1	3.9 x 2.4 x 0.5	3.0 x 1.0	23.95	21.49	18.95
157323	Matrix Orbital	LK204-25R	20 x 4 w/ keypad	1200-19,200	5.0 @ 16	Black-Yellow/Green	1,3,4,6	3.7 x 2.4 x 1.1	3.0 x 1.0	74.95	70.95	67.95
694170	Matrix Orbital	LK204-25-1YR	20 x 4 w/ keypad	1200-19,200	5.0 @ 16	Yellow-Bk	1,7,10,12	3.9 x 2.4 x 1.2	3.0 x 1.0	68.95	65.45	62.45
281391	Matrix Orbital	GLK12232-25-SM	122 x 32 w/ graphics	9600-115,000	5.0 @ 250	Black-White	1,8	3.4 x 1.4 x 0.5	2.4 x 0.7	74.95	70.95	67.95
281404	Matrix Orbital	GLK12232-25-FGW	122 x 32 w/ graphics	9600-115,000	5.0 @ 20	Black-White	1,8	3.9 x 2.4 x 0.4	3.3 x 1.4	78.95	77.95	76.95
174182	Matrix Orbital	GLC24064	240 x 64 w/ graphics	1200-19,200	5.0 @ 31	Black-Yellow/Green	1,3,6	7.1 x 2.6 x 0.7	5.2 x 1.5	159.95	157.95	149.95
694381	Matrix Orbital	GLK24064-25-WBR	240 x 64 w/ graphics	9600-115,000	5.0 @ 35	White-Blue	1,9,13	7.1 x 2.6 x 0.7	5.0 x 1.3	139.95	132.95	125.95

- † 1. For a power supply, Jameco recommends P/N 164101, pg 123
2. Includes instruction codes for character generation, cursor control, printing, etc. (Examples for Stamps in PBASIC included)
3. Manual included
4. Connect 16 modules using the same two wire interface
5. EEPROM stores text font, settings, and text screen

6. Backlight control, bar graphs, large digits, multiple displays, software contrast control, auto line wrapping & auto scroll feature
7. Connect up to 127 modules on the same 2-wire interface
8. 122 x 32 pixel graphic display, text display using built-in or user supplied fonts, adjustable contrast, backlighting & keypad interface
9. 240 x 64 pixel graphic display, text display using built-in or user supplied fonts, adjustable contrast, backlighting & keypad interface

10. Built-in font provision for up to 8-user defined characters, software controlled brightness, use up to a 25-key keypad with one 10-key buffer, 6 general purpose outputs, horizontal or vertical bar graphs
11. LCD Serial Backpack® accepts RS232, CMOS or TTL signal
12. Inverse yellow
13. White text/blue background



* Web Code: DBH

JAMECO ValuePro		Incandescent Lamps											* Order in multiples of 10		
Part No.	Cross Ref.	Mfr.	Fig.	Description	Volts	MSCP	1	10	100						
209390	14	JVP	1	G3 1/2 miniature screw	2.47	.50	\$.45	\$.39	\$.35						
209402	40	JVP	2	T3 1/4 miniature screw	6.3	.50	.35	.29	.25						
209411	44	JVP	3	T3 1/4 miniature bayonet	6.3	.90	.29	.25	.19						
209429	46	JVP	2	T3 1/4 miniature screw	6.3	.90	.49	.45	.39						
209437	47	JVP	4	T3 1/4 miniature bayonet	6.3	.50	.25	.22	.19						
210403	51	JVP	5	G3 1/2 miniature bayonet	7.5	1.0	*	.07	.06						
209453	53	JVP	5	G3 1/2 miniature bayonet	14.4	1.0	*	.19	.15						
209461	73	JVP	6	T1 3/4 wedge	14	.30	.29	.25	.19						
209488	86	JVP	6	T1 3/4 wedge	6.3	4.0	.25	.19	.15						
209509	161	JVP	3	T3 1/4 wedge	14	1.0	*	.15	.12						
209525	194	JVP	3	T3 1/4 wedge	14	2.0	*	.08	.07						
209761	685	JVP	7	T1 midget flange	5	.05	.29	.25	.19						
209824	1813	JVP	4	T3 1/4 miniature bayonet	14.4	.86	*	.08	.07						
209832	1815	JVP	4	T3 1/4 miniature bayonet	14	1.4	*	.08	.07						
209859	1818	JVP	4	T3 1/4 miniature bayonet	24	3.3	.35	.29	.25						
209883	1821	JVP	8	T3 1/4 screw	28	3.4	*	.08	.07						
141073	2182	JVP	9	T1 3/4 wire terminal	14	.34	.49	.45	.39						
141066	2200	JVP	9	T1 3/4 wire terminal	5	.05	.49	.45	.39						
141057	6833	JVP	10	T 3/4 wire terminal	5	.05	.69	.59	.55						

* JVP = Jameco ValuePro

JAMECO ValuePro		Incandescent Lamps (Cont.)											* Order in multiples of 10		
Part No.	Cross Ref.	Mfr.	Fig.	Description	Volts	MSCP	1	10	100						
1943916	CM8-A241	JVP	11	T1 wire terminal w/ blue cap	12	.15	\$.29	\$.25	\$.19						
210008	7328	JVP	12	T1 3/4 bi-pin	6	.60	.69	.59	.55						
141006	7361	JVP	12	T1 3/4 bi-pin	5	.05	.45	.39	.35						
210032	7382	JVP	12	T1 3/4 bi-pin	14	.30	.65	.59	.55						
210083	7839	JVP	13	T1 bi-pin	28	.15	.35	.29	.25						
210092	120MB	JVP	14	T2 miniature bayonet	120	1200	.75	.69	.55						
309673	6S6	JVP	15	S6 candelabra	120	—	*	.08	.07						
309681	20T6	JVP	16	T6 1/2 20W intermediate	120	—	*	.19	.15						
210198	48PSB	JVP	17	T1 tel. slide base type 5	48	1800	.35	.29	.25						
210219	60PSB	JVP	17	T2 tel. slide base type 5	60	2200	.45	.39	.35						
210340	PR2	JVP	18	B3 1/2 snl cont. mini flange	2.38	.80	*	.09	.07						
210374	PR6	JVP	18	B3 1/2 snl cont. mini flange	2.47	.45	*	.09	.07						

JAMECO ValuePro		Neon Lamps											* Order in multiples of 10			* Web Code: VAD	
Part No.	Cross Ref.	Mfr.	Fig.	Description	Voltage	1	10	100									
27351	A1A (NE-2)	JVP	19	Wire terminal .6mA	65-120	\$.35	\$.29	\$.25									
210260	A9A (NE-2E)	JVP	19	Wire terminal .7mA	65-120	*	.19	.15									
210315	C2A (NE-2H)	JVP	19	Wire terminal	65-120	.35	.29	.25									
210286	B2A (NE-51H)	JVP	20	T3 1/4 miniature bayonet	65-120	.45	.39	.35									

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

Neon Panel Mount Lamps

- Input voltage: 120V
- Mounting hole dia.: 5/8" (16mm)
- Solder terminals: 0.196" (5mm)

1585485:

- Rectangular
- 6" wire leads
- Size: .91" L x .38" W x .77" D

Part No.	Cross Ref. No.	Color	1	10	100
215803	R9-71N-05-120V-R	Red	\$1.95	\$1.75	\$1.59
215812	R9-71N-05-120V-Y	Yellow	1.49	1.35	1.19
215830	R9-71N-05-120V-G	Green	1.49	1.35	1.19
1585485	32501001714	Green

Incandescent/Neon Panel Mount Lamps

- Mounting hole: .310" Dia.
- 2099788: Incandescent type
- 2.7VDC @ 60mA
- 10" lead wires
- 1765849: Neon type
- 105VAC to 125VAC
- 4.4"/4.8" lead wires

Part No.	Mfr. Part No.	Color	1	10	100
2099788	970D00146	Red	\$1.95	\$1.75	\$1.49
1765849	2150A1	Red	2.49	2.25	1.95

Ultraviolet Lamp & Ballast (Rapid Start)

Part No.	Mfr.	Mfr. Part No.	Description	1	10	50
2100128	Philips	TUV25W/G25	20" T5 ultraviolet lamp	\$19.95	\$17.95	\$15.95
2100005	Lightwave	LW20EB20-120	25W rapid start ballast	4.95	4.49	3.95

Clip-On Reading Light

- Two bright LEDs spread the light evenly over the entire reading area.
- Overall length: 6"
- Light weight and portable
- Flexible neck
- Uses 2 CR2025 coin batteries (included)

Part No.	Description	1	5	25
2120508	Clip-on LED light	\$10.95	\$9.95	\$8.49

LED Panel Mount Indicators

- Easy panel installation
- Panel/status/instrument indicators

* Web Code: UAU

141111/141129/141137: Chrome housing

Part No.	Cross Ref. No.	Mfr.	LED Size	Color	Dimensions (in.)	Mounting Hole	Vf @ If	Pricing
					L A B			1 10 100
141111	L922SRD	JVP	T1	Red	.56 .34 .25	.23"	2V @ 20mA	\$.85 \$.75 \$.69
141129	L913RD	JVP	T1	Red	.56 .39 .32	.24"	2V @ 20mA	1.39 1.25 1.15
141137	L917RD	JVP	T1 3/4	Red	.70 .55 .47	.31"	2V @ 20mA	1.19 1.05 .95
637183	UT2U1G-H113-R801-W05*	LED	T1 3/4	Green	.55 5.5 5.5	.24"	12V @ 10mA	1.19 1.05 .95

* Has internal resistor to run 12V@10mA

12V Incandescent Panel Mount Lamps

- 215715/215723/215732: Solder terminals - 0.196" (5mm)

* Web Code: HBJ

Part No.	Cross Ref. No.	Fig.	Color	Mounting Hole	Wire Length	1	10	100
215750	R9-55B-W130-12V-R	1	Red	9/32" (7mm)	4.9" (125mm)	\$1.49	\$1.35	\$1.19
215758	R9-55B-W130-12V-Y	1	Yellow	9/32" (7mm)	4.9" (125mm)	1.49	1.35	1.19
215766	R9-55B-W130-12V-G	1	Green	9/32" (7mm)	4.9" (125mm)	1.65	1.55	1.39
215774	R9-46B-W100-12V-R	2	Red	1/2" (13mm)	3.9" (100mm)	1.49	1.35	1.19
215782	R9-46B-W100-12V-Y	2	Yellow	1/2" (13mm)	3.9" (100mm)	.75	.65	.55
215791	R9-46B-W100-12V-G	2	Green	1/2" (13mm)	3.9" (100mm)	1.49	1.35	1.19
215715	R9-71B-05-12V-R	3	Red	5/8" (16mm)	Terminals	1.85	1.69	1.49
215723	R9-71B-05-12V-Y	3	Yellow	5/8" (16mm)	Terminals	.75	.65	.55
215732	R9-71B-05-12V-G	3	Green	5/8" (16mm)	Terminals	1.49	1.35	1.19



4" to 12" Fluorescent Lamps & Power Supplies

Now you can easily and affordably mount these fluorescent lamps to add cool cold-cathode effects and give your display a richer look and feel.

Part No.	* Mfr.	Mfr. Part No.	Description	Size (L" x Dia.)	1	10	25
2077474	JKL	FLC10-12	Cool white lamp	10 x .120	\$3.95	\$3.49	\$2.95
2077458	JKL	FLC10-16	Cool white lamp	10 x .160	3.95	3.49	2.95
2077466	JKL	FLC12-12	Cool white lamp	12 x .120	3.95	3.49	2.95
239636	VLM	FLPS1	12VDC power supply for P/N 239610		10.95	9.95	8.95
2077440	VLM	FLPS	12VDC power supply for P/N 2077474, 2077458, 2077466		5.95	5.49	4.95

† 1" solder terminals


Oscillators

TTL Oscillators

- Frequency stability ± 100 ppm
- Operating temp.: 0°C to 70°C
- Output load TTL: 10 TTL max.
- Machine tooled 4 pins

Half Can

- Input voltage: +3.3VDC $\pm 10\%$
- Most fit into a 8-pos. DIP socket
- P/N 676385, pg 40



Pin #	Function
1	N/C
4	GND
5	Output
8	+5VVS


* Web Code: MAM

Half Can (Continued)

Part No.	* Mfr.	Frequency (MHz)	Max. Input Current	Rise Fall Time	Pricing
					1 10 100
325681	JVP	28.322	70mA	5ns	\$.95 \$.85 \$.75
325737	JVP	48.0	70mA	5ns	.95 .85 .75

Full Can

- Input volt.: +5VDC ± 0.5 VDC
- Most fit into a 14-pos. DIP socket
- P/N 133006, pg 40



* Web Code: XAD

Part No.	* Mfr.	Frequency (MHz)	Max. Input Current	Rise Fall Time	Pricing
					1 10 50
27861	JKL	1.0	7mA	15ns	\$1.95 \$1.79 \$1.59
27879	JKL	1.8432	7mA	15ns	1.95 1.79 1.59
27924	JKL	2.0	7mA	15ns	1.49 1.35 1.19
27967	JKL	4.0	7mA	10ns	1.95 1.79 1.59
354889	JVP	4.0	15mA	10ns	1.49 1.35 1.19
144207	JKL	11.059	50mA	10ns	.75 .65 .55

Full Can (Continued)

Part No.	* Mfr.	Frequency (MHz)	Max. Input Current	Rise Fall Time	Pricing
					1 10 50
325358	JVP	7.3728	15mA	10ns	\$.95 \$.85 \$.75
27991	JKL	8.0	15mA	15ns	1.95 1.79 1.59
354897	JVP	8.0	30mA	10ns	.95 .85 .75
325331	JVP	9.216	30mA	10ns	.95 .85 .75
27887	JKL	10.0	15mA	10ns	1.95 1.79 1.59
27895	JKL	12.0	15mA	10ns	1.95 1.79 1.59
27908	JKL	16.0	15mA	10ns	.75 .65 .55
325382	JVP	18.432	30mA	10ns	.95 .85 .75
27932	JKL	20.0	17mA	10ns	1.25 1.09 .99
354918	JVP	20.0	30mA	10ns	.95 .85 .75
27941	JKL	32.0	18mA	7ns	.75 .65 .55
76822	JKL	33.0	18mA	6ns	1.95 1.79 1.59
153226	JKL	40.0	15mA	6ns	.99 .89 .79
76831	JKL	50.0	25mA	6ns	.75 .65 .55
2095381	JKL	60.0	65mA	5ns	.95 .85 .75
325420	JVP	66.666	70mA	5ns	.95 .85 .75
76857	JKL	100.0	25mA	3ns	1.95 1.79 1.49

* JKL = JKL Components | JVP = Jameco ValuePro | LED = Ledtech | VLM = Velleman Inc. | ♦ = Manufacturer Varies

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Crystals, Fuse Holders & Clips

FOX SMD Oscillator

5.0V HCMOS/TTL output

- Frequency stability: $\pm 100\text{ppm}$
- Dimensions: 7.5mmW x 1.5mmH x 5.2mmD

Part No.	Mfr. Part No.	Freq. (MHz)	Imped.	Pricing		
				1	10	100
1592263	F3345-200	20	25mA	\$1.59	\$1.39	\$1.19

Tuning Forks

- Operating temperature range: -10°C to $+60^{\circ}\text{C}$
- Frequency: 32.768kHz
- Drive level: 1mW
- Frequency tolerance: $\pm 50\text{ppm}$
- Aging for first year: $\pm 3\text{ppm}$ (max. $+25^{\circ}\text{C}$)

Part No.	Comparable to:	Imped.	1	10	100
14584	CY32.76	10.5pF	\$.35	\$.29	\$.25
325244	JVP-325243	12.5pF	.35	.29	.25

Crystal Oscillator Sockets

- Good for prototyping and PCB mounting
- Can be PCB mounted without the modifications that would be needed with DIP-IC sockets
- Low profile solder tail; machine tooled on 4 pins

Part No.	Description	*Web Code: COS	1	10	100
676385	8-pos. socket for half can		\$.45	\$.39	\$.35
133006	14-pos. socket for full can		.55	.45	.35

Fuse Holders

*Web Code: UEA

Omni-Blok® Molded Base Fuse Block

- Dielectric strength: 1500V min.
- Clip/terminals: tin plated spring brass
- Solder terminal *1 5x20mm, 2 3AG

Part No.	Mfr. Part No.	Curr. Rating	Size*	1	10	100
1711947	354001-GY	15A, 300V	1 ...	\$.95	\$.85	\$.79
1712608	520101	10A, 300V	269	.65	.59

Panel Mount for 3AG Fuse

- Dielectric strength: 2400V min.
- Black thermoplastic, UL94V-0
- Terminals: copper & copper alloy, tin plated

Part No.	Mfr. Part No.	Curr. Rating	1	10	100
1711681	342012	20A ...	\$1.99	\$1.69	\$1.59

*R/C Crystal Oscillators — Enter Web Code RCO

JAMECO ValuePro

Low Profile Fuse Clips

- Low contact resistance
- Withstands shock/vibration
- Order in multiples of 10

Part No.	Description	For Use With†	Size (H" x W" x D" x P")	1	10	500
119280	5mm, side leads	1	.33 x .25 x .20 x .21 ...	\$.15	\$.13	\$.09
102860	5mm, front leads	1	.37 x .25 x .21 x .1915	.13	.09
2099438	1/4", side leads	2	.42 x .25 x .20 x .2115	.13	.09
102842	1/4", front leads (10A)	2	.32 x .27 x .25 x .2315	.13	.09

5mm x 20mm Miniature Thumbscrew Cap Holders

- Straight solder terminal
- Size: 1.5"L x 0.6"Dia.

Part No.	Approvals	Current	Mounting Hole	1	10	100	500
150464	CE	6A @ 250VAC	.50"Dia. x .43"Flat ...	\$1.09	\$.99	\$.89	\$.79
102825	UL/CSA	10A @ 250VAC	.50"Dia.	1.25	1.09	.95	.89

1/4" x 1/4" Standard Thumbscrew Cap Holders

- Straight solder terminal
- Current: 10A @ 250VAC

Part No.	Approvals	Size (L" x Dia.)	Mounting Hole	1	10	100	500
120994	CE	1.95" x .71"	.58"Dia. (Double D-style) ...	\$.95	\$.85	\$.69	\$.65
18703	UL/CSA	2.05" x .71"	.58"Dia. x .52"Flat (D-style) ...	1.59	1.35	1.19	.95

1/4" x 1/4" PCB Fuse Holder


- Current: 16A @ 250V

Part No.	*Mfr. Approvals	Size (L" x Dia.)	Mounting Hole	1	10	100
1769743	BSM UL/CSA/VDE	1.86 x .51	.4 x .4 grid	\$5.49	\$4.95	\$4.75

*BSM = Bussman | JVP = Jameco ValuePro | † Manufacturer Varies


Crystals

- Frequency calibration tolerance: $\pm 50\text{ppm}$ @ 25°C
- Freq. stability tolerance: $\pm 50\text{ppm}$ from -10° to $+60^{\circ}\text{C}$
- Operating temperature: -10°C to $+60^{\circ}\text{C}$
- Shunt capacitance: 7pF max.
- Drive level: 4.0mW max.



HC49/U (HC18/U) Case

Dimensions in millimeters



Application Reference (4-14MHz) (parallel resonance)


- C1: 150-470 pF
- C2: 220-820 pF
- C3: Match crystal impedance

HC49/U (HC18/U) Case

* Order in multiples of 10

Part No.	*Mfr.	Frequency (MHz)	Impedance	Pricing		
				1	10	100
102613	†	1.8432	18pF	\$.59	\$.55	\$.49
102621	†	2.0	Series	.55	.49	.45
101274	†	2.4576	32pF	.59	.55	.49
14533	†	3.579545	18pF	.49	.39	.35
324364	JVP	4.0	Series	.59	.55	.49
14592	†	4.0	20pF	.59	.55	.49
324371	JVP	4.194	12pF	*	.19	.15
324451	JVP	6.0	32pF	*	.19	.15
324460	JVP	6.0	Series	*	.19	.15
14710	†	7.3728	30pF	*	.19	.15
14728	†	8.0	Series	.59	.55	.49
14381	†	10.0	Series	.59	.55	.49
120061	†	11.0592	Series	.59	.55	.49
324128	JVP	11.0592	Series	.25	.22	.19
324110	JVP	11.0592	32pF	.49	.45	.39
14402	†	12.0	Series	.59	.55	.49
537799	†	14.31818	Series	*	.09	.08
14453	JVP	16.0	Series	.49	.39	.35
324233	JVP	18.432	20pF	.29	.25	.22
324241	JVP	19.6608	20pF	*	.09	.08
324268	JVP	20.0	20pF	.59	.55	.49
14517	†	20.0	Series	.59	.55	.49
324398	JVP	49.86	20pF	*	.19	.15

Fuse Holders & Clips



*Web Code: EEE

5mm x 20mm Miniature Low Profile Fuse Holder

- Current: 10A @ 250VAC
- D-style

Part No.	Approvals	Size (L" x Dia.)	Mounting Hole	1	10	100
102832	UL/CSA	1.4 x 0.6	.5"Dia. x .46" Flat	\$2.49	\$2.19	\$1.99

5mm x 20mm Miniature In-Line Fuse Holder

Part No.	AWG	Wire Color	Body Size	1	10	100
109330	20	Red	1.8"L	\$.69	\$.65	\$.59

1/4" x 1/4" Standard In-Line Fuse Holders

- Built-in spring ensures good fuse connection
- Vinyl covered wire with stranded copper center

Part No.	AWG	Wire Lengths	Body Length	Color Body/Wire	1	10	100
109322	22	3.5/3"	2.4"	Black/Red	\$.79	\$.75	\$.69
102868	20	3/3"	2.2"	White/Red	.89	.79	.69
151918	18	6/6"	2.4"	White/Red	1.19	1.09	.95
108784	16	21/26"	2.2"	Black/Orange	1.79	1.55	1.29
108792	14	19/25"	2.5"	Black/Red	2.49	2.25	1.95

JAMECO ValuePro

5mm x 20mm Mini Fast Acting GMA Fuses (250V)

- Recommended for new designs

Part No.	*Mfr.	Cross Ref.	Amps	1	10	100
103887	JVP	GMA-250mA	.25A	\$.29	\$.25	\$.22
102041	JVP	GMA-500mA	.5A	\$.29	\$.25	\$.22
103908	JVP	GMA-1A	1A	\$.29	\$.25	\$.22
103916	JVP	GMA-2A	2A	\$.29	\$.25	\$.22
103924	JVP	GMA-3A	3A	\$.29	\$.25	\$.22
103932	JVP	GMA-5A	5A	\$.29	\$.25	\$.22

1 1/4" x 1/4" Standard Fast Acting (250V) AGC/3AG Fuses

Part No.	*Mfr.	Cross Ref.	Amps	1	10	100
69404	JVP	AGC-250mA	.25A	\$.29	\$.25	\$.22
10410	JVP	AGC-0.5	.5A	\$.29	\$.25	\$.22
10373	JVP	AGC-1A	1A	\$.29	\$.25	\$.22
652949	LTL	312001.HXP	1A	\$.29	\$.25	\$.22
197528	JVP	AGC-1.6	1.6A	\$.29	\$.25	\$.22
10382	JVP	AGC-2A	2A	\$.29	\$.25	\$.22
197536	JVP	AGC-2.5	2.5A	\$.29	\$.25	\$.22
69439	JVP	AGC-3A	3A	\$.29	\$.25	\$.22
197544	JVP	AGC-4	4A	\$.29	\$.25	\$.22
10402	JVP	AGC-5A	5A	\$.29	\$.25	\$.22
197552	JVP	AGC-6.3	6.3A	\$.29	\$.25	\$.22
69462	JVP	AGC-10	10A	\$.29	\$.25	\$.22
186301	JVP	AGC-16	16A	\$.29	\$.25	\$.22

Resettable Fuses

Polymer Positive Temperature Coefficient (PTC) fuses have provided designers in numerous industries a new tool in their battle to improve product quality and performance. As PPTC fuses are resettable, warranty costs and service calls are largely avoided.

- Rated voltage: (V_{MAX}): 60V
- Max. current: (I_{MAX}): 40A
- Lead length (D): 7.6mm min.
- Thickness (E): 3.1mm max.

Part No.	*Mfr.	P/N	Hold Curr. (I _H , A)	Trip Curr. (I _T , A)	Fig.	Size (mm)				Pricing		
						A	B	C	E	1	10	100
199832	RA020-60		0.20	0.40	1	7.4	12.2	5.1	3.1	\$.49	\$.45	\$.39
199858	RA030-60		0.30	0.60	1	7.4	13.0	5.1	3.1	\$.59	\$.55	\$.49
199874	RA050-60		0.50	1.00	1	7.9	13.7	5.1	3.1	\$.59	\$.55	\$.49
199891	RA075-60		0.50	1.50	1	10.4	15.2	5.1	3.1	\$.45	\$.39	\$.35
199882	RA065-60		0.65	1.30	1	9.7	14.5	5.1	3.1	\$.59	\$.55	\$.49
199912	RA110-60		1.10	2.20	2	13.0	18.0	5.1	3.1	\$.59	\$.55	\$.49
199938	RA160-60		1.60	3.20	2	16.3	21.3	5.1	3.1	\$.59	\$.55	\$.49
200062	RB500-30		5.00	10.00	3	14.0	24.9	10.2	3.0	\$.69	\$.65	\$.59

JAMECO ValuePro

Ceramic Resonators

- Frequency accuracy: ±0.5% @ 25°C
- Extended temp. range: -20°C to +85°C
- Withstanding volt. (5 sec): 100V max.

Part No.	Product No.	Frequency	Resistance	Pins	1	10	100
324620	TZTA-6.00MT	6.0MHz	30Ω	2	\$.09	\$.09	\$.08
324727	TZTT-8.00MT	8.0MHz	25Ω	3	\$.39	\$.35	\$.29
324566	TZTA-12.00MT	12.0MHz	25Ω	2	\$.39	\$.35	\$.29
324672	TZTT-20.00MT	20.0MHz	55Ω	3	\$.49	\$.45	\$.39

Fuses

Part No.	*Mfr.	Cross Ref.	Amps	1	10	100
197502	JVP	GMD-500mA	0.5A	\$.39	\$.35	\$.29
103827	BSM	GMC-1A	1A	\$.35	\$.29	\$.25
197465	JVP	GMD-1A	1A	\$.39	\$.35	\$.29
197472	JVP	GMD-2	2A	\$.39	\$.35	\$.29
197482	JVP	GMD-3.15	3.15A	\$.39	\$.35	\$.29
197500	JVP	GMD-5A	5A	\$.39	\$.35	\$.29

* Medium time delay type

1 1/4" x 1/4" Ceramic Fast Acting 3AB Fuses (250V)

Part No.	*Mfr.	Cross Ref.	Amps	1	10	100
656851	LTL	314.750HXP	.75	\$.69	\$.65	\$.59
656966	LTL	314012.HXP	12	\$.59	\$.55	\$.49

5mm x 20mm Fast Acting Fuse Kit

- Glass cartridge, silver-end caps
- Voltage rating: 250VAC
- IEC127/BS4265/GEE4 spec.
- 100 pieces: 10 ea. of 0.1A, 0.2A, 0.5A, 1A, 1.6A, 2A, 2.5A, 3A, 4A and 5A

Part No.	*Mfr.	Cross Ref.	Amps	1	10	100
645343	K/FF			\$15.95	\$14.95	\$13.95



Look for pricing shaded in blue throughout the catalog and for a larger selection go to: Jameco.com/MakesCents

1 1/4" x 1/4" Standard Slow Blow MDL/3AG Fuses (250V)

Part No.	*Mfr.	Cross Ref.	Amps	1	10	100
653263	LTL	313.010.HXP	.01A	\$2.29	\$2.09	\$1.99
653301	LTL	313.100.HXP	.10A	\$.99	\$.95	\$.89
25655	JVP	MDL-1/4	.25A	\$.59	\$.55	\$.49
653386	LTL	313.400HXP	.4A	\$.99	\$.89	\$.79
25689	JVP	MDL-1/2	.5A	\$.59	\$.55	\$.49
25639	JVP	MDL-1	1A	\$.59	\$.55	\$.49
25646	JVP	MDL-2	2A	\$.59	\$.55	\$.49
69535	JVP	MDL-3	3A	\$.49	\$.45	\$.39
653511	LTL	313003HXP	3A	\$.55	\$.49	\$.45
25672	JVP	MDL-5	5A	\$.59	\$.55	\$.49
69570	JVP	MDL-10	10A	\$.59	\$.55	\$.49

Circuit Breakers

- Quick connect style terminals
- Actuator: black plastic button
- Mounting hole: 0.450"
- Included hardware: nut, knurled nut, ID plate

Part No.	*Mfr.	P/N	Cur. Rating (A @ VAC)	1	10	100	500
621376	JVP	35-2105	5 @ 125/250	\$3.95	\$3.69	\$3.29	\$2.95
621413	JVP	35-2110	10 @ 125/250	3.95	3.69	3.29	2.95
621430	JVP	35-2115	15 @ 125/250	3.95	3.69	3.29	2.95
621448	JVP	35-2120	20 @ 125/250	3.95	3.69	3.29	2.95

LA & ZA Equivalent Series Radial Leaded Varistors

Fig. 1	Fig. 2	Fig. 3	Fig. 4	Fig. 5	Fig. 6
.255"	.411"	.847"	.612"	.307"	.563"
.292"	.426"	.875"	.638"	.323"	.597"
1.0"	1.0"	1.0"	1.0"	1.0"	1.0"
.20"	.328"	.41"	.308"	.20"	.315"

* Web Code: CEF

ZA Series

Part No.	*Mfr.	Product No.	Continuous Voltage		Transient Energy Joules	Max. Clamping Voltage		Fig.	Pricing		
			V _{M(AC)}	V _{M(DC)}		V _C	I _{PK(A)}		1	10	100
666793	JVP	V22ZA1 [Ⓜ]	7	14	22	0.9	43	1	*	\$.09	\$.08
667382	JVP	V18ZA1 [Ⓜ]	11	18	0.8	36	2.5	1	*	.09	.08
666785	JVP	V22ZA05 [Ⓜ]	14	22	0.4	80	1	2	*	.19	.15
666822	JVP	V24ZA50 [Ⓜ]	14	22	13	43	20	3	*	.09	.08
666831	JVP	V27ZA05 [Ⓜ]	17	27	0.5	60	1	2	*	.09	.08
666777	JVP	V18ZA40 [Ⓜ]	20	11	18	10	36	3	*	.09	.08
666881	JVP	V56ZA8 [Ⓜ]	35	56	10	110	10	4	*	.09	.08
666890	JVP	V68ZA2-VP [Ⓜ]	40	68	2.5	135	2.5	1	*	.09	.08
666929	JVP	V82ZA4 [Ⓜ]	50	82	8	135	25	5	*	.09	.08
666953	JVP	V150ZA20 [Ⓜ]	95	150	50	250	100	3	*	.09	.08
666988	JVP	V180ZA10 [Ⓜ]	115	180	30	300	50	4	*	.09	.08
667008	JVP	V330ZA05 [Ⓜ]	210	330	6.5	580	5	2	*	.09	.08

LA Series

34446	◆	V130LA10A	130	175	38	340	50	6	\$.39	\$.35	\$.29
34462	◆	V130LA20A	130	175	70	340	100	3	.59	.55	.49
1762883	LTL	V130LA20AP	130	175	70	340	100	3	.49	.45	.39
667067	JVP	V140LA5	130	200	70	340	50	5	*	.09	.08
667059	JVP	V130LA20B	130	200	140	340	100	3	.59	.55	.49
667121	JVP	V150LA20A	150	240	170	395	100	3	.39	.35	.29
34471	◆	V250LA20	250	330	72	650	50	6	.39	.35	.29
667219	JVP	V420LA40B	420	680	23	1120	100	3	.39	.35	.29
667227	JVP	V480LA40A	485	780	148	1290	50	6	.29	.25	.22
667235	JVP	V480LA80B	485	780	265	1290	100	3	.39	.35	.29

* BSM = Bussman | JVP = Jameco ValuePro | LTL = Littelfuse | + Manufacturer Varies

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Component Cabinet Kits

Includes the Most Popular Components with Extra Spaces for Your Customized Expansion

- Each kit includes drawer component cabinet (319600) and 20 plastic dividers (319611)
- Each kit has the most popular component in its category
- Each kit is designed for your specific expansion
- Includes identification labels for each drawer, with reorder numbers to replenish stock and blank adhesive labels for empty drawers
- Free standing or wall mountable cabinet • Weight of kits: 4.6 to 6.4 lbs.
- Cabinet size: 6.0"L x 15.0"W x 7.9"H • Drawer size: 5.5"L x 2.7"W x 1.5"H
- 20 clear plastic drawers (319601) and 20 dividers (319611) • Cabinet: ABS-black (P/N 319600 see pg 173)

20-drawer
component cabinet
with every kit!



7400 Series IC Kit

SAVE \$200

Includes 350 pcs. (30 Types) 7400 (TTL) Integrated Circuits

10 each	10 each	10 each	10 each	10 each	20 each
7402	7416	7438	74123	74160	7400
7405	7417	7447	74132	74174	7404
7408	7427	7485	74151	74175	7406
7410	7430	74107	74153	74279	7407
7414	7432	74121	74157		7474

Part No.	Description	1	5
84953	350 pcs. 7400 series IC kit	\$199.95	\$179.95

74LS00 Series IC Kit

SAVE \$76

Includes 420 pcs. (35 Types) 74LS00 (TTL) Integrated Circuits

10 each	10 each	10 each	10 each	20 each
74LS05	74LS73	74LS125	74LS193	74LS00
74LS10	74LS75	74LS139	74LS240	74LS02
74LS11	74LS85	74LS151	74LS244	74LS04
74LS14	74LS86	74LS155	74LS245	74LS08
74LS20	74LS90	74LS157	74LS273	74LS32
74LS30	74LS93	74LS174	74LS373	74LS74
74LS47	74LS123	74LS175	74LS374	74LS138

84961	420 pcs. 74LS series IC kit	\$149.95	\$129.95
130391	Refill for 84961 (420 pcs.)	134.95	119.95

CD4000 Series (CMOS) IC Kit

SAVE \$25

Includes 300 pcs. (25 Types) CD 4000 Series Integrated Circuits

10 each	10 each	10 each	10 each	20 each
CD4015	CD4024	CD4051	CD4093	CD4001
CD4016	CD4027	CD4069	CD4511	CD4011
CD4017	CD4040	CD4070	CD4538	CD4013
CD4020	CD4046	CD4071	CD4543	CD4049
CD4023	CD4050	CD4081	CD4584	CD4066

84970	300 pcs. CD 4000 series IC kit....	\$79.95	\$69.95
130403	Refill for 84970 (300 pcs.)	64.95	59.95

Linear IC Kit

SAVE \$66

Includes 480 pcs. (40 Types)

10 each	10 each	10 each	10 each	20 each
TL72CP	LM337T	LF412CN	ULN2803A	LM317T
TL74CN	LF353N	LMC555CN	NE5532N	LM324N
TL082CP	LF356N	LM556N	7808T	LM339N
TL084CN	LM358N	LM723CN	78L12CZ	LM741CN
MAX232CPE	LM386N-1	LM1458N	7815T	LM555CN
LM301N	LM386N-3	DS1488N	7905T	7805T
LM308N	LM393N	DS1489N	7912CT	78L05CZ
LM311N	LF411CN	ULN2003AN	7915CT	7812T

84988	480 pcs. (40 types) Linear IC kit	\$189.95	\$169.95
130411	Refill for 84988 (480 pcs.)	174.95	159.95

Transistor Kit

Includes 560 pcs. (20 Types)

10 each	10 each	10 each	10 each	100 each
2N2222A	2N4401	MJE3055T	TIP31A	2N3904
2N2907A	2N4403	MPF102	TIP32A	2N3906
2N3053	2N5951	MPSA06	TIP102	PN2222
2N3055	2N7000	MPSA13	TIP120	PN2907

82595	560 pcs. Transistor kit	\$69.95	\$59.95
130374	Refill for 82595 (560 pcs.)	54.95	49.95

Diode and Rectifier Kit

Includes 420 pcs. (15 Types) Zener Switching & Silicon Rectifiers

10 each	10 each	10 each	10 each	100 each
1N270	1N4007	1N4735A	1N5408	1N914
1N751A	1N4150	1N4742A	C106B1	1N4004
1N4001	1N4733A	1N5404	KBP04M	1N4148

82587	420 pcs. Diode kit	\$39.95	\$34.95
130366	Refill for 82587 (420 pcs.)	29.95	26.95

1/8-Watt Carbon Film Resistor Kit

Includes 540 pcs. (30 Values) 1/8-Watt 5% Resistors

10 each	10 each	10 each	10 each	10 each	50 each	50 each
10Ω	390Ω	2.2kΩ	6.8kΩ	47kΩ	100Ω	4.7kΩ
47Ω	470Ω	2.7kΩ	15kΩ	470kΩ	220Ω	10kΩ
150Ω	680Ω	3.3kΩ	22kΩ	1MΩ	1kΩ	100kΩ
270Ω	1.5kΩ	5.1kΩ	27kΩ	10MΩ	—	—
330Ω	2kΩ	5.6kΩ	33kΩ	—	—	—

Part No.	Description	1	5
108329	540 pcs. 1/8-watt Resistor kit	\$25.95	\$22.95
108303	Refill for 108329 (540 pcs.)	10.95	8.95

1/4-Watt Carbon Film Resistor Kit

Includes 540 pcs. (30 Values) 1/4-Watt 5% Resistors

10 each	10 each	10 each	10 each	10 each	50 each	50 each
10Ω	390Ω	2kΩ	5.6kΩ	47kΩ	100Ω	4.7kΩ
47Ω	470Ω	2.2kΩ	15kΩ	470kΩ	220Ω	10kΩ
150Ω	680Ω	2.7kΩ	20kΩ	1MΩ	1kΩ	100kΩ
270Ω	1.2kΩ	3.3kΩ	22kΩ	10MΩ	—	—
330Ω	1.5kΩ	5.1kΩ	33kΩ	—	—	—

81832	540 pcs. 1/4-watt Resistor kit	\$27.95	\$25.95
103166	Refill for 81832 (540 pcs.)	12.95	10.95

1/2-Watt Carbon Film Resistor Kit

Includes 540 pcs. (30 Values) 1/2-Watt 5% Resistors

10 each	10 each	10 each	10 each	10 each	50 each	50 each
10Ω	390Ω	2.2kΩ	6.8kΩ	47kΩ	100Ω	4.7kΩ
47Ω	470Ω	2.7kΩ	15kΩ	470kΩ	220Ω	10kΩ
150Ω	680Ω	3.3kΩ	22kΩ	1MΩ	1kΩ	100kΩ
270Ω	1.5kΩ	5.1kΩ	27kΩ	10MΩ	—	—
330Ω	2kΩ	5.6kΩ	33kΩ	—	—	—

107879	540 pcs. 1/2-watt Resistor kit	\$29.95	\$26.95
107853	Refill for 107879 (540 pcs.)	15.95	14.25

1/2-Watt Single Turn Cermet Pot Kit

Includes 100 pcs. (8 Types)

10 each	10 each	10 each	10 each	10 each
63P500Ω	63P2KΩ	63P10KΩ	63P50KΩ	63P500kΩ
63P1KΩ	63P5KΩ	63P20KΩ	63P100kΩ	63P1MΩ

85032	100 pcs. single turn Pot kit	\$74.95	\$64.95
-------	------------------------------------	---------	---------

3/4-Watt 15 Turn Cermet Pot Kit

Includes 100 pcs. (10 Values) 3/4-Watt Linear Taper Potentiometer

10 each	10 each	10 each	10 each	10 each
43P500Ω	43P2KΩ	43P10KΩ	43P50KΩ	43P500kΩ
43P1KΩ	43P5KΩ	43P20KΩ	43P100kΩ	43P1MΩ

85041	100 pcs. 15 turn Pot kit	\$84.95	\$74.95
-------	--------------------------------	---------	---------

LEDs & Mounting Hardware Kit

Includes 560 pcs. (20 Types) LEDs and Mounting Hardware

SAVE \$14

10 each	10 each	10 each	10 each	100 each
11359	34657	34761	114673	23077
11797	34673	104248	114681	95513
14277	34690	104256	136493	202471
34606	34711	104264	333569	2006730

84996	560 pcs. LED & Hardware kit	\$69.95	\$59.95
-------	----------------------------------	---------	---------

Switch Kit

SAVE \$64

Includes 150 pcs. (15 Types) Pushbutton, DIP & Toggle Switches

10 each	10 each	10 each	10 each	10 each
21910	21979	26358	26649	109171
21936	26315	26367	38818	139012
21952	26332	26623	76523	153252

85059	150 pcs. Switch kit	\$99.95	\$89.95
-------	---------------------------	---------	---------

85059 (Switch Kit)

81841 (Capacitor Kit)

Spacers & Electronic Hardware Kit

Includes 2700 pcs. (27 Types) Spacer, Hex Nuts Flat, Tooth & Lock Washers and Slotted PH Screws

100 each	100 each	100 each	100 each	100 each	100 each
Spacers	Hex Nuts	Flat	Internal Tooth	Split Lock	PH Machine
—	2-56	#2	#2	2-56 x 1/4, 1/2	—
4-40	4-40	#4	#4	4-40 x 1/4, 1/2	—
6-32	6-32	#6	#6	6-32 x 1/4, 1/2	—
8-32	8-32	#8	#8	8-32 x 1/4, 1/2	—

Part No.	Description	1	5
108433	2700 pcs. Electronic Hardware kit	\$99.95	\$89.95

Monolithic Ceramic Capacitor Kit

Includes 280 pcs. (10 Types) 50V ±20% Monolithic Ceramic Caps.

10 each	10 each	10 each	10 each	100 each
22pF	.001μF	.047μF	.22μF	.01μF
100pF	.0022μF	.47μF	1μF	.1μF

171475	280 pcs. Monolithic Cap. kit	\$36.95	\$32.95
171483	Refill for 171475 (280 pcs.)	24.95	21.95

Radial Electrolytic Capacitor Kit

Includes 240 pcs. (15 Values) Radial Electrolytic Capacitors

10 each	10 each	20 each	20 each	20 each
100μF @ 50V	1000μF @ 16V	1μF @ 50V	3.3μF @ 50V	22μF @ 50V
220μF @ 25V	2200μF @ 25V	1μF @ 100V	4.7μF @ 50V	47μF @ 50V
470μF @ 25V	3300μF @ 25V	2μF @ 50V	10μF @ 50V	100μF @ 25V

81867	240 pcs. Radial Capacitor kit	\$39.95	\$34.95
130331	for 81867 (240 pcs.)	29.95	24.95

Axial Capacitor Kit

SAVE \$16

Includes 140 pcs. (10 Values) ±20% Axial Electrolytic Capacitors

10 each	10 each	10 each	20 each	20 each
47μF @ 50V	220μF @ 50V	1000μF @ 25V	1μF @ 50V	4.7μF @ 50V
100μF @ 50V	470μF @ 50V	2200μF @ 16V	2.2μF @ 50V	10μF @ 50V

81875	240 pcs. Axial Capacitor kit	\$39.95	\$34.95
130340	Refill for 81875 (140 pcs.)	26.95	23.95

Ceramic Disc Capacitor Kit

SAVE \$16

Includes 520 pcs. (10 Values) 50V Ceramic Disc Capacitors

20 each	20 each	20 each	100 each	100 each
10pF	47pF	470pF	.022μF	.01μF
22pF	100pF	.001μF	.047μF	.1μF

81859	520 pcs. Ceramic Capacitor kit	\$39.95	\$34.95
130232	Refill for 81859 (520 pcs.)	26.95	23.95

Mylar Capacitor Kit

SAVE \$21

Includes 280 pcs. (10 Values) 100V ±10% Mylar Capacitors

10 each	10 each	10 each	10 each	100 each
.001μF	.022μF	.047μF	.47μF	.01μF
.0068μF	.033μF	.22μF	1μF	.1μF

81883	280 pcs. Mylar Capacitor kit	\$39.95	\$34.95
130358	Refill for 81883	29.95	24.95

Dipped Tantalum Capacitor Kit

SAVE \$13

Includes 150 pcs. (15 Values) ±20% Dipped Tantalum Capacitors

10 each	10 each	10 each	10 each	10 each
.1μF @ 35V	1μF @ 25V	3.3μF @ 25V	10μF @ 16V	22μF @ 16V
.22μF @ 35V	1μF @ 16V	4.7μF @ 35V	10μF @ 35V	33μF @ 25V
.47μF @ 25V	2.2μF @ 16V	6.8μF @ 35V	15μF @ 25V	47μF @ 25V

81841	150 pcs. Tantalum Capacitor kit	\$79.95	\$69.95
130260	Refill for 81841 (150 pcs.)	64.95	54.95

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



135394 - Capacitors



135271 - LEDs



169578 - Photocells



18294 - Toy Motors



149649 - Fans



55968 - Spacers



319600 - Cabinet

• Opened grab bags are not returnable

• Use our 20-drawer cabinet w/ labels to store your components, P/N 319600

Shaded in brown on this page you will find Jameco's nine (9) most popular component Grab Bags. They are all individually bagged, and are combined to make up the Schwab's School Selection (P/N 163213) referenced towards the bottom of the page.

Capacitor Assortments

Part No.	Product No.	Description	Wt. (lbs.)	1	10
17857	GB100	200 assorted ceramic disc capacitors	0.2	\$6.95	\$5.95
135335	GB100LB	900 assorted ceramic disc capacitors	1.0	14.95	12.95
17881	GB101	100 assorted mylar capacitors	0.3	5.95	4.95
135458	GB101LB	400 assorted mylar capacitors	1.0	14.95	12.95
17911	GB102	100 assorted electrolytic capacitors radial, axial, snap	0.5	6.95	5.95
135394	GB102LB	300 assorted electrolytic capacitors radial, axial, snap (photo above)	1.0	12.95	10.95
17945	GB103	100 assorted tantalum capacitors (dipped epoxy and solid tubular)	0.1	12.95	10.95

Inductors and Chokes

Part No.	Product No.	Description	Wt. (lbs.)	1	10
2081342	GB200	100 assorted axial chokes & inductors	2.0	\$9.95	\$8.95

Resistor and Resistor Network Assortments

Part No.	Product No.	Description	Wt. (lbs.)	1	10
134130	GB115	200 asst. 1/8, 1/4, 1/2 resistors (2.5&10%)	0.8	\$5.95	\$4.95
18104	GB116	200 assorted 1/4W resistors (5&10%)	0.1	4.95	3.95
135351	GB116LB	2000 assorted 1/4W resistors	0.8	14.95	12.95
18139	GB117	200 assorted 1/2W resistors (5&10%)	0.2	6.95	5.95
18163	GB118	200 asst. 1/8W resistor networks (2&8.5%) (8 & 10-pin SIP packages, 22Ω-150k)	0.3	4.95	4.49

Trimmers, Single and Multi-Turn Potentiometers

Part No.	Product No.	Description	Wt. (lbs.)	1	10
18075	GB113	100 assorted 1/10W to 1/8W trimmer pots (100Ω to 2MΩ values)	0.1	\$6.95	\$5.95
18278	GB174	100 assorted 1/4W, 1/2W & 3/4W single/ multi-turn pots (100Ω to 5MΩ assorted values)	0.2	9.95	8.95
135407	GB174LB	300 assorted 1/4W, 1/2W & 3/4W single/ multi-turn pots (100Ω to 5MΩ assorted values)	1.0	19.95	17.95

LEDs, 7-Segment Displays and Photocells

Part No.	Product No.	Description	Wt. (lbs.)	1	10	25
18041	GB110	100 assorted sizes & colored LEDs (T1 & T1½ round and rectangular)	0.1	\$7.95	\$6.95	\$5.95
18323	GB186	500 assorted sizes #18041 LEDs	0.3	24.95	21.95	19.95
135271	GB110LB	1900 assorted #18041 LEDs	1.0	59.95	54.95	49.95
18201	GB162	50 assorted sizes of colored displays (7-segment LED, modules, stick)	0.5	10.95	9.95	8.95
169578	GB125	100 assorted values photocells	0.2	21.95	19.95	17.95

Schwab's Electronic Component School Selection

Jameco's nine (9) most popular Grab Bags (highlighted on this page) are all individually bagged. North Dakota Engineer, Loren Schwab, recommended this selection of products as a standard item. He also recommended a 20-drawer component cabinet with labels (319600, see photo above) for storage.

Includes: Ceramic and electrolytic capacitors, diodes, transistors, potentiometers, LEDs, 1/4W resistors, switches, spacers and standoffs.

Part No.	Product No.	Description	Wt. (lbs.)	1	10	50
163213	GB197	Schwab's School Selection	2.2	\$49.95	\$44.95	\$39.95
319600	6897CAB	20 drawer component cabinet	3.5	16.95	15.49	13.95

\$79.55 Value



What's your suggestion?



149649 - Fans



55968 - Spacers



319600 - Cabinet

Integrated Circuits, Sockets and Male Headers

Part No.	Product No.	Description	Wt. (lbs.)	1	10
17996	GB108	100 assorted TTL DIP & SMDs (74, 74ALS, 74HC, 74HCT, 74F, 74LS, 74S)	0.2	\$9.95	\$8.95
135280	GB108LB	400 assorted TTL series DIP & SMDs (same as P/N 17996, above)	1.0	24.95	22.49
18024	GB109	100 asst. linear series (NSC, Motorola, TI) TO-3, 8 & 14-pin DIP, SOIC packages	0.1	12.95	11.49
145242	GB109LB	300 assorted linear series (NSC, Motorola, TI) TO-3, 8 & 14-pin DIP, SOIC packages	0.5	29.95	26.95
105620	GB120	100 assorted sockets (DIP, PGA, SIMM, SIP)	0.3	6.95	5.95
135386	GB120LB	300 assorted sockets (DIP, PGA, SIMM, SIP)	1.0	14.95	12.95
2095138	GB204	100 asst. .079/100 male headers (breakway) Straight, right angle, single and double row	0.3	9.95	8.95

Diodes, Transistors and Crystals/Oscillators

Part No.	Product No.	Description	Wt. (lbs.)	1	10	25
17961	GB107	200 assorted diodes (zener, switching, silicon)	0.1	\$9.95	\$8.95	\$7.95
18171	GB127	100 assorted transistors (NPN, PNP, power)	0.1	7.95	6.95	5.95
114446	GB150	100 assorted crystals/oscillators	0.2	7.95	6.95	5.95

Switches, Toy Motors, Gears and Fans

Part No.	Product No.	Description	Wt. (lbs.)	1	10
18235	GB165	50 assorted switches (toggle, pushbutton, rocker, slide)	0.4	\$8.95	\$7.95
135378	GB165LB	150 assorted #18235 switches	2.0	19.95	17.95
18294	GB182	5 assorted toy DC motors (1.5-24V)	0.5	7.95	6.95
149649	GB193	5 assorted AC&DC fans (photo above)	4.5	9.95	8.95
1943094	GB198	30 assorted gears & shafts, plastic/nylon (20, 22, 23, 26, 30, 58, 63 teeth vary)	0.3	12.95	10.95

Spacer, Standoff and Terminal Assortments

• Round • Hex • Aluminum • Brass • Steel • Plastic • Nylon

Part No.	Product No.	Description	Wt. (lbs.)	1	10
55968	GB140	100 assorted 4-40, 6-32, 8-32 round/hex, alum/brass/nylon, spacers/standoffs	0.3	\$14.95	\$12.95
135423	GB140LB	300 assorted same as P/N 55968	1.0	29.95	26.95
2082118	GB203	100 assorted solderless terminals spade, ring, faston, butt, crimp types	0.2	7.95	6.95

Screw Hardware & Drill Bit Assortments

• Screws, nuts, washers and lock washers; sizes 2-56, 4-40, 6-32 and 8-32
• Plastic • Steel • Brass • Aluminum • Nylon

Part No.	Product No.	Description	Wt. (lbs.)	1	10	25
171571	GB149	500 assorted types of screws, nuts, washers & lock washers	1.0	\$6.95	\$5.95	\$4.95
171635	GB149LB	1400 asst. same as P/N 171571	3.2	15.95	14.95	13.95
2082038	GB202	20 assorted drill bits 10 sizes: .021" (#75) thru .12" (#31)	0.3	14.95	13.49	11.95

Bumpers and Rubber Feet Assortment

Part No.	Product No.	Description	1	10
2081385	GB201	100 assorted bumpers & adhesive rubber feet	\$8.95	\$7.95

Surprise Electronic Component Grab Bag

Axial and radial electrolytics, monolithic, dipped silver mica and mylar capacitors, ICs, connectors, sockets, headers, thermistors, LEDs, resistor networks, diodes, standoffs, transistors, oscillators/resonators, inductors, crystals, resistors, pots and switches (1000 pcs.)

Our Best Seller!

Part No.	Product No.	Description	1	10
135263	GB191LB	1000 assorted pieces electronic components	\$19.95	\$17.95


*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Aluminum Radial-Lead Polarized Electrolytic Capacitors (±20%) 85°C

* Web Code: CCE



Leakage Current (20°C)	After 1 min.	0.03CV or 4µA, whichever is greater
	After 2 min.	0.01CV or 3µA, whichever is greater



† CROSS REFERENCES: Nichicon: LB/VX/USA/SR/SA/UVR; Elna: RC2/RE2; IC: RAR/RSS; Marcon: SEM/SSM; Rubycon: MS7/TWSS; Sprague: 501D/513D; UCC: SME/SRE/SRA/SRG; Panasonic: KA/KS/SU

* Order in multiples of 10 or 100

* Order in multiples of 10 or 100

Part No.	Cross Ref. No. †	*Mfr.	Value (µF)	Volt	Size (mm) * D x H x L.S.	Pricing			
						1	10	100	500
609043	UVR2A0R1MDD	JVP	0.1	100	5 x 11 x 2	*	\$.09	\$.07	\$.05
330465	RA0.47/50	JVP	0.47	50	5 x 11 x 2	*	.05	.04	.03
330431	RA1/25	JVP	1	25	5 x 11 x 2	*	.06	.05	.04
94161	5R1/50	JVP	1	50	4 x 5 x 1.5	*	.13	.10	.08
94326	7R1/50	♦	1	50	4 x 7 x 2.1	*	*	.009	.008
29831	R1/50	♦	1	50	5 x 11 x 2	*	.06	.05	.04
29833	R1/50	JVP	1	50	5 x 11 x 2	*	.08	.06	.05
330941	RN1/50	JVP	1	50	5 x 11 x 2	*	.15	.12	.09
115423	R1/63	♦	1	63	5 x 11 x 2	*	*	.009	.008
1946324	R2.2/6.3TR	♦	2.2	6.3	4 x 8 x 4.5	*	*	.009	.008
93729	R2.2/50	♦	2.2	50	5 x 11 x 2	*	.07	.05	.04
93731	R2.2/50	JVP	2.2	50	5 x 11 x 2	*	.08	.06	.05
135184	R3.3/50	JVP	3.3	50	5 x 11 x 2	*	.12	.09	.07
31000	R4.7/50	♦	4.7	50	5 x 11 x 2	*	.06	.05	.04
31002	R4.7/50	JVP	4.7	50	5 x 11 x 2	*	.08	.06	.05
1946332	R10/6.3TR	♦	10	6.3	3 x 6 x 4	*	*	.009	.008
1946341	R10/6.3ATR	♦	10	6.3	4 x 7 x 5	*	.04	.03	.02
198839	R10J/16	JVP	10	16	5 x 11 x 2	*	.08	.06	.045
94212	5R10/25	JVP	10	25	4 x 5 x 1.5	*	.10	.08	.06
1946359	R10/25TR	♦	10	25	4 x 7 x 5	*	*	.009	.008
330916	RN10/25	JVP	10	25	5 x 11.5 x 1.5	*	.15	.12	.09
1946367	R10/25ATR	♦	10	25	5 x 11 x 5	*	.05	.04	.03
94221	5R10/35	JVP	10	35	5 x 5 x 2	*	.10	.08	.06
29891	R10/50	♦	10	50	5 x 11 x 2	*	.06	.05	.04
29893	R10/50	JVP	10	50	5 x 11 x 2	*	.10	.08	.06
330482	RA10/63	JVP	10	63	5 x 11 x 2	*	.10	.08	.06
330609	RA10/250	JVP	10	250	10 x 16 x 5	.35	.25	.19	.15
1946287	R22/10TR	♦	22	10	5 x 11 x 5	*	*	.009	.008
1946295	R22/16	♦	22	16	5 x 12 x 5	*	.05	.03	.015
1946308	R22/25TR	♦	22	25	5 x 11 x 5	*	.05	.03	.015
198943	EC2235H511	JVP	22	35	5 x 11 x 2	*	.05	.03	.02
93739	R22/50	JVP	22	50	5 x 11 x 2	*	.08	.06	.05
1946316	R22/50TR	♦	22	50	5 x 12 x 5	*	.06	.04	.03
93747	R33/50	JVP	33	50	6.3 x 11 x 2.5	*	.11	.09	.07
1946244	R47/16TR	♦	47	16	5 x 12 x 5	*	*	.009	.008
198863	R47J/16	JVP	47	16	6.3 x 11 x 2.5	*	.08	.06	.05
198952	R47J/35	JVP	47	35	5 x 11 x 2	*	.10	.08	.06
1946252	R47/35TR	♦	47	35	6 x 12 x 5	*	.04	.03	.02
31114	R47/50	♦	47	50	6 x 11 x 2.5	*	.06	.05	.04
31116	R47/50	JVP	47	50	6.3 x 11 x 2.5	*	.11	.09	.07
330617	RA47/250	JVP	47	250	13 x 25 x 5	.55	.45	.35	.29
609289	UVR2V470MHD	JVP	47	350	16 x 35.5 x 7.5	.75	.55	.45	.35
330676	RA47/450	JVP	47	450	18 x 30 x 7.5	1.09	.89	.75	.59
1946261	R68/16TR	♦	68	16	5 x 11 x 5	*	.10	.05	.03
207811	R100/10	♦	100	10	5 x 11 x 2	*	*	.009	.008
330422	RA100/16	JVP	100	16	5 x 11 x 2	*	.10	.08	.06
94432	7R100/16	JVP	100	16	6 x 7 x 2.5	*	.08	.06	.05
94289	5R100/16	JVP	100	16	6.5 x 5 x 2.5	*	.15	.12	.09
93761	R100/25	♦	100	25	6 x 11 x 2.5	*	.08	.06	.05
198970	R100J/35	JVP	100	35	6.3 x 11 x 2.5	*	.10	.08	.06
29962	R100/50	♦	100	50	8 x 11 x 3.5	*	.10	.08	.06

Part No.	Cross Ref. No. †	*Mfr.	Value (µF)	Volt	Size (mm) * D x H x L.S.	Pricing			
						1	10	100	500
29964	R100/50	JVP	100	50	8 x 11.5 x 3.5	*	\$.13	\$.10	\$.08
330529	RA100/100	JVP	100	100	10 x 17 x 5	*	.19	.15	.13
330580	RA100/160S	JVP	100	160	16 x 25 x 7.5	.65	.49	.39	.29
330625	RA100/250	JVP	100	250	16 x 31.5 x 7.5	1.09	.85	.65	.49
330684	RA100/450	JVP	100	450	22 x 42.5 x 10.5	2.49	2.25	1.95	1.69
198872	R220J/16	JVP	220	16	6.3 x 11 x 2.5	*	.11	.09	.07
30496	R220/25	♦	220	25	8 x 11 x 3.5	*	.10	.08	.06
30498	R220/25	JVP	220	25	8.5 x 11 x 3.5	*	.10	.08	.06
93772	R220/35	JVP	220	35	8 x 12 x 3.5	*	.15	.12	.09
93778	R220/50	♦	220	50	10 x 12 x 5	*	.14	.11	.08
93780	R220/50	JVP	220	50	10 x 16 x 5	*	.19	.15	.12
609115	UVR2C221MHD	JVP	220	160	16 x 30 x 7.5	.75	.65	.59	.49
93796	R330/25	♦	330	25	10 x 12 x 5.0	*	.12	.09	.07
198978	R330J/35	JVP	330	35	10 x 12.5 x 5	*	.19	.15	.12
330473	RA330/50	JVP	330	50	10 x 16 x 5	.29	.22	.19	.14
1946279	R470/10TR	♦	470	10	6 x 11 x 5	*	*	.009	.008
93809	R470/16	♦	470	16	8 x 11 x 3.5	*	.13	.10	.08
93811	R470/16	JVP	470	16	8 x 11.5 x 3.5	.29	.22	.17	.14
31183	R470/25	JVP	470	25	10 x 12 x 3.5	.35	.25	.19	.15
31181	R470/25	♦	470	25	10 x 12 x 5	*	.19	.15	.12
93817	R470/35	♦	470	35	10 x 16 x 5	.29	.22	.17	.14
93819	R470/35	JVP	470	35	10 x 16 x 5	.39	.32	.25	.19
93827	R470/50	JVP	470	50	10 x 20 x 5	.39	.32	.25	.19
93825	R470/50	♦	470	50	12 x 20 x 5	.35	.25	.19	.15
158465	R470B63	JVP	470	63	13 x 20 x 5	.69	.55	.45	.35
199102	R470J/100	JVP	470	100	16 x 25 x 7.5	1.15	.89	.69	.55
330456	RA680/25S	JVP	680	25	8 x 16 x 3.5	1.09	.85	.65	.49
1945436	R1000/6.3	♦	1000	6.3	10 x 13 x 5	*	.09	.07	.05
30015	R1000/16	♦	1000	16	10 x 16 x 5	.25	.22	.16	.12
30017	R1000/16	JVP	1000	16	10 x 16 x 5	.35	.25	.19	.15
93833	R1000/25	♦	1000	25	10 x 20 x 5	.35	.25	.19	.15
93835	R1000/25	JVP	1000	25	10 x 20 x 5	.39	.32	.25	.19
93841	R1000/50	JVP	1000	50	6.5 x 11.3 x 2.2	.65	.49	.39	.32
93843	R1000/50	JVP	1000	50	13 x 25 x 5	.75	.59	.49	.39
199111	R1000J/100	JVP	1000	100	18 x 41 x 7.5	1.75	1.49	1.25	.99
30533	R2200/25	♦	2200	25	12 x 25 x 5.0	.65	.49	.39	.29
30535	R2200/25	JVP	2200	25	13 x 21 x 5	.69	.55	.45	.35
198986	R2200J/35	JVP	2200	35	16 x 25 x 7.5	.85	.69	.55	.45
608956	UVR1H22MHD	JVP	2200	50	16 x 30 x 7.5	1.15	.89	.69	.55
198898	R3300J/16	JVP	3300	16	13 x 21 x 5	.65	.49	.39	.29
30893	R3300/25	JVP	3300	25	13 x 29 x 5	.85	.69	.55	.45
198994	R3300J/35	JVP	3300	35	16 x 30 x 7.5	1.09	.89	.75	.59
198901	R4700J/16	JVP	4700	16	16 x 25 x 7.5	.85	.69	.55	.45
93850	R4700/25	♦	4700	25	16 x 31 x 7.5	.85	.69	.55	.45
93852	R4700/25	JVP	4700	25	16 x 31.5 x 7.5	.95	.79	.59	.49
199006	R4700J/35	JVP	4700	35	18 x 35 x 7.5	1.35	1.15	.99	.85
163302	R4700/50	JVP	4700	50	22 x 41 x 10	1.85	1.59	1.39	1.19
163301	R4700/50	♦	4700	50	22 x 42 x 10	1.65	1.39	1.19	1.05
198935	R6800J/25	JVP	6800	25	18 x 35.5 x 7.5	1.25	1.05	.85	.65
608892	UVR1A103MHD	JVP	10000	10	16 x 35.5 x 7.5	.69	.55	.45	.35
608948	UVR1C103MHD	JVP	10000	16	18 x 35 x 7.5	1.29	1.09	.95	.79

Note: Above case sizes may have ± tolerances "TR" at the end of Cross Ref. numbers are Tape and Reel

* Capacitor dimensions and styles may vary on items with various manufacturers

* Non-polarized

* JVP = Jameco ValuePro | ♦ Manufacturer Varies

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.


Aluminum Radial-Lead Polarized Electrolytic Capacitors (±20%) 105°C

* Web Code: HAA

105°C – HT Type General Purpose



Leakage Current (20°C)	After 1 min.	0.03CV or 4μA, whichever is greater
	After 2 min.	0.01CV or 3μA, whichever is greater



† CROSS REFERENCES: Nichicon: LB/VX/USA/SR/SA/UPW/UVZ/UHE; Elna: RC2/RE2; IC: RAR/RSS; Marcon: SEM/SSM; Rubycon: MS7/TWSS; Sprague: 501D/513D; UCC: SME/SRE/SRA/SRG; Panasonic: KA/KS/SU

* Order in multiples of 10 or 100

* Order in multiples of 10

Part No.	Cross Ref. No. †	*Mfr.	Value (μF)	Volt	Size (mm) * D x H x L.S.	Pricing			
						1	10	100	500
609545	UVZ1H0R1MDD	JVP	0.1	50	5 x 11 x 2	*	\$.11	\$.08	\$.06
330772	RB1/50	JVP	1	50	5 x 11 x 2	*	.07	.05	.036
158491	R1B100	JVP	1	100	5 x 11 x 2	*	.12	.09	.07
609959	UVZ2E010MED	JVP	1	250	8 x 11 x 3.5	*	.19	.15	.12
609561	UVZ1H2R2MDD	JVP	2.2	50	5 x 11.5 x 2	*	.09	.06	.045
330781	RB4.7/50	JVP	4.7	50	5 x 11 x 2	*	.07	.05	.04
330692	RB10/16	JVP	10	16	5 x 11 x 2	*	.11	.08	.06
330799	RB10/50	JVP	10	50	5 x 11 x 2	*	.07	.05	.037
607849	UPW1H100MDD	JVP	10	50	5 x 11 x 2	*	.12	.09	.07
609641	UVZ1J100MDD	JVP	10	63	5 x 11 x 2	*	.15	.11	.09
610036	UVZ2W100MHD	JVP	10	450	13 x 21 x 5	.65	.49	.39	.32
158327	R22B35	JVP	22	35	5 x 11 x 2	*	.09	.06	.045
609650	UVZ1J220MDD	JVP	22	63	5 x 11 x 2	*	.10	.08	.06
609828	UVZ2C220MPD	JVP	22	160	10 x 15 x 5	.29	.25	.19	.15
609975	UVZ2E220MHD	JVP	22	250	13 x 20 x 5	.39	.35	.29	.25
607929	UPW1H270MHD	JVP	27	50	5 x 11 x 2	*	.09	.07	.05
609684	UVZ1J330MED	JVP	33	63	6.3 x 11 x 2.8	*	.12	.09	.07
608374	UPW2A330MPD6	JVP	33	100	8 x 15 x 3.5	*	.12	.09	.07
609502	UVZ1C470MDD	JVP	47	16	5 x 11 x 2	*	.10	.07	.05
1945428	R47/35	♦	47	35	6.3 x 11 x 2	*	.10	.07	.05
330820	RB47/50	JVP	47	50	6.3 x 11 x 2.5	*	.11	.08	.06
608139	UPW1J470MPD	JVP	47	63	8 x 11.5 x 3.5	*	.19	.15	.12
2100241	RB47/100	♦	47	100	10 x 16 x 5	*	.19	.15	.12
610010	UVZ2E470MHD	JVP	47	250	13 x 25 x 5	.65	.49	.39	.32
606862	UHE1H560MED	JVP	56	50	8.0 x 11 x 3.5	*	.09	.05	.03
1946228	RB100/10	♦	100	10	5 x 11 x 3.5	*	*	.009	.008
330740	RB100/25	JVP	100	25	6.3 x 11 x 2.5	*	.11	.08	.06
158394	R100B50	JVP	100	50	8 x 11.5 x 3.5	*	.15	.12	.09
608032	UPL1J101MHG6	♦	100	63	13 x 15 x 5	*	*	.009	.008
609748	UVZ2A101MPD	JVP	100	100	10 x 20 x 5	.39	.32	.25	.19
609967	UVZ2E101MHD	JVP	100	250	16 x 31 x 7.5	1.35	1.09	.85	.65
608340	ECA1JFQ151L	♦	150	63	10 x 21 x 5	*	.12	.09	.07
1946236	RB180/10	♦	180	10	6.5 x 11 x 2.5	*	*	.009	.008
207845	R180/16	JVP	180	16	6 x 15 x 2.5	*	.05	.03	.015
606934	EEUF1J181	♦	180	63	10 x 20 x 5	*	.12	.07	.04
606555	UHE1A221MED	JVP	220	10	6.3 x 11 x 2.5	*	.07	.05	.04
158263	R220B25	JVP	220	25	8 x 11 x 3.5	*	.15	.11	.08
606820	UHE1H221MPD	JVP	220	50	10 x 16 x 5	.39	.32	.25	.19

* Capacitor dimensions and styles may vary on items with various manufacturers

Part No.	Cross Ref. No. †	*Mfr.	Value (μF)	Volt	Size (mm) * D x H x L.S.	Pricing			
						1	10	100	500
158407	R220B50	JVP	220	50	10 x 17 x 5	\$.39	\$.32	\$.25	\$.19
609721	UVZ1V331MPD	JVP	330	35	10 x 16 x 5	*	.19	.15	.12
607136	UHE2A331MHD	JVP	330	100	12.5 x 40 x 5	.65	.59	.55	.49
609852	UVZ2C331MHD	JVP	330	160	18 x 40 x 7.5	.49	.45	.39	.35
606977	UHE1J391MHD	JVP	390	63	18 x 15 x 7.5	.29	.25	.19	.15
158203	R470B16	JVP	470	16	8 x 11 x 3.5	*	.19	.15	.12
158289	R470B25	♦	470	25	10 x 16 x 5	*	.19	.15	.12
606740	UHE1E471MPD6	JVP	470	25	10 x 17 x 5	.32	.25	.19	.15
606854	UHE1H471MPD	JVP	470	50	13 x 20 x 5	.45	.35	.29	.22
608016	UPW1H561MHD	JVP	560	50	13 x 25 x 5	.49	.39	.29	.25
608671	UHE1H681MHD	JVP	680	50	13 x 28 x 5	.85	.65	.49	.39
608163	UPW1J681MHD	JVP	680	63	16 x 25 x 5	.49	.39	.29	.25
607689	UPW1C821MPD	JVP	820	16	10 x 20 x 5	*	.19	.15	.12
606432	UHEQJ102MPD	JVP	1000	6.3	8 x 14 x 3.5	*	.17	.12	.09
330722	RB1000/16	JVP	1000	16	10 x 20 x 5	.35	.29	.22	.17
158298	R1000B25	JVP	1000	25	10 x 17 x 5	.45	.35	.29	.22
158378	R1000B35	JVP	1000	35	13 x 21 x 5	.55	.45	.35	.25
609553	UVZ1H102MHD	JVP	1000	50	13 x 25 x 5	.55	.45	.35	.29
607216	UPWQJ122MPD	JVP	1200	6.3	10 x 15 x 5	*	.15	.09	.07
606627	UHE1C122MPD	JVP	1200	16	10 x 24 x 5	.32	.25	.19	.15
606918	UHE1J122MHD	JVP	1200	63	16 x 40 x 7.5	.59	.55	.49	.45
607232	UPWQJ152MPD	JVP	1500	6.3	10 x 20 x 5	.39	.32	.25	.19
607398	UPW1A152MPD6	JVP	1500	10	10 x 20 x 5	.39	.32	.25	.19
607742	UPW1E152MHD6	JVP	1500	25	12.5 x 25 x 5	.45	.35	.29	.25
607873	UPW1H152MHD	JVP	1500	50	16 x 30 x 7.5	.99	.89	.79	.69
606467	UHEQJ182MHD	JVP	1800	6.3	10 x 20 x 5	.35	.25	.19	.15
607751	UPW1E182MHD	JVP	1800	25	13 x 25 x 5	.75	.59	.45	.35
609342	UVZQJ222MPD	JVP	2200	6.3	10 x 20 x 5	.39	.32	.25	.19
606563	UHE1A222MPD	JVP	2200	10	10 x 24 x 5	.45	.35	.29	.22
609705	UVZ1V222MHD	JVP	2200	35	16 x 26 x 7.5	.69	.55	.45	.35
158432	R2200B50	JVP	2200	50	16 x 30 x 7.5	.99	.79	.65	.55
608278	UPW1V332MHD	JVP	3300	35	18 x 33 x 7.5	1.35	1.15	.95	.75
609588	UVZ1H332MHD	JVP	3300	50	18 x 36 x 7.5	1.49	1.25	1.05	.85
607814	UPW1E472MHD	JVP	4700	25	18 x 35 x 7.5	1.25	1.05	.85	.65
607697	UPW1C822MHD	JVP	8200	16	16 x 33 x 7.5	1.19	.99	.89	.75
609473	UVZ1C103MHD	JVP	10000	16	18 x 41 x 7.5	1.19	.99	.89	.75
609326	UVZQJ153MHD	JVP	15000	6.3	16 x 35.5 x 7.5	.39	.35	.29	.25

* Capacitor dimensions and styles may vary on items with various manufacturers

Snap-Mount Large-Can Aluminum Electrolytic Capacitors (±20%)



- Operating temperature range: (SNA) -40°C to +85°C; (SNB) -40°C to +105°C
- Can-Top safety vent

* Web Code: EBG

Part No.	Cross Ref. No.	*Mfr.	Value (μF)	Volt	Size (mm) * D x H x L.S.	Pricing		
						1	10	100
331846	SNA120/450	JVP	120	450	22 x 40 x 8.6	\$2.49	\$2.25	\$1.95
331811	SNA470/250	JVP	470	250	25 x 40 x 8.6	1.95	1.75	1.49
203263	SNB470/400/5	JVP	470	450	35 x 49 x 9	6.95	5.95	4.95
155889	SN560/200	♦	560	200	23 x 41 x 9.5	1.09	.99	.89
115378	SNB4700/35	JVP	4700	35	23 x 40 x 9	.99	.89	.79
115422	SNA4700/50	JVP	4700	50	30 x 41 x 9.5	.99	.89	.75

Part No.	Cross Ref. No.	*Mfr.	Value (μF)	Volt	Size (mm) * D x H x L.S.	Pricing		
						1	10	100
331723	SNA4700/63	JVP	4700	63	25 x 40 x 9.1	\$3.49	\$3.15	\$2.85
331901	SNB6800/50	JVP	6800	50	25.2 x 42.4 x 9	3.95	3.49	2.95
157738	SNB10000/50	JVP	10000	50	35 x 40 x 12	4.75	3.75	3.25
331716	SNA15000/25	JVP	15000	25	25 x 41 x 9	3.49	2.95	2.49
2120022	U32D†	♦	33000	50	35 x 117 x 13	9.95	8.95	7.95

* Capacitor dimensions and styles may vary on items with various manufacturers

† Screw terminals

* JVP = Jameco ValuePro | ♦ Manufacturer Varies

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Electrolytic & Dipped Tantalum Capacitors


4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

JAMECO ValuePro

Aluminum Axial-Lead Electrolytic Capacitors (±20%) 85°C



Operating temperature range	-40°C to +85°C
Leakage Current (After 2 minutes 20°C)	0.02CV or 2µA, whichever is greater



* Web Code: GAA

* Order in multiples 10 or 100

Part No.	Product No.	*Mir.	Value (µF)	Voltage	Size (mm) * D x H	Pricing			
						1	10	100	500
10866	A1/50	♦	1	50V	5 x 13	*	\$.17	\$.14	\$.11
10868	A1/50	JVP	1	50V	5 x 12	.29	.22	.17	.14
93569	A2.2/50	♦	2.2	50V	6 x 13	*	.19	.15	.12
11076	A4.7/50	♦	4.7	50V	6 x 13	*	.17	.14	.11
1946201	A10/16A	♦	10	16V	5 x 13	*	*	.009	.008
1946199	A10/16	♦	10	16V	4 x 7	*	*	.009	.008
10882	A10/50	♦	10	50V	6 x 12	*	.15	.12	.09
331425	AB10/450	JVP	10	450V	13 x 25	.95	.75	.59	.49
1946210	A22/16	♦	22	16V	5 x 11	*	*	.009	.008
199268	A22J/25	JVP	22	25V	6 x 12.5	*	.19	.15	.12
331433	AB22/450	JVP	22	450V	16 x 26.5	1.75	1.49	1.25	.99
2081730	A33/35	JVP	33	35V	7 x 14	*	.12	.09	.07
135319	A47/25	♦	47	25V	8 x 16	*	.17	.14	.11
11105	A47/50	♦	47	50V	8 x 16	.25	.22	.17	.14
199188	A100J/16	JVP	100	16V	6 x 12.5	.29	.22	.17	.14
199284	A100J/25	JVP	100	25V	8 x 15	*	.19	.15	.12
93551	A100/35	♦	100	35V	8 x 16	.29	.22	.17	.14
10911	A100/50	♦	100	50V	8 x 20	.29	.22	.17	.14
10913	A100/50	JVP	100	50V	8 x 16	.32	.25	.19	.15
331380	AB100/100	JVP	100	100V	10 x 20.5	.29	.25	.19	.15

* Capacitor dimensions and styles may vary on items with various manufacturers

Part No.	Product No.	*Mir.	Value (µF)	Voltage	Size (mm) * D x H	Pricing			
						1	10	100	500
331417	AB100/250	JVP	100	250V	16 x 31	\$1.95	\$1.75	\$1.59	\$1.39
11019	A220/50	JVP	220	50V	10 x 17	.49	.39	.32	.27
199217	A470J/16	JVP	470	16V	8 x 17	.35	.29	.22	.17
199381	A470J/35	JVP	470	35V	10 x 21	.39	.32	.25	.19
11123	A470/50	JVP	470	50V	13 x 22	.75	.59	.49	.39
93633	A1000/16	JVP	1000	16V	10 x 21	.35	.29	.25	.19
10954	A1000/25	♦	1000	25V	13 x 31	.65	.49	.39	.32
10956	A1000/25	JVP	1000	25V	10 x 20	.75	.59	.49	.39
93649	A1000/35	♦	1000	35V	13 x 26	.75	.59	.49	.39
93651	A1000/35	JVP	1000	35V	13 x 22	.85	.69	.59	.49
147256	A1000/50	♦	1000	50V	16 x 31	.75	.59	.49	.39
11033	A2200/16	♦	2200	16V	16 x 40	.85	.69	.59	.49
93658	A2200/35	JVP	2200	35V	16 x 30	1.25	.99	.79	.65
199479	A2200J/50	JVP	2200	50V	18 x 33	1.95	1.75	1.49	1.25
93666	A3300/25	JVP	3300	25V	16 x 30	.85	.65	.55	.49
199487	A3300J/50	JVP	3300	50V	22 x 43	2.49	2.25	1.95	1.75
93673	A4700/25	JVP	4700	25V	22 x 39	1.35	1.15	.95	.75
158811	A4700A50	JVP	4700	50V	22 x 43	2.49	2.25	1.95	1.75
93681	A10000/16	♦	10000	16V	22 x 51	1.95	1.75	1.49	1.25
93683	A10000/16	JVP	10000	16V	16 x 40	1.95	1.75	1.49	1.25


* Capacitor dimensions and styles may vary on items with various manufacturers

JAMECO ValuePro

Resin Dipped Solid Tantalum Capacitors (±10%)

- Operating temperature range: -55°C to +85°C (+125°C with derating)
- Exceptional temperature stability
- Flame retardant coating
- Rated voltage DC: ≤ +85°C
- Moisture-resistant
- Designed for entertainment and commercial equipment
- Low leakage current

* Web Code: VAE



* Order in multiples 10

Part No.	Product No.	*Mir.	Value (µF)	Volt (V)	Size (mm) * D x H x L.S.	Pricing			
						1	10	100	500
545561	TAP104K035SCS	JVP	.10	35	4.0 x 6.0 x 2.5	\$.39	\$.32	\$.25	\$.19
33488	TM.1	JVP	.10	35	4.5 x 7.0 x 2.5	.39	.32	.25	.19
33486	TM.1/35	♦	.10	35	4.5 x 7.0 x 5.2	.32	.25	.19	.15
545570	TAP104K050SCS	JVP	.10	50	4.0 x 6.0 x 2.5	*	.19	.15	.12
33523	TM.33/35	♦	.33	35	4.5 x 7.0 x 2.5	.32	.25	.19	.15
33525	TM.33	JVP	.33	35	4.5 x 7.0 x 2.5	.39	.32	.25	.19
33507	TM.22/35	♦	.22	35	4.5 x 7.0 x 5.0	.32	.25	.19	.15
33533	TM.47	JVP	.47	35	4.5 x 7.0 x 2.5	.39	.32	.25	.19
33531	TM.47/35	♦	.47	35	4.5 x 7.0 x 2.5	.32	.25	.19	.15
61102	TM.68	JVP	.68	35	4.5 x 7.0 x 2.5	*	.12	.09	.07
546142	TAP684K050SCS	JVP	.68	50	4.3 x 7.0 x 2.5	*	.19	.15	.12
545588	TAP105K025SCS	JVP	1	25	4.3 x 7.0 x 2.5	.39	.32	.25	.19
154862	TM1/25	JVP	1	25	4.5 x 7.0 x 2.5	.39	.32	.25	.19
154860	TM1/25	♦	1	25	4.5 x 7.0 x 4.7	.32	.25	.19	.15
545596	TAP105K035SCS	JVP	1	35	4.3 x 7.0 x 2.5	.39	.32	.25	.19
33664	TM1	JVP	1	35	4.5 x 7.0 x 2.5	.39	.32	.25	.19
33662	TM1/35	♦	1	35	4.5 x 7.0 x 2.7	.35	.29	.22	.17
545609	TAP105K050SCS	JVP	1	50	4.7 x 7.5 x 2.5	.59	.55	.45	.29
94003	TM2.2/16	JVP	2.2	16	4.5 x 7.0 x 2.5	.29	.25	.19	.15
94001	TM2.2/16	♦	2.2	16	4.5 x 7.0 x 4.7	.32	.25	.19	.15
33736	TM2.2/35	JVP	2.2	35	5.0 x 8.0 x 2.5	.35	.29	.22	.17
332152	TDR2.2/50	JVP	2.2	50	6.5 x 11 x 2.5	.49	.45	.39	.35
545941	TAP335K025SCS	JVP	3.3	25	4.3 x 7.0 x 2.5	.45	.35	.29	.22
94035	TM4.7/16	♦	4.7	16	5.0 x 8.0 x 2.5	.35	.29	.22	.17
546071	TAP475K025SCS	JVP	4.7	25	4.3 x 7.0 x 2.5	.55	.45	.35	.29

Note: Above case sizes may have ± tolerances

* Capacitor dimensions and styles may vary

* Order in multiples 10

Part No.	Product No.	*Mir.	Value (µF)	Volt (V)	Size (mm) * D x H x L.S.	Pricing			
						1	10	100	500
94043	TM4.7/25	♦	4.7	25	5.0 x 8.0 x 4.7	\$.45	\$.35	\$.29	\$.22
546089	TAP475K035SCS	JVP	4.7	35	4.7 x 7.5 x 2.5	.59	.49	.39	.32
33806	TM4.7/35	♦	4.7	35	5.5 x 9.5 x 2.5	.49	.39	.32	.25
546185	TAP685K025SCS	JVP	6.8	25	4.7 x 7.5 x 2.5	.49	.39	.32	.25
33873	TM6.8/35	♦	6.8	35	6.5 x 9.0 x 4.7	.45	.35	.29	.22
545625	TAP106K010SCS	JVP	10	10	4.7 x 7.5 x 2.5	.49	.39	.32	.25
94060	TM10/16	♦	10	16	4.6 x 7.5 x 3.2	.49	.39	.32	.25
94062	TM10/16	JVP	10	16	5.0 x 8.0 x 2.5	.55	.45	.35	.29
545633	TAP106K020SCS	JVP	10	20	5.4 x 8.0 x 2.5	.45	.35	.29	.25
545641	TAP106K025SCS	JVP	10	25	5.4 x 8.0 x 2.5	.55	.45	.35	.29
94080	TM10/25	JVP	10	25	5.5 x 9.5 x 2.5	.59	.49	.39	.32
94078	TM10/25	♦	10	25	5.5 x 9.5 x 2.8	.55	.45	.35	.29
545650	TAP106K035SCS	JVP	10	35	5.4 x 8.0 x 2.5	1.15	.95	.79	.65
33691	TM10	JVP	10	35	5.5 x 11.0 x 2.5	.99	.79	.65	.49
33689	TM10/35	♦	10	35	6.5 x 11.0 x 4.7	.99	.79	.65	.49
332161	TDR10/50	JVP	10	50	8.5 x 13.0 x 2.5	1.95	1.75	1.59	1.39
545721	TAP156K010SCS	JVP	15	10	4.7 x 7.5 x 2.5	*	.15	.12	.09
545748	TAP156K020SCS	JVP	15	20	5.4 x 8.0 x 2.5	.35	.29	.25	.19
33719	TM15/25	JVP	15	25	4.5 x 8.0 x 2.5	.79	.65	.49	.39
597468	TAP156K035SCS	JVP	15	35	5.5 x 9.5 x 4.7	.99	.89	.79	.69
33751	TM22/6.3	♦	22	6.3	4.7 x 7.5 x 2.5	.29	.25	.19	.15
545852	TAP226K016SCS	JVP	22	16	5.4 x 8.0 x 2.5	.69	.55	.45	.35
94095	TM22/16	JVP	22	16	5.5 x 9.5 x 2.5	.55	.45	.35	.29
94094	TM22/16	♦	22	16	5.5 x 9.5 x 4.1	.55	.45	.35	.29

Dipped Tantalum Capacitors continued on next page

* JVP = Jameco ValuePro | ♦ Manufacturer Varies

RoHS compliant product

+ This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version.

Details on page 199.

Resin Dipped Solid Tantalum Capacitors (±10%) (Continued)

*Web Code: VAE

Part No.	Product No.	Mfr.	Value (μF)	Volt (V)	Size (mm)* D x H x L.S.	Pricing			
						1	10	100	1000
545879	TAP226K025SCS	JVP	22	25	6.0 x 9.4 x 2.5	\$1.75	\$1.49	\$1.25	\$.99
94107	TM22/25	◆	22	25	8.5 x 13.0 x 3.2	1.25	1.09	.99	.89
545991	TAP336K016SCS	JVP	33	16	6.0 x 9.4 x 2.5	1.19	.95	.85	.65
546003	TAP336K020SCS	JVP	33	20	6.0 x 9.4 x 2.5	.79	.65	.55	.49
33785	TM33/25	◆	33	25	8.5 x 13.0 x 4.7	1.75	1.49	1.25	.99
546100	TAP476K010SCS	JVP	47	10	6.0 x 9.4 x 2.5	1.25	.99	.79	.65
94123	TM47/16	◆	47	16	5.2 x 8.2 x 2.5	1.49	1.25	.99	.79
546118	TAP476K016SCS	JVP	47	16	6.0 x 9.4 x 2.5	1.75	1.49	1.25	.99

Note: Above case sizes may have ± tolerances

*Capacitor dimensions and styles may vary

Part No.	Product No.	Mfr.	Value (μF)	Volt (V)	Size (mm)* D x H x L.S.	Pricing			
						1	10	100	500
33822	TM47	◆	47	25	9.5 x 16.5 x 2.5	\$1.59	\$1.35	\$1.15	\$.99
546206	TAP686K006SCS	JVP	68	6.3	5.0 x 8.2 x 2.5	.79	.69	.59	.49
546222	TAP686K016SCS	JVP	68	16	7.0 x 11.0 x 2.5	1.49	1.25	1.09	.89
545668	TAP107K006SCS	JVP	100	6.3	6.0 x 9.4 x 2.5	1.39	1.19	.95	.85
33700	TM100/35	◆	100	6.3	8.5 x 13.0 x 4.7	1.35	1.15	.95	.79
597450	TAP107K016SCS	JVP	100	16	7.0 x 11.0 x 2.5	2.75	2.49	2.25	1.95
545684	TAP107K020SCS	JVP	100	20	8.2 x 12.5 x 2.5	3.49	3.15	2.75	2.49
545772	TAP157K010SCS	JVP	150	10	7.0 x 11 x 2.5	1.95	1.79	1.49	1.29

Note: Above case sizes may have ± tolerances

*Capacitor dimensions and styles may vary

Ceramic Disc Capacitors (±5, ±10 or ±20%)

25, 50, 500 and 1000 Volt, Z5U Temperature Coefficient

*Web Code: HBW



- Operating temp. range: +10°C to +85°C
- Dielectric withstanding voltage: 2.5 times rated volt. for not < 1 sec.
- Capacitance change over temp. range: +22% to -56%

* Order in multiples of 10 or 100

* Order in multiples of 10 or 100

Part No.	Product No.	Mfr.	Value	Volt (V)	Tol.	Dia. (mm)	Pricing				
							1	10	100	1000	5000
332291	CD3.3/1000	JVP	3.3pF	1000	20	5	*	\$1.19	\$1.15	\$1.13	\$0.99
15333	DC10	◆	10pF	50	20	5	*	.06	.04	.032	.025
332322	CD20/1000	JVP	20pF	1000	20	5	.29	.22	.17	.14	.11
332312	CD10/1000	JVP	10pF	1000	20	6	*	.15	.12	.09	.07
332217	CD33/50	JVP	33pF	50	20	5	*	.08	.06	.045	.035
15405	DC22	◆	22pF	50	20	6	*	.06	.04	.032	.025
15407	DC22	JVP	22pF	50	20	6	*	.07	.05	.035	.028
1947010	DC33TR	◆	33pF	100	10	5	*	.06	.04	.025	.01
1947028	DC33ATR	◆	33pF	500	5	5	*	*	.009	.008	.007
15512	DC47	JVP	47pF	50	20	5	*	.08	.06	.045	.039
1947036	DC47TR	◆	47pF	500	5	6	*	*	.009	.008	.007
332347	CD47/1000	JVP	47pF	1000	20	5	*	.06	.04	.03	.02
15341	DC100	◆	100pF	50	20	5	*	.06	.04	.03	.02
15343	DC100	JVP	100pF	50	20	5	*	.08	.06	.04	.03
1947044	DC100TR	◆	100pF	100	10	8	*	.06	.04	.025	.015
332363	CD120/1000	JVP	120pF	1000	20	5	*	.14	.11	.09	.07
1947087	DC150ATR	◆	150pF	500	5	4	*	*	.009	.008	.007
1947052	DC150TR	◆	150pF	100	10	8	*	.05	.03	.02	.01
332371	CD150/1000	JVP	150pF	1000	20	5	*	.09	.07	.05	.04
15413	DC220	◆	220pF	50	20	5	*	.06	.04	.025	.015
1947132	DC220TR	◆	220pF	50	5	8	*	.06	.04	.025	.015
1947159	DC220ATR	◆	220pF	100	5	7	*	*	.009	.008	.007
1947239	DC220BTR	◆	220pF	500	10	10	*	*	.009	.008	.007
332380	CD220/1000	JVP	220pF	1000	20	5	*	*	.009	.008	.007
15448	DC330	◆	330pF	50	20	5	*	*	.009	.008	.007
1947301	DC330TR	◆	330pF	100	20	5	*	.06	.04	.02	.01
1947378	DC330ATR	◆	330pF	500	20	5	*	*	.009	.008	.007
15528	DC470	◆	470pF	50	20	5	*	.07	.05	.03	.025
1947319	DC470TR	◆	470pF	100	20	5	*	*	.009	.008	.007

TR at the end of Product Number are Tape and Reel

Part No.	Product No.	Mfr.	Value	Volt (V)	Tol.	Dia. (mm)	Pricing				
							1	10	100	1000	5000
332401	CD470/1000	JVP	470pF	1000	20	5	\$2.25	\$1.17	\$1.14	\$1.11	\$0.99
332420	CD560/1000	JVP	560pF	1000	20	6	*	.17	.14	.11	.09
15190	DC.001	◆	.001μF	50	20	6	*	.06	.04	.03	.02
15192	DC.001	JVP	.001μF	50	20	6	*	.06	.04	.025	.02
1947343	DC.001TR	◆	.001μF	100	20	4	*	*	.009	.008	.007
1947394	DC.001ATR	◆	.001μF	500	20	4	*	*	.009	.008	.007
1947415	DC.001BTR	◆	.001μF	500	10	7	*	*	.009	.008	.007
332436	CD1000/1000	JVP	.001μF	1000	20	5	.32	.25	.19	.15	.12
1947327	DC.0022TR	◆	.0022μF	25	20	4	*	.06	.04	.025	.015
1947386	DC.0022ATR	◆	.0022μF	500	20	7	*	*	.009	.008	.007
332443	CD2200/1000	JVP	.0022μF	1000	20	6	*	.15	.12	.10	.08
1947407	DC.0033	◆	.0033μF	500	20	9	*	.05	.03	.02	.015
15211	DC.0047	◆	.0047μF	50	20	6	*	.07	.05	.04	.025
1947335	DC.0047TR	◆	.0047μF	100	20	5	*	.06	.04	.025	.015
15229	DC.01	◆	.01μF	50	20	6	*	.06	.04	.032	.025
15231	DC.01	JVP	.01μF	50	20	6	*	.07	.05	.035	.03
97375	DC.01/1K20	◆	.01μF	1000	20	12	.29	.22	.17	.14	.11
97377	DC.01/1K20	JVP	.01μF	1000	20	12	.35	.29	.22	.17	.14
332487	CD20000/1000	JVP	.02μF	1000	20	16	.55	.45	.35	.29	.22
15245	DC.022	◆	.022μF	50	20	8	*	.08	.06	.045	.039
1947351	DC.047B	◆	.047μF	25	20	7	*	.08	.06	.04	.02
15253	DC.047	◆	.047μF	50	20	8	*	.09	.07	.045	.035
15255	DC.047	JVP	.047μF	50	20	8	*	.10	.08	.06	.05
332507	CD50000/1000	JVP	.05μF	1000	20	16	.99	.79	.65	.49	.39
151116	DC.1/25	◆	.1μF	25	20	6	*	.11	.08	.06	.05
151118	DC.1/25	JVP	.1μF	25	20	6	*	.12	.09	.07	.055
15270	DC.1	◆	.1μF	50	20	8	*	.19	.15	.12	.09
15272	DC.1	JVP	.1μF	50	20	8	.32	.25	.19	.15	.12
332516	CD100000/1000	JVP	.1μF	1000	20	21	1.49	1.25	1.09	.95	.79

TR at the end of Product Number are Tape and Reel

Axial Leaded Ceramic Capacitors (±5, ±10, ±20 or ±100%)

50, 100 and 200 Volt, NPO, X7R and Z5U Temperature

*Web Code: ACC

Order in multiples of 10 or 100

Order in multiples of 10

Part No.	Product No.	Mfr.	Value	Volt (V)	Temp Co-eff.	Tol.	Pricing		
							10	100	1000
546273	SA102A220JAA	JVP	22pF	200	NPO	5	\$0.09	\$0.06	\$0.05
546265	SA102A101JAA	JVP	100pF	200	NPO	5	.12	.07	.05
546281	SA105A102JAA	JVP	1000pF	50	NPO	5	.12	.07	.05
546249	SA101C102KAA	JVP	1000pF	100	X7R	10	.07	.05	.03
1069763	SA101C222KAA	AVX	2200pF	100	X7R	10	*	.009	.008

Part No.	Product No.	Mfr.	Value	Volt (V)	Temp Co-eff.	Tol.	Pricing		
							10	100	1000
546290	P10R103K5	JVP	0.01μF	50	X7R	10	\$1.15	\$1.12	\$0.99
546302	SA105E103MAA	JVP	0.01μF	50	Z5U	20	.10	.06	.04
546257	SA101C103KAA	JVP	0.01μF	100	X7R	100	.07	.05	.03
536542	P20R104K5	JVP	0.1μF	50	X7R	10	.12	.09	.07
546345	SA305E105MAA	JVP	1.0μF	50	Z5U	20	.12	.09	.07

* AVX = AVX Corp. | JVP = Jameco ValuePro | ◆ Manufacturer Varies

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Ceramic & Metallized Capacitors

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

JAMECO ValuePro

Monolithic Radial Ceramic Capacitors

NPO (COG) Series (±5%)

Order in multiples of 10 or 100

Part No.	Product No.	Mfr.	Value	Volt. (V)	Size (mm)* W x T x H x L.S.	Pricing			
						10	100	1000	5000
332523	COG10/100	JVP	10pF	100	4.0 x 2.0 x 3.2 x 5.1	\$.12	\$.09	\$.07	\$.05
332541	COG22/100	JVP	22pF	100	3.6 x 2.3 x 3.6 x 2.5	.13	.09	.07	.05
2080358	RD15CG-240J	◆	24pF	50	4.0 x 2.0 x 3.6 x 2.5	* .009	.008	.007	.007
2080331	RD15CG-270J	PDC	27pF	50	4.0 x 2.0 x 3.6 x 2.5	* .009	.008	.007	.007
2080323	RD15CG-390M	PDC	39pF	50	4.0 x 2.0 x 3.6 x 2.5	* .009	.008	.007	.007
332567	COG47/100	JVP	47pF	100	3.8 x 2.0 x 3.3 x 2.5	.12	.09	.07	.05
332574	COG68/100	JVP	68pF	100	3.6 x 1.5 x 3.6 x 5.1	.12	.09	.07	.05
2080340	RD15CG-331J	PDC	330pF	50	4.0 x 2.0 x 3.6 x 2.5	.12	.09	.07	.05

X7R Series (±10%)

* Order in multiples of 10

Part No.	Product No.	Mfr.	Value	Volt. (V)	Size (mm)* W x T x H x L.S.	Pricing				
						1	10	100	1000	5000
332583	MOC100/100	JVP	100pF	100	5.0x5.0x3.0x2.5	*	\$.12	\$.09	\$.07	\$.05
332612	MOC470/100	JVP	470pF	100	5.0x5.0x3.0x2.5	*	.19	.15	.12	.09
544825	SR151C102KAA	JVP	1000pF	100	3.8x2.5x3.8x5.1	*	.12	.09	.07	.05
544833	SR151C103KAA	JVP	.01μF	100	3.8x2.5x3.8x5.1	*	.10	.07	.05	.035
597281	SR211C103KAA	JVP	.01μF	100	3.8x2.5x3.8x5.1	*	.09	.07	.05	.04
332647	MOC10000/100	JVP	.01μF	100	5.0x5.0x3.0x2.5	*	.12	.09	.07	.06
332655	MOC22000/100	JVP	.022μF	100	5.0x5.0x3.0x2.5	*	.12	.09	.07	.05
544892	SR211C223KAA	JVP	.022μF	100	3.8x2.5x3.8x5.1	*	.14	.10	.08	.06
544905	SR211C333KAA	JVP	.033μF	100	3.8x2.5x3.8x5.1	*	.15	.12	.09	.07
544913	SR211C473KAA	JVP	.047μF	100	3.8x2.5x3.8x5.1	.29	.22	.17	.14	.11
544921	SR215C104KAA	JVP	.1μF	50	3.8x2.5x3.8x5.1	*	.14	.11	.08	.06
544884	SR211C104KAA	JVP	.1μF	100	3.8x2.5x3.8x5.1	*	.15	.12	.09	.08
332672	MOC100000/100	JVP	.1μF	100	5.0x5.0x3.0x2.5	*	.15	.12	.09	.08
544948	SR305C474KAA	JVP	.47μF	50	3.8x2.5x3.8x5.1	.45	.35	.29	.22	.17

† ±20% Note: Above case sizes may have ± tolerances * Capacitor dimensions and styles may vary

JAMECO ValuePro

Ceramic Trimmer Capacitors

5mm

JAMECO EXCLUSIVE

* Web Code: PBZ

- Working voltage: 200VDC
- Turning torque: 35-200 g-cm
- Oper. temp. range: -30°C ~ +85°C
- Withstand volt.: 400VDC
- Q Factor @ 1MHz: >200
- Insulation resis.: >10MΩ min. @ 250VDC

Part No.	Capacitance Range (pF)	Color Code	1	10	100	1000
136979	9.0-50.0	Green	\$.49	\$.39	\$.32	\$.27

8mm (.315")

* Web Code: PAT

- Turning torque: 40-200 g-cm
- Operating temp. range: -55°C ~ +85°C
- Insulation resis.: 10MΩ min. @ 250VDC
- Withstand volt.: 550VDC
- Working volt.: 250VDC
- Q Factor @ 1MHz: >300

Part No.	Capacitance Range (pF)	Color Code	1	10	100	1000
134818	3.5-13.0	Ivory	\$.49	\$.39	\$.29	\$.19
32839	4.0-34.0	Yellow	1.15	.99	.85	.69
2077554	5.0-25.0	Blue	.69	.55	.45	.35
32855	6.0-70	Nil	.99	.85	.69	.59
94449	8.5-100	Purple	.99	.85	.69	.59
94466	8.5-120	Nil	.99	.85	.69	.59

Memory Back-Up Capacitors

Applications:

- Back-up on CMOS microcomputers, static RAM, DTSs (digital tuning systems)
- Memory back-up of remote controllers


Features:

- Small size vs. capacitance
- Voltage: 5.5VDC, 8VDC

Part No.	Cross Ref. No.	Mfr.	Value (F)	Size (mm) L x T x Dia.	1	10	100
2082409	MBC.047/8	◆	0.047	13.7x7.8 x 13.1	\$2.49	\$2.19	\$1.95
142949	MBC.22/5.5	JVP	0.22	11.8 x 6.4 x 12.8	3.95	3.49	2.95
142957	MBC1.0/5.5	◆	1.0	N/A x 7.4 x 20.8	4.25	3.75	3.25
227811	S5R5V105	◆	1.0	24.2 x 4.8 x 18.0	3.95	3.49	2.95

* JVP = Jameco ValuePro | PDC = Prosperity Dielectric Co. | ◆ Manufacturer Varies

- Data processing
- Communications engineering
- Operating temp. range: -10°C to +85°C



* Web Code: JBV

Z5U Series (±20%)

* Order in multiples of 10

Part No.	Product No.	Mfr.	Value	Volt. (V)	Size (mm)* W x T x H x L.S.	Pricing			
						1	10	100	1000
81543	MD10	JVP	10pF	50	3.5 x 2.0 x 3.0 x 2.5	*	\$.05	\$.04	\$.03
81533	MD22	◆	22pF	50	4.0 x 2.0 x 4.0 x 5.1	*	.12	.09	.07
81525	MD100	◆	100pF	50	3.3 x 2.0 x 3.0 x 2.5	*	.09	.07	.06
81517	MD.001	◆	.001μF	50	4.5 x 2.0 x 3.0 x 2.5	*	.10	.08	.06
138181	MD.022	◆	.0022μF	50	4.0 x 2.0 x 5.5 x 2.5	*	.10	.08	.06
25507	MD.01	◆	.01μF	50	3.5 x 2.0 x 3.0 x 2.5	*	.12	.09	.07
57621	MD.047	◆	.047μF	50	2.5 x 2.5 x 3.0 x 2.5	*	.12	.09	.07
25523	MD.1	◆	.1μF	50	6.0 x 2.0 x 4.0 x 5.1	*	.08	.06	.045
544868	SR205E104MAA	JVP	.1μF	50	4.0 x 2.6 x 3.8 x 2.5	*	.10	.07	.05
25525	MD.1	JVP	.1μF	50	3.4 x 2.2 x 3.6 x 5.1	*	.11	.08	.06
25540	MD.22	◆	.22μF	50	6.0 x 2.0 x 4.5 x 5.1	*	.15	.12	.09
25541	MD.22	JVP	.22μF	50	6.0 x 2.0 x 4.5 x 2.5	*	.19	.15	.12
138237	MD.33	◆	.33μF	50	6.0 x 2.0 x 8.0 x 5.1	*	.14	.11	.08
544930	SR215E334MAA	JVP	.33μF	50	3.8 x 2.5 x 3.8 x 5.1	*	.12	.09	.07
25558	MD.47	◆	.47μF	50	4.5 x 2.5 x 4.5 x 5.1	*	.17	.14	.11
81509	MD1	◆	1μF	50	6.0 x 3.0 x 7.0 x 5.1	.35	.29	.22	.17
544956	SR305E105MAA	JVP	1μF	50	3.8 x 2.5 x 3.8 x 5.1	.39	.32	.25	.19


Note: Above case sizes may have ± tolerances * Capacitor dimensions and styles may vary

* AVX Radial Ceramic Capacitors — Enter Web Code XDE

* Prosperity Radial Ceramic Capacitors — Enter Web Code CMC

Metallized Polyester Film Mylar Capacitors (±10%)

- Non-inductive construction
- Operating temp. range: -40°C to +85°C
- Dissipation factor: 0.01 (at 1kHz)
- Dielectric strength: 150% of rated volt. for 5 sec.



* Web Code: RAD

* Order in multiples of 10

Part No.	Product No.	Value (μF)	Volt. (V)	Size (mm)* L x T x H x L.S.	Pricing			
					1	10	100	1000
26833	MY.001	.001	100	7.0 x 3.0 x 7.0 x 5.1	*	\$.10	\$.07	\$.05
1946164	MY.0068	.0068	100	5.5 x 2.5 x 10.0 x 5.1	*	.15	.12	.09
26884	MY.01	.01	100	6.0 x 3.0 x 7.0 x 5.1	*	.15	.12	.09
207837	MY.018/50	.018	50	6.1 x 2.6 x 11.3 x 5.1	*	.05	.03	.02
26905	MY.022	.022	100	6.0 x 3.0 x 10.0 x 5.1	*	.15	.12	.09
26921	MY.033	.033	100	8.0 x 4.0 x 11.0 x 16.1	*	.15	.12	.09
26930	MY.047	.047	100	8.0 x 4.0 x 12.0 x 5.1	*	.19	.15	.12
1946172	MY.068	.068	100	8.6 x 4.0 x 11.0 x 7.6	*	.15	.12	.10
135562	MY.1/50	.1	50	14.0 x 6.0 x 12.0 x 5.1	*	.17	.14	.11
26956	MY.1	.1	100	12.5 x 5.0 x 9.5 x 7.6	*	.19	.15	.12
93921	MY.1/250	.1	250	12.5 x 5.5 x 10 x 10.1	.29	.22	.17	.14
26972	MY.22	.22	100	12.5 x 5.5 x 10 x 7.6	*	.19	.15	.12
1946181	MY.22SM	.22	100	12.5 x 5.0 x 8.5 x 10.1	*	.15	.12	.10
93964	MY.33/250	.33	250	18.0 x 7.0 x 12.5 x 15.2	.32	.25	.19	.15
26999	MY.47	.47	100	18.0 x 6.0 x 11.5 x 16.1	.45	.35	.29	.22
27001	MY1	1.0	100	18.0 x 7.5 x 14.0 x 15.2	.55	.45	.35	.29
93981	MY1/250	1.0	250	26.0 x 9.0 x 16.0 x 15.2	.65	.49	.39	.32
93999	MY2/250	2.2	250	26.0 x 9.0 x 16.0 x 27.9	1.25	.99	.79	.65

† ±20% tolerance * Capacitor dimensions and styles may vary on items with various manufacturers

* SMT Capacitors Available Online — Enter Web Code SMT

Look for pricing shaded in blue throughout the catalog and for a larger selection go to:

Jameco.com/MakesCents

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

JAMECO ValuePro

Motor Capacitors

- Operating temp.: -25°C to +85°C
- Insulation resistance: >300MΩ
- Metal or plastic shell and double welding sheet metal
- Quick connect



332806

*Web Code: MCS

Motor Running Capacitors

Part No.	Cross Ref. No.	Value	Volt (V)	Size D x H (mm)	1	10	50
332806	MRC370V4	4μF	370	34 x 50	\$.99	\$.89	\$.79
332814	MRC370V5	5μF	370	34 x 50	1.49	1.35	1.19
332822	MRC370V7R5	7.5μF	370	36 x 80	1.49	1.35	1.19
332831	MRC370V10	10μF	370	42 x 80	1.95	1.75	1.59
332865	MRC440V10	10μF	440	40 x 70	3.49	2.95	2.59

Motor Starting Capacitors

332697	MSC125V21	21μF	125	37 x 70	\$1.49	\$1.35	\$1.19
332777	MSC250V30	30μF	250	37 x 70	1.95	1.75	1.59
332785	MSC250V53	53μF	250	46 x 86	2.49	2.29	1.95
536585	PSU10835A*	108μF	250	46 x 86	6.95	6.39	5.95
332700	MSC125V124	124μF	125	37 x 70	1.49	1.35	1.19
332718	MSC125V161	161μF	125	37 x 70	1.49	1.35	1.19
332726	MSC125V189	189μF	125	37 x 70	1.95	1.75	1.59
332734	MSC125V216	216μF	125	37 x 86	2.29	1.95	1.75
332742	MSC125V270	270μF	125	37 x 86	2.49	2.29	1.95
332751	MSC125V590	590μF	125	46 x 111	3.95	3.69	3.39

* Mfr. is Cornell Dubilier

Parasonic® Metallized Film Capacitors (±5%)

V Series – Stacked

- Operating temp. range: -40°C to 85°C
- Low dissipation factor: 1% max.

*Web Code: TAB

Order in multiples of 10


Part No.	Mfr. Part No.	Value (μF)	Voltage	Dimensions (mm) W x H x Th. x L x S.	10	100	500
920510	ECQ-V1H104JL	.1	50	7.3 x 4 x 5 x 5	\$.15	\$.12	\$.09
920595	ECQ-V1H474JL	.47	50	7.3 x 6 x 7.3 x 5	.22	.17	.14

Dipped Silver Mica Capacitors (±5%)

Metallized Polyester Film

- Case type: DM15
- Lead space: 0.23"
- Operating temp. range: -55° to +125°C
- Tolerance: ±5%

*Web Code: HAB



Part No.	Product No.	Value	Volt. (V)	Size (mm) L x T x H*	1	10	100	1000
15991	DM100	10pF	500	11 x 4 x 9	\$.69	\$.65	\$.59	\$.55
16037	DM220	22pF	500	11 x 4 x 9	.59	.49	.39	.32
16096	DM470	47pF	500	11 x 4 x 9	.69	.65	.59	.55
16002	DM101	100pF	500	11 x 4 x 9	.69	.65	.59	.55
16088	DM331	330pF	500	11 x 4 x 9	.95	.75	.59	.49
16109	DM471	470pF	500	11 x 4 x 9	1.09	.89	.69	.55
16011	DM102	1000pF	100	11 x 4 x 9	1.35	1.15	.95	.79

* Capacitor dimensions and styles may vary

Expanded Offering of Thousands of Prosperity SMT Multilayer Ceramic Chip Capacitors at www.Jameco.com

- Temperature range: -55°C to 125°C
- General purpose

MA Series:

*MA0603 – 1 value — P/N 2079744

*MA0805 – 13 values — Web Code: ZAK

*MA1206 – 13 values — Web Code: ZAL

*MA1210 – 1 value — P/N 2079912

*MA1812 – 1 value — P/N 2079921

Order in multiples of 100

Part No.	100	1000	4000	8000
2079744	\$.009	\$.008	\$.007	\$.006
MA0805	.009	.008	.007	.006
MA1206	.009	.008	.007	.006
2079912	.009	.008	.007	.006
2079921	.009	.008	.007	.006

For Passive Component Testers See Page 153

SMD Capacitors

Aluminum Electrolytic Capacitors

Operating Temp. Range: -55°C to +105°C

* Order in multiples of 10

*Web Code: BCE



* Order in multiples of 10

Leakage current (20°C) after 2 minutes .01CV or 3μA

Part No.	Nichicon Cross Ref No.	Value (μF)	Voltage (V)	Dia. (mm)	1	10	100	500
610431	UWT1H0R1MCL1GB	0.1	50	4.0	*	\$.07	\$.05	\$.04
610423	UWT1H010MCL2GB	1.0	50	4.0	*	.09	.07	.05
608631	UUD1H010MCL1GS	1.0†	50	4.0	*	.12	.09	.07
610634	UWT1V2R2MCL2GB	2.2	35	4.0	*	.07	.05	.04
608665	UUD1H2R2MCL1GS	2.2†	50	4.0	*	.15	.12	.09
608681	UUD1H3R3MCL1GS	3.3†	50	4.0	*	.12	.09	.07
608788	UUD1V4R7MCL1GS	4.7†	35	4.0	*	.12	.09	.07
608702	UUD1H4R7MCL1GS	4.7†	50	4.0	*	.15	.12	.09
115351	RV2-166V100MR*	10	16	4.0	*	.09	.07	.05
610108	UWT0G220MCL1GB	22	4.0	4.0	*	.05	.04	.03
608489	UUD1A220MCL1GS	22†	10	4.0	*	.12	.09	.07
610239	UWT1A220MCL1GB	22	10	5.0	*	.07	.05	.04
610474	UWT1H220MCL1GB	22	50	6.3	*	.15	.12	.09
610183	UWT0J330MCL1GB	33	6.3	4.0	*	.09	.07	.05
608585	UUD1E330MCL1GS	33†	25	6.3	*	.12	.09	.07

* Operating temperature: -40°C to +85°C † Low impedance

Resin Molded Solid Tantalum Chip Capacitors (±20%)

* Order in multiples of 10

Part No.	*Mfr.	Capacitance	Case Size	Volt.	1	10	100	1000
86933	JVP	1μF	A	16	*	\$.07	\$.05	\$.04
87020	+	10μF	B	10	*	.07	.05	.04
87038	+	10μF	C	16	*	.15	.12	.09
87101	JVP	47μF	D	16	*	.19	.12	.09
87118	+	100μF	D	10	.39	.35	.25	.19

Case Size (Dimensions in mm)

EIA Case Code	L ±0.2	W ±0.2	H ±0.2	P ±0.3	a ±0.2	h(min)
A (3216-18)	3.2	1.6	1.7	0.8	1.2	0.7
B (3528-21)	3.5	2.8	1.9	0.8	2.2	0.7
C (6032-28)	6.0	3.2	2.6	1.3	2.2	1.0
D (7343-31)	7.3	4.3	2.9	1.3	2.4	1.0



Molded Solid Tantalum Chip Capacitors continued on next page

* JVP = Jameco ValuePro | + Manufacturer Varies

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

SMD Molded Tantalum & Ceramic Chip Capacitors

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE


JAMECO ValuePro

Resin Molded Solid Tantalum Chip Capacitors (±10%)

★ Web Code: WAE

* Order in multiples of 10 or 100

* Order in multiples of 10



Case Size (Dimensions in mm)

EIA Case Code	L ±0.2	W ±0.2	H ±0.2	P ±0.3	a ±0.2	h(min)
A (3216-18)	3.2	1.6	1.7	0.8	1.2	0.7
B (3528-21)	3.5	2.8	1.9	0.8	2.2	0.7
C (6032-28)	6.0	3.2	2.6	1.3	2.2	1.0
D (7343-31)	7.3	4.3	2.9	1.3	2.4	1.0

* Order in multiples of 10 or 100

Part No.	Case Size	Value (µF)	Low ESR	Volt.	Pricing			
					1	10	100	1000
544964	A	0.1µF	35		*	*	\$.009	\$.008
544972	A	0.1µF	50		*	*	.009	.008
544981	A	1µF	16		*	*	.009	.008
597290	A	1µF	35		*	*	.009	.008
545043	A	2.2µF	16		*	*	.009	.008
545051	A	3.3µF	16		*	*	.009	.008
545060	A	3.3µF	20		*	*	.009	.008

Part No.	Case Size	Value (µF)	Low ESR	Volt.	Pricing			
					1	10	100	1000
597329	A	*4.7µF	10		*	\$.09	\$.07	\$.05
545086	A	6.8µF	10		*	*	.009	.008
545027	A	10µF	6.3		*	*	.009	.008
597311	A	*10µF	6.3		*	.09	.07	.05
545115	A	*15µF	10		*	.09	.07	.05
545131	B	1µF	35		*	*	.009	.008
545158	B	2.2µF	35		*	.09	.07	.05
545174	B	4.7µF	16		*	*	.009	.008
597373	B	*10µF	16		*	.12	.09	.07
545166	B	22µF	16		*	.12	.09	.07
545203	B	47µF	10		*	.19	.17	.15
545254	C	2.2µF	35		*	.09	.07	.05
545262	C	3.3µF	35		*	.12	.09	.07
545289	C	10µF	25		*	.09	.07	.05
545238	C	10µF	35		*	.29	.25	.22
545300	C	22µF	16		*	.12	.09	.07
597353	C	*47µF	16		*	.29	.25	.22


Part No.	Case Size	Value (µF)	Low ESR	Volt.	Pricing			
					1	10	100	1000
545297	C	100µF	10		\$.29	\$.25	\$.19	\$.15
545385	D	4.7µF	35		.29	.25	.22	.19
545326	D	10µF	35		*	.19	.17	.15
545334	D	15µF	35		.29	.25	.22	.19
597388	D	*15µF	35		.29	.25	.22	.19
545342	D	22µF	25		*	.19	.17	.15
597396	D	*22µF	25		.29	.25	.22	.19
545351	D	22µF	35		.99	.89	.79	.65
597433	D	*22µF	35		.99	.89	.79	.65
545393	D	47µF	16		*	.19	.17	.15
597417	D	*47µF	16		.29	.25	.22	.19
545406	D	47µF	25		.39	.35	.29	.25
545553	D	68µF	20		.99	.89	.79	.65
545422	D	100µF	10		.29	.25	.22	.19
545473	D	150µF	10		.39	.35	.29	.25
545369	D	220µF	10		.39	.35	.29	.25
597441	D	*220µF	10		.99	.89	.79	.65

Multilayer Ceramic Chip Capacitors

★ Web Code: MCD

SMT Case Dimensions (mm)

	0402	0603	0805	1206	1210	1812
L	1.0	1.6	2.0	3.2	3.2	4.5
W	0.5	0.81	1.25	1.6	2.5	3.2
T	1.02	1.02	0.065	1.55	1.02	1.52
t	0.25	0.35	0.25	0.5	0.5	0.61



* Order in multiples of 10 or 100

Part No.	*Mfr.	Case	Value	Volt.	Tolerance	Temp.	1	10	100	1000
646135	+	0402	47pF	50	5	NPO	*	*	\$.009	\$.008
646178	+	0402	100pF	50	5	NPO	*	*	.009	.008
543742	JVP	0402	220pF	50	10	NPO	*	*	.009	.008
543777	JVP	0402	0.1µF	16	+80/-20	Y5V	*	*	.009	.008
646910	+	0603	100pF	50	5	NPO	*	*	.009	.008
544008	JVP	0603	330pF	50	5	NPO	*	*	.009	.008
649483	+	0603	1000pF	50	10	X7R	*	*	.009	.008
649598	+	0603	8200pF	50	10	X7R	*	*	.009	.008
735322	AVX	0603	0.01µF	50	5	X7R	*	*	.009	.008
1929031	AVX	0603	0.1µF	25	10	X7R	*	*	.009	.008
649766	+	0603	2.2µF	6.3	10	X5R	*	*	.009	.008
649774	+	0603	4.7µF	6.3	10	X5R	*	*	.009	.008
650020	+	0805	27pF	50	5	NPO	*	*	.009	.008
736026	AVX	0805	30pF	50	5	NPO	*	*	.009	.008
650097	+	0805	100pF	50	5	NPO	*	*	.009	.008
650126	+	0805	180pF	50	5	NPO	*	*	.009	.008
1566882	+	0805	220pF	100	5	NPO	*	*	.009	.008
650193	+	0805	680pF	50	5	NPO	*	*	.009	.008
544323	JVP	0805	1000pF	50	10	X7R	*	*	.009	.008
2079541	PDC	0805	1200pF	50	5	NPO	*	*	.009	.008
544278	+	0805	2200pF	50	5	NPO	*	*	.009	.008
544331	JVP	0805	0.01µF	50	10	X7R	*	*	.009	.008
87372	JVP	0805	0.1µF	25	10	X7R	*	*	.009	.008
87177	JVP	0805	0.1µF	50	20	Z5U	*	*	.009	.008
650484	+	0805	0.33µF	25	10	X5R	*	*	.009	.008
650492	+	0805	0.47µF	25	10	X5R	*	*	.009	.008
650687	+	0805	1.0µF	16	+80/-20	Y5V	*	*	.009	.008
650505	+	0805	1.0µF	25	10	X5R	*	*	.009	.008
544489	JVP	0805	2.2µF	10	10	X5R	*	*	.009	.008
650521	+	0805	2.2µF	16	10	X5R	*	*	.009	.008
650556	+	0805	3.3µF	10	10	X5R	*	*	.009	.008
544420	JVP	0805	4.7µF	6.3	10	X5R	*	*	.009	.008
650581	+	0805	10µF	6.3	10	X5R	*	*	.009	.008
1858797	MUR	0805	10µF	16	+80/-20	Y5V	*	.12	.07	.05
544497	JVP	1206	10pF	100	5	NPO	*	*	.009	.008

Part No.	*Mfr.	Case	Value	Volt.	Tolerance	Temp.	1	10	100	1000
544534	JVP	1206	22pF	100	5	NPO	*	*	\$.009	\$.008
544542	JVP	1206	33pF	100	5	NPO	*	*	.009	.008
544569	JVP	1206	47pF	100	5	NPO	*	*	.009	.008
650880	+	1206	68pF	50	5	NPO	*	*	.009	.008
544500	JVP	1206	100pF	100	5	NPO	*	.06	.04	.02
544551	JVP	1206	330pF	100	5	NPO	*	*	.009	.008
544577	JVP	1206	680pF	100	5	NPO	*	*	.009	.008
2079795	PDC	1206	1000pF	50	±20	NPO	*	*	.009	.008
544681	JVP	1206	1000pF	50	5	NPO	*	*	.009	.008
544518	JVP	1206	1000pF	100	5	NPO	*	*	.009	.008
544526	JVP	1206	1500pF	100	5	NPO	*	*	.009	.008
651057	+	1206	1800pF	50	5	NPO	*	*	.009	.008
544690	JVP	1206	2200pF	50	5	NPO	*	*	.009	.008
651209	+	1206	4700pF	50	10	X7R	*	*	.009	.008
651102	+	1206	4700pF	50	5	NPO	*	*	.009	.008
651111	+	1206	5600pF	50	5	NPO	*	*	.009	.008
651129	+	1206	0.01µF	25	5	NPO	*	*	.009	.008
87329	+	1206	0.01µF	50	10	X7R	*	*	.009	.008
87388	+	1206	0.1µF	50	10	X7R	*	.09	.07	.06
651541	+	1206	0.1µF	50	+80/-20	Y5V	*	*	.009	.008
544606	JVP	1206	0.1µF	100	10	X7R	*	*	.009	.008
544711	JVP	1206	0.22µF	50	10	X7R	*	*	.009	.008
651399	+	1206	0.27µF	50	10	X7R	*	*	.009	.008
544729	JVP	1206	0.33µF	50	10	X7R	*	*	.009	.008
544673	JVP	1206	0.47µF	25	10	X7R	*	*	.009	.008
651410	+	1206	0.47µF	50	10	X7R	*	*	.009	.008
87222	JVP	1206	0.47µF	50	20	Z5U	*	.15	.12	.09
651428	+	1206	1.0µF	25	10	X7R	*	*	.009	.008
651479	+	1206	2.2µF	16	10	X5R	*	*	.009	.008
651452	+	1206	2.2µF	25	10	X5R	*	*	.009	.008
651508	+	1206	4.7µF	10	10	X5R	*	*	.009	.008
651487	+	1206	4.7µF	16	10	X5R	*	*	.009	.008
544745	JVP	1206	4.7µF	16	+80/-20	Y5V	*	*	.009	.008
651461	+	1206	4.7µF	25	10	X5R	*	*	.009	.008
651532	+	1206	10µF	6.3	10	X5R	*	*	.009	.008
651516	+	1206	10µF	10	10	X5R	*	*	.009	.008
651495	+	1206	10µF	16	10	X5R	*	.15	.09	.07
651524	+	1206	22µF	6.3	10	X5R	*	.19	.15	.12

Multilayer Ceramic Chip Capacitors continued on next page

* AVX = AVX Corp. | JVP = Jameco ValuePro | MUR = Murata Electronics | PDC = Prosperity | + Manufacturer Varies

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

Multilayer Ceramic Chip Capacitors (Continued)

★ Web Code: MCD

* Order in multiples of 10 or 100

Part No.	Mfr.	Case	Value	Volt.	Tolerance	Temp.	1	10	100	1000
651612	+	1210	0.1µF	50	10	X7R	*	*	\$.009	\$.008
544761	JVP	1210	0.1µF	100	10	X7R	*	.15	.12	.09
544788	JVP	1210	0.22µF	50	10	X7R	*	*	.009	.008
651647	+	1210	0.33µF	50	10	X7R	*	*	.009	.008
651655	+	1210	0.47µF	50	10	X7R	*	*	.009	.008
651663	+	1210	1.0µF	50	10	X7R	*	.15	.09	.07
651671	+	1210	2.2µF	25	10	X7R	*	*	.009	.008
651680	+	1210	4.7µF	16	10	X7R	*	.19	.15	.12
651701	+	1210	4.7µF	25	10	X7R	*	*	.009	.008
651698	+	1210	10µF	10	10	X7R	*	.19	.15	.12

* Order in multiples of 10


Part No.	Mfr.	Case	Value	Volt.	Tolerance	Temp.	1	10	100	1000
651786	+	1210	10µF	10	10	X5R	*	\$.19	\$.15	\$.12
651735	+	1210	10µF	16	10	X5R	*	.15	.09	.07
651719	+	1210	10µF	25	10	X5R	*	.19	.15	.12
651751	+	1210	22µF	6.3	10	X5R	.39	.35	.29	.25
651794	+	1210	22µF	10	10	X5R	.39	.35	.29	.25
651743	+	1210	22µF	16	10	X5R	.39	.35	.29	.25
651760	+	1210	47µF	6.3	10	X5R	.99	.89	.79	.69
651778	+	1210	100µF	6.3	20	X5R	.99	.89	.79	.69
651831	+	1812	1µF	50	10	X5R	*	.09	.07	.05
651858	+	1812	22µF	10	10	X5R	.39	.35	.29	.25

Dual-In-Line "DIP" Resistor Networks ±2% (G)

★ Web Code: GAP

16-Pin (140mW/Resistor) ±2%

- Max. operating voltage: 100V
- Temp. coefficient: ±100ppm/°C
- Operating temp.: -55°C to +125°C
- Insulation res.: 10,000MΩ min.
- Lead solderability/solvent resistance: meets requirements of MIL-R-83401



	1	10	100	500
Pricing	\$.59	\$.55	\$.49	\$.45
Orange Pricing	*	.19	.15	.12

Part No.	Ohms
164005	33
108556	100
856095	120
108564	220

Part No.	Ohms
108572	330
108581	470
108599	1.0k
87601	1.0k*

Part No.	Ohms
108610	4.7k
108628	10k
108644	100k

* Bussed, minimum order of 10



SIP Conformal Coated Resistor Networks ±2% (G) and ±5% (J)

- Rated power per resistor at 70°C: 125m w/ resistor
- Insulation res.: 10,000MΩ min. at 100V
- Resistor temp. coefficient: 200ppm/°C
- Low profile is compatible w/ DIPs
- Common circuit
- Oper. temp.: -55°C to 125°C

★ Web Code: WRN

6-Pin Bussed (±2%)

Part No.	Ohms	Part No.	Ohms	Part No.	Ohms	Part No.	Ohms
267098	10	267821	330	268040	12k	268171	120k
267670	22	267856	510	268058	15k	268189	150k
267688	27	267864	560	268066	18k	268197	180k
267696	33	267910	1.5k	268082	22k	268200	220k
267709	39	267928	1.8k	268091	27k	268218	270k
267717	47	267936	2k	268104	33k	268226	330k
267725	51	267944	2.2k	268111	39k	268234	390k
267733	56	267952	2.7k	268120	47k	268242	470k
267741	68	267979	3.9k	268138	56k	268251	560k
267750	82	268007	5.6k	268146	68k	268269	680k
267768	100	268015	6.8k	268154	82k	268277	820k
267776	120	268023	8.2k	268162	100k	268285	1M
267792	180	268032	10k				

8-Pin Isolated (±2%)

Part No.	Ohms	Part No.	Ohms	Part No.	Ohms	Part No.	Ohms
2078021	22	2078039	47	2078055	75	2078071	1.5k
2077984	27	2078047	68	2078135	270	2099956	15k

8-Pin Isolated (±5%)

Part No.	Ohms	Part No.	Ohms	Part No.	Ohms	Part No.	Ohms
2078119	33	2078127	47	2078098	560	2078012	4.7k
2078101	39	2077992	510	2078004	2.2k	2099964	680

8-Pin Bussed (±2%)

Part No.	Ohms	Part No.	Ohms	(G) Part No.	Ohms	Part No.	Ohms
267354	10	276040	510	97826	10k	276365	120k
275872	27	276074	820	276234	12k	276373	150k
275881	33	276091	1.2k	276242	15k	276381	180k
275899	39	276104	1.5k	276251	18k	276390	220k
275901	47	276111	1.8k	2077941	20k	276402	270k
2077896	56	97797	2.2k	276277	22k	276411	330k
275936	68	2077968	2.7k	276285	27k	276429	390k
275944	82	276154	3.3k	276293	33k	276437	470k
275987	180	276163	3.9k	276306	39k	276445	560k
275995	220	276189	5.1k	276315	47k	276453	680k
276007	270	276197	5.6k	276331	68k	276461	820k
97762	470	276200	6.8k	276349	82k	276470	1M

8-Pin Bussed (±5%)

Part No.	Ohms	Part No.	Ohms	Part No.	Ohms	Part No.	Ohms
2077829	10	2077909	56	2077950	4.7k	2077634	82k
2077853	22	2077837	150	2077802	8.2k	2077773	150k
2077861	33	2077845	1k	2077925	10k		

10-Pin Isolated (* ±2; † ±5%)

Part No.	Ohms	Part No.	Ohms	Part No.	Ohms	Part No.	Ohms
97586	330*	2078063	470†	772537	4.7k*	2078143	47k†
97594	470*	2077976	680*	2078080	10k†		

	Pricing per each					
	10	100	500	10	100	500
6-pin 2%	\$.19	\$.07	\$.15	\$.05	\$.12	\$.03
8-pin 2%	.19	.07	.15	.05	.12	.03
8-pin 5%	.19	.07	.15	.05	.12	.03
10-pin 2%	.19	.09	.15	.07	.12	.05
10-pin 5%	.19	.09	.15	.07	.12	.05

10-Pin Bussed (±2%)

Part No.	Ohms	Part No.	Ohms	Part No.	Ohms	Part No.	Ohms
267418	10	2077749	820	280920	6.8k	98095	100k
280583	22	97877	1k	280938	8.2k	281084	120k
280591	27	280816	1.2k	24643	10k	281105	180k
2077706	33	280823	1.5k	280971	18k	281113	220k
280612	39	280831	1.8k	2077933	20k	281121	270k
280621	47	2077870	2k	281025	39k	281130	330k
280663	82	97893	2.2k	281034	47k	281148	390k
97834	100	24660	4.7k	281041	56k	281172	680k
280701	180	280903	5.1k	281050	68k	281181	820k
97851	330	2077757	5.6k	281068	82k	281199	1M
97869	470						

10-Pin Bussed (±5%)

Part No.	Ohms	Part No.	Ohms	Part No.	Ohms	Part No.	Ohms
2077765	18	2077669	100	2077693	2k	2077722	47k
2077642	22	2077677	180	2077714	10k	2077731	100k
2077651	33	2077888	470				



5-Watt Wirewound Resistors (5%)

★ Web Code: TCH

Single Value Resistor Pricing: 5-Watt Wirewound Resistors (±5%)

To order: Use part no. adjacent to Ω in chart below. Values may not be combined for quantity price breaks.

Specify Part No. & Resistor Value (see Standard Resistor Values Chart below)

	1	10	100	500	2500
Pricing	\$.45	\$.39	\$.35	\$.29	\$.25
Orange Pricing	.29	.25	.19	.17	.15

Part No.	Ohms	Part No.	Ohms	Part No.	Ohms	Part No.	Ohms	Part No.	Ohms	Part No.	Ohms
659956	R 0.10	660130	R 1.0	660295	R 5.0	660480	R 27	660851	R 820	661036	R 10k
659964	R 0.15	660201	R 2.0	660375	R 10	660551	R 50	660877	R 1.0k		
660050	R 0.5	660279	R 4.0	660447	R 20	660623	R 100	661010	R 4.7k		

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

NAME BRANDS	4 LEVELS OF SAVINGS
HOUSE BRANDS	FACTORY OVERRUN
DOLLAR SALE	

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

1/8-Watt Carbon Film Resistor (±5%) Assortment

Part No.	Cross Ref.	Values	Description (see chart, right)	1	5
108303	ASST1830R	X #	10 ea. of 24 values marked by X and 50 ea. of 6 values marked below by # (540 pcs.)	\$10.95	\$8.95
108329	CAB182R	—	1/8 watt resistor component cabinet kit 30 values (540 pcs.) see page 42	25.95	22.95

1/8-Watt Resistors sold in bags of 100

Specify Part No. & Resistor Value	1	10	50	250
(see Standard Resistor Values Chart below)	\$4.00	\$2.00	\$1.00	\$0.75

1/8-Watt Resistor Assortment Values (Ohms)

10 X	150 X	330 X	680 X	2.0k X	3.3k X	5.6k X	15k X	33k X	470k X
47 X	220 #	390 X	1.0k #	2.2k X	4.7k X	6.8k X	22k X	47k X	1.0M X
100 #	270 X	470 X	1.5k X	2.7k X	5.1k X	10k #	27k X	100k #	10M X

Part No.	Ohms	Part No.	Ohms	Part No.	Ohms	Part No.	Ohms
107916	100	108118	6.8k	108185	33k	108214	100k
108097	5.1k	1849591	R	10k			

1/4-Watt Carbon Film Resistors (±5%) RoHS

Assortment Pricing: 1/4-Watt Carbon Film Resistors (±5%)

Assortments may not be combined for quantity price breaks

Part No.	Cross Ref. No.	Values Included	Description (see chart below)	Pricing		
				1	5	50
10720	ASST8-R	—	5 ea. 70 values (350 pcs.) (every other value from 10Ω - 5.6 MΩ) R	\$9.95	\$8.49	\$6.95
103166	ASST30-R	● X	10 ea. 24 values marked ● and 50 ea. 6 values marked X (540 pcs.) R	12.95	10.95	8.95
10664	ASST27-R	▲	100 ea. 27 values marked (2,700 pcs.) R	24.95	21.95	19.95
81832	N/A	—	1/4-watt resistor cabinet kit 30 values, see pg 42 (540 pcs.)	27.95	25.95	23.95

Single Value Resistor Pricing: 1/4-Watt Carbon Film Resistors (±5%)

To order: Use part number adjacent to ohms in chart below.
Values may not be combined for quantity price breaks.

Pricing per Resistor (Please order in increments of 100)				
Specify Part No. & Resistor Value	100	1000	5000	25000
(see Standard Resistor Values Chart below)	\$0.02	\$0.11	\$0.09	\$0.07

Part No.	Ohms	Part No.	Ohms	Part No.	Ohms	Part No.	Ohms	Part No.	Ohms	Part No.	Ohms	Part No.	Ohms	Part No.	Ohms
690216	R 2.2	690427	R 15	690620 ▲ ×	R 100	690822 ▲ ●	R 680	691024 ▲ ×	R 4.7k	691227 ▲ ●	R 33k	691420	R 220k	691622	R 1.5M
690224	R 2.4	690435	R 16	690638	R 110	690831	R 750	691032 ▲ ●	R 5.1k	691235	R 36k	691438	R 240k	691631	R 1.6M
690232	R 2.7	690443	R 18	690646	R 120	690849	R 820	691041 ▲ ●	R 5.6k	691243	R 39k	691446	R 270k	691892	R 1.8M
690241	R 3.0	690451	R 20	690654	R 130	690857	R 910	691059	R 6.2k	691251	R 43k	691454	R 300k	691649	R 2.0M
690259	R 3.3	690460	R 22	690662 ▲ ●	R 150	690865 ▲ ×	R 1.0k	691067	R 6.8k	691260 ▲ ●	R 47k	691462	R 330k	691657	R 2.2M
690267	R 3.6	690478	R 24	690671	R 160	690873	R 1.1k	691075	R 7.5k	691278	R 51k	691471	R 360k	691665	R 2.4M
690275	R 3.9	690486	R 27	690689	R 180	690881 ●	R 1.2k	691083	R 8.2k	691286	R 56k	691489	R 390k	691673	R 2.7M
690283	R 4.3	690494	R 30	690697	R 200	690890	R 1.3k	691091	R 9.1k	691294	R 62k	691497	R 430k	691681	R 3.0M
690291	R 4.7	690507	R 33	690700 ▲ ×	R 220	690902 ▲ ●	R 1.5k	691104 ▲ ×	R 10k	691307	R 68k	691500 ▲ ●	R 470k	691690	R 3.3M
690304	R 5.1	690515	R 36	690718	R 240	690911	R 1.6k	691112	R 11k	691315	R 75k	691518	R 510k	691702	R 3.6M
690312	R 5.6	690523	R 39	690726 ▲ ●	R 270	690929	R 1.8k	691121	R 12k	691323	R 82k	691526	R 560k	691711	R 3.9M
690321	R 6.2	690531	R 43	690734	R 300	690937 ▲ ●	R 2.0k	691139	R 13k	691331	R 91k	691534	R 620k	691737	R 4.7M
690339	R 6.8	690540 ▲ ●	R 47	690742 ▲ ●	R 330	690945 ▲ ●	R 2.2k	691147 ▲ ●	R 15k	691340 ▲ ×	R 100k	691542	R 680k	691745	R 5.1M
690347	R 7.5	690558	R 51	690751	R 360	690953	R 2.4k	691155	R 16k	691358	R 110k	691551	R 750k	691753	R 5.6M
690363	R 8.2	690566	R 56	690769 ●	R 390	690961 ▲ ●	R 2.7k	691163	R 18k	691366	R 120k	691569	R 820k	691761	R 6.2M
690371	R 9.1	690574	R 62	690777	R 430	690970	R 3.0k	691171 ●	R 20k	691374	R 130k	691577	R 910k	691770	R 6.8M
690380 ▲ ●	R 10	690582	R 68	690785 ▲ ●	R 470	690988 ▲ ●	R 3.3k	691180 ▲ ●	R 22k	691382	R 150k	691585 ▲ ●	R 1.0M	691788	R 7.5M
690398	R 11	690591	R 75	690793	R 510	690996	R 3.6k	691198	R 24k	691391	R 160k	691593	R 1.1M	691796	R 8.2M
690401	R 12	690603	R 82	690806	R 560	691008	R 3.9k	691201	R 27k	691403	R 180k	691606	R 1.2M	691809	R 9.1M
690419	R 13	690611	R 91	690814	R 620	691016	R 4.3k	691219	R 30k	691411	R 200k	691614	R 1.3M	691817 ▲ ●	R 10M

1/2-Watt Carbon Film Resistors (±5%)

Assortment Pricing: 1/2-Watt Carbon Film Resistors (±5%)

Assortments may not be combined for quantity price breaks

Part No.	Cross Ref. No.	Values Included	Description (see chart below)	1	5
107853	ASST1230R	X #	10 ea. of 24 values marked by X and 50 ea. of 6 values marked by # (540 pcs.)	\$15.95	\$14.25
107845	ASST1227R	✓	100 ea. of 27 values marked by ✓ (2,700 pcs.)	36.95	32.95
107837	ASST1270R	N/A	5 ea. of 70 values (every other value from 10Ω - 5.6 MΩ) (350 pcs.) (see chart below)	9.95	8.95
107879	CAB12R	N/A	1/2-watt resistor component cabinet kit - 30 values (540 pcs.), see page 42	29.95	26.95

Single Resistor Value Pricing: 1/2-Watt Carbon Film Resistors (±5%)

To order: Use part number adjacent to ohms in chart below.
Values may not be combined for quantity price breaks.

Pricing Per Resistor (Please order in increments of 100)				
Specify Part No. & Resistor Value	100	1000	5000	25000
(see Standard Resistor Values Chart below)	\$0.03	\$0.02	\$0.014	\$0.01

Part No.	Ohms	Part No.	Ohms	Part No.	Ohms	Part No.	Ohms	Part No.	Ohms	Part No.	Ohms	Part No.	Ohms	Part No.	Ohms
659577	<i>R</i> 1.0	661124	<i>R</i> 27	661327	<i>R</i> 180	661474	<i>R</i> 750	661634 ✓X	<i>R</i> 3.3k	661829	<i>R</i> 20k	662071	<i>R</i> 220k	662231 ✓X	<i>R</i> 1.0M
659606	<i>R</i> 1.3	661141	<i>R</i> 33	661335	<i>R</i> 200	661482	<i>R</i> 820	661642	<i>R</i> 3.6k	661837 ✓X	<i>R</i> 22k	662098	<i>R</i> 270k	662240	<i>R</i> 1.1M
659614	<i>R</i> 1.5	661167	<i>R</i> 39	661343 ✓#	<i>R</i> 220	661503 ✓#	<i>R</i> 1.0k	661651	<i>R</i> 3.9k	661845	<i>R</i> 24k	662119	<i>R</i> 330k	662291	<i>R</i> 1.8M
659657	<i>R</i> 2.2	661183 ✓X	<i>R</i> 47	661351	<i>R</i> 240	661520	<i>R</i> 1.2k	661677 ✓#	<i>R</i> 4.7k	661853 X	<i>R</i> 27k	662135	<i>R</i> 390k	662311	<i>R</i> 2.2M
659673	<i>R</i> 2.7	661191	<i>R</i> 51	661360 ✓X	<i>R</i> 270	661538	<i>R</i> 1.3k	661685 ✓X	<i>R</i> 5.1k	661870 ✓X	<i>R</i> 33k	662151 ✓X	<i>R</i> 470k	662397	<i>R</i> 4.7M
659737	<i>R</i> 4.7	661204	<i>R</i> 56	661378	<i>R</i> 300	661546 ✓X	<i>R</i> 1.5k	661693 ✓X	<i>R</i> 5.6k	661896	<i>R</i> 39k	662194	<i>R</i> 680k	662477 ✓X	<i>R</i> 10M
659809	<i>R</i> 9.1	661221	<i>R</i> 68	661386 ✓X	<i>R</i> 330	661554	<i>R</i> 1.6k	661714 X	<i>R</i> 6.8k	661917 ✓X	<i>R</i> 47k	662215	<i>R</i> 820k		
659817 ✓X	<i>R</i> 10	661239	<i>R</i> 75	661407 X	<i>R</i> 390	661562	<i>R</i> 1.8k	661731	<i>R</i> 8.2k	661933	<i>R</i> 56k	★ More 1/2W Resistors Web Code: SCH			
659833	<i>R</i> 12	661247	<i>R</i> 82	661423 ✓X	<i>R</i> 470	661571 ✓X	<i>R</i> 2.0k	661757 ✓#	<i>R</i> 10k	661950	<i>R</i> 68k				
659850	<i>R</i> 15	661263 ✓#	<i>R</i> 100	661431	<i>R</i> 510	661589 ✓X	<i>R</i> 2.2k	661773	<i>R</i> 12k	661976	<i>R</i> 82k				
659884	<i>R</i> 20	661280	<i>R</i> 120	661440	<i>R</i> 560	661600 ✓X	<i>R</i> 2.7k	661790 ✓X	<i>R</i> 15k	661992 ✓#	<i>R</i> 100k				
659892	<i>R</i> 22	661301 ✓X	<i>R</i> 150	661466 ✓X	<i>R</i> 680	661618	<i>R</i> 3.0k	661811	<i>R</i> 18k	662039	<i>R</i> 150k				

★ More 1/2W Resistors
Web Code: SCH

0805 (1/8W) Chip Resistor Assortment (±5%)

144 Values, 50 pcs. each

- 7,200 pieces total
- Max. overload volt.: 200V
- Case size (2 cases): 10.5"L x 6.7"W x 1.7"T
- Operating temp.: 70°C
- Weight: 1.9 lbs.
- Size (mm): 2.0L x 1.25W x 0.5Thick

Includes: Case with labels

Part No.	Product No.	1	5	25
172806	16-500.....	\$74.95	\$64.95	\$54.95

Resistance Value Chart:

1.2	10	75	430	2.0k	10k	51k	270k	2.2M
1.6	16	85	470	2.2k	11k	56k	300k	2.4M
2.2	18	91	510	2.4k	12k	62k	360k	2.7M
2.4	20	110	560	2.7k	13k	68k	390k	3.0M
2.7	22	120	620	3.0k	15k	75k	430k	3.3M
3.0	24	130	680	3.3k	16k	82k	470k	3.6M
3.3	27	150	750	3.6k	18k	91k	510k	3.9M
4.3	30	160	820	3.9k	20k	100k	560k	4.3M
4.7	33	180	910	4.3k	22k	110k	620k	4.7M
5.1	39	200	1.0k	4.7k	24k	120k	750k	5.1M
5.6	43	220	1.1k	5.6k	27k	150k	820k	5.6M
6.2	47	240	1.2k	6.2k	30k	160k	910k	6.8M
6.8	51	270	1.3k	6.8k	33k	180k	1.0M	7.5M
7.5	56	300	1.5k	7.5k	36k	200k	1.1M	8.2M
8.2	62	360	1.6k	8.2k	39k	220k	1.8M	9.1M
9.1	68	390	1.8k	9.1k	43k	240k	2.0M	10M

1206 (1/4W) Chip Resistor Assortment (±1%)

56 Values, 200 pcs. each; 11,200 pcs. Total

- Maximum working voltage: 200V
- Operating temp.: 70°C
- Temp. coefficient: ±100 ppm/°C
- Resistor dimensions (mm): 3.10L x 1.5 W x 0.55H
- Packaged 200 pc. strip



Part No.	Cross Ref. No.	1	5	25
156882	SMR1206SB	\$94.95	\$84.95	\$76.95

Value Chart (Ohms)

10	121	1.5k	20k	243k
12	150	2k	24.3k	301k
15	200	2.43k	30.1k	392k
20	243	3.01k	39.2k	499k
24.3	301	3.92k	49.9k	619k
30.1	392	4.99k	61.9k	750k
39.2	499	6.19k	75k	909k
49.9	619	7.5k	90.9k	1M
61.9	750	9.09k	100k	
75	909	10k	121k	
90.9	1k	12.1k	150k	
100	1.21k	15k	200k	

YAGEO

1/4W 1% Metal Film Resistors

- Wire leads
- Color bands

Qty.	100	1000	5000	10000
MF-25	\$0.009	\$0.008	\$0.007	\$0.006

MFR Series - 90 Values *Web Code: MFR

1/16W 5% Chip Resistor Arrays

- Op. temp.: +55°C to 155°C
- 4-chip resistors

Qty.	100	1000	5000	10000
TC-164	\$0.009	\$0.008	\$0.007	\$0.006
YC-164	.009	.008	.007	.006

TC164 Series - 2 Values *Web Code: ZAH

YC164 Series - 4 Values *Web Code: ZAG

Series 766 SMT Chip Resistor Array

- ±2% or 0.5Ω whichever is greater
- Dielectric strength: 100VAC
- Max. operating volt.: 50V • Bussed
- Power: 1W @ 70°C

Part No.	Product No.	1	10	100
1179284	745C101103JP	\$0.59	\$0.55	\$0.45



16mm Linear Taper Potentiometers (±20%)

- Rated volt.: 200V
- Body diameter: 0.63"
- Shaft diameter: 0.250"
- Insulation resis.: >100MΩ @ 500VDC

1/8-Watt (±20%)

- Rotational angle: 300° (±5°) • Rotation life: 15k cycles

Qty.	1	10	100	500
Pricing	\$1.39	\$1.19	\$1.05	\$0.89

Part No.	Manufacturer Part No.	Shaft Length	Ohms
286193	RV16AF-10-20R1-B53	0.531"	5k
286206	RV16AF-10-20R1-B14	0.531"	10k
286214	RV16AF-10-20R1-B54	0.531"	50k
286222	RV16AF-10-20R1-B55	0.531"	500k

1/8-Watt with SPST Switch (±20%)

- Withstanding voltage: 500VAC for 1 min.
- Switch rating: 12VDC/1A

Qty.	1	10	100	500
Pricing	\$2.15	\$1.95	\$1.75	\$1.59

Part No.	Manufacturer Part No.	Shaft Length	Ohms
286598	RV16A03F-10-15R1-B1K	0.335"	1k
286620	RV16A03F-10-15R1-B10K	0.335"	10k

1/5-Watt with SPST Switch (±20%)

- Rotational angle: 270° (±5°) • Rotation life: 100k cycles

Qty.	1	10	100	500
Orange Pricing	\$1.95	\$1.75	\$1.59	\$1.45

Part No.	Manufacturer Part No.	Shaft Length	Ohms
286767	RV16C-40-16F1-B5K	0.374"	5k
286791	RV16C-40-16F1-B500K	0.374"	500k

RC Series 1% SMD Thick Film Resistors

- Op. temp.: +55°C to 125°C
- General purpose

1/10W 0603 - 16 Values

1/8W 0805 - 45 Values

1/4W 1206 - 27 Values

1/2W 1210 - 1 Value

Qty.	100	1000	5000	10000
0603	\$0.009	\$0.008	\$0.007	\$0.006
0805	.009	.008	.007	.006
1206	.009	.008	.007	.006
1210	.009	.008	.007	.006

*Web Code: ZAA

*Web Code: ZAB

*Web Code: ZAC

*Web Code: ZAQ

Honeywell

RV4N Series (53C3)

- 2W @ 70°C ambient
- Shaft length: 0.875"
- Temp. range: -55°C to +120°C
- Mounting hole: 0.375"
- Max. panel thickness: 0.25"

Includes: Mounting hardware

Qty.	1	10	50	100
Pricing	\$10.49	\$9.25	\$7.95	\$6.95



13936 *Web Code: JAE

2-Watt Linear Taper Potentiometers (±10%)

Part No.	Military No.	Ohms	Part No.	Military No.	Ohms
241568	RV4NAYS0101A	100	13952	RV4NAYS0103A	10k
241584	RV4NAYS0251A	250	241656	RV4NAYS0203A	20k
183610	RV4NAYS0501A	500	241664	RV4NAYS0253A	25k
13936	RV4NAYS0102A	1k	95417	RV4NAYS0503A	50k
241613	RV4NAYS0202A	2k	13979	RV4NAYS0104A	100k
241621	RV4NAYS0252A	2.5k	241681	RV4NAYS0254A	250k
13995	RV4NAYS0502A	5k	241728	RV4NAYS0105A	1M



24mm Audio Taper 1/4-Watt (±20%)

- Body diameter: 0.945"
- Shaft diameter: 0.250"
- Terminal type: solder lugs
- Rotational angle: 300° (±5°)
- Insulation resistance: >100MΩ @ 500VDC
- Max. voltage: 250V

Qty.	1	10	100	500
Pricing	\$1.49	\$1.29	\$1.09	\$0.95

Part No.	Manufacturer Part No.	Shaft Length	Ohms
255426	RV24AF-10-15R1-A14	0.335"	10k
255434	RV24AF-10-15R1-A54	0.335"	50k
255442	RV24AF-10-15R1-A15	0.335"	100k
255451	RV24AF-10-15R1-A55	0.335"	500k
255469	RV24AF-10-15R1-A16	0.335"	1M



1/2-Watt Linear Taper (±10%)

- Temperature range: -55°C to +125°C
- Non-rotational key, Non-slotted shaft end
- Maximum panel thickness: 0.1875"
- Mounting hole: 0.3125"
- Shaft dia.: 0.25" • Shaft length: 0.355"

Includes: Mounting hardware

Qty.	1	10	100	500
Pricing	\$1.09	\$0.95	\$0.79	\$0.65

Part No.	Cross Ref.	Ohms	Part No.	Cross Ref.	Ohms
29050	P1K	1k	29103	P100K	100k
29197	P5K	5k	29066	P1MEG	1M
29082	P10K	10k			

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Linear Taper, Wirewound & Cermet Potentiometers

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE



1/2-Watt 24mm Linear Taper with SPST Switch ($\pm 20\%$)

- Shaft diameter: 0.25"
- Maximum voltage: 500V
- Terminal type: solder lugs
- Switch rating: 125VAC, 1A
- Rotational angle: $300^\circ (\pm 5^\circ)$



* Web Code: KBR

Qty.	1	10	100	500
Pricing	\$1.95	\$1.75	\$1.49	\$1.35

Part No.	Manufacturer Part No.	Shaft Length (L)	Ohms
263768	RV24A01F-10-15R1-B13	0.335"	1k
263792	RV24A01F-10-15R1-B14	0.335"	10k
263813	RV24A01F-10-15R1-B54	0.335"	50k
263822	RV24A01F-10-15R1-B100K	0.335"	100k
263848	RV24A01F-10-15R1-B55	0.335"	500k



1/2-Watt 24mm Linear Taper ($\pm 20\%$)

- Rotational angle: $300^\circ (\pm 5^\circ)$
- Max. volt.: 500V • Shaft Dia.: 0.25"
- Withstanding voltage for 1 minute: 500VAC

* Web Code: NRO

Qty.	1	10	100	500
Pricing	\$1.65	\$1.49	\$1.35	\$1.19

Part No.	Manufacturer Part No.	Shaft Length (L)	Ohms
255477	RV24AF-10-15R1-B52	0.335"	500
255485	RV24AF-10-15R1-B13	0.335"	1k
255493	RV24AF-10-15R1-B23	0.335"	2k
255514	RV24AF-10-15R1-B53	0.335"	5k
255522	RV24AF-10-15R1-B14	0.335"	10k
255531	RV24AF-10-15R1-BF4	0.335"	25k
255549	RV24AF-10-15R1-B54	0.335"	50k
255557	RV24AF-10-15R1-B15	0.335"	100k
255565	RV24AF-10-15R1-BF5	0.335"	250k

1/4-Watt Miniature Linear ($\pm 20\%$) X201 (19/32") Vertical Mount

- 15mm thick • Volt. rating: 350VDC
- Power rating: below 5k Ω – 1/4 watt @ 40°C ; 5k Ω & above – 1/4 watt @ 55°C
- Total rotation: $260^\circ \pm 5^\circ$

Cross Ref. Chart

Equivalent to:
CTS X201R
Bourns 3355X
PIHER PT15

Qty.	1	10	100	500
Pricing	\$0.55	\$0.45	\$0.39	\$0.35


Part No.	Cross Ref. No.	Ohms	Part No.	Cross Ref. No.	Ohms
94693	X201R1K	1k	94714	X201R10K	10k
35503	X201R252B	2.5k	94722	X201R50K	50k
94706	X201R5K	5k	94731	X201R100K	100k

3/4-Watt, 3/4" Rectangular, 15-Turn Cermet Potentiometers Side Adjustment ($\pm 10\%$)

3006P Series Value Equivalents

* Web Code: FDG

- Low PC board profile
- Temp. range: -55°C to 125°C
- Absolute min. resis.: 1% or 2 Ω
- Contact resis.: 1% or 1 Ω max.
- Power rating: 0.75W @ 70°C (400V max.)



Cross Ref. Chart

Equivalent to:
Allen Bradley 94P
Beckman 89PR
Bourns 3006P
Litton 6034Y
Mecopcal 8034
Murata 2101P
Spectrol 43P
VRN 961-20
Weston 830P

Qty.	1	10	100	500
Pricing	\$1.49	\$1.29	\$1.09	\$0.95
Orange Pricing	.75	.69	.65	.59

Part No.	Cross Ref. No.	Ohms	Part No.	Cross Ref. No.	Ohms
241235	3006P-101	100	41873	3006P-203	20k
241242	3006P-201	200	241307	3006P-203	20k
41937	3006P-501	500	241314	3006P-253	25k
241252	3006P-501	500	41911	3006P-503	50k
241269	3006P-102	1k	241323	3006P-503	50k
241270	3006P-102	1k	41849	3006P-104	100k
41865	3006P-202	2k	241332	3006P-104	100k
241278	3006P-202	2k	63001	3006P-204	200k
41890	3006P-502	5k	241350	3006P-204	200k
241286	3006P-502	5k	41953	3006P-504	500k
41822	3006P-103	10k	41806	3006P-105	1M
241294	3006P-103	10k	241374	3006P-105	1M



2 & 5-Watt Linear Taper Wirewound ($\pm 20\%$)

- Temp. range: -10°C to $+70^\circ\text{C}$
- Non-rotational key

Includes: Mounting hardware
2-Watt ($\pm 20\%$) • Length: 0.825"

- Shaft diameter: 0.25"
- Mounting hole: 0.375"
- Base length: 0.25"



* Web Code: WAR

Part No.	Cross Ref. No.	Ohms	1	10	100	500
123960	PT1K	1k	\$3.95	\$3.49	\$3.09	\$2.69

5-Watt ($\pm 20\%$)

- Shaft length/diameter: 0.67"/0.23" (6mm)
- Mounting hole: 0.32"
- Maximum panel thickness: 0.1"



Part No.	Cross Ref. No.	Ohms	1	10	100	500
140514	PW5B100	100	\$2.95	\$2.75	\$2.49	\$2.25

Bourns® 2-Watt 10-Turn Wirewound ($\pm 5\%$)

* Web Code: JBE

- Insulation resis.: (500VDC) 1000M Ω min.
- Absolute min. resis.: 1 Ω or 0.1% max.
- Operating temp. range: $+1^\circ\text{C}$ to $+125^\circ\text{C}$

3540S-1 Series: 2W @ 70°C ; metal
3590S-1 Series: 2W @ 40°C ; plastic
3540S-1 Series: 2W @ 40°C ; metal

Part No.	Mfr. Part No.	Ohms	1	10	50
183548	3540S-1-502L	5k	\$23.95	\$21.95	\$19.95
855818	3590S-2-502L	5k	12.95	11.95	10.95
183521	3540S-1-103	10k	19.95	18.95	17.95
771121	3590S-1-103L	10k	12.95	11.95	10.95
771155	3590S-2-103L	10k	12.95	11.95	10.95
771139	3590S-1-104L	100k	16.95	15.49	13.95



2-Watt 10-Turn Linear Taper ($\pm 5\%$)

Part No.	Cross Ref. No.	Ohms	1	10	50
2111880	3540S-1-502L	5k	\$9.95	\$9.49	\$8.95

Series 308 Potentiometers 1/2" Square, 0.5 Watt

- Single conductive plastic, 0.5W
- 0.125" Dia. x 0.181" L
- Smooth shaft with slotted end
- Effective rotation: $265^\circ (\pm 5^\circ)$
- Electrical rotation: $295^\circ (\pm 5^\circ)$
- Linearity: $\pm 5\%$ independent



Part No.	Mfr. Part No.	Resistance	1	10	50
2125405	308N10K	10k Ω	\$5.95	\$4.95	\$4.25

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

1/2-Watt, 1/4" Round, Cermet Potentiometers ($\pm 10\%$)

3329P Series Value Equivalents Cross Ref. Chart

- Sealed to withstand wave soldering and immersion cleaning process
- Terminals: solderable pins
- TO-5 grid
- Top adjustment
- Extended temp. range: -55°C to $+150^\circ\text{C}$

Equivalent to:
Beckman 82M
Bourns 3329P
Mecopcal 8050
MEC 471
Murata 3321P
Spectrol 62-3
VRN 171
Weston 567

Qty.	1	10	100	500
Pricing	\$1.29	\$1.15	\$0.99	\$0.79
Orange Pricing	.59	.55	.49	.45

Part No.	Cross Ref. No.	Ohms	Part No.	Cross Ref. No.	Ohms
254465	3329P-101	100	254538	3329P-203	20k
254473	3329P-201	200	95484	3329P-104	100k
95441	3329P-102	1k	254570	3329P-204	200k
96719	3329P-103	10k	254597	3329P-105	1M

1/4-Watt, 1/4" Square Trim Potentiometers Top Adjustment ($\pm 10\%$)

Bourns 3266W Series Value Equivalents

- 12 turns nominal
- Contact resis. variation: 3% or 3 Ω max. (whichever is greater)
- Absolute min. resis.: 1% or 2 Ω max. (whichever is greater)
- Power rating: 0.25W @ 70°C (300V max.)
- Insulation resistance: (500VDC) 1,000M Ω min.

Qty.	1	10	100	500
Pricing	\$1.95	\$1.75	\$1.49	\$1.25
Orange Pricing	1.49	1.25	1.09	.99

Part No.	Cross Ref. No.	Ohms	Part No.	Cross Ref. No.	Ohms
254609	3266W-500	50	254677	3266W-103	10k
254617	3266W-101	100	254692	3266W-253	25k
254626	3266W-201	200	254706	3266W-503	50k
254633	3266W-501	500	254714	3266W-104	100k
254642	3266W-102	1k	254722	3266W-204	200k
254651	3266W-202	2k	254730	3266W-504	500k
254669	3266W-502	5k	254749	3266W-105	1M

Pocket Trim Potentiometer Adjustment Tool


- Glass-filled body
- Stainless steel blade



Part No.	Description	Size	1	10	100
153315	Trimmer tool	5.2" L	\$1.95	\$1.75	\$1.49

1/2-Watt, 1/4" Square, Single-Turn Cermet Potentiometers (±10%)

- Insulation resis.: 500VDC 1000MΩ min.
- Contact res.: 1% or 3Ω • Linear taper
- Rotation life: 200 cycles
- Absolute min. res.: 1% or 2Ω
- Terminals: solderable pins
- Top adjustment: 240° nominal
- Wipe positioning: 50% nominal



Check cross ref. chart below

*Web Code: UDF

Qty.	1	10	100	500
Pricing	\$.75	\$.65	\$.55	\$.45
Orange Pricing	.55	.49	.45	.39

3362H Series (Top Adjustment Sealed)

Part No.	Cross Ref. No.	Ohms
770371	3362H-103	10k

3362P Series (Top Adjustment)

Part No.	Cross Ref. No.	Ohms
191644	3362P-200	20
189341	3362P-500	50
253972	3362P-201	200
182810	3362P-501	500
253982	3362P-102	1k
182829	3362P-502	5k
182837	3362P-103	10k

3362W Series (Side Adjustment)

Part No.	Cross Ref. No.	Ohms
254175	3362W-102	1k
254204	3362W-103	10k

1/2-Watt, 3/8" Square, Single-Turn Trimmer Potentiometers w/ Shaft

- 3 positions • Shaft length: 0.32"
- 0.1" lead spacing



Part No.	Mfr. Part No.	1	10	100
2118803	18STS1K	\$1.49	\$1.35	\$1.09
2118791	18STS10K	1.49	1.35	1.09

1/2-Watt, 3/8" Square, Single-Turn Trimmer Potentiometers

Bourns 3386 Series Equivalents

*Web Code: CDG

- Resis. tolerance: ±10%
- Insulation resis.: (500VDC) 1,000MΩ min.
- Absolute min. resis.: 2Ω max.
- Contact resis. variation: 2% or 3Ω
- Temp. range: -55°C to 125°C



Price	3386P	3386W	3386X
1 pc.	\$1.15	\$.55	\$.95
10 pcs.	.95	.49	.85
100 pcs.	.79	.45	.75
500 pcs.	.69	.39	.69

Value (Ω)	3386P - P/N	3386W - P/N	3386X - P/N
50Ω	—	241381	—
100Ω	254297	—	264612
200Ω	254300	—	—
500Ω	43123	241412	264639
1kΩ	42964	241429	—
2kΩ	43043	241437	—
5kΩ	43078	241445	264664
10kΩ	43001	241454	264671
20kΩ	43051	241461	264680
25kΩ	254377	241470	264698
50kΩ	43107	—	264701
100kΩ	43027	241497	264719
200kΩ	254407	241509	—
250kΩ	254414	241517	264735
300kΩ	43060	—	—
500kΩ	63212	—	—
1MΩ	42981	241533	264751
2MΩ	105216	—	—

1/2-Watt, 3/8" Square, Multi-Turn Trim Top Adjustment (±10%) Potentiometers

Bourns 3296 and 3299 Series Equivalents


- Resistance tolerance: ±10% • 25 turns nominal
- Insulation resistance: (500VDC) 1,000MΩ min.
- Absolute min. resistance: 1% or 2Ω max.
- Contact resis.: 1% or 3Ω
- Power rating: 0.5W @ 70°C (300V max.)
- Temp range: -55°C to 150°C

Cross Ref. Chart

Equivalent to:

Allen Bradley	E2B
Beckman	72PR
Bourns	3362P
Bourns	3386P
Copal	CT6
Copal	CT-6P
Mepcopal	8038
Murata	3104P
Murata	PVC6
Spectrol	63P
VRN	780-12P
Weston	840P
Vislay	76

*Web Code: TDF



Pricing	3296W	3296Y	3299W/Y
1 pc.	\$1.95	\$1.49	\$1.49
10 pcs.	1.75	1.35	1.35
100 pcs.	1.49	1.19	1.19
500 pcs.	1.35	.95	.95

Instrumentation Knobs (1/4" Shaft Diameters)

JAMECO EXCLUSIVE

*Web Code: EBD



Part No.	Product No.	Body	Pointer	H" x Dia."	Fig.	1	10	100
265009	JK-902B	Black	White	.60 x .95	1	\$.79	\$.69	\$.59
264998	JK-902A	Black	White	.69 x 1.31	1	.95	.79	.69
264990	JK-901D	Black/alum	White	.47 x .78	2	.89	.75	.65
264955	JK-901C	Black/alum	White	.61 x 1.06	2	.79	.69	.59
264946	JK-901B	Black/alum	White	.64 x 1.29	2	.95	.85	.75
264920	JK-901A	Black/alum	White	.79 x 1.77	2	1.49	1.35	1.09
264892	RN-113A	Black/alum	Numeric	.70 x 1.15	3	.95	.85	.75
264883	RN-112A	Black/alum	Numeric	.90 x 1.46	3	.95	.85	.75
264912	RN-114A	Black/alum	Numeric	.58 x 1.46	3	.95	.85	.75
102788	JK-903C	Black	White	.54 x 1.25	4	.69	.59	.49
104176	JK-902C	Black	White	.49 x .75	5	.95	.85	.75
202287	CP-Z1-M-S	Black/alum	White	.60 x .80	6	.79	.69	.59
136241	GKB-214	Black/alum	White	.52 x .54	7	.95	.79	.69
138393	41108-1	Black/alum	White	.56 x .85	7	1.19	1.05	.95
265077	JK-905C	Black/blue	White	.58 x .57	8	.95	.79	.69
265084	JK-905D	Black/green	White	.58 x .57	8	.95	.79	.69
265051	JK-905A	Black/red	White	.58 x .57	8	.95	.79	.69
265069	JK-905B	Black/yellow	White	.58 x .57	8	.95	.79	.69
265033	JK-904C	Black/blue	White	.47 x .78	9	.75	.59	.49
265018	JK-904A	Black/red	White	.47 x .78	9	.75	.59	.49
265025	JK-904B	Black/yellow	White	.47 x .78	9	.75	.59	.49

* For use with 1/4" knurled shaft † 1/8" shaft diameter

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

NAME BRANDS	4 LEVELS OF SAVINGS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE
-------------	---------------------	--------------	-----------------	-------------

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

High-Current Toroid & Chip Inductors

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

JAMECO ValuePro

High-Current Toroid Inductors


★ Web Code: KBY

- Low radiation
- Low core loss
- V = vertical mount;
- H = horizontal mount
- High current capacity
- Operating temp.: -55°C to +105°C
- DC - DC converter, EMI filter applications
- For complete specs see datasheets, www.Jameco.com



J. W. Miller 5700 Series Value Equivalents

- Size: A = 22.22mm max.; B = 11.09mm max. C = 15.0 ±1.0mm; D = 1.2±0.5mm
- High current capacity
- Low radiation
- Low core loss
- See page 132 for EMI suppression cores



J. W. Miller 2100 Series Value Equivalents

Qty.	1	10	100
Pricing	\$1.19	\$.95	\$.85
Orange Pricing	.55	.49	.45

Part No.	Cross Ref. No.	L (μH) @ 1kHz	Part No.	Cross Ref. No.	L (μH) @ 1kHz
371741	2101-V	10	371611	2112-H	100
371506	2101-H	10	371864	2113-V	120
371750	2102-V	12	371872	2114-V	150
371514	2102-H	12	371881	2115-V	180
371769	2103-V	15	371899	2116-V	220
371522	2103-H	15	371653	2116-H	220
371776	2104-V	18	371901	2117-V	270
371531	2104-H	18	371661	2117-H	270
371549	2105-H	22	371670	2118-H	330
371792	2106-V	27	371928	2119-V	390
371557	2106-H	27	371688	2119-H	390
371805	2107-V	33	371936	2120-V	470
371565	2107-H	33	371696	2120-H	470
371813	2108-V	39	371944	2121-V	560
371573	2108-H	39	371709	2121-H	560
371581	2109-H	47	371952	2122-V	680
371830	2110-V	56	371717	2122-H	680
371848	2111-V	68	371961	2123-V	820
371602	2111-H	68	371725	2123-H	820
371856	2112-V	100	371979	2124-V	1000

J. W. Miller 2200 Series Value Equivalents

Qty.	1	10	100
Pricing	\$1.29	\$1.15	\$.95
Orange Pricing	.65	.59	.55

Part No.	Cross Ref. No.	L (μH) @ 1kHz	Part No.	Cross Ref. No.	L (μH) @ 1kHz
371021	2201-H	10	371151	2214-H	150
371274	2202-V	12	371400	2215-V	180
371282	2203-V	15	371160	2215-H	180
371047	2203-H	15	371418	2216-V	220
371063	2205-H	22	371426	2217-V	270
371071	2206-H	27	371186	2217-H	270
371320	2207-V	33	371434	2218-V	330
371080	2207-H	33	371194	2218-H	330
371338	2208-V	39	371442	2219-V	390
371098	2208-H	39	371207	2219-H	390
371101	2209-H	47	371451	2220-V	470
371119	2210-H	56	371215	2220-H	470
371354	2210-V	56	371469	2221-V	560
371362	2211-V	68	371223	2221-H	560
371127	2211-H	68	371477	2222-V	680
371371	2212-V	100	371231	2222-H	680
371135	2212-H	100	371485	2223-V	820
371389	2213-V	120	371240	2223-H	820
371143	2213-H	120	371493	2224-V	1000
371397	2214-V	150	371258	2224-H	1000

Qty.	1	10	100
Orange Pricing	\$.95	\$.85	\$.75

Part No.	Cross Ref. No.	L (μH) @ 1kHz	Part No.	Cross Ref. No.	L (μH) @ 1kHz
208259	5701	10	208274	5703	125
208266	5702	25	208283	5704	275
208311	5711	50	208292	5705	450
208303	5707	75			

J. W. Miller 2300 Series Value Equivalents

Qty.	1	10	100
Pricing	\$1.39	\$1.25	\$1.19
Orange Pricing	.75	.65	.59

Part No.	Cross Ref. No.	L (μH) @ 1kHz	Part No.	Cross Ref. No.	L (μH) @ 1kHz
386901	2301-V	10	387188	2313-V	120
386361	2301-H	10	386636	2313-H	120
386935	2302-V	12	386652	2314-H	150
386396	2302-H	12	387233	2315-V	180
386951	2303-V	15	386679	2315-H	180
386425	2303-H	15	387268	2316-V	220
387006	2305-V	22	386695	2316-H	220
386468	2305-H	22	387284	2317-V	270
387022	2306-V	27	386724	2317-H	270
386484	2306-H	27	387330	2319-V	390
386505	2307-H	33	386767	2319-H	390
387065	2308-V	39	387364	2320-V	470
386521	2308-H	39	386783	2320-H	470
387090	2309-V	47	387381	2321-V	560
386548	2309-H	47	387410	2322-V	680
387111	2310-V	56	387436	2323-V	820
387137	2311-V	68	386855	2323-H	820
386581	2311-H	68	388041	2324-V	1000
386601	2312-H	100	386880	2324-H	1000

JAMECO ValuePro

Chip Inductors (SMD)

- Ceramic core, wire wound for superior reliability
- High self-resonant frequency
- Stable electrical characteristics
- Flat top surface for automated pick and place

PM0805/
PM1008



PM0805 Series Equivalents

Qty.	10	100
Pricing	\$.12	\$.09

Part No.	Cross Ref. No.	L (nH)	Part No.	Cross Ref. No.	L (nH)
663592	0805-2N2M	2.2	663664	0805-33NM	33
663605	0805-3N3M	3.3	663672	0805-39NM	39
663621	0805-8N2M	8.2	663681	0805-47NM	47
663630	0805-12NM	12	663701	0805-68NK	68
663648	0805-18NM	18	663710	0805-82NK	82
663656	0805-27NM	27			

JAMECO ValuePro

Chip Inductors (SMD) (Continued)

PM1008 Series Equivalents

Qty.	10	100
Orange Pricing	\$.12	\$.09

Part No.	Cross Ref. No.	L (nH)	Part No.	Cross Ref. No.	L (nH)
663736	1008-10NM	10	663867	1008-R12K	120
663744	1008-12NM	12	663875	1008-R15K	150
663752	1008-15NM	15	663883	1008-R18K	180
663761	1008-18NM	18	663891	1008-R22K	220
663779	1008-22NM	22	663904	1008-R27K	270
663787	1008-27NM	27	663912	1008-R33K	330
663795	1008-33NM	33	663921	1008-R39K	390
663808	1008-39NM	39	663939	1008-2R7K	2700
663816	1008-47NM	47	663947	1008-3R3K	3300
663824	1008-56NK	56	663955	1008-3R9K	3900
663832	1008-68NK	68	663963	1008-4R7K	4700
663841	1008-82NK	82			

PM1210 Series Equivalents

Qty.	10	100
Orange Pricing	\$.12	\$.09

Part No.	Cross Ref. No.	L (μH)	Part No.	Cross Ref. No.	L (μH)
663971	1210-1R0J	1.0	664114	1210-150J	15
663980	1210-1R2J	1.2	664122	1210-180J	18
663998	1210-1R5J	1.5	664149	1210-270J	27
664000	1210-1R8J	1.8	664157	1210-330J	33
664018	1210-2R2J	2.2	664165	1210-390J	39
664026	1210-2R7J	2.7	664173	1210-470J	47
664034	1210-3R3J	3.3	664181	1210-560J	56
664042	1210-3R9J	3.9	664190	1210-680J	68
664051	1210-4R7J	4.7	664202	1210-820J	82
664069	1210-5R6J	5.6	664211	1210-101J	100
664077	1210-6R8J	6.8	664229	1210-121J	120
664085	1210-8R2J	8.2	664237	1210-151J	150
664093	1210-100J	10	664245	1210-181J	180
664106	1210-120J	12	664253	1210-221J	220

PM1812 Series Equivalents

Qty.	10	100
Orange Pricing	\$.12	\$.09

Part No.	Cross Ref. No.	L (μH)	Part No.	Cross Ref. No.	L (μH)
643014	1812-R10K	0.10	643276	1812-150J	15
643022	1812-R12K	0.12	643284	1812-180J	18
643031	1812-R15K	0.15	643292	1812-220J	22
643049	1812-R18K	0.18	643305	1812-270J	27
643057	1812-R22K	0.22	643313	1812-330J	33
643065	1812-R27K	0.27	643321	1812-390J	39
643073	1812-R33K	0.33	643330	1812-470J	47
643081	1812-R39K	0.39	643348	1812-560J	56
643090	1812-R47K	0.47	643356	1812-680J	68
643102	1812-R56K	0.56	643364	1812-820J	82
643111	1812-R68K	0.68	643372	1812-101J	100
643129	1812-R82K	0.82	643381	1812-121J	120
643153	1812-1R5J	1.5	643399	1812-151J	150
643161	1812-1R8J	1.8	643401	1812-181J	180
643188	1812-2R7J	2.7	643410	1812-221J	220
643196	1812-3R3J	3.3	643436	1812-331J	330
643209	1812-3R9J	3.9	643444	1812-391J	390
643217	1812-4R7J	4.7	643452	1812-471J	470
1864812	1812-6R85	6.8	643461	1812-561J	560
643241	1812-8R2J	8.2	643479	1812-681J	680
643268	1812-120J	12	643487	1812-821J	820

* Murata

Have A Large Volume Order That Requires Special Pricing? Call us at 1-800-831-4242

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

1206 Chip Ferrite Beads

For EMI Filtering

- 26Ω Impedance ±25% @ 100MHz
- Operating temp.: -55° to 125°C
- DC resistance: 0.05Ω

Order in multiples of 10

Part No.	Mfr. Part No.	Current	10	100	500
1845371	BLM31AJ260SN1R	500mA	\$.09	\$.08	\$.07

Epoxy Conformal Coated RF Chokes

- Operating temp.: -55°C to +105°C
- Dielectric strength: 500Vrms
- Color bands identification
- Low DCR
- Low cost

*Web Code: WBG

J. W. Miller 77F Series Equivalents

- High current and self-resonant frequency
- Overall length: 2.41"
- Body length: 0.41"
- Lead length: 1.0"
- Body diameter: 0.157"

Order in multiples of 10

Qty.	10	100
Pricing	\$.15	\$.12
Orange Pricing	.05	.04

Part No.	Cross Ref. No.	L (μH)	Part No.	Cross Ref. No.	L (μH)
371995	77F6R8K*	6.8	372058	77F101J	100
372007	77F100K*	10	372066	77F221J	220
372015	77F270K*	27	372074	77F331J	330
372023	77F330J	33	372082	77F391J	390
372031	77F470J	47	372091	77F102J	1000
372040	77F820J	82			

*L (μH) ±10%

J. W. Miller 78F Series Equivalents

- High Q and self-resonant frequency
- Overall length: 2.28"
- Body diameter: 0.11"
- Lead length: 1.0"
- Body length: 0.28"

Order in multiples of 10

Qty.	10	100
Pricing	\$.15	\$.12
Orange Pricing	.05	.04

Part No.	Cross Ref. No.	L (μH)	Part No.	Cross Ref. No.	L (μH)
372103	78F6R8K*	0.68	372197	78F220J	22
372111	78F1R0K*	1.0	372200	78F270J	27
372120	78F1R8K*	1.8	372218	78F330J	33
372138	78F2R7K*	2.7	372226	78F390J	39
372146	78F3R3J	3.3	372234	78F470K	47
372154	78F4R7J	4.7	372251	78F121J	120
372162	78F8R2J	8.2	372269	78F221J	220
372171	78F100J	10	372277	78F471J	470
372189	78F120J	12			

Epoxy Conformal Coated Chokes

- Operating temp.: -25°C to +85°C
- Tolerance: 5%

*Web Code: WBG

Order in multiples of 10

Qty.	10	100
Pricing	\$.15	\$.12
Orange Pricing	.07	.05

Part No.	Cross Ref. No.	L (μH)	Part No.	Cross Ref. No.	L (μH)
208143	CEC-100J	10	208215	CEC-331J	330
208151	CEC-270J	27	208223	CEC-471J	470
208160	CEC-330J	33	208231	CEC-821J	820
208194	CEC-101J	100	208240	CEC-102J	1000
208207	CEC-221J	220			

Conformal Coated RF Chokes

J. W. Miller 5300 Series Value Equivalents

- High current & self-resonant frequency
- Low DCR
- Epoxy coated to protect winding from harsh environments
- Low cost

*Web Code: MBY

Qty.	1	10	100
Pricing	\$.55	\$.39	\$.29
Orange Pricing	.29	.25	.19

Part No.	Cross Ref. No.	L (μH)	Part No.	Cross Ref. No.	L (μH)
644332	5300-03R	1.5	642476	5300-19R	33
644341	5300-10R	5.6	642492	5300-25R	100
644367	5300-13R	10	642530	5300-33R	470
644375	5300-17R	22			

Molded RF Chokes

- Dielectric strength: 1000Vrms
- Injection molded to protect from extreme environment
- High Q and high reliability

*Web Code: PBY

J. W. Miller 9230 Series Equivalents

Qty.	1	10	100
Pricing	\$.59	\$.49	\$.35
Orange Pricing	.35	.29	.25

Part No.	Cross Ref. No.	L (μH)	Part No.	Cross Ref. No.	L (μH)
372285	9230-94	0.10	372373	9230-34	3.9
372293	9230-00	0.15	372381	9230-36	4.7
372306	9230-04	0.22	372390	9230-44	10
372314	9230-10	0.39	372402	9230-52	22
372322	9230-12	0.47	372411	9230-56	33
372331	9230-14	0.56	372429	9230-64	68
372349	9230-16	0.68	372437	9230-68	100
372357	9230-20	1.0	372445	9230-70	120
372365	9230-32	3.3			

J. W. Miller 9250 Series Equivalents

Qty.	1	10	100
Pricing	\$.49	\$.45	\$.39
Orange Pricing	.49	.45	.39

Part No.	Cross Ref. No.	L (μH)	Part No.	Cross Ref. No.	L (μH)
372453	9250-102	1.0	372509	9250-473	47
372461	9250-222	2.2	372517	9250-104	100
372470	9250-472	4.7	372525	9250-224	220
372488	9250-103	10	372533	9250-474	470
372496	9250-223	22	372550	9250-225	2200

Hash RF Chokes

J. W. Miller 5200 Series Value Equivalents

- High current capacity
- Varnish coated
- Ideal for use as EMI filter, output choke smoothing coil
- Low DCR

Qty.	1	10	100
Pricing	\$.69	\$.59	\$.55

Part No.	Cross Ref. No.	L (μH)	Part No.	Cross Ref. No.	L (μH)
642396	5230R	4	642417	5254R	250
642409	5240R	40	642425	5256R	500
681070	5252R	125	642433	5258R	1000

Axial Leaded RF Chokes

- Inductive tolerance: 10%
- Operating temp.: -55°C to +125°C
- Overall length: 3.6" max.
- Lead length: 1.5" max.
- Body length: 0.77" max.
- Body dia.: 0.3" max.

*Web Code: XCF

J. W. Miller 4600 Series Value Equivalents

Qty.	1	10	100
Pricing	\$.35	\$.29	\$.25

Part No.	Cross Ref. No.	L (μH)	Part No.	Cross Ref. No.	L (μH)
208071	4604	1.5	642337	4624R	15
208080	4606	2.4	642345	4626R	24
208101	4609	5.5	642353	4629R	55
208119	4610	6.2	642388	4632R	100
208127	4611	8.2			

High Current Axial RF Chokes

- High current capacity
- Ferrite bobbin core
- Test frequency: 1kHz
- Low DCR

JAMECO EXCLUSIVE

*Web Code: BCG

J. W. Miller 5800 Series Value Equivalents

Qty.	1	10	100
Pricing	\$.69	\$.55	\$.39
Orange Pricing	.35	.29	.25

Part No.	Cross Ref. No.	L (μH)	Part No.	Cross Ref. No.	L (μH)
642548	5800-3R9R	3.9	642652	5800-271R	270
642556	5800-8R2R	8.2	642661	5800-331R	330
642564	5800-100R	10	642679	5800-391R	390
642572	5800-470R	47	642687	5800-471R	470
642581	5800-560R	56	642695	5800-102R	1000
642599	5800-820R	82	642708	5800-152R	1500
642601	5800-101R	100	642716	5800-222R	2200
642610	5800-121R	120	642724	5800-472R	4700
642628	5800-151R	150	642732	5800-682R	6800
642636	5800-181R	180	642741	5800-103R	10000
642644	5800-221R	220			

J. W. Miller 5900 Series Value Equivalents

Qty.	1	10	100
Pricing	\$.99	\$.79	\$.59
Orange Pricing	.49	.45	.39

Part No.	Cross Ref. No.	L (μH)	Part No.	Cross Ref. No.	L (μH)
642759	5900-100R	10	642839	5900-271	270
642767	5900-220R	22	642847	5900-331R	330
642775	5900-470R	47	642855	5900-391R	390
642783	5900-560R	56	642871	5900-681R	680
642791	5900-101R	100	642880	5900-102R	1000
642804	5900-121R	120	642919	5900-682R	6800
642812	5900-151R	150	642901	5900-472R	4700
642821	5900-221R	220	642927	5900-103R	10000

Jump from catalog to web.
Quick Search by Web Code

Web Code SEARCH

***Web Code: EPS**

Enter web codes online for additional product listings and specifications. Look for the web code box on the home page.

www.Jameco.com/More

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

JAMECO ValuePro

Hook-Up Wire – Single & Dual Rated

- Applications: Interconnection circuits, wiring of computer and data processing equipment, applications and automotive • Tin-plated copper • PVC insulation • Stranded • Sold in 100' rolls

Single Rated (UL1007): -40° to 80°C: 300V peak

Dual Rated (UL1007 & UL1569): -40° to 105°C: 600V peak

Appliance Wiring Material (AWM) is UL recognized covering of insulated wire & cable intended for internal wiring of appliances & equipment.



AWG	Stranding	UL1007	UL1569	Black P/N	Red P/N	White P/N	Green P/N	Yellow P/N	Blue P/N	1	5	10
28	7 x 36	x	x	734611	734603	734610	734606	734605	734614	\$6.95	\$6.49	\$5.95
26	7 x 34	x	x	734511	734503	734510	734506	734505	734514	7.95	7.29	6.49
24	7 x 32	x	x	734411	734403	734410	734406	734405	734414	8.95	7.95	6.95
22	7 x 30	x		126085	126034	126077	310852	310878	310886	6.95	5.95	4.95
22	7 x 30	x	x	734311	734303	734310	734306	734305	734314	9.95	8.95	7.95
20	10 x 30	x		125840	125795	125831	310894	310915	310922	9.95	8.95	7.95
20	10 x 30	x	x	734211	734203	734210	734206	734205	734214	11.95	10.95	9.95
18	16 x 30	x		125787	125736	125752	310932	310949	310958	13.95	12.95	11.95
18	16 x 30	x	x	734111	734103	734110	734106	734105	734114	16.95	15.49	13.95
16	26 x 30	x	x	734011	734003	734010	734006	734005	734014	19.95	17.95	15.95

*Web Code: JAS

Composite Data, Audio, Video Security & Control Cable

Two RG6 18 AWG solid bare copper conductors and Two 4-pair UTP 24 AWG solid bare copper conductors



- Gas injected FPE insulation coax cable, polyolefin insulation CAT5e cable and F-R PVC jackets
- Banana Peel™ jacketless cable
- Component nominal outer diameter: 0.194"
- Overall nominal outer diameter: 0.600"
- Color: black

Part No.	Mfr. Part No.	Description	Price
734163	7913S-1000	1000' reel	\$549.95

Prototyping Products – pgs 172-178

Soldering Equipment – pgs 165-170

Wire Cutters/Strippers – pgs 160-162

Solid Hook-Up Wire – 22 AWG

*Web Code: PAF

- Temperature range: -55°C to +105°C
- Passes UL VW-1 flame test • MIL-W-16878/1, type B PVC
- For use with breadboards such as the JE20 series, pg 172

100 Foot Reel		Pricing	
Part No.	Color	1	5
36768	Blue	\$7.49	\$6.79
36792	Black	7.49	6.79
36822	Green	7.49	6.79
36856	Red	7.49	6.79
36881	White	7.49	6.79
36920	Yellow	7.49	6.79

1000 Foot Reel		Pricing	
Part No.	Color	1	5
36776	Blue	\$59.95	\$54.95
36805	Black	59.95	54.95
36840	Green	59.95	54.95
36864	Red	59.95	54.95
36899	White	59.95	54.95
36928	Yellow	59.95	54.95



Kynar™ Wire-Wrap Wire – 30 AWG

*Web Code: NAC

- Polyvinylidene fluoride insulation • Used for prototyping
- Silver plated copper (solid conductor) • UL 1423
- Temperature: -40°C to +125°C • Passes UL VW-1 flame test
- Wire wrap tools, pg 163 • See pg 18 for sockets

100 Foot Reel		Pricing	
Part No.	Color	1	5
22542	Blue	\$8.95	\$7.95
22577	Black	8.95	7.95
22631	Red	8.95	7.95
22665	White	8.95	7.95
22606	Green	8.95	7.95
22700	Yellow	8.95	7.95

1000 Foot Reel		Pricing	
Part No.	Color	1	5
22551	Blue	\$54.95	\$49.95
22585	Black	54.95	49.95
22649	Red	54.95	49.95
22673	White	54.95	49.95
22614	Green	54.95	49.95
22702	Yellow	54.95	49.95



JAMECO ValuePro

Twisted Paired Cable – 24 AWG

- PVC insulation • Reduced EMI
- Use for hook-up wire • 80°C
- Stranded tinned wire (7 x 32) • 300 V



*Web Code: EBC

100 Foot Reel		Pricing	
Part No.	Color	1	5
173164	Black/white	\$8.95	\$7.95
105912	Grn/white	8.95	7.95
173148	Red/white	8.95	7.95

1000 Foot Reel		Pricing	
Part No.	Color	1	5
173172	Black/white	\$79.95	\$69.95
105807	Grn/white	79.95	69.95
173156	Red/white	79.95	69.95



JAMECO ValuePro

Modular Telephone Cable – 28 AWG

- Color coded conductors
- Flat modular cable • Gray
- 7 x 43 stranded • PVC jacket

*Web Code: LCG

JAMECO EXCLUSIVE



Part No.	Cross Ref. No.	Conductors	Length (ft.)	1	5	10
644666	300-840SL-100	4	100	\$5.95	\$5.49	\$4.95
644674	300-840SL-1000	4	1000	49.95	44.95	39.95
644691	300-860SL-100	6	100	8.95	7.95	6.95
644703	300-860SL-1000	6	1000	69.95	64.95	59.95
644720	300-880SL-100	8	100	9.95	8.95	7.95
644738	300-880SL-1000	8	1000	89.95	84.95	79.95

JAMECO ValuePro

Bus Bar Hook-Up Wire

*Web Code: BBW

Tinned Copper (Type 1) and Bare Copper (Type 2)

- Solid soft drawn annealed bare copper
- Type 1 – Tinned copper, sold in 100' reels
- Type 2 – Non-insulated bare copper, sold in 1/4 lb. reels
- Single conductor
- Approvals: Type 1: ASTM-B-3, QQ-W-343-Type-S; Type 2: ASTM B-3

Part No.	Gauge	Type	O.D (in.)	Amps	1	5	25
2098478	24 AWG	1	0.020	5	\$6.95	\$6.25	\$5.49
2119339	24 AWG	2	0.020	—	10.95	9.95	8.95
2098486	22 AWG	1	0.025	7	7.95	7.25	6.49
2119321	22 AWG	2	0.025	—	9.95	8.95	7.95
2098494	20 AWG	1	0.032	8.5	9.95	8.95	7.95
2119312	20 AWG	2	0.025	—	8.95	7.95	7.25
2098507	18 AWG	1	0.040	16	13.95	12.49	10.95
2119304	18 AWG	2	0.040	—	7.95	7.25	6.49
2098515	16 AWG	1	0.061	19	17.95	16.49	14.95
2119291	16 AWG	2	0.051	—	6.49	5.75	4.95



1/4 Lb. Solid Bare Nickel Chromium Resistance Wire

This wire is made for applications requiring extremely high temperatures and resistance such as electrical heating and industrial rheostats. The heat rating allows the wire to withstand severe overloads and short circuits.

- 60% nickel, 16% chromium, 24% iron
- Temperature: to 3056°F (1680°C)
- Excellent resistance characteristics

*Web Code: BNC



Part No.	Gauge	Nom. O.D	Length (ft.)	Ω/Ft. @ 68F	1	5	25
2119371	16 AWG	.0510"	32	.2595	\$15.95	\$14.49	\$13.49
2119380	18 AWG	.0400"	51	.4219	16.49	14.95	13.95
2119398	20 AWG	.0320"	81	.6592	16.95	15.49	14.59
2119401	22 AWG	.0253"	129	1.055	17.95	16.49	14.95
2119419	24 AWG	.0201"	205	1.671	18.95	17.49	15.95

JAMECO ValuePro

1/4 Lb. Magnet Wire


*Web Code: MGT

Excellent Windability!

Magnetic wire is perfect for custom winding applications: coils, inductors, transformers, motors, ballasts, relays, speakers and timers.

- Solid bare copper conductor
- Polyurethane/polyamide (nylon) insulation
- Solderable @ 806°F/430°C (14-24 AWG), 680°F/360°C (25-40 AWG)
- Approvals: MIL JW-1177/9, MW 28-C, Class 130 (14-24 AWG)
- MIL JW-1177/42, MW 80-C, Class 155 (25-40 AWG)

Part No.	Gauge	Nom. O.D	Length (ft.)	Temp. Range	1	5	25
2098371	16 AWG	.0524"	32	-30° – 130°C	\$5.49	\$4.95	\$4.49
2098380	18 AWG	.0418"	51	-30° – 130°C	5.75	5.25	4.75
2098398	20 AWG	.0334"	81	-30° – 130°C	5.95	5.49	4.95
2098401	22 AWG	.0265"	129	-30° – 130°C	6.49	5.95	5.49
2098419	24 AWG	.0213"	205	-30° – 130°C	6.95	6.49	5.95
2119347	26 AWG	.0169"	328	-30° – 155°C	7.95	7.25	6.49
2119355	28 AWG	.0136"	520	-30° – 155°C	8.95	7.95	7.25
2119363	30 AWG	.0109"	825	-30° – 155°C	9.49	8.49	7.49





Coaxial Cable

JAMECO ValuePro

* Web Code: CLC

Common Coax Cables: RG-#/U (RG = Radio Grade; U = Universal)

RG-6: CATV/SAT, 18 AWG Coax, 75Ω

RG-8: Amateur radio; thicker than RG-6, 50Ω

RG-58: Radio communication, amateur radio, 50Ω

RG-59: Baseband video in CCTV, low shielding, 75Ω

RG-174: WiFi pigtailed, more flexible but higher loss than RG-58, 50Ω

- Color: black
- PVC jacket

Part No.	*Mfr.	Product No.	Fig.	Length	AWG	Type	Nom. Imp (Ω)	Insul.	Bare Copper	Braid Shield	Pricing	
											1	5
233269	BDN	9116 010100	1	100' Reel	18 Solid	Series 6	75	B	0.040"	60 ³	\$10.95	\$9.95
232733	BDN	1189A 010100	2	100' Reel	18 Solid	Series 6	75	B	0.040"	60/40 ²	12.95	11.95
732769	BDN	8214 010500	3	500' Reel	11 Stranded	RG8/U	50	A	0.108"	97	549.95	529.95
232776	BDN	8214 0101000	3	1000' Reel	11 Stranded	RG8/U	50	A	0.108"	97	649.95	629.95
732865	BDN	8237 0101000	3	1000' Reel	13 Stranded	RG8/U	52	A	0.085"	97	849.95	799.95
2124146	JVP	4449-100	4	100' Reel	19 Stranded	RG58A/U	50	A	0.036"	95	32.95	31.49
644754	JVP	RG58/U-100	5	100' Reel	20 Solid	RG58/U	50	A	0.015"	38	14.95	13.95
644762	JVP	RG58/U-1000	5	1000' Reel	20 Solid	RG58/U	50	A	0.015"	38	109.95	99.95
234158	BDN	543945 010100	6	100' Reel	20 Solid	RG59/U	75	C	0.145"	95	16.95	15.95
234086	BDN	1505A 010100	7	100' Reel	20 Solid	RG59/U	75	B	0.032"	98 ¹	32.95	29.95
232961	BDN	8281 010100	3	100' Reel	20 Solid	RG59/U	75	A	0.031"	98	44.95	39.95
734161	BDN	543945 010500	6	500' Reel	20 Solid	RG59/U	75	C	0.145"	95	79.95	74.95
732980	BDN	8281 010500	3	500' Reel	20 Solid	RG59/U	75	A	0.031"	98	349.95	329.95
734088	BDN	1505A 010100	7	1000' Reel	20 Solid	RG59/U	75	B	0.032"	98 ¹	329.95	319.95
644797	JVP	RG59/U-100	5	100' Reel	22 Solid	RG59/U	75	A	0.005"	31	11.95	10.95
644800	JVP	RG59/U-1000	5	1000' Reel	22 Solid	RG59/U	75	A	0.005"	31	74.95	69.95
232653	BDN	9259 010100	3	100' Reel	22 Stranded	RG59/U	75	A	0.030"	95	32.95	29.95
2119443	JVP	4459-100	4	100' Reel	26 Stranded	RG174/U	50	A	0.019"	90	39.95	37.95
644818	JVP	RG174/U-100	4	100' Reel	26 Stranded	RG174/U	50	A	0.020"	98	19.95	18.95
644826	JVP	RG174/U-1000	4	1000' Reel	26 Stranded	RG174/U	50	A	0.020"	98	179.95	169.95
234135	BDN	8218 010U100	5	100' Reel	27 Stranded	Video	75	A	0.017"	93	34.95	29.95



Fig. 1



Fig. 2




Fig. 3



Fig. 4




Fig. 5



Fig. 6



Fig. 7

A = Polyethylene
B = Gas Injected Foam HDPE
C = Polyolefin
1 = With DuoFoil shield
2 = Duobond IV shield
3 = Duobond II + Aluminum Braid Shield

Wire & Cable



Multi-Conductor Cable

JAMECO ValuePro

* Web Code: MCC

Part No.	Mfr.	Product No.	Fig.	AWG (stranded)	# of Cond.	Length	Jacket	Wire Color	Insul.	Nom. O.D.	Pricing	
											1	5
732996	BDN	8442 060100	1	22 ¹	2	100' Reel	Chrome/PVC	Black, Red	A	0.170"	\$29.95	\$26.95
733008	BDN	8442 060500	1	22 ¹	2	500' Reel	Chrome/PVC	Black, Red	A	0.170"	109.95	99.95
734054	BDN	8442 060U1000	1	22 ¹	2	1000' Unreel	Chrome/PVC	Black, Red	A	0.170"	199.95	189.95
733024	BDN	8443 060100	2	22 ¹	3	100' Reel	Chrome/PVC	Black, Red, Green	A	0.172"	34.95	32.95
733032	BDN	8443 060500	2	22 ¹	3	500' Reel	Chrome/PVC	Black, Red, Green	A	0.172"	139.95	135.95
733059	BDN	8444 060100	3	22 ¹	4	100' Reel	Chrome/PVC	Black, Red, White, Green	A	0.185"	44.95	42.95
733067	BDN	8444 060500	3	22 ¹	4	500' Reel	Chrome/PVC	Black, Red, White, Green	A	0.185"	179.95	169.95
733083	BDN	8445 060100	4	22 ¹	5	100' Reel	Chrome/PVC	Blk, Red, Wh, Grn, Brn	A	0.194"	54.95	49.95
733104	BDN	8445 0601000	4	22 ¹	5	1000' Reel	Chrome/PVC	Blk, Red, Wh, Grn, Brn	A	0.194"	349.95	339.95
733201	BDN	8770 060100	5	18/20 drain wire ²	3	100' Reel	Chrome/PVC	Black, Red, Clear	B	0.246"	59.95	57.95
733227	BDN	8770 0601000	5	18/20 drain wire ²	3	1000' Reel	Chrome/PVC	Black, Red, Clear	B	0.246"	599.95	579.95
2119531	JVP	5576-100	5	22/22 drain wire ²	3	100' Reel	Gray/PVC	Black, Red, White	B	0.190"	29.95	28.49
644383	JVP	SC4-25	6	24 drain wire ³	4	25' Reel	Gray/PVC	Multi-Colored	A	0.200"	6.95	6.25
644391	JVP	SC4-100	6	24 drain wire ³	4	100' Reel	Gray/PVC	Multi-Colored	A	0.200"	24.95	22.49
644404	JVP	SC4-1000	6	24 drain wire ³	4	1000' Reel	Gray/PVC	Multi-Colored	A	0.200"	179.95	169.95
644412	JVP	SC-925	6	24 drain wire ³	9	25' Unreel	Gray/PVC	Multi-Colored	A	0.230"	14.95	12.95
644421	JVP	SC9-100	6	24 drain wire ³	9	100' Reel	Gray/PVC	Multi-Colored	A	0.230"	44.95	39.95
644439	JVP	SC9-1000	6	24 drain wire ³	9	1000' Reel	Gray/PVC	Multi-Colored	A	0.230"	349.95	329.95
644447	JVP	SC15-25	6	24 drain wire ³	15	25' Unreel	Gray/PVC	Multi-Colored	A	0.280"	24.95	22.95
644455	JVP	SC15-100	6	24 drain wire ³	15	100' Reel	Gray/PVC	Multi-Colored	A	0.280"	49.95	44.95
644463	JVP	SC15-1000	6	24 drain wire ³	15	1000' Reel	Gray/PVC	Multi-Colored	A	0.280"	399.95	379.95
644471	JVP	SC25-25	6	24 drain wire ³	25	25' Unreel	Gray/PVC	Multi-Colored	A	0.370"	29.95	26.95
644480	JVP	SC25-100	6	24 drain wire ³	25	100' Reel	Gray/PVC	Multi-Colored	A	0.370"	89.95	85.95
2006377	JVP	SC25-500	6	24 drain wire ³	25	500' Unreel	Gray/PVC	Multi-Colored	A	0.370"	399.95	379.95



Fig. 1



Fig. 2



Fig. 3




Fig. 4




Fig. 5




Fig. 6

1 = Unshielded
2 = Overall Beldfoil Shield
3 = 100 Aluminum Mylar Shield
A = PVC B = Polyethylene
Blk = Black Brn = Brown
Grn = Green Wh = White

Clearance
Center



Large Quantities Heavily Discounted
Factory Overruns - Jameco Excess Inventory - Discontinued Product Lines
www.Jameco.com/Clearance

* BDN = Belden | JVP = Jameco ValuePro

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com




Paired Cable

★ Web Code: HCS

Part No.	Product No.	Fig.	AWG/Drain Wire	# of Pairs	Length	Jacket	Wire Color	Insul.	Pricing		
									1	5	
733172	8720 060100	1	14 / 16	1	100' Reel	Chrome/PVC	Black/Clear	B	\$79.95	\$74.95	
733190	8720 060500	1	14 / 16	1	500' Reel	Chrome/PVC	Black/Clear	B	369.95	349.95	
734066	8720 060U500	1	14 / 16	1	500' Unreel	Chrome/PVC	Black/Clear	B	369.95	349.95	
233146	8714 060100	1	16 / 18	1	100' Reel	Chrome/PVC	Black/Clear	B	69.95	63.95	
2119515	5574-100	1	18 / 24	1	100' Reel	Chrome/PVC	Black/White	B	41.95	37.95	
234194	8762 060100	1	20 / 20	1	100' Reel	Chrome/PVC	Black/Clear	B	29.95	26.95	
733112	8451 010100	3	22 / 22	1	100' Reel	Black/PVC	Black/Red	A	26.95	24.95	
734063	8451 010U500	3	22 / 22	1	500' Unreel	Black/PVC	Black/Red	A	129.95	115.95	
734180	8723 060100	2	22 / 24	2	100' Reel	Chrome/PVC	Black/Red, Green/White	A	49.95	46.95	
734184	8723 060U500	2	22 / 24	2	500' Unreel	Chrome/PVC	Black/Red, Green/White	A	199.95	189.95	
734181	8723 0601000	2	22 / 24	2	1000' Reel	Chrome/PVC	Black/Red, Green/White	A	399.95	379.95	
734179	1419A 060100	4	24 / 24	2	100' Reel	Chrome/PVC	Wh/Blue Str, Blue/Wh Str, Wh/Org Str, Org/Wh Str	C	29.95	26.95	
734085	1419A 0601000	4	24 / 24	2	1000' Reel	Chrome/PVC	Wh/Blue Str, Blue/Wh Str, Wh/Org Str, Org/Wh Str	C	314.95	299.95	

*Manufacturer: ValuePro



A = Polypropylene
B = Polyethylene
C = Datalene
Wh = White
Org = Orange Str = Stripe



Flat Ribbon Cable



Gray Cable — 28AWG (7 x 36)

★ Web Code: WBX



- Insulation: polyvinyl chloride (PVC)
- Single edge red stripe for pin 1 orientation

Part No.	Cross Ref. No.	Conductors	Length	1	5	25
643794	171-10-10	10	10'	\$2.79	\$2.49	\$2.19
643807	171-10-25	10	25'	5.49	5.25	4.99
643815	171-10-100	10	100' reel	17.95	15.95	14.95
643831	171-16-10	16	10'	3.95	3.59	3.29
643840	171-16-25	16	25'	7.95	6.95	6.29
643858	171-16-100	16	100' reel	23.95	21.95	19.95
643874	171-20-10	20	10'	3.95	3.59	3.29
643891	171-20-100	20	100' reel	32.95	29.95	26.95
643911	171-25-10	25	10'	4.95	4.49	3.95
643920	171-25-25	25	25'	10.95	8.95	7.95
643938	171-25-100	25	100' reel	36.95	33.95	29.95
643962	171-26-10	26	10'	5.95	5.49	4.95
643971	171-26-25	26	25'	11.95	10.95	9.95
643989	171-26-100	26	100' reel	39.95	36.95	34.95
644033	171-34-10	34	10'	5.95	5.49	4.95
644041	171-34-25	34	25'	12.95	11.95	10.95
644050	171-34-100	34	100' reel	53.95	51.95	48.95
644076	171-37-10	37	10'	6.95	6.29	5.59
644084	171-37-25	37	25'	11.95	10.95	9.95
644092	171-37-100	37	100' reel	46.95	42.95	38.95
644113	171-40-10	40	10'	7.95	6.95	6.29
644121	171-40-25	40	25'	15.95	14.49	12.95
644130	171-40-100	40	100' reel	55.95	52.95	49.95
644156	171-50-10	50	10'	8.95	7.95	6.95
644164	171-50-25	50	25'	17.95	16.49	14.95
644172	171-50-100	50	100' reel	69.95	62.95	58.95
689426	9L28050008H100	50	100' reel	109.95	104.95	99.95
644199	171-60-10	60	10'	8.95	7.95	6.95
644201	171-60-25	60	25'	17.95	16.95	14.95
644210	171-60-100	60	100' reel	64.95	59.95	54.95

*Belden: -40°C to +105°C

- Prepackaged and priced in lengths listed below

Multicolor Cable — 28AWG (7 x 36)

- Standard 10-color repeat sequence
- Voltage rating: 300V
- Stranded copper wire
- Center spacing: 0.05"
- Temp. rating: -20°C to +80°C

★ Web Code: WCF

Part No.	Cross Ref. No.	Conductors	Length	1	5	25
639672	28RC10-10	10	10'	\$3.95	\$3.59	\$3.19
643508	28RC10-25	10	25'	8.95	7.95	6.95
643516	28RC10-100	10	100' reel	29.95	27.95	24.95
643532	28RC16-10	16	10'	5.95	5.49	4.95
643541	28RC16-25	16	25'	12.95	11.95	10.95
643559	28RC16-100	16	100' reel	49.95	44.95	39.95
643575	28RC20-10	20	10'	6.95	6.49	5.95
643583	28RC20-25	20	25'	16.95	15.49	13.95
643591	28RC20-100	20	100' reel	64.95	59.95	54.95
643612	28RC25-10	25	10'	8.95	7.95	6.95
643621	28RC25-25	25	25'	20.95	18.95	17.95
643639	28RC25-100	25	100' reel	69.95	64.95	59.95
643655	28RC34-10	34	10'	10.95	9.95	8.95
643663	28RC34-25	34	25'	25.95	23.95	21.95
643671	28RC34-100	34	100' reel	89.95	84.95	79.95
643698	28RC40-10	40	10'	12.95	11.95	10.95
643701	28RC40-25	40	25'	29.95	26.95	23.95
643719	28RC40-100	40	100' reel	109.95	104.95	99.95
643735	28RC50-10	50	10'	19.95	17.95	15.95
643743	28RC50-25	50	25'	39.95	36.95	33.95
643751	28RC50-100	50	100' reel	139.95	129.95	119.95

Flat Ribbon Cable – Gray

★ Web Code: WBX

.100" (2.54mm) — 24AWG

- Capacitance: 31pF/m
- Insulation resis.: 100MΩ
- Temp. rating: 105°C
- Insulation material: 7mm polyvinyl chloride (PVC) gray

Part No.	Mfr.	Cross Ref.	Conductor	Length	1	5	25
363813	ValuePro	H24G-10-10	10	10'	\$9.95	\$8.95	\$7.95
363856	ValuePro	H24G-10-100	10	100'	69.95	63.95	59.95

We're Listening to What You Need

Our goal is to provide you with more of what you want. Let us know how we can better serve your electronic needs. Send feedback to Management@Jameco.com.



BELDEN

Speaker Cable

*Web Code: JCS

Part No.	Product No.	Length	AWG	Color	1	5
734081	9708 368U1000	1000' Unreel	18 Stranded	Clear	\$349.95	\$329.95
232602	9717 368100	100' Reel	14 Stranded	Clear	39.95	35.95
733430	9717 368500	500' Reel	14 Stranded	Clear	299.95	279.95
232629	9718 368100	100' Reel	12 Stranded	Clear	54.95	49.95
732646	9718 3681000	1000' Reel	12 Stranded	Clear	819.95	799.95

JAMECO ValuePro 2-Conductor Power/Speaker Cable – 24 AWG

- Black wire with white polarity stripe
- Temperature rating: 20°C to 60°C
- Stranded copper wire (7 x 32)
- Operating voltage: 300V

JAMECO
EXCLUSIVE

*Web Code: VAL

Part No.	Product No.	Length	1	5	10
100280	CAR45B-100	100'	\$7.95	\$7.25	\$6.49
100299	CAR45B-1K	1000'	54.95	49.95	46.95

Cat 5e/6 Network Crossover Cables

- Connect 2 PCs without a hub
- 24AWG (7 x 43) stranded
- Strain relief RJ45 connectors
- 4-pair • 8P8C • UTP

*Web Code: CAE

Part No.	*Mfr.	Length	Description	1	10	100
2115573	BEL	3 ft.	Cat 5e red	\$2.49	\$2.25	\$1.95
302041	JVP	7 ft.	Cat 5e gray	3.75	3.35	2.95
685812	BEL	7 ft.	Cat 5e yellow	3.75	3.35	2.95
169261	JVP	10 ft.	Cat 5e gray	6.95	6.25	5.65
203781	JVP	12 ft.	Cat 5e black	2.95	2.65	2.35
679762	+	3 ft.	Cat 6 gray	2.95	2.65	2.35
681096	+	7 ft.	Cat 6 gray	3.75	3.35	2.95

† Without snagless boot

JAMECO ValuePro

Category 6

- Gold over nickel contacts
- With RJ45 plugs and molded strain reliefs
- Assembled using ETL verified 24AWG stranded cable
- Exceeds performance levels as specified in TIA/EIA 568B.2-1 category 6

*Web Code: BBK

Part No.	Length	Color	1	10	50
2115581	1 ft.	Gray	\$2.25	\$1.95	\$1.75
219707	3 ft.	Gray	2.25	1.95	1.75
219715	7 ft.	Gray	3.25	2.95	2.49
219723	14 ft.	Gray	6.25	5.49	4.95
219731	25 ft.	Gray	8.95	7.95	6.95
219740	50 ft.	Gray	13.95	12.55	10.95
219854	3 ft.	Blue	2.49	2.25	1.95
219862	7 ft.	Blue	3.25	2.95	2.49
219871	14 ft.	Blue	6.25	5.49	4.95
219889	25 ft.	Blue	8.95	7.95	6.95
219897	50 ft.	Blue	13.95	12.55	10.95
220003	3 ft.	White	2.25	1.95	1.75
220011	7 ft.	White	2.95	2.65	2.35
2115602	1 ft.	Red	2.25	1.95	1.75
219900	3 ft.	Red	2.25	1.95	1.75
219918	7 ft.	Red	3.25	2.95	2.49
219934	25 ft.	Red	7.95	7.49	6.95
219942	50 ft.	Red	12.49	11.49	9.95
219803	3 ft.	Green	2.25	1.95	1.75
219811	7 ft.	Green	3.25	2.95	2.49
219820	14 ft.	Green	6.25	5.49	4.95
219766	7 ft.	Black	3.25	2.95	2.49
219782	25 ft.	Black	7.95	7.49	6.95
219791	50 ft.	Black	10.95	9.95	9.49

Network Cables

Category 6 (Cont.)

*Web Code: BBK

Part No.	Length	Color	1	10	50
2115590	1 ft.	Yellow	\$2.25	\$1.95	\$1.75
219969	7 ft.	Yellow	3.25	2.95	2.49
219993	50 ft.	Yellow	10.95	9.95	8.95

Category 5e

- 8P8C • 4 pair
- 350 MHz • UTP • “Snagless” boot
- 24 AWG (7 x 43) stranded
- Color coded for easy wire tracing

*Web Code: CAE

Part No.	Length	Color	1	10	100
168292	3 ft.	Gray	\$1.55	\$1.39	\$1.25
168305	7 ft.	Gray	2.25	1.95	1.75
168313	15 ft.	Gray	3.95	3.55	2.95
168321	25 ft.	Gray	6.75	5.95	5.35
201777	3 ft.	Red	1.55	1.39	1.25
201785	7 ft.	Red	2.25	1.95	1.75
201793	15 ft.	Red	3.95	3.55	2.95
201806	25 ft.	Red	6.49	5.95	5.35
201697	3 ft.	Black	1.55	1.39	1.25
201700	7 ft.	Black	2.25	1.95	1.75
201718	15 ft.	Black	3.95	3.55	2.95
201726	25 ft.	Black	6.75	5.95	5.35
201734	3 ft.	Blue	1.55	1.39	1.25
1945381	5 ft.	Blue	1.95	1.75	1.65
201742	7 ft.	Blue	2.25	1.95	1.75
1945401	10 ft.	Blue	3.49	3.15	2.75
201751	15 ft.	Blue	3.95	3.55	2.95
201769	25 ft.	Blue	6.75	5.95	5.35
522845	50 ft.	Blue	7.95	6.95	6.25

* BDN = Belden | BEL = Belkin | JVP = Jameco ValuePro | + Manufacturer Variants

JAMECO ValuePro

Category 5e Network Cable

*Web Code: KCG



24 AWG UTP Category 5e Enhanced - 350MHz (Non-Plenum)

Part No.	*Mfr.	Product No.	Length	Color	Description	1	5
645714	JVP	10X5-704TH-25VP	25'	Blue	Solid	\$3.95	\$3.49
645722	JVP	10X5-704TH-100VP	100'	Blue	Solid	13.95	12.49
645731	JVP	10X5-704TH-1000	1000'	Blue	Solid	119.95	109.95
644543	JVP	10X5-701TH-25VP	25'	Gray	Solid	3.49	3.25
644551	JVP	10X5-701TH-100	100'	Gray	Solid	13.95	12.49
644560	JVP	10X5-701TH-1000	1000'	Gray	Solid	119.95	109.95
644607	JVP	10X5-804TH-25	25'	Blue	Stranded	4.95	4.49
644615	JVP	10X5-804TH-100	100'	Blue	Stranded	15.95	13.49
644623	JVP	10X5-804TH-1000	1000'	Blue	Stranded	125.95	109.95
645773	JVP	10X5-802TH-25	25'	Black	Stranded	3.95	3.49
645781	JVP	10X5-802TH-100	100'	Black	Stranded	15.95	13.49
645790	JVP	10X5-802TH-1000	1000'	Black	Stranded	125.95	109.95
644586	JVP	10X5-801TH-100	100'	Gray	Stranded	15.95	13.49
644594	JVP	10X5-801TH-1000	1000'	Gray	Stranded	125.95	109.95

24 AWG UTP Category 5e Enhanced - 350MHz (Plenum)

Part No.	*Mfr.	Product No.	Length	Color	Description	1	5
734097	BDN	1585A D15100	100'	Blue	Solid	\$19.95	\$17.95
734093	BDN	1585A 877100	100'	Natural	Solid	24.95	22.95
734094	BDN	1585A 8771000	1000'	Natural	Solid	229.95	209.95
734096	BDN	1585A 877U1000	1000' Unreel	Natural	Solid	229.95	209.95
1942121	BDN	1501A 0091000	1000'	White	Solid	229.95	209.95
1941970	BDN	1701A 0091000	1000'	White	Solid	329.95	309.95

* Bonded

Category 5e (Cont.)

*Web Code: CAE

Part No.	Length	Color	1	10	100
201814	3 ft.	Yellow	\$1.55	\$1.39	\$1.25
1945372	5 ft.	Yellow	1.95	1.75	1.65
201822	7 ft.	Yellow	2.25	1.95	1.75
1945399	10 ft.	Yellow	3.49	3.15	2.75
201831	15 ft.	Yellow	3.95	3.55	2.95
201849	25 ft.	Yellow	6.49	5.95	5.35

JAMECO ValuePro Modular Telephone/Printer Sharing Cables (Gray)

- RJ12 – 4P4C for telephone
- RJ11 – 6P4C for telephone or network
- RJ11 – 6P6C for telephone or printer sharing
- RJ45 – 8P8C for telephone or modem-dial-up use

*Web Code: EBF

Style 1 – Reverse wiring for telephone systems

Style 2 – Straight wiring for networking/printer sharing

Part No.	Conn. Style	Type	Length	Pricing		
				1	10	100
2125851	1	RJ12-4P4C	6ft.	\$1.49	\$1.35	\$1.19
196227	1	RJ11-6P4C	7ft.	1.75	1.59	1.39
115554	2	RJ11-6P4C	7ft.	1.75	1.59	1.39
115588	1	RJ11-6P6C	7ft.	1.49	1.35	1.19
115617	2	RJ11-6P6C	7ft.	1.95	1.75	1.59
115677	2	RJ45-8P8C	7ft.	1.95	1.75	1.59
115545	1	RJ11-6P4C	25ft.	2.95	2.65	2.35
201232	2	RJ11-6P4C†	35ft.	1.75	1.59	1.39

† Beige

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Modular Plugs, Jacks & Accessories

JAMECO ValuePro

P = No. of positions
C = No. of contacts

Modular Plugs

★ Web Code: FBB



Part No.	Description	Size (L" x W" x H")	1	10	100	1000
103491	4P4C (RJ14) handset	.49 x .30 x .26	★	\$.13	\$.12	\$.09
79290	6P4C (RJ11)	.49 x .38 x .26	★	.14	.13	.10
79273	6P6C (RJ11)	.49 x .38 x .26	.25	.23	.20	.18
79281	8P8C (RJ45) (for stranded wire)	.85 x .46 x .31	.47	.43	.38	.29
119343	8P8C (RJ45) unshielded (for solid wire)	.85 x .46 x .31	.45	.39	.35	.29
524411	8P8C, unshielded (for oval solid wire)	.85 x .46 x .31	.55	.49	.45	.39
116611	8P8C (RJ45) shielded	.87 x .46 x .33	1.09	.99	.89	.79
204231	8P8C (RJ45) shielded (for STP wire)	.48 x .46 x .28	.75	.69	.59	.49
116602	8P8C (RJ45) shielded (for solid wire)	.85 x .46 x .31	.99	.89	.79	.59
180646	10P10C (RJ50) for stranded wire	.85 x .46 x .31	.49	.45	.39	.35

Modular Jacks

★ Web Code: NEL



Part No.	*Mfr.	Description	Panel Mount	Size (L" x W" x H")	1	10	100	1000
115128	JVP	4P4C (RJ14) handset side entry, center latch	No	.51 x .40 x .57	\$.45	\$.39	\$.35	\$.29
852836	AMP	4P4C (RJ14) side entry, center latch, flangeless	No	.82 x .44 x .63	.59	.55	.49	.45
2121560	★	4P4C (RJ14) side entry, center latch, right angle PCB	No	.72 x .57 x .41	.65	.59	.49	.39
199620	JVP	4P4C (RJ14) handset side entry, center latch	Yes	.51 x .55 x .57	.29	.25	.22	.19
105945	JVP	6P4C (RJ11) side entry, center latch, top flange	Yes	.48 x .48 x .71	★	.19	.17	.15
2077781	★	6P4C (RJ11) side entry, center latch	No	.72 x .51 x .45	.45	.39	.35	.29
151766	JVP	6P4C (RJ11) side entry, center latch	Yes	.80 x .52 x .59	.65	.59	.55	.49
524277	AMP	6P6C (RJ11) top entry, center latch, flangeless	No	.53 x .64 x .63	.65	.59	.55	.49
2077221	★	6P6C (RJ11) side entry, front latch, PCB ground	Yes	.73 x .55 x .58	.69	.59	.49	.45
115837	JVP	6P6C (RJ11) side entry, center latch	Yes	.51 x .48 x .57	.85	.75	.65	.59
204178	JVP	6P6C (RJ11) dual entry, center latch	Yes	.62 x 1.1 x .60	1.35	1.19	.99	.79
124039	JVP	6P6C (RJ11) top entry, 6" leads, panel mount	Yes	.54 x .59 x .72	1.25	1.09	.99	.89
800315	MOL	6P6C (RJ11) side entry, center latch, unshielded, 4 gangs	No	.92 x .85 x .52	2.69	2.45	2.19	1.95
852449	AMP	6P6C (RJ25) side entry, center latch, SMT, low profile	Yes	.72 x .63 x .50	.79	.69	.59	.49
889129	AMP	6P6C (RJ25) top entry, center latch SMT	No	.55 x .53 x .50	1.65	1.49	1.35	1.19
115844	JVP	8P8C (RJ45) side entry, center latch	No	.53 x .60 x .57	.69	.59	.55	.49
2078240	★	8P8C (RJ45) side entry, center latch	Yes	.81 x .60 x .59	.69	.59	.49	.45
203449	JVP	8P8C (RJ45) side entry, center latch, shielded	No	.84 x .63 x .53	.95	.85	.75	.65
2078258	★	8P8C (RJ45) side entry, center latch, low profile	No	.71 x .60 x .46	.49	.45	.39	.35
524461	AMP	8P8C (RJ45) side entry, front latch, low profile	No	.72 x .61 x .50	.55	.49	.45	.39
2078266	★	8P8C (RJ45) side entry, front latch, low profile	No	.68 x .59 x .49	.45	.39	.35	.29
1537416	KYC	8P8C (RJ45) side entry, front latch, low profile	Yes	.72 x .60 x .50	.59	.45	.35	.29
524488	AMP	8P8C (RJ45) top entry, top latch	No	.66 x .62 x .63	.65	.59	.55	.49
2077790	★	8P8C (RJ45) top entry, bottom latch	Yes	.64 x .61 x .62	.55	.49	.45	.39

JAMECO ValuePro

RS-232-to-RJ11/RJ45 Modular Jack Adapters

★ Web Code: RDR

Simplify networking applications when changing your RS-232 port to an RJ11 or RJ45 modular jack. Comes with all necessary hardware and wiring.

Part No.	*Mfr.	Description	1	10	100
66181	JVP	DB9 M to RJ11 (6P6C)	\$2.49	\$2.25	\$1.95
66191	JVP	DB9 M to RJ45 (8P8C)	2.75	2.49	2.25
614977	GCE	DB9 M to RJ45 (8P8C)	2.75	2.49	2.25
614985	GCE	DB9 F to RJ11 (4P4C)	1.95	1.75	1.59
114738	JVP	DB9 F to RJ11 (6P4C)	2.35	2.09	1.89
66203	JVP	DB9 F to RJ11 (6P6C)	2.75	2.49	2.25
66212	JVP	DB9 F to RJ45 (8P8C)	2.95	2.65	2.39

Part No.	*Mfr.	Description	1	10	100
615005	GCE	DB9 F to RJ45 (8P8C)	\$2.45	\$2.19	\$1.95
66229	JVP	DB25 M to RJ11 (6P6C)	2.75	2.49	2.25
2099681	★	DB15 F to RJ-11 (6P6C)	2.19	1.95	1.79
66237	JVP	DB25 M to RJ45 (8P8C)	1.85	1.69	1.49
615021	GCE	DB25 M to RJ45 (8P8C)	2.49	2.25	1.95
204273	JVP	DB25F - RJ11 (6P4C)	.65	.59	.55
66254	JVP	DB25 F to RJ45 (8P8C)	1.85	1.69	1.49

EZ-RJ45 Category 5 & 6 Modular Plugs

Strip the wire and insert into the plug & pull out the wire on the other side. This ensures correct conductor order and uniformity in crimping. No wire bar and no wasted cable.


Part No.	Mfr. Part No.	Description	1	10	100	1000
158115	300568EZ	8P8C CAT5 EZ-Plug	\$1.65	\$1.49	\$1.35	\$1.19
2099278	300668EZ	8P8C CAT6 EZ-Plug	1.75	1.59	1.45	1.29




4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Modular Couplers and Adapter

★ Web Code: XAH



Style 1 Reverse wiring for telephone systems
Style 2 Straight wiring for networking/printer sharing



Part No.	Description	Fig.	1	10	100
71757	6P6C modular coupler, Style 1, RJ11	1	\$.95	\$.85	\$.75
135087	6P6C modular coupler, Style 2, RJ11	1	1.09	.99	.89
181091	6P6C make "T" adapter, Style 2, RJ11	2	.79	.69	.59
118501	8P8C modular coupler, Style 1, RJ45	1	1.75	1.55	1.39
135079	8P8C modular coupler, Style 2, RJ45	1	1.39	1.25	1.15
153023	8P8C modular coupler, Style 2 (for CAT 5) RJ45	3	7.95	7.15	6.45

Keystone-Type RJ11 & RJ45 Jacks

Modular Punchdown Type

- CAT 5e classification
- Punchdown type wiring connections with color coding
- Size: 0.57"W x 1.23"D x 0.63"H

★ Web Code: MBV

Part No.	*Mfr.	Description	Color	1	10	100
213517	JVP	6P6C (RJ11)	White	\$2.49	\$2.25	\$1.95
195630	JVP	8P8C (RJ45)	Black	2.25	1.95	1.75
212951	JVP	8P8C (RJ45)	Blue	2.25	1.95	1.75
212944	JVP	8P8C (RJ45)	White	2.95	2.65	2.39
636130	FST	8P8C (RJ45)	Almond	2.49	2.25	1.95
615144	GCE	Tool-less	Ivory	2.25	1.95	1.79

JAMECO ValuePro

RJ45-Plug Color Caps (Boots)

- Round strain relief
- Order in multiples of 10

★ Web Code: JBG

Part No.	Color	10	100	500	1000
204410	Black	\$.19	\$.17	\$.15	\$.11
204353	Gray	.19	.17	.15	.11
204362	Blue	.19	.17	.15	.11

Cisco Wall Jack DSL Filter

- Filters out DSL
- Dimension: 4.7" x 3.0"

Part No.	Description	Color	1	10
15077	6P4C (RJ11)	White	\$2.95	\$2.65

RJ11 Retractable Cable

This RJ11 cable extends up to 8'. When you pack up, give it a tug and it retracts into its lightweight, rugged case like a windowshade. It's completely tangleproof.



Part No.	Product No.	1	5	25
233349	AC29908B	\$.99	\$.95	\$.89

More Information Online
www.Jameco.com

* AMP = AMP | FST = FutureSmart | GCE = GC Electronics | JVP = Jameco ValuePro | KYC = Kycon | MOL = Molex | ★ Manufacturer Varies

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



Modular Jack Boxes



*** Web Code: UAM**

Part No.	Description	Fig.	Pricing		
			1	10	100
103464	6P4C adhesive jack RJ11 (beige)	1	\$.99	\$.85	\$.69
71984	6P6C adhesive jack RJ11 (beige)	1	1.19	1.05	.89
71651	8P8C adhesive jack RJ45 (beige)	1	1.29	1.15	.99
213032	8P8C adhesive jack RJ45 (single, white) (CAT 5e)	2	2.95	2.59	2.39
213049	8P8C adhesive jack RJ45 (dual, white) (CAT 5e)	3	3.95	3.59	3.25

RJ45 (8P8C) Type Wall Plates

- Size: 2.8"W x 4.5"H
- RJ45 8P8C



*** Web Code: RBH**

Part No.	No. of ports	Color	Pricing		
			1	10	100
636965	1	Almond	\$.99	\$.89	\$.79
212978	1	White	.99	.89	.79
212960	4	Ivory	.99	.89	.79
195565	3	Ivory	.99	.79	.59
637028	4	Almond	.99	.79	.59

17" Self-Grip/Wrap Velcro Straps

- Wrap around anything and sticks to itself for fast, easy bundling
- Bundle cords, cables, wires, pipes, tubing and trees (landscaping)
- Grip on one side, loop on back
- Eliminates plastic tie wraps and hardware
- Reusable
- Size: 17"L x 1/2"W (cut to your length)
- Color: black
- 12 pieces in pack



NEW
MARKED IN PINK

Part No.	Mfr. Part No.	1	10	20
2125325	Self-grip/wrap velcro	\$6.95	\$6.25	\$5.59

8P8C In-Line Coupler

- Panel mount thickness: 0.062" nominal
- Housing: black polyphenylene oxide
- Terminals: 0.018" diameter phosphor bronze with 50µ" gold over nickel
- Snaps into 0.595" x 0.765" rectangular wall plate cut-outs



Part No.	Mfr.	Mfr. Part No.	1	10	100
524445	AMP	555052-1	\$4.75	\$4.25	\$3.79

Professional Modular Connector Crimping Tool

- 6mm and 12mm stripping guide
- Spring return action
- Crimp modular plugs without changing dies
- Crimps 10P10C, RJ45: 8P8C, RJ11 and RJ12: 6P6C, and 4P4C
- Insulated handles • Size: 8.2"L • Weight: 1.2 lbs.



Part No.	Mfr. Part No.	1	10	25
181148	HT200	\$54.95	\$49.49	\$44.55

For more Hand Tools, see pages 160-163

RIP-TIE Rip-Tie Lite Cable Wraps

- Patented one end permanently attaches to the cable and the other end has a pull tab
- Made of the best quality hook and loop touch fastener tested for 10,000 closures with no loss of holding strength



10 per pack

Part No.	Description	1	5
700699	1/2"W x 8"L, rainbow	\$8.95	\$7.95
700701	1/2"W x 8"L, black	9.95	8.95



5' Low Profile Wire Conduit

No more tripping or running over cables and cords. This low profile conduit hides cables/cords and provides cable management at the same time. Simply install on any wall or floor with its double-sided tape.



Part No.	Description	1	5
2112479	Low profile conduit	\$19.95	\$17.95

Round-Type Strain Relief Bushings

- UL approved nylon 66, 94V-2
- Used extensively for protecting cords and to prolong cord life
- Order in multiples of 10



Part No.	Cable Type	Length (in.)	10	100	1000
182351	SVI/SVT	.43	\$.08	\$.07	\$.05
182369	SJ/SJT; 16 AWG	.58	.12	.10	.08

3M Wire Marker Tape Dispensers

Dispenser with ten refillable compartments for marking wire with numbered or colored tape.

- Self-adhesive tapes
- Size: (tape) 96"L x 0.25"W



159231: 1 roll each numbered 0 to 9
2099657: 1 roll each black, blue, brown, green, gray, orange, red, violet, white and yellow

Part No.	Mfr. Part No.	1	10
159231	STD-0-9	\$41.95	\$37.95
2099657	STD-C	39.95	35.95

6' Wiring Duct & Cover

- Light gray • Lead free PVC
- 489230:
 - Wide finder slotted wiring duct
 - Standard mounting PC holes
 - Size: 1.75"W x 1.62"H
 - Sold in 6 foot lengths only



Part No.	Description	1	5
489230	Duct	\$34.95	\$31.49
489213	Cover	7.95	7.25



Nylon Cable ID Markers

- Nylon cable tie ID marker (white)
- Order in multiples of 10


135175

Part No.	Size	10	100
182705	1.5"L x 0.75"W x .02"T	\$.09	\$.07
135175	2.0"L x 0.75"W x .02"T	.12	.10

Dollar Sale Discount Center

Jameco.com/MakesCents

Nail-In Cable Clips



190828

190861

- Material: Impact resistant PE
- With nails inserted

For telephone cords; white

Order in multiples of 100

Part No.	Cross Ref. No.	W" x H" x H1"	100	1000
190828	NF1.2	.24 x .21 x .15	\$.009	\$.008
190836	NF1.6	.31 x .31 x .20	.009	.008

For general round cables; gray

Order in multiples of 100

Part No.	Cross Ref. No.	W" x H" x H1"	100	1000
190861	NC0.35N	.14 x .23 x .15	\$.009	\$.008
190887	NC1N	.24 x .35 x .26	.009	.008
190895	NC2N	.31 x .45 x .34	.009	.008
190908	NC3N	.39 x .53 x .41	.009	.008

3" to 13" Nylon Cable Ties

Standard

- Cable ties made from UL approved Nylon 66
- Temperature range: -40°C to +85°C
- Color: clear (except P/N 182677: white)
- Flammability rating: UL 94V-2

*** Web Code: QAV**

Part No.	Size (L" x W")	Tensile Strength	100	1000
70561	3.1 x 0.10	18 lbs.	\$.04	\$.03
126544	4.0 x 0.10	18 lbs.	.03	.02
182677	4.75 x 0.13	18 lbs.	.04	.03
182651	5.5 x 0.13	18 lbs.	.11	.10
139150	8.0 x 0.10	18 lbs.	.04	.03
182669	8.0 x 0.13	18 lbs.	.04	.03
182685	8.0 x 0.18	18 lbs.	.04	.03
70907	5.8 x 0.10	40 lbs.	.08	.07
190756	10.0 x 0.14	40 lbs.	.09	.07
190772	11.0 x 0.19	40 lbs.	.09	.07
190764	13.0 x 0.14	40 lbs.	.10	.08

Weather Resistant

- Contains Carbonate A for greater resistance to ultraviolet rays in outdoor use



104142

UV Resistant

Part No.	Size (L" x W")	Tensile Strength	100	1000
139125	3.0 x 0.90	18 lbs.	\$.03	\$.01
104142	4.0 x 0.10	18 lbs.	.05	.03
104134	5.8 x 0.10	40 lbs.	.08	.05
190782	8.0 x 0.13	40 lbs.	.11	.08
190800	10.0 x 0.14	40 lbs.	.18	.13
190802	13.0 x 0.14	40 lbs.	.19	.17

Cable Tie Assortment Kits

- Tensile strength: 18-50 lbs.

145701: 1000 pcs. (4"L); 10 colors
150412: 850 pcs. total 500 pcs. (4"L); 300 pcs. (8"L); 50 pcs. (11"L), 5 colors



Part No.	Wt. (lbs.)	1	10	25
145701	0.7	\$9.95	\$8.95	\$7.95
150412	1.7	17.95	16.95	15.95



Universal Cable Tie Tool

- 2.5 - 5mm width (of cable)
- Tension adjustable
- Spring return action
- Metal



Part No.	Product No.	1	5	10
182298	0302TG-7	\$19.95	\$17.95	\$15.95

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Cable Tie Mounts & Cable Clamps

- Tie mount and screw tab cable clamps
- Material: UL approved nylon 66, 94V-2



* Web Code: FBE



Part No.	Cross Ref. No.	Fig.	Description	* Order in multiples of 10	1	10	100	1000
182942	0505HC-101S	1	4-way cable tie mount, self-adhesive, .75"D	...	* \$10	\$0.9	\$0.8	
171214	HC-100	1	4-way cable tie mount, self-adhesive, use w/ 0.1"W max., 0.5" square	...	* .16	.14	.13	
71408	HC-101	1	4-way cable tie mount, self-adhesive, use w/ 0.1"W max., 0.9" square	...	* .19	.17	.15	
71395	HC-102	1	4-way cable tie mount, self-adhesive, use w/ 0.2"W max., 1.1" square	...	* .25	.23	.19	
71386	HC-103	1	4-way cable tie mount, self-adhesive, use w/ 0.4"W max., 1.1" square	...	* .37	.33	.29	.27
70595	HC-0	2	4-way cable tie, screw type, use w/ 0.2"W max., 0.8"L x 0.4"W	...	* .19	.17	.15	
182301	0510HC-2	3	Cable tie mount, 1/4" screw hole, 0.5"D	...	* .17	.15	.14	
173761	HC-1	3	Cable tie, saddle type, 0.6"L x 0.4"W	...	* .10	.09	.08	
182318	0519ATC-17	4	2-way adjustable tie mount, #6 flat head screw, 0.7"D	...	* .25	.22	.19	
182376	0519ATC-22	4	2-way adjustable tie mount, #6 flat head screw, 0.9"D	...	* .21	.19	.15	
182334	0520FC-1	5	Cable tie mount, self-adhesive, 0.1"D	...	* .19	.17	.14	
173729	UC0.5	6	Cable clamp for 3/16" cable	...	* .08	.06	.04	
173737	UC1	6	Cable clamp for 1/4" cable	...	* .11	.10	.09	
71062	MCV-100R	7	Cable ID tie (4"L x 0.1"W) with tab (.98"W x .31"H)	...	* .29	.27	.23	

FLEXO® Braided Sleeve

- Color: black
- Length: 25 feet
- Cut and abrasion resistant
- Maintains properties across wide temperature range
- UV resistant

Flexo® Clean-Cut Braided

- Dense braid structure provides fuller coverage
- Fray resistant when cut w/ scissors

Part No.	Mfr. Part No.	Min/Max Flex (in.)	Inside Dia. (in.)	Outside Dia. (in.)	1	5
162157	CCP0.25BK25	5/32 - 7/16	0.250	0.440	\$15.95	\$14.49
162165	CCP0.50BK25	1/4 - 3/4	0.500	0.750	17.95	15.95

Flexo® Pet Braided

- Braided from 10 mil polyethylene terephthalate monofilament yarns
- UL recognized component
- Conforms to FMVSS 302
- High tensile strength

Part No.	Mfr. Part No.	Min/Max Flex (in.)	Inside Dia. (in.)	Outside Dia. (in.)	1	5
693679	PTNO.25BK25	1/8 - 7/16	0.250	0.440	\$7.95	\$6.95
693687	PTNO.38BK25	3/16 - 5/8	0.375	0.425	11.95	10.95
695383	PTNO.50BK25	1/4 - 3/4	0.500	0.550	11.95	10.75

Flat & Tubular Tinned Copper Braids

These braids are used for sheilding cables, ground straps, and as a protective braid covering hoses and tubes.

- Woven wire construction
- 100 ft. spools
- 95% minimum shield coverage
- QQ-W-343 & ASTM B-33 Compliant



Part No.	Description	1	5	25
2124171	1/8" x .02" flat, 72 x 36 strand, approx. 18 AWG	\$36.95	\$33.95	\$29.95
2124189	1/4" x .03" flat, 168 x 36 strand, approx. 14 AWG	59.95	54.95	49.95
2124154	1/4" tubular, 384 x 36 strand, approx. 10 AWG	89.95	79.95	72.95
2124162	3/8" tubular, 384 x 36 strand, approx. 10 AWG	99.95	89.95	79.95



JAMECO ValuePro

Heat Shrink Tubing Kits

A selection of heat shrinkable flexible polyolefin tubing that offers an outstanding balance of electrical, physical and chemical properties for a wide variety of industrial and military applications. Rated for 275°F (135°C).

2095971		2095963		285481		2095947		645976	
Size	Pieces	Size	Pieces	Size	Pieces	Size	Pieces	Size	Pieces
1/8"	12	1/16"	56	3/16"	30	1/16"	56	3/32"	35
1/4"	10	3/32"	35	1/4"	28	3/32"	35	1/8"	28
3/8"	6	1/8"	28	3/8"	20	1/8"	28	3/16"	21
1/2"	4	3/16"	18	1/2"	14	3/16"	18	1/4"	21
3/4"	3	1/4"	9	3/4"	6	1/4"	9	3/8"	14
1"	2	3/8"	8	1"	4	3/8"	8	1/2"	14

Part No.	Mfr.	Description	Pieces	Length	1	5
2095971	ValuePro	Black, dual wall, moisture resistant	37	4	\$24.95	\$22.49
2095963	ValuePro	Black	154	4	19.95	17.95
285481	3M	Black	102	6	65.95	58.95
2095947	ValuePro	Black/red/white/yellow/blue/green/clear	154	4	19.95	17.95
645976	3M	Black/red/white/yellow/blue/green/clear	133	6	65.95	58.95

* Web Code: HST



Heat Shrink Tubing

- 2:1 uniform shrink ratio
- Shrink temp.: 90°C
- Color: black

Polyolefin Tubing

- Only sold in 10' & 100' lengths

* Web Code: HST

Part No.	Dia. Before (mm)	Length (ft.)	1	10
644834	0.12" (3)	10	\$1.95	\$1.75
644851	0.12" (3)	100	12.65	11.49
644869	0.16" (4)	10	2.15	1.95
644877	0.16" (4)	100	19.95	17.95
644906	0.20" (5)	10	2.45	2.19
644914	0.20" (5)	100	21.45	19.29
644931	0.24" (6)	10	2.55	2.29
644949	0.24" (6)	100	21.75	19.59
644957	0.31" (8)	10	2.95	2.65
644965	0.31" (8)	100	31.95	28.75
644973	0.43" (11)	10	3.95	3.55
644981	0.43" (11)	100	35.95	32.35
644990	0.59" (15)	10	4.95	4.45

Polyolefin Flexible Tubing

- Dielectric strength: 1300V
- Temp. range: -45°C to +125°C
- Flame retardant
- Precut 39" length (1 meter)

Part No.	Dia. Before (mm)	1	10	100
71327	.059" (1.5)	\$5.5	\$4.9	\$4.5
71871	.079" (2.0)	.55	.49	.45
71280	.098" (2.5)	.95	.85	.75
72063	.197" (5.0)	.79	.69	.65

Polyolefin Heat Shrink Tubing

FIT221/FIT221B Series

Insulation from environment and resistance from water, fungus, and UV light. Use for insulation and repair, wire and cable harnessing/bundling, cable and connector protection, and wire and tubing splicing and connecting.

- Operating temp: -55°C to 135°C
- Shrinkage ratio: 2:1 @ 121°C
- Dielectric strength: 500V/mil (197kV/cm)
- Volume resistivity: 10¹⁴Ω-cm

* Web Code: VAH

Clear (4-foot pieces)

Part No.	Mfr. Part No.	Before/After ID (in.)	1	10	100
419119	FIT221-3/64	.046/.023	\$.79	\$.69	\$.59
419135	FIT221-1/16	.063/.031	.95	.85	.75
419178	FIT221-1/8	.125/.062	1.19	1.05	.95
419215	FIT221-1/4	.250/.125	2.25	1.95	1.75
419231	FIT221-3/8	.375/.187	1.79	1.59	1.39
419274	FIT221-3/4	.750/.375	2.75	2.59	2.39
2113682	TT-100	1.00/.500	3.95	3.69	3.29

Black (4-foot pieces)

419101	FIT221B-3/64	.046/.023	\$.89	\$.79	\$.69
419127	FIT221B-1/16	.063/.031	.99	.89	.79
419143	FIT221B-3/32	.093/.046	.99	.89	.79
419160	FIT221B-1/8	.125/.062	.99	.89	.79
419186	FIT221B-3/16	.187/.093	1.25	1.09	.99
419207	FIT221B-1/4	.250/.125	1.85	1.69	1.49
419223	FIT221B-3/8	.375/.187	1.95	1.75	1.59
419240	FIT221B-1/2	.500/.250	1.95	1.75	1.59


Black (6-inch pieces)

Part No.	Mfr. Part No.	Before/After ID (in.)	Bags of	1	5
419400	FIT221B-1/16	.063/.031	36	\$12.95	\$12.45
419549	FIT221B-3/4	.750/.375	12	14.75	13.29

JAMECO ValuePro

Audio/Video Cables and Adapters

* Web Code: JAU

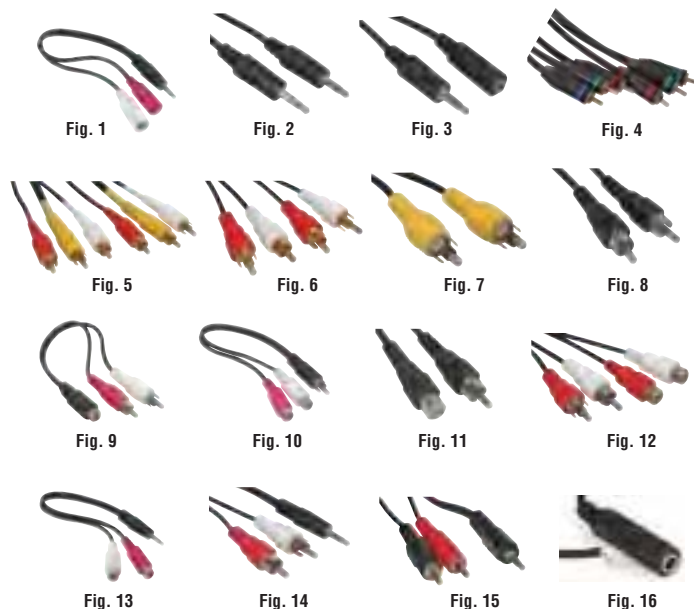

3.5mm Audio Splitter and Extension/Patch Cables

Part No.	*Mfr.	Fig.	Description	1	10	100
228398	JVP	1	6' 3.5mm stereo Y-cable F jacks (2) to M plug ...	\$2.35	\$2.09	\$1.89
228494	JVP	2	6' 3.5mm stereo M to M plug (black)	1.45	1.29	1.15
228515	JVP	3	6' 3.5mm stereo M plug to F jack (black)	2.35	2.09	1.89
228507	JVP	2	12' 3.5mm stereo M to M plug (black)	1.95	1.75	1.59
228523	JVP	3	12' 3.5mm stereo M plug to F jack (black)	2.49	2.25	1.95
2077538	+	3	20' 3.5mm stereo M plug to F jack (black)	2.75	2.49	2.25

JAMECO ValuePro

Component Video and Audio Cable

- Low-loss 75Ω oxygen-free copper center conductors and foam dielectric provide maximum signal transfer bandwidth for improved picture quality and performance
- Corrosion resistant, precise 24k gold-plated connectors ensure long lasting quality
- Fully molded color coded connectors attached to an ultra-flexible PVC jacket provide excellent strain relief, easy installation, and identification
- 100%, 0.012mm aluminum-polyester foil shielding and spiral-wound copper-braid shielding provides clear, noise-free, vivid picture quality



Part No.	Description	1	10	25
229403	6' component video RGB and stereo audio cable	\$9.95	\$8.95	\$7.95

Audio/Video BNC to RCA Cables & Adapter

Fully molded nickel connectors. Used for displays that require a single BNC connection from a PAL/NTSC video source.



* Web Code: AVC

Part No.	Description	1	10	25
1945057	3' BNC to BNC video cable ... w/ BNC to RCA male adapter	\$3.95	\$3.49	\$2.95
683059	6' BNC to RCA cable (RG-59) ...	3.95	3.49	2.95

RGB/VGA Video Cables

- 75Ω coaxial cable
- Pin 1 red, pin 2 green, pin 3 blue, pin 14 white/black vertical, pin 13 gray horizontal
- 5 BNCs to HDDB15-pin male



Part No.	Description	1	10	25
73648	6' cable	\$9.95	\$8.95	\$7.95
118068	10' cable	10.95	9.95	8.95

• Color: black

S-VHS Cables and Adapters

Low-loss fully shielded Super-VHS cables, 4-contact mini DIN plus S-VHS cable and dual-RCA plug stereo cables.



* Web Code: TBL

- Fully-molded color coded gold RCA connectors
- Flexible black PVC jacket
- Applications: home theaters, DSS receivers, Super-VHS VCRs, camcorders & DVD players

Part No.	Description	1	10	100
683075	S-video male plug to RCA video female jack (blue)	\$.99	\$.85	\$.69
228591	6' S-VHS video cable, gold plated	2.15	1.95	1.79
2120487	6' S-VHS video cable, silver plated	1.95	1.75	1.59

JAMECO ValuePro

DVI Cables

Digital Video Interface (DVI) provides a high-speed digital connection for visual data types that are display technology independent. The DVI specifications meet the needs of all segments of the PC industry and will enable these different segments to unite around one monitor interface standard.



* Web Code: EEM

Part No.	Description	1	10	25
320346	Single link 2 meters	\$3.95	\$3.49	\$3.15
1944265	Dual link 3 meters	13.95	12.49	11.25

We Ship the Same Day!

Just place your order by 6PM EST.



* JVP = Jameco ValuePro | LKG = LKG Industries | MST = Monster Cable | + Manufacturer Varies

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

HDMI Cables, Adapters, Audio Plugs & Jacks

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

JAMECO ValuePro

HDMI Cables & Adapters

*Web Code: DEM

High Definition Multimedia Interface (HDMI) is the industry supported, uncompressed, all digital audio/video interface. HDMI provides an interface between any audio/video source, such as set-top box, DVD players, A/V receivers, audio/video monitors, DTV, HDTV, and plasma monitor.




Part No.	Product No.	Description	1	5	25
1944142	10HM-01128-01	Male to male, 1 meter	\$10.95	\$9.95	\$8.95
1944151	10HM-01128-02	Male to male, 2 meters	12.95	11.49	9.95
1944169	10HM-01128-05	Male to male, 5 meters	17.95	15.95	14.49
2115611	AV22400B-12	HDMI M to DVI M 12 feet	14.95	13.49	11.95
1944177	10HM-15128-01	Male to DVI-D single link, 1 meter	9.95	8.95	7.95
1944185	10HM-15128-02	Male to DVI-D single link, 2 meters	11.95	10.95	9.95
1944193	10HM-15128-05	Male to DVI-D single link, 5 meters	16.95	15.25	13.75
1944206	30HM-15228-M0	HDMI M to DVI F video adapter	8.95	7.95	6.95
1944214	30HM-15328-M0	HDMI F to DVI M video adapter	8.95	7.95	6.95
1944222	30HM-01100	M to M HDMI gender changer	7.49	6.95	6.49
1944231	30HM-01200	F to M HDMI gender changer	6.49	5.75	5.25
1944249	30HM-01400	F to F HDMI gender changer/coupler	7.95	7.25	6.49

Stereo, Phone, Audio Plugs & Jacks

*Web Code: AJS

Part No.	Manufacturer	Product No.	Fig.	Description	Dimensions (mm)	1	10	100
297297	Switchcraft	850X	1	2.5mm mono phone, audio plug, black plastic	25.8L x 6.35 Dia.	\$3.49	\$3.15	\$2.79
281869	Switchcraft	750	2	3.5mm mono audio plug, plastic	41.5L x 5.7 ID	3.79	3.59	3.39
281754	Switchcraft	250	3	1/4" mono phone audio plug, plastic	73.7L x 7.6 ID	3.45	3.09	2.79
281762	Switchcraft	267	4	1/4" commercial phone plug, black plastic	73.7L x 7.6 ID	4.49	3.95	3.75
281789	Switchcraft	297	5	1/4" stereo phone audio plug, metal	73.7L x 7.6 ID	4.95	4.49	3.95
281771	Switchcraft	280	6	1/4" mono phone audio plug, metal	73.7L x 7.6 ID	4.49	3.69	3.25
229876	ValuePro	JR0101BLK	7	RCA plug, metal (black stripes)	61.7L x 7.0 ID	1.95	1.75	1.49
229868	ValuePro	JR0101R	7	RCA plug, metal (red stripes)	61.7L x 7.0 ID	1.95	1.75	1.49
230287	ValuePro	JR0101Y	8	RCA plug, yellow housing, gold plated	61.7L x 7.0 ID	1.49	1.25	1.09
229921	ValuePro	JR1625BLK	9	RCA plug, plastic, black (5 pk)	51.5L x 5.0 ID	1.45	1.29	1.15
229930	ValuePro	JR1625R	10	RCA plug, plastic, red (5 pk)	51.5L x 5.0 ID	1.45	1.29	1.15
281800	Switchcraft	3502	11	RCA phone audio plug, metal	33.8L x 5.0 ID	1.95	1.75	1.59
281818	Switchcraft	3502A	12	RCA phono audio plug, nickel	42.4L x 7.3 ID	2.25	1.95	1.75
281834	Switchcraft	41	13	3.5mm audio jack	7.8L x 5.9 Dia.	1.85	1.69	1.49
2114562	Adam Tech	ASJ-40-4A	14	3.5mm stereo jack, PCB mount, open	9.0H x 11.6W x 37.0L	1.15	1.05	.95
2114571	Adam Tech	ASJ-41-5	15	3.5mm stereo jack, PCB mount, closed	38.5H x 12.6L	1.59	1.45	1.35
568392	Switchcraft	35RAPC4BH3	16	3.5mm stereo jack, rt. angle horz., threaded	6.0H x 11.0W x 8.0L	1.49	1.35	1.19
1766180	Switchcraft	35RAPC4BHN2	16	3.5mm stereo jack, rt. angle horz., non-threaded	5.0H x 12.0W x 15.0L	1.69	1.49	1.35
2081334	Shogyo	354-3PY	16	3.5mm mono jack, rt. angle horz., non-threaded	6.1H x 11.9W x 12.0L	1.09	.89	.69
2100291	Shogyo	354-PY (CT)	17	3.5mm mono jack, rt. angle horz., threaded	6.45H x 11.7W x 14.3L	1.19	.99	.79
2081772	Kycon	ST3120-3-WHT	18	3.5mm stereo jack, rt. angle horz., non-threaded	10.45H x 12.0W x 6.8L	.49	.45	.39
1766121	Switchcraft	35RAPC2AV	19	3.5mm mono jack, rt. angle ver., threaded	11.6H x 7.7W x 14.0L	1.25	1.09	.95
1766198	Switchcraft	35RAPC4BV4	19	3.5mm stereo jack, rt. angle ver., threaded	12.3H x 8.1W x 14.0L	1.75	1.59	1.45
2095373	Various	HTJ-035-22D	20	3.5mm mono jack, rt. angle horz., non-threaded, blk.	10.45H x 10.0W x 14.0L	.99	.89	.79
2095437	ValuePro	J355W	21	3.5mm mono audio jack	10.1H x 8.4W x 17.6L	1.19	.99	.79
2081238	Shogyo	SCJ330	21	3.5mm mono audio jack	10.6H x 9.0W x 21.7L	1.95	1.75	1.49
281738	Switchcraft	11	22	1/4" mono phone audio jack	12.8L x 9.1 Dia.	1.85	1.69	1.49
296892	Switchcraft	12A	23	1/4" mono phone audio jack, metal	31.7L x 9.4 Dia.	1.79	1.59	1.45
296905	Switchcraft	13B	23	1/4" mono phone audio jack, metal	30.6L x 9.4 Dia.	3.49	3.29	3.09
281746	Switchcraft	12B	23	1/4" stereo phone audio jack	14.7L x 9.1 Dia.	1.95	1.79	1.59
2120209	ValuePro	STJ-.25	24	1/4" stereo phone audio jack, shielded, threaded	20.8L x 16.7W x 16.5H	1.69	1.49	1.35
220581	ValuePro	KY-006-1(W)	25	RCA jack, PCB mount, white	11.2H x 14.2W x 12.2L	.59	.55	.49
220556	ValuePro	KY-006-1(R)	25	RCA jack, PCB mount, red	11.2H x 14.2W x 12.2L	.65	.59	.55
220572	ValuePro	KY-006-1(B)	25	RCA jack, PCB mount, black	11.2H x 14.2W x 12.2L	.39	.35	.25
220564	ValuePro	KY-006-1(Y)	25	RCA jack, PCB mount, yellow	11.2H x 14.2W x 12.2L	.39	.35	.29
2076359	Various	AJ842G3	26	RCA jack, PCB mount, rt. angle, red/white/yellow (3)	40.6H x 22.9W x 21.6L	.59	.55	.49
2076332	Various	SCJ-0358-YLW	27	RCA jack, PCB mount, yellow	9.9H x 19.1W x 13.0L	.49	.45	.39
169502	Various	SCJ-0358-BLK-R	27	RCA jack, PCB mount, black	10.2H x 21.6W x 12.7L	.55	.49	.45
319249	Velleman	CA066	28	RCA jack, 2 pair stereo, panel mount, red/white	73.7H x 12.2W x 24.9L	.95	.85	.75
159485	Various	CS7021-DN-BLK-R	29	RCA jack, panel mount, black	21.3W x 9.7H	.95	.85	.75
172340	Various	CS7021-DN-RD-R	29	RCA jack, panel mount, red	21.3W x 9.7H	.85	.75	.69
2123451	Velleman	LSC2	30	Speaker terminal board, 2-pos, pushbutton	50.8H x 50.8W x 31.8D	1.59	1.45	1.39
2123469	GC/Waldom	33-1404	31	Speaker terminal board, 4-pos, pushbutton	76.2H x 25.4W x 31.8D	1.79	1.65	1.59


† Closed circuit

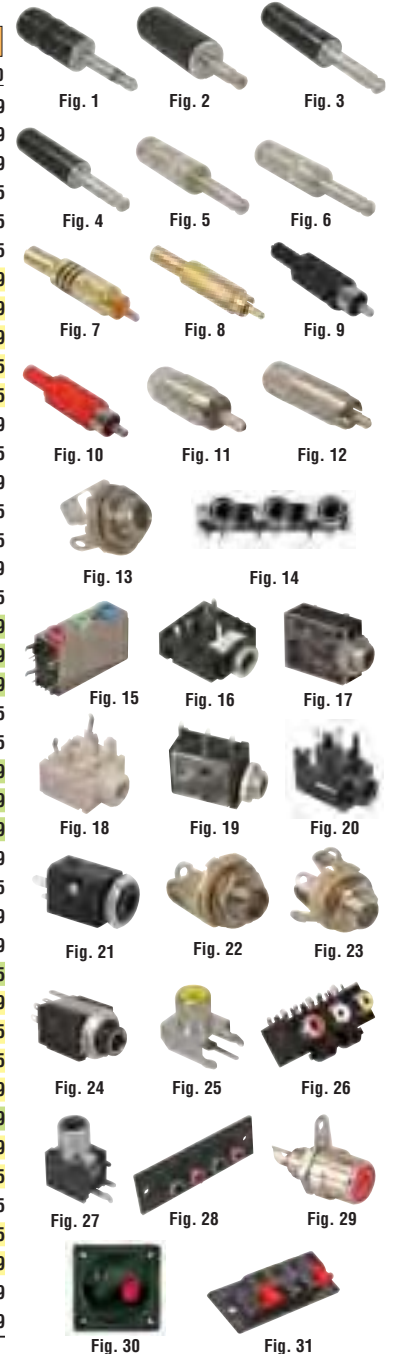

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

Microphone (XLR) Connectors

Part No.	Manufacturer	Product No.	Fig.	Description	Dimensions (mm)	★ Web Code: ABV		
						1	10	25
277026	Switchcraft	A3F	1	3-pin female, metal	82.5 x 5.3 Dia.	\$5.25	\$4.75	\$4.25
281560	Switchcraft	A3M	2	3-pin male, metal	70.3 x 5.3 Dia.	4.55	3.95	3.65
297422	Switchcraft	C3F	3	3-pin female, metal, panel mount	36.9 x 36.5 Dia.	7.49	6.95	6.75
281640	Switchcraft	D3F	4	3-pin female, metal, panel mount	27.0W x 36.3H x 30.6D	5.95	5.39	4.85
281623	Switchcraft	A6F	1	6-pin female, metal	80.2 x 4.6 Dia.	16.95	14.95	13.95
281711	Switchcraft	D6M	5	6-pin male, metal, panel mount	27.0W x 36.3H x 30.6D	8.95	8.49	7.95
319011	ValuePro	250-710	2	3-pin male, metal	70.6L x 7.31D	2.95	2.65	2.39
319003	ValuePro	250-720	1	3-pin female, metal	81.5L x 7.43D	2.25	1.95	1.75
319038	ValuePro	250-705	4	3-pin female, metal, panel mount	26.2W x 35.5H x 35.9D	3.45	2.95	2.65



Audio Adapters

Part No.	Manufacturer	Cross Ref. No.	Description	★ Web Code: KBQ		
				1	10	100
309665	ValuePro	251-175	3.5mm stereo F jack to 3.5mm mono M plug	\$.35	\$.29	\$.25
2115637	Belkin	F8V211TT	1/4" stereo F jack to 3.5mm stereo M plug	.69	.59	.55
228283	ValuePro	251-120	RCA F jack to mono 1/4" M plug	.69	.59	.55
228267	ValuePro	251-116	RCA F to F jack coupler, gold plated	.59	.55	.49
2115629	Belkin	F8V210TT	RCA F to F jack coupler, silver plated	.55	.49	.45



AMP CPC Contacts

Type III+ Snap-In Crimp Pins w/ Retention Spring

- Finish:
A: 30µ" gold over nickel
B: 15µ" gold over nickel
C: Tin-lead
- Crimp type except *P/N 526424 (solder type)
- Contact body – brass or phosphor bronze

Part No.	Mfr. P/N	AWG	Finish	Type	1	10
526441	1-66361-1	18-14	A	Pin	\$.65	\$.55
526424	66180-1	18-16	A	Pin*	.85	.75
526432	66181-1	18-16	A	Socket	.95	.85
526459	66103-3	24-20	B	Pin	.49	.45
526563	1-66103-5	24-20	C	Pin	.49	.45
526361	1-66103-7	24-20	A	Pin	.59	.49
526379	66105-3	24-20	B	Socket	.69	.59
526504	1-66105-6	24-20	C	Socket	.49	.45

Size 20DF Contacts

- Contact body: brass
- Finish: A: 30µ" gold over nickel;
B: gold flash over nickel

Part No.	Mfr. P/N	AWG	Finish	Type	Order in multiples of 10	
					10	100
223221	1-66505-0	28-24	B	Socket†	\$.19	\$.15
223247	745253-6	26-22	A	Socket†	.19	.15
223298	66504-9	24-20	A	Socket	.19	.15
223255	1-66504-0	24-20	B	Socket	.19	.15

† With insulation support

Find data sheets easily on the product specification page. www.Jameco.com

AMP CPC Circular Plastic Connectors

Series 1 — Standard density, signal and low-current applications

- Accepts type III+; high-current type II
- and subminiature coax contacts
- Voltage rating: 600V (UL)



Receptacles

Part No.	Mfr. P/N	Size/Pos	Gender	1	10
495091	206429-1	11-4	Reverse	\$2.95	\$2.65
495218	206430-1	11-4	Reverse	1.95	1.75
495162	206061-1	11-4	Standard	2.25	1.95
495293	211401-1	13-7	Standard	4.95	4.49
421382	206036-1	17-16	Standard	2.59	2.35
495146	206043-1	17-14	Reverse	2.59	2.29

Plugs


Part No.	Mfr. P/N	Size/Pos.	Gender	1	10
495322	206037-1	17-16	Standard	\$3.49	\$3.15
495031	206044-1	17-14	Reverse	2.95	2.65
495103	206708-1	13-9	Standard	2.95	2.65
421374	211399-1	13-7	Standard	3.49	2.95
495082	206060-1	11-4	Standard	2.79	2.49

AMP Circular Cable Clamps

Provides strain relief and can be used in all series receptacles and plugs.

- Material:
thermoplastic black, UL94V-0 rated (plastic); zinc alloy (metal)

Part No.	Mfr. P/N	Material	Shell	Cable	1	10
			Size	O.D.(max.)		
494039	206062-1	Plastic	11	.329"	\$3.75	\$3.35
494063	206070-1	Plastic	17	.453"	3.75	3.35
494055	206966-1	Plastic	13	.453"	3.75	3.35
494101	208945-5	Metal	14	.562"	7.95	6.95
494119	208945-7	Metal	22	.750"	10.95	9.95



★ Web Code: PCB

AMP Extraction Tool

- Works with general contacts of CPC, multimate and MATE-N-LOCK II contacts

Part No.	Mfr. Part No.	1	10
841838	305183	\$17.95	\$15.95

D-Sub Pin Insertion/Extraction Tools

- 19094/527582/223335: Plastic body; metal tips
- 223327: Handle with .050" hex wrench and exchangeable tips

Part No.	Mfr.	Product No.	Contact Size	1	10
19094	ValuePro	500-200	—	\$3.95	\$3.49
527582	AMP	91067-1	22	6.95	6.49
223335	AMP	91067-2	20DMM/DF	7.49	6.75
223327	AMP	91285-1	HD-20	19.95	17.95

D-Sub Crimping Tool

- Heavy-duty metal tool with cutter and insulated handles
- For computer pins & sockets, D-sub 26-28 AWG wire; butt-insulated connectors, 22-26 AWG wire; telephone spade lugs, 22-26 AWG wire and non-insulated connectors, 20-22 AWG & 14-18 AWG
- Coiled spring return • Size: 7.3"L x 1.5"W

Part No.	Mfr. Part No.	1	5	25
99443	HT202A	\$8.95	\$7.95	\$6.95

More Tools on pages 159-164

AMPLIMITE™ .050" Series 2 Type B Header

- Right angle plug
- Housing: PBT black
- Cap shields: zinc, nickel over copper
- Contacts: phosphor bronze, 0.76µm gold in contact area, tin in solder area

Part No.	Mfr. P/N	Positions	1	5
749417	2-5174225-5	68	\$21.95	\$19.95



★ Web Code: BCY

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

D-Subminiature Connectors

Right Angle PCB Mount ★ Web Code: FAN
Metal .318" Setback – Tin plated short style



* Order in multiples of 10

Part No.	Manufacturer	Product No.	Contacts	Gender	1	10	100
1952839	Foxconn	D-SUB-9M†	9	M	\$.55	\$.45	\$.35
104943	ValuePro	DB9P318	9	M	\$.69	.59	.49
614441	AMP	747840-4†	9	M	1.49	1.35	1.19
2076682	Various	DB9S318	9	F	.65	.55	.45
104952	ValuePro	DB9S318	9	F	.75	.65	.55
614504	AMP	747844-4†	9	F	1.95	1.75	1.49
71124	ValuePro	DA15P318†	15	M	.69	.59	.49
71125	ValuePro	DA15P318	15	M	.79	.69	.59
168743	ValuePro	HDDB15S318*	15	M	.49	.45	.39
77956	ValuePro	DA15S318	15	F	.79	.69	.59
1952273	Kycon	HDDSUB-15S†*	15	F	*	.19	.15
71466	ValuePro	HDDB15S318	15	F	.89	.79	.69
614539	AMP	747845-4†	15	F	1.75	1.55	1.39
15150	ValuePro	DB25P318	25	M	.75	.65	.55
614230	AMP	745238-4	25	M	2.95	2.69	2.39
265439	Various	DSUB-25F	25	F	.75	.65	.55
15182	ValuePro	DB25S318	25	F	.85	.75	.65
446483	Cinch	DBKL-25SAT-E25†	25	F	.49	.45	.39
614141	AMP	745783-4	25	F	1.95	1.75	1.59
71706	ValuePro	DC37P318†	37	M	1.15	.95	.89
78183	ValuePro	DC37S318	37	F	1.29	1.15	.99

* High Density † Without female jack screws (P/N 172603, pg 69)

Metal Solder-Cup

★ Web Code: EAB



Part No.	Manufacturer	Product No.	Contacts	Gender	1	10	100
15748	ValuePro	1001-9P-R	9	M	\$.55	\$.45	\$.35
222990	AMP	747904-2	9	M	2.25	1.95	1.75
222957	AMP	747904-4†	9	M	2.25	1.95	1.75
15771	ValuePro	500-109	9	F	.65	.55	.45
2125510	Amphenol	DB9S-SFJ††	9	F	.99	.85	.75
223052	AMP	747905-2	9	F	2.25	1.95	1.75
15035	ValuePro	1001-15P-R	15	M	.69	.55	.45
15078	ValuePro	1002-15P-R*	15	M	.95	.75	.59
223001	AMP	747908-2	15	M	1.95	1.75	1.59
15052	ValuePro	1001-15S-R	15	F	.75	.59	.49
164823	ValuePro	1002-15S-R*	15	F	.95	.75	.59
223061	AMP	747909-2	15	F	.99	.89	.79
15115	ValuePro	1001-25P-R	25	M	.95	.79	.69
223010	AMP	747912-2	25	M	3.25	2.95	2.65
222973	AMP	747912-4†	25	M	1.95	1.75	1.59
15157	ValuePro	500-125	25	F	.95	.79	.69
223079	AMP	747913-2	25	F	3.75	3.15	2.65
223044	AMP	747913-4†	25	F	.99	.89	.79
203799	ValuePro	1002-26P*	26	M	.85	.69	.55
203782	ValuePro	1002-26S-R*	26	F	.29	.25	.19
639630	Amphenol	EDC37P	37	M	.49	.45	.39
15473	ValuePro	1002-37P	37	M	1.35	1.15	.95
222981	AMP	747916-4†	37	M	.99	.89	.79
482724	Amphenol	EDC37S	37	F	.99	.89	.79
15500	ValuePro	GC028-R	37	F	1.25	1.09	.95
223087	AMP	747917-2	37	F	.99	.89	.79
482732	Amphenol	EDD50P	50	M	.29	.25	.19
15676	ValuePro	GC029-R	50	M	1.95	1.69	1.49
482741	Amphenol	EDD50S	50	F	.49	.45	.39
15691	ValuePro	GC030	50	F	.99	.89	.79

* High Density † Zinc plated shell †† With female jack screws

Have A Large Volume Order That Requires Special Pricing?

Call us at 1-800-831-4242

Right Angle PCB Mount

Metal .590" Set Back – Tin plated long style

★ Web Code: HAN



• Current rating: 1A

Part No.	Manufacturer	Product No.	Contacts	Gender	1	10	100
104970	ValuePro	DB9P590	9	M	\$.95	\$.85	\$.75
104978	ValuePro	DB9S590	9	F	.95	.85	.75
104985	Astron	DA15P590†	15	M	.29	.25	.19
104993	ValuePro	DA15S590†	15	F	.29	.25	.19
104994	ValuePro	DA15S590	15	F	1.29	1.15	.95
189624	Various	DB25P590††	25	M	.29	.25	.19
105006	ValuePro	DB25P590	25	M	.99	.89	.79
105013	ValuePro	DB25S590†	25	F	.99	.89	.79
105014	ValuePro	DB25S590	25	F	1.29	1.15	.95

† Without female jack screws (P/N 172603, pg 69) †† Without board tabs

Metal Straight PCB Mount

★ Web Code: SBK



Part No.	Manufacturer	Product No.	Contacts	Gender	1	10	100
111692	ValuePro	DB9PPCB	9	M	\$.55	\$.45	\$.35
15781	ValuePro	DB9SPCB	9	F	.59	.49	.39
176760	ValuePro	DA15PPCB	15	M	.65	.55	.45
176752	ValuePro	DA15SPCB	15	F	.65	.55	.45
15123	ValuePro	DB25PPCB	25	M	.75	.65	.55
2095091	Amphenol	EDB25ST	25	F	.29	.25	.19
15165	ValuePro	DB25SPCB	25	F	.79	.69	.59
180021	ValuePro	DC37SPCB	37	F	1.25	1.09	.95

* High Density

Crimp-Type

★ Web Code: UBR



Part No.	Manufacturer	Product No.	Contacts	Gender	1	10	100
73189	ValuePro	500-010	9	M	\$.49	\$.39	\$.35
222640	AMP	205204-1	9	M	1.15	.95	.85
73197	ValuePro	500-110	9	F	.55	.45	.35
222842	AMP	205203-3	9	F	.85	.75	.65
222691	AMP	205203-1	9	F	1.09	.95	.75
73200	ValuePro	G37-15	15	M	.65	.59	.55
180882	ValuePro	1006-15P-R*	15	M	.39	.35	.29
222703	AMP	205205-1	15	M	.49	.45	.39
222658	AMP	205206-1	15	M	.65	.59	.55
73219	ValuePro	G16125-R	15	F	.65	.55	.45
180890	ValuePro	1006-15S*	15	F	.35	.29	.25
38789	ValuePro	500-027	25	M	.65	.55	.45
222818	AMP	207464-2	25	M	.79	.65	.55
38771	ValuePro	500-127	25	F	.75	.69	.65
222922	AMP	207463-1	25	F	.95	.85	.75

* High Density

IDC Ribbon Cable

- Contact material: phosphor bronze
- Terminates with standard D-type connectors

★ Web Code: MAP



Part No.	Manufacturer	Product No.	Shell	Cont.	Gender	1	10	100
109226	ValuePro	MDB9P	Metal	9	M	\$1.75	\$1.49	\$1.25
12504	ValuePro	CDB9P	Plastic	9	M	2.25	1.95	1.75
109218	ValuePro	MDB9S	Metal	9	F	1.85	1.65	1.45
12521	ValuePro	CDB9S	Plastic	9	F	2.49	2.25	1.95
614387	AMP	747318-4††	Plastic	9	F	4.49	3.95	3.49
1577961	3M	8309-6000	Metal	9	F	3.95	3.69	3.29
614328	AMP	747303-4	Metal	9	F	.99	.89	.79
117382	ValuePro	MDA15P	Metal	15	M	1.75	1.49	1.29
12299	ValuePro	CDA15P	Plastic	15	M	1.49	1.25	1.09

†† With standard mounting holes

Continued on next page

D-Subminiature Connectors (Continued)

IDC Ribbon Cable (Continued)

Part No.	Manufacturer	Product No.	Shell	Cont.	Gender	1	10	100
116012	ValuePro	MDA15S	Metal	15	F	\$1.95	\$1.75	\$1.49
12319	ValuePro	CDA15S	Plastic	15	F	1.49	1.25	1.09
115984	ValuePro	MDB25P	Metal	25	M	2.39	2.09	1.79
614344	AMP	747306-2	Metal	25	M	.99	.89	.79
12335	ValuePro	CDB25P	Plastic	25	M	1.89	1.75	1.49
115976	ValuePro	MDB25S	Metal	25	F	2.25	1.95	1.75




IDC Ribbon Cable (Continued)

* Web Code: MAP

Part No.	Manufacturer	Product No.	Shell	Cont.	Gender	1	10	100
12432	ValuePro	CDB25S	Plastic	25	F	\$2.25	\$1.95	\$1.75
115992	ValuePro	MDC37P	Metal	37	M	2.95	2.65	2.35
614336	AMP	747306-1	Metal	37	M	7.95	7.49	6.95
12466	ValuePro	CDC37P	Plastic	37	M	2.95	2.69	2.39
116004	ValuePro	MDC37S	Metal	37	F	3.49	2.95	2.49
12483	ValuePro	CDC37S	Plastic	37	F	2.95	2.69	2.29

D-Sub Solder & Crimp Contacts

* Web Code: JDC



Female Solder Contact - Fig. 1

Order in multiples of 10

Part No.	Mfr.	Product No.	AWG	10	100	500
223319	AMP	66569-3	18	\$.35	\$.29	\$.25

Male Solder Contact - Fig. 2

Order in multiples of 10

Part No.	Mfr.	Product No.	AWG	10	100	500
234982	AMP	66570-3	28-24	\$.29	\$.25	\$.19

Female Crimp Contacts - Fig. 3

Order in multiples of 10

Part No.	Mfr.	Product No.	AWG	10	100	1000
43369	ValuePro	500-155	28-24	\$.12	\$.09	\$.08
185412	ValuePro	1006-PS†	28-24	\$.09	\$.07	\$.05
223221	AMP	1-66505-0	28-24	\$.19	\$.15	\$.12
223239	AMP	66683-4	28-24	\$.19	\$.15	\$.12
223247	AMP	745253-6	26-22	\$.19	\$.15	\$.12
860001	AMP	66504-4	24-20	\$.12	\$.09	\$.07
223298	AMP	66504-9	24-20	\$.19	\$.15	\$.12
223255	AMP	1-66504-0	24-20	\$.19	\$.15	\$.12
223271	AMP	5-66504-7	24-20	\$.12	\$.09	\$.07

† Use with 180890, pg 68

AMP D-Sub Enclosure Kit

- Kit includes: (2) 4-40 jack screw (zinc alloy), lack themoplastic connector insert, steel tin plated inner and outer shell, black PVC enclosure, 62-pin male D-sub connector



Part No.	Mfr.	Part No.	1	10	100
837986		748476-1	\$4.95	\$4.49	\$3.95

.050" (1.27mm) Pitch LFH™ Matrix 50 Shielded Receptacle

60 Circuit, Vertical

- Same size as 15-pin D-sub for standard panel cut-outs and hardware use
- Volt./current: 40V @ 1A
- Contact resistance: 20mΩ max.
- Insulation resistance: 100MΩ min.
- Housing: glass filled polymer, UL94V-0
- Contact: beryllium copper alloy
- Plating: 30μ" min. gold over nickel in contact area, 100μ" min. tin/lead over nickel in PC tail area, 150μ" min. bright tin over nickel all over copper flash on shields



Part No.	Mfr.	Part No.	1	10
802222		70928-0002	\$9.95	\$8.95

Male Crimp Contacts - Fig. 4

Order in multiples of 10

Part No.	Mfr.	Product No.	AWG	10	100	1000
185421	ValuePro	1006-PP†	28-24	\$0.09	\$0.08	\$0.07
43377	ValuePro	500-055	28-24	\$.12	\$.09	\$.08
223108	AMP	66507-9	28-24	\$.19	\$.15	\$.12
223095	AMP	1-66507-0	28-24	\$.12	\$.09	\$.07
223132	AMP	745254-7	26-22	\$.19	\$.17	\$.15
223191	AMP	66506-9	24-20	\$.19	\$.15	\$.12
23167	AMP	1-66506-0	24-20	\$.19	\$.15	\$.12
838399	AMP	2-66506-4	24-20	\$.15	\$.12	\$.09
223183	AMP	5-66506-9	24-20	\$.12	\$.09	\$.07
223175	AMP	205202-7	24-20	\$.35	\$.29	\$.25

† Use with 180882, pg 68

Female Crimp Contact (M39029/63-368) - Fig. 5

• Machined

Part No.	Mfr.	Product No.	1	10	100
449351	AMP	205090-1	\$.55	\$.45	\$.39

Male Crimp Contact (M39029/64-369) - Fig. 6

• Machined

Part No.	Mfr.	Product No.	1	10	100
449342	AMP	205089-1	\$.49	\$.39	\$.35

D-Sub Connector Hoods

* Web Code: DAB



- Use with D-sub solder cup and housing style connectors (hardware included)

D Series: Plastic hood with strain relief (gray)


MD Series: Metal coated plastic hood w/ strain relief

MH Series: Die-cast metal hood with strain relief

Part No.	Mfr.	Product No.	Pins	1	10	100
15722	ValuePro	DB9H	9	\$.59	\$.49	\$.39
25620	ValuePro	MDB9H	9	\$.65	\$.55	\$.45
147741	ValuePro	MHDB9	9	1.59	1.39	1.19
230893	AMP	205729-1†	9	2.65	2.39	2.19
15019	ValuePro	DA15H	15	\$.75	\$.59	\$.49
25567	ValuePro	MDA15H	15	\$.89	\$.69	\$.59
15086	ValuePro	DB25H	25	\$.59	\$.49	\$.39
25604	ValuePro	MDB25H	25	\$.89	\$.69	\$.59
15107	ValuePro	MHDB25	25	2.25	1.95	1.75
230914	AMP	205718-1†	25	1.49	1.35	1.19
15457	ValuePro	DC37H	37	\$.95	\$.79	\$.65
25612	ValuePro	MDC37H	37	\$.95	\$.79	\$.65
15660	ValuePro	DD50H	50	1.99	1.89	1.79
230931	AMP	205732-1†	50	1.75	1.59	1.39

† Plastic clam shell hood (black)

Hardware for D-Sub Connector Hoods



* Web Code: PAM

4-40 Screw Sets

- 102808: 4-40 screw (.385"L) and retainer clip
- 16548: 4-40 x .187" jack screw (.31"L thread), washer, lock washer and nut set
- 444912: (2) washers, lockwasher, hex nut and screw locks are steel with zinc plating and yellow chromate finish
- 1575931: (2) nut-4-40 UNC, lock washer, 0.03" dia. spacer, jack socket screw

Part No.	Mfr.	Prod. No.	Plating*	1	10	100
102808	ValuePro	14-553	A	\$.55	\$.49	
16548	ValuePro	14-522	A	\$.55	\$.49	
444912	Cinch	D20418-39	C	1.69	1.49	1.35
1575931	3M	3341-1S	A	1.95	1.75	1.59



4-40 x .187" Jack Screws

* Order in multiples of 10

Part No.	Mfr.	Length	Plating*	1	10	100
169931	ValuePro	.275"	A	\$.25	\$.22	\$.19
172603	ValuePro	.315"	A	\$.29	\$.25	\$.19
2100283	ValuePro	.315"	D	\$.19	\$.19	\$.15
1582209	Keystone	.315"	C	\$.19	\$.19	\$.15
1582508	Keystone	.315"	B	\$.29	\$.25	\$.19
102816	ValuePro	.437"	B	\$.39	\$.35	\$.25
108987	ValuePro	.515"	A	\$.45	\$.39	\$.29

4-40 x .187" Standoffs

More Standoffs on 108

Part No.	Mfr.	Length	Plating*	1	10	100
175636	ValuePro	.187"	B	\$.25	\$.22	\$.15
102796	ValuePro	.250"	A	\$.35	\$.29	\$.25

4-40 Thumbscrew

Part No.	Mfr.	Length	Plating*	1	10	100
125015	ValuePro	1.65"	A	\$.29	\$.25	\$.19

* A: Zinc, clear chromate B: Chrome C: Zinc, yellow chromate D: Chrome with lock washer

25-Pin Dual Plastic Hood

Designed for custom applications requiring two D-sub connectors.

Kit includes: Backshell and hardware



Part No.	Description	1	10	100
34091	25-pin hood	\$1.25	\$1.19	\$.99

* D-Sub Junction Shells Online — Enter Web Code JEM

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

molex JAMECO ValuePro

- 5.03mm (.198") pitch
- Passive friction lock
- Housing: nylon; UL94V-2
- Temperature range: -40°C to +105°C
- Contact retention to housing: 20 lbs. min.



Free Hanging Plug (Matrix)



Panel Mount Plug (In-line)



Free Hanging Receptacle (Matrix)



Panel Mount Receptacle (In-line)



PCB Header (In-line)



PCB Header (Matrix)

Power Connectors

molex .062" (1.57mm) Plugs

• Current: 5.0A

* Order in multiples of 10

Part No.	Mfr. No.	Circuits	Type	Pattern	Mating Conn.	1	10	100
224477	03-06-2011	1	Free hanging	In-line	224397 *	\$.07	\$.05
224485	03-06-2023	2	Free hanging	In-line	224400 *	.19	.15
229948	03-06-2024	2	Panel mount	In-line	229956 *	.09	.08
224493	03-06-2032	3	Free hanging	In-line	—	.39	.35	.25
229964	03-06-2033	3	Panel mount	In-line	229972 *	.19	.15
224506	03-06-2042	4	Free hanging	In-line	224426 *	.19	.15
224514	03-06-2044	4	Free hanging	Matrix	22443439	.35	.29
230041	03-06-2062	6	Panel mount	Matrix	230050 *	.19	.15
224531	03-06-2092	9	Free hanging	Matrix	224451 *	.19	.15

molex .062" (1.57mm) Receptacles

* Web Code: HBL

Part No.	Mfr. No.	Circuits	Type	Pattern	Mating Conn.	1	10	100
224397	03-06-1011	1	Free hanging	In-line	224477 *	\$.07	\$.05
224400	03-06-1023	2	Free hanging	In-line	224485 *	.15	.12
229956	03-06-1022	2	Panel mount	In-line	229948 *	.15	.12
229972	03-06-1038	3	Panel mount	In-line	229964 *	.19	.15
224434	03-06-1044	4	Free hanging	Matrix	22451439	.35	.25
224442	03-06-1062	6	Free hanging	Matrix	—	.35	.29	.25
230050	03-06-1061	6	Panel mount	Matrix	230041 *	.19	.15
224451	03-06-1092	9	Free hanging	Matrix	22453135	.29	.25

JAMECO ValuePro .084" (2.13mm) Plugs

Part No.	Cross Ref. No.	Circuits	Type	Pattern	Mating Conn.	1	10	100
379276	50-84-1060	6	Free hanging	Matrix	379348 *	\$.12	\$.09
379305	50-84-1150	15	Free hanging	Matrix	379372 *	.15	.12

JAMECO ValuePro .084" (2.13mm) Receptacles

Part No.	Cross Ref. No.	Circuits	Type	Pattern	Mating Conn.	1	10	100
379381	10-84-4020	2	PCB	In-line	— *	\$.12	\$.09
379401	10-84-4030	3	PCB	In-line	— *	.15	.12
379428	10-84-4040	4	PCB	In-line	— *	.15	.12
379444	10-84-4060	6	PCB	Matrix	— *	.15	.12
379461	10-84-4090	9	PCB	Matrix	—29	.25	.19
379487	10-84-4120	12	PCB	Matrix	—35	.29	.25

molex JAMECO ValuePro

- Contact: brass or phosphor bronze
- Temp. range: -40°C to +105°C
- Tin plating



Crimp-Type Male



Solder-Tail Male



Crimp-Type Female



Solder-Tail Female

.062" (1.57mm) Bulk

Part No.	Mfr.	Cross Ref. No.	Description	Gender	AWG	10	100	1000
224581	Molex	02-06-2132	Crimp type	M	24-30 \$.09	\$.07	\$.05
224573	Molex	02-06-1132	Crimp type	F	24-3009	.07	.05
224565	Molex	02-06-2103	Crimp type	M	18-2409	.07	.05
224557	Molex	02-06-1103	Crimp type	F	18-2409	.07	.05
227379	Molex	02-06-8103	Solder tail	M	—12	.09	.07
227387	Molex	02-06-7103	Solder tail	F	—12	.09	.07

.084" (2.13mm) Bulk

401314	ValuePro	02-08-1002C	Crimp type	F	12-14 \$.05	\$.04	\$.03
401331	ValuePro	02-08-1004C	Crimp type	F	12-1405	.04	.03

Power Connector Contacts

* Web Code: JBL

.084" (2.13mm) Bulk (Continued)

Order in multiples of 10

Part No.	Mfr.	Cross Ref. No.	Description	Gender	AWG	10	100	500
379524	ValuePro	02-08-1002B	Crimp type	F	16-20 \$.09	\$.07	\$.05
401306	ValuePro	02-08-1002A	Crimp type	F	18-2207	.05	.04
401322	ValuePro	02-08-1004A	Crimp type	F	18-2205	.04	.03
401357	ValuePro	02-08-2004SC	Crimp type	M	12-1407	.05	.04
401373	ValuePro	02-08-2004LC	Crimp type	M	12-1405	.04	.03
379541	ValuePro	02-08-2004SB	Crimp type	M	16-2005	.04	.03
401349	ValuePro	02-08-2004SA	Crimp type	M	18-2205	.04	.03

.093" (2.36mm) Bulk

224207	Molex	02-09-2118	Crimp type	M	18-22 \$.12	\$.09	\$.07
224215	Molex	02-09-1119	Crimp type	F	18-2212	.09	.07
224223	Molex	02-09-2103	Crimp type	M	14-2012	.09	.07
224231	Molex	02-09-1104	Crimp type	F	14-2012	.09	.07
224240	Molex	02-09-2133	Solder tail	M	—15	.12	.09
224258	Molex	02-09-1134	Solder tail	F	—15	.12	.09

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

molex® .093" Power Connector Kits

Kit contains mating sets of housings and pins.


• Voltage: 250VAC • Temp. range: -40°C to +105°C

142181: • 3 ea. 2-pin plugs & receptacles,
8 ea. female & male contacts • Current: 12A

142201: • 2 ea. 4-pin plugs & receptacles,
10 ea. female & male contacts • Current: 9A



Standard Crimp Contacts



* Web Code: CAV

Includes: Male and female tin-plated standard brass .010" pins; 18-22 AWG crimp size wire

Part No.	Mfr. Part No.	Description	1	10	100
142181	1545	2-pin kit	\$4.49	\$3.95	\$3.49
142201	1490	4-pin kit	4.49	3.95	3.49

.098" (2.49mm) Pitch AT Power Connectors

- Voltage rating: 250V AC/DC
- Current rating: 7A AC/DC
- Temperature range: -25°C to 85°C
- Withstanding volt.: 1500V/min.
- Insulation resistance: 1000MΩ min.
- For use with motherboards and power supplies
- Material: nylon

78300: • Size: 0.93"L x 0.37"W x 0.57"H

• Material of post: tin-plated brass

• Diameter of post: 0.09"

78327: • Size: 0.94"L x 0.25"W x 0.74"H

* Web Code: QAT



* Order in multiples of 10

Part No.	Description	1	10	100
78300	6-pin male header	* \$1.19	\$1.15	
78327	6-pin female housing.....	.29	.25	.22

Hand Crimp Tools

Designed to crimp terminals, strip and cut wires, and cut bolts. For Molex .062" & .093" (pg 70) and KK® series (pg 76) crimp terminals.

* Web Code: GBU

308030: Cuts & strips 14-24 AWG wires

227491: Cuts & strips 18-30 AWG wires

Part No.	Mfr. Part No.	Length	Color	1	5
308030	W-HT-1919	8.3"L	Red	\$14.95	\$13.95
227491	W-HT-1921	8.3"L	Yellow ...	14.95	13.95

Connector Extraction Tools



* Web Code: BAV

Part No.	Mfr. Part No.	AWG	Conn. Size	1	5
142156	W-HT-2285	14	.062" ...	\$14.95	\$12.95
227467	W-HT-2023	18-30	.062"	10.95	9.85
142236	W-HT-2038	14	.093"	14.95	12.95
227395	W-HT-2054	14-30	.093"	10.95	9.85
236128	W-HT-1884	22-30	.100"	10.95	9.49

* Jumpers Available Online — Enter Web Code GAQ

.118" Pitch ATX Power Connectors

* Web Code: FEM

For Motherboards and Power Supplies

• Current rating: 7A AC/DC • Temperature range: -25°C to 85°C

147379: Material: nylon 66, UL-94V0

• Material of post: tin-plated brass • Diameter of post: 0.045"

147387: Material: nylon 66, UL-94V0


147395: Material: tin-plated brass



* Order in multiples of 10

Part No.	Description	L	W	H	Dia	Use With	1	10	100	1000
147379	20-pin male connector	1.7"	0.4"	0.6"	—	—	\$.59	\$.55	\$.49	\$.45
147387	20-pin housing connector	1.7"	0.4"	0.8"	—	147395	.59	.55	.49	.45
147395	Power terminal pin, F	0.59"	—	—	0.068"	147387	*	.15	.12	.09

Power Connectors & Pins

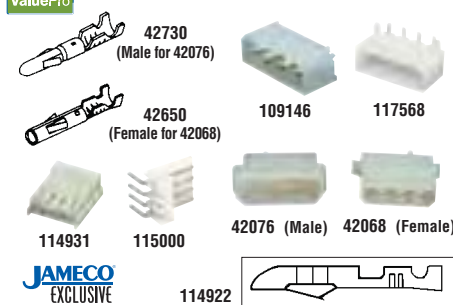

Connector & Housing Specifications:

- Voltage rating: 250VAC (Mate-N-Lock 600VAC)
- Operating temperature: -55°C to +105°C

Crimp Pin Specifications:

- Material: tin plated brass
- Current rating: 1.5A
- Wire size range: 18-24 AWG
- Use crimp tool P/N 99443, pg 161

* Web Code: KAP

.200" — For 5.25" Disk Drives & Power Supplies

42076 & 42068 Connector Housings:

- External key bar indicates pin 1
- Extraction tools, P/Ns 131887 & 131879 (see below)
- Keyed mating connectors

* Order in multiples of 10

Part No.	Description	1	10	100
109146	4-pin male vert. PCB mtg.....	\$.75	\$.65	\$.59
117568	4-pin male PCB mtg, horiz. edge mnt.....	.95	.85	.75
42076	4-pin male housing.....	*	.12	.09
42068	4-pin female housing.....	*	.19	.15
42730	Male crimp pin for 42076.....	*	.12	.09
42650	Female crimp pin for 42068.....	*	.09	.07

.100" — For 3.5" Disk Drives & Power Supplies

* Order in multiples of 10

Part No.	Description	1	10	100
114931	4-pin female housing.....	\$.29	\$.22	\$.15
114922	Female crimp pin for 114931.....	*	.12	.09
115000	4-pin male rt. angle PCB mounting.....	.39	.35	.29


Extraction Tools for Crimp Terminals

- Quickly and easily extract .093" locking pins from interlocking connectors
- Length: 5"
- See above for crimp pins
- 131887:** Male tool for 42730, above
- 131879:** Female tool for 42650, above

Part No.	Cross Ref. No.	1	5
131887	HT319C	\$9.95	\$8.95
131879	HT319B.....	9.95	8.95

.049" (1.25mm) Pitch Headers and Housings

- Wire to board
- Blade pin
- Friction lock
- Current rating: 1A
- Contact resistance: 20mΩ max.
- Insulation resistance: 100MΩ min.
- Housing material: PA polyimide (Nylon) 6/6, UL94V-0 rated
- Contact material: phosphor bronze
- Order in multiples of 10



Shrouded Vertical Headers (Fig. 1)

Part No.	Cross Ref. No.	Circuits	10	100	500
420339	53047-0210.....	2	\$.09	\$.07	\$.05
420347	53047-0310.....	3	.09	.07	.05
420363	53047-0510.....	5	.12	.09	.07
420371	53047-0610.....	6	.12	.09	.07
420380	53047-0710.....	7	.12	.09	.07

Shrouded Right-Angle Headers (Fig. 2)

Part No.	Cross Ref. No.	Circuits	10	100	500
420427	53048-0210.....	2	\$.09	\$.07	\$.05
420435	53048-0310.....	3	.09	.07	.05
420443	53048-0410.....	4	.09	.07	.05
420451	53048-0510.....	5	.12	.09	.07
420460	53048-0610.....	6	.12	.09	.07
420486	53048-0810.....	8	.12	.09	.07
420507	53048-1010.....	10	.15	.12	.09

Housings (Fig. 3)

Part No.	Cross Ref. No.	Circuits	10	100	500
420241	51021-0200.....	2	\$.05	\$.04	\$.03
420259	51021-0300.....	3	.05	.04	.03
420267	51021-0400.....	4	.05	.04	.03
420275	51021-0500.....	5	.05	.04	.03
420283	51021-0600.....	6	.05	.04	.03
420291	51021-0700.....	7	.05	.04	.03
420321	51021-1000.....	10	.05	.04	.03

molex® Female Crimp Terminals

For above housings

- Contact material: phosphor bronze
- Plating contact: 0.9µm (35µ") tin
- Pre-plated



Order in multiples of 10

Part No.	Mfr. Part No.	AWG	10	100	500
668457	50079-8100.....	26-28	\$.09	\$.08	\$.07
668473	50058-8100.....	28-32	.12	.09	.07

Can't find what you are looking for in the catalog? Check out the thousands of products online priced near cost.

www.Jameco.com/Clearance

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Headers, Housings & IDC Connectors


4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE



.079" (2.00mm) Pitch Headers and Housings

- Voltage rating: 125V
- Contact resistance: 20mΩ max.
- Insulation resistance: 1000MΩ min.
- Housing material: PBT polyester
- Dielectric withstanding voltage: 250VAC/1 min.

JAMECO
EXCLUSIVE



* Order in multiples of 10

Dual Row Vertical Headers (Fig. 1)

Part No.	Cross Ref. No.	Circuits	1	10	100
378521	87758-0416R	4
378556	87758-1016R	10
378572	87758-1416R	14
378581	87758-1616R	16
378599	87758-1816R	18
378610	87758-2216R	22
378628	87758-2416R	24
378652	87758-3016R	30
378708	87758-4016R	40
378724	87758-4416R	44
378759	87758-5016R	50

Right-Angle Headers (Fig. 2)

Part No.	Cross Ref. No.	Circuits	1	10	100
378775	87760-0616R	6
378783	87760-0816R	8
378804	87760-1216R	12
378812	87760-1416R	14
378821	87760-1616R	16
378839	87760-1816R	18
378847	87760-2016R	20

Housings w/o Polarizing Key (Fig. 3)

Part No.	Cross Ref. No.	Circuits	1	10	100
377991	51110-0850R	8
378003	51110-1050R	10
378011	51110-1250R	12
378020	51110-1450R	14
378038	51110-1650R	16
378046	51110-1850R	18
378054	51110-2050R	20
378062	51110-2250R	22
378071	51110-2450R	24
378089	51110-2650R	26
378097	51110-2850R	28
378100	51110-3050R	30


Housings w/ Polarizing Key (Fig. 4)

Part No.	Cross Ref. No.	Circuits	1	10	100
378142	51110-0851R	8
378151	51110-1051R	10
378169	51110-1251R	12
378177	51110-1451R	14
378185	51110-1651R	16
378193	51110-1851R	18
378206	51110-2051R	20
378214	51110-2251R	22
378222	51110-2451R	24
378231	51110-2651R	26
378249	51110-2851R	28
378257	51110-3051R	30

.079" (2.00mm) Male Headers

- Solder to PC boards for instant plug-in access via shorting blocks (pg 74)
- Insulator: UL94V-0 polyester
- Contact material: phosphor bronze
- Temperature range: -55°C to +120°C
- .025" square posts on a .100" x .100" matrix
- Use with crimp connector housing, pg 81
- Current rating: 1 amp
- Contact area: gold

* Web Code: VMH



* Order in multiples of 10

Right Angle Single Row Male Headers

Part No.	Product No.	Contacts	1	10	100	1000
2076914	079RA12	2
2076922	079RA14	4
2076931	079RA15	5
2076949	079RA110	10

Straight Single Row Male Headers

Part No.	Product No.	Contacts	1	10	100	500
2076957	079SS2	2
2077087	079SS3R	3
2077095	079SS4R	4
2077108	079SS6R	6
2077116	079SS10R	10
2077124	079SS14R	14
2077132	079SS20R	20

Straight Double Row Male Headers

Part No.	Product No.	Contacts	1	10	100	500
2077141	079DH4R	4
2077167	079DH6R	6
2077204	079DH8R	8
2076965	079DH10	10
2076973	079DH12	12
2076981	079DH14	14
2076990	079DH16	16
2077001	079DH20	20
2077010	079DH26	26
2077028	079DH30	30
2077036	079DH40	40

Milli-Grid™ Female Crimp Terminal

For 51110 Series Housings on left

- Lead free
- Contact material: phosphor bronze
- Plating contact: 0.38μm (15μ") gold
- Under plating: nickel

molex®

Order in multiples of 10

Part No.	Mfr. No.	AWG	10	100	500
668465	50394-8100R	24-30

.100" (2.54mm) PCB Connector

* Web Code: YBZ

Receptacle, Top Entry with Hooks (Tin/Brass)


- Accepts 0.025" square posts
- Voltage rating: 250VAC
- Contact resistance: 40mΩ max.
- Insulation material: nylon 6/6, UL94V-2
- Withstanding voltage: 1000VAC/min.

Order in multiples of 10

Part No.	Mfr. Part No.	Pos.	10	100
668394	2405S09V000R	9

.100" (2.54mm) IDC Connectors

- Voltage rating: 250VAC
- Housing: UL94V-2 nylon
- Contact material: phosphor bronze
- Plating: tin

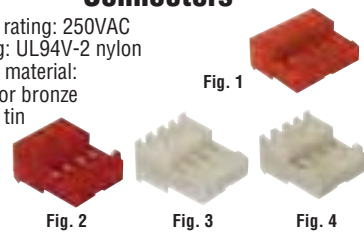

Order in multiples of 10

Closed-End Style

Without Polarizing Tabs (Fig. 1)

Part No.	Product No.	Pos.	AWG	Color	10	100	500
345631	640440-5	5	22	Red
345640	640440-6	6	22	Red
345738	640441-6	6	24	White
345746	640441-7	7	24	White
345771	1-640441-0	10	24	White
345800	1-640442-4	4	26	Blue

With Polarizing Tabs (Fig. 2)

Part No.	Product No.	Pos.	AWG	Color	10	100	500
345973	643813-3	3	22	Red
345990	643813-5	5	22	Red
346028	643813-8	8	22	Red
346044	1-643813-0	10	22	Red
346087	643814-5	5	24	White
346095	643814-6	6	24	White
346108	643814-7	7	24	White
346116	643814-8	8	24	White

Feed-Thru Style

Without Polarizing Tabs (Fig. 3)

Part No.	Product No.	Pos.	AWG	Color	10	100	500
346327	640620-2	2	22	Red
346351	640620-5	5	22	Red
346360	640620-6	6	22	Red
346378	640620-7	7	22	Red
346394	640620-9	9	22	Red
346407	1-640620-0	10	22	Red
346423	640621-3	3	24	White
346440	640621-5	5	24	White
346458	640621-6	6	24	White
346474	640621-8	8	24	White
346482	640621-9	9	24	White

With Polarizing Tabs (Fig. 4)

Part No.	Product No.	Pos.	AWG	Color	10	100	500
346685	644540-2	2	22	Red
346693	644540-3	3	22	Red
346722	644540-6	6	22	Red
346731	644540-7	7	22	Red
346749	644540-8	8	22	Red
346765	1-644540-0	10	22	Red
346773	644563-2	2	24	White
346781	644563-3	3	24	White
346811	644563-6	6	24	White
346837	644563-8	8	24	White
346853	1-644563-0	10	24	White


All Jameco purchases are guaranteed for a full 90 days and even longer for Jameco House Brands.

AMP MTA-100 .100" (2.54mm) IDC Connector

Closed-End Style w/o Polarizing Tabs w/ Locking Ramp

- Contacts: phosphor bronze, tin-plated
- Voltage rating: 250VAC
- Current rating: 5A

* Web Code: CCV



Part No.	Product No.	Pos.	AWG	Color	10	100	500
524710	640440-4	4	22	Red	\$.19	\$.17	\$.15

Order in multiples of 10

.100" Strain Relief Covers



Part No.	Cross Ref.	Fig.	Style	Pos.	10	100
326019	643075-2	1	Closed-end	2	\$.09	\$.08
326035	643075-4	1	Closed-end	4	\$.09	\$.08
326043	643075-5	1	Closed-end	5	\$.09	\$.08
326051	643075-6	1	Closed-end	6	\$.09	\$.08
326060	643075-7	1	Closed-end	7	\$.09	\$.08
326078	643075-8	1	Closed-end	8	\$.09	\$.08
326086	643075-9	1	Closed-end	9	\$.09	\$.08
326094	1-643075-0	1	Closed-end	10	\$.09	\$.08
326107	643077-2	2	Feed-thru	2	\$.09	\$.08
326115	643077-3	2	Feed-thru	3	\$.09	\$.08
326123	643077-4	2	Feed-thru	4	\$.09	\$.08
326131	643077-5	2	Feed-thru	5	\$.09	\$.08
326140	643077-6	2	Feed-thru	6	\$.09	\$.08
326158	643077-7	2	Feed-thru	7	\$.09	\$.08
326166	643077-8	2	Feed-thru	8	\$.09	\$.08
326174	643077-9	2	Feed-thru	9	\$.09	\$.08
326182	1-643077-0	2	Feed-thru	10	\$.09	\$.08

Order in multiples of 10

AMP T-Handle Tool

- For .100" (2.54mm) IDC connectors



Part No.	Mfr. P/N	Description	1	5
365974	59803-1	.100" hand tool	\$29.95	\$26.95

DOLLAR SALE


Over 5,000 SKUs
Over 15 Million Parts in Stock
In Lots of up to 1000 Pieces
Priced Below a Dollar.

Look for pricing shaded in blue throughout the catalog and for a larger selection go to:

Jameco.com/MakesCents

.156" (3.96mm) IDC Connectors

AMP MTA-156 Series Value Equivalents

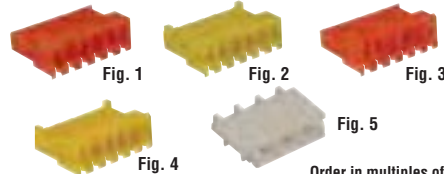

Closed-End Style

With Locking Ramp, w/o Polarizing Tabs (Fig. 1)

Part No.	Product No.	Pos.	AWG	Color	10	100	500
397431	640426-2	2	18	Orange	\$.09	\$.08	\$.07
397440	640426-3	3	18	Orange	\$.15	\$.12	\$.09
397474	640426-6	6	18	Orange	\$.09	\$.08	\$.07
397520	640427-2	2	20	Yellow	\$.15	\$.12	\$.09
397554	640427-5	5	20	Yellow	\$.15	\$.12	\$.09
397562	640427-6	6	20	Yellow	\$.09	\$.08	\$.07

Order in multiples of 10

With Locking Ramp, Polarizing Tabs (Fig. 2)

Part No.	Product No.	Pos.	AWG	Color	10	100	500
397618	643817-2	2	18	Orange	\$.09	\$.08	\$.07
397626	643817-3	3	18	Orange	\$.09	\$.08	\$.07
397634	643817-4	4	18	Orange	\$.09	\$.08	\$.07
397642	643817-5	5	18	Orange	\$.09	\$.08	\$.07
397651	643817-6	6	18	Orange	\$.09	\$.08	\$.07
397706	643818-2	2	20	Yellow	\$.09	\$.08	\$.07
397714	643818-3	3	20	Yellow	\$.09	\$.08	\$.07
397722	643818-4	4	20	Yellow	\$.09	\$.08	\$.07
397731	643818-5	5	20	Yellow	\$.09	\$.08	\$.07
397749	643818-6	6	20	Yellow	\$.09	\$.08	\$.07

Strain Relief Covers for Closed-End Style

Part No.	Product No.	Pos.	10	100	500
398696	643067-2	2	\$.09	\$.08	\$.07
398709	643067-3	3	\$.09	\$.08	\$.07
398717	643067-4	4	\$.09	\$.08	\$.07
398725	643067-5	5	\$.09	\$.08	\$.07

Feed-Thru Style

With Locking Ramp, w/o Polarizing Tabs (Fig. 3)

Part No.	Product No.	Pos.	AWG	Color	10	100	500
397802	640599-3	3	18	Orange	\$.09	\$.08	\$.07
397829	640599-5	5	18	Orange	\$.09	\$.08	\$.07
397837	640599-6	6	18	Orange	\$.09	\$.08	\$.07
397888	640600-2	2	20	Yellow	\$.09	\$.08	\$.07
397909	640600-4	4	20	Yellow	\$.09	\$.08	\$.07
397917	640600-5	5	20	Yellow	\$.09	\$.08	\$.07
397925	640600-6	6	20	Yellow	\$.09	\$.08	\$.07

With Locking Ramp, Polarizing Tabs (Fig. 4)

Part No.	Product No.	Pos.	AWG	Color	10	100	500
397984	644465-3	3	18	Orange	\$.09	\$.08	\$.07
397992	644465-4	4	18	Orange	\$.09	\$.08	\$.07
398004	644465-5	5	18	Orange	\$.09	\$.08	\$.07
398012	644465-6	6	18	Orange	\$.09	\$.08	\$.07
398063	644466-2	2	20	Yellow	\$.09	\$.08	\$.07
398071	644466-3	3	20	Yellow	\$.09	\$.08	\$.07
398080	644466-4	4	20	Yellow	\$.09	\$.08	\$.07
398098	644466-5	5	20	Yellow	\$.09	\$.08	\$.07
398101	644466-6	6	20	Yellow	\$.09	\$.08	\$.07


Strain Relief Covers for Feed-Thru Style (Fig. 5)

Part No.	Product No.	Pos.	10	100	500
398602	643071-2	2	\$.09	\$.08	\$.07
398611	643071-3	3	\$.09	\$.08	\$.07
398629	643071-4	4	\$.09	\$.08	\$.07
398637	643071-5	5	\$.09	\$.08	\$.07
398645	643071-6	6	\$.09	\$.07	\$.05

Commercial MATE-N-LOK™ Connectors & Terminals

- Fully polarized nylon housing
- UL94V-2 rated housing
- Durability: 50 cycles, mating and unmating

AMP



PCB In-Line Vert. Pin Header w/ Detent Lock (Fig. 1)

Part No.	Product No.	Pos.	1	10	100
679607	350210-1	3	\$.45	\$.39	\$.35
679674	350214-1	16	\$.49	\$.45	\$.39

PCB In-Line Vert. Socket Header w/ Detent (Fig. 2)

Part No.	Product No.	Pos.	1	10	100
679682	770997-1	4	\$.49	\$.45	\$.39

PCB In-Line Vert. Pin Header w/ Positive Lock (Fig. 3)

Part No.	Product No.	Pos.	1	10	100
679594	350541-1	3	\$.59	\$.55	\$.49
679615	350543-1	4	\$.59	\$.55	\$.49



* Order in multiples of 10

PCB Dual Row Vertical Pin Header w/ Positive Lock (Fig. 4)


Part No.	Product No.	Pos.	1	10	100
679623	350425-1	6 (2 x 3)	\$.99	\$.89	\$.75
679640	1-380991-0	10 (2 x 5)	\$.79	\$.75	\$.69
679666	350214-1	16 (2 x 8)	1.69	1.49	1.35

In-Line Housing Plug, Free Hanging (Fig. 5)

Part No.	Product No.	Pos.	1	10	100
679383	770827-1	4	\$.19	\$.15	\$.15

In-Line Housing Cap, Free Hanging (Fig. 6)

Part No.	Product No.	Pos.	1	10	100
679308	1-480350-0	1	\$.09	\$.08	\$.08
679316	1-480351-0	1	\$.09	\$.08	\$.08



* Order in multiples of 10

In-Line Housing Plug, Free Hanging w/ Positive Lock (Fig. 7)

Part No.	Product No.	Pos.	1	10	100
679367	1-480721-0	3	\$.29	\$.25	\$.22
679375	1-480722-0	4	\$.29	\$.25	\$.22

Dual Row Housing Cap w/ Positive Lock (Fig. 8)

Part No.	Product No.	Pos.	1	10	100
679332	1-480340-0	6 (2 x 3)	\$.19	\$.17	\$.17
679341	1-480345-0	8 (2 x 4)	\$.19	\$.17	\$.17
679359	1-480339-0	10 (2 x 5)	\$.45	\$.39	\$.35

Motor Mount, Dual Row Plug w/ Positive Lock (Fig. 9)

Part No.	Product No.	Pos.	1	10	100
679391	1-480283-0	8 (2 x 3)	\$.19	\$.17	\$.17
679412	1-480287-0	12 (2 x 6)	\$.29	\$.25	\$.22

Continued on next page

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

AMP Commercial MATE-N-LOK™ Connectors & Terminals (Cont.)



Fig. 10

Fig. 11

Fig. 12

Fig. 13

Fig. 14

Pin

Socket

Fig. 15

Motor Mount, Dual Row Cap with Positive Lock (Fig. 10)

* Order in multiples of 10

Part No.	Mfr. Part No.	Pos.	1	10	100
679527	1-480271-0.3	6 (2 x 3)	* .15	.12	
679535	1-480284-0.3	8 (2 x 4)	* .19	.15	
679543	1-480286-0.3	10 (2 x 5)99	.89	.79
679551	1-480288-0.3	12 (2 x 6)29	.25	.22
679560	1-480439-0.3	16 (2 x 8)39	.35	.29

Vertical In-Line IDC (Fig. 13)

Part No.	Mfr. Part No.	Pos.	AWG	1	10	100
679691	770156-4.3	4	20	\$.39	\$.35	\$.29
679703	770156-3.3	4	1835	.29	.25

IDC Dust Covers (Fig. 14)

Order in multiples of 10

Part No.	Mfr. Part No.	Pos.	Style	10	100
679711	770232-1.3	4	Feed-to	\$.09	\$.07
679720	770233-1.3	4	Feed-thru15	.12

Crimp Terminals (Fig. 15)

- Material: A—brass pre-tin;
B—phosphor bronze/pre-tin

Order in multiples of 10

Part No.	Mfr. Part No.	Type	AWG	Material	10	100
526168	60619-1.3	Socket 20-14	A	\$.15	\$.12
526125	60620-1.3	Pin 20-14	A12	.09
847009	350922-3.3	Pin 12-10	B09	.07
845652	350536-3.3	Socket 20-14	B05	.04

Look for pricing shaded in blue

www.Jameco.com/MakesCents

.100" & 2mm Shorting Blocks



- Mates to .025" square posts on .100" centers
- Shorts headers/jumper blocks or color code strip line plugs
- Mate with male headers, above
- Pin material: phosphor bronze

* Web Code: MAC

Open: Open on top to allow for a test point

Closed: Closed top

119264: 2mm (for disk drives)

Order in multiples of 10

Part No.	Description	10	100	500
22024	Top open, black (.100") .3	\$.12	\$.09	\$.07
119264	Top open, black (2mm) .3	.12	.09	.07
112425	Top open, blue (.100") .3	.10	.07	.05
112417	Top open, red (.100") .3	.10	.07	.05
19141	Top closed, black (.100") .3	.10	.07	.05
112442	Top closed, blue (.100") .3	.10	.07	.05
112432	Top closed, red (.100") .3	.10	.07	.05
152671	Top closed, black (.100") .3	.15	.12	.09

More Information Online

Compare products online to quickly find the products you want with the specifications and real time product availability. Purchasing products has never been easier.

www.Jameco.com


Panel Mount Housing Plug with Positive Lock (Fig. 11)

* Order in multiples of 10

Part No.	Mfr. Part No.	Pos.	1	10	100
679471	1-480304-0.3	3 (1 x 3)	* .15	\$.12	
679498	1-480274-0.3	9 (3 x 3)55	.49	.45
679501	1-480275-0.3	12 (3 x 4)35	.29	.25
679519	1-480323-0.3	15 (3 x 5)45	.35	.29

Panel Mount Housing Cap with Positive Lock (Fig. 12)

Part No.	Mfr. Part No.	Pos.	1	10	100
679447	1-480277-0.3	9 (3 x 3)	\$.39	\$.35	\$.29
679463	1-480324-0.3	15 (3 x 5)39	.35	.29

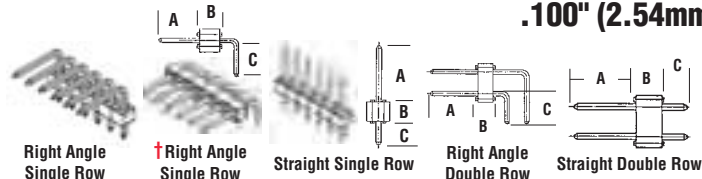

Right Angle Single Row Male Headers

Part No.	Manufacturer	Product No.	Pos.	Size (A"xB"xC")	Plating	1	10	100
2120305	Various	PN3-230/120-021W.3	2	.21 x .10 x .10	Gold	\$.29	\$.25	\$.19
2076842	ValuePro	RMH5	5	.27 x .10 x .12	Gold	* .19	.15
2076851	ValuePro	RMH6	6	.27 x .10 x .12	Gold29	.25
153728	ValuePro	RMH8	8	.27 x .10 x .12	Gold39	.35
2076869	Various	RMH26	26	.27 x .10 x .12	Gold55	.45
103271	ValuePro	RMH36 (LP) .3	36	.23 x .10 x .12	Gold95	.79
1946041	ValuePro	RMH36AR(type A) .3	36	.27 x .10 x .22	Gold85	.69

† Low profile

Straight Single Row Male Headers

Part No.	Manufacturer	Product No.	Pos.	Size (A"xB"xC")	Plating	1	10	100
2076797	Various	SMH01	1	.23 x .10 x .12	Gold	* .15	\$.09
222966	Various	SMH01GT-43.3	1	.43 x .10 x .12	Gold/Tin	* .15	.11
108338	ValuePro	SMH02.3	2	.23 x .10 x .12	Gold29	.25
421489	AMP	103185-3	3	.23 x .09 x .12	Gold/Tin	* .19	.15
109576	ValuePro	SMH03.3	3	.23 x .10 x .12	Gold35	.29
117560	ValuePro	SMH04.3	4	.23 x .10 x .12	Gold29	.25
2120276	OST	PHI-787/120-041.3	4	.78 x .10 x .12	Gold25	.22
2076789	Various	SMH05	5	.23 x .10 x .12	Gold	* .19	.15
153700	ValuePro	SMH06.3	6	.23 x .10 x .12	Gold29	.25
2076800	Various	SMH07	7	.23 x .10 x .12	Gold	* .09	.07
687181	Leoco	2556P07JL62.3	7	.23 x .10 x .12	Gold/Tin	* .15	.12
153702	ValuePro	SMH08.3	8	.23 x .10 x .12	Gold29	.25
2076818	Various	SMH09	9	.23 x .10 x .12	Gold	* .09	.07
103393	ValuePro	SMH10.3	10	.23 x .10 x .12	Gold35	.29

* Dimension "A" has gold plating; dimension "C" has tin plating

.100" (2.54mm) Male Headers

Straight Single Row Male Headers (Continued)

Part No.	Manufacturer	Product No.	Pos.	Size (A"xB"xC")	Plating	1	10	100
103377	ValuePro	SMH17.3	17	.23 x .10 x .12	Gold	\$.35	\$.29
103369	ValuePro	SMH20.3	20	.23 x .10 x .12	Gold35	.29
202825	ValuePro	SMH22	22	.23 x .10 x .12	Gold35	.29
103351	ValuePro	SMH25.3	25	.23 x .10 x .12	Gold39	.35
103342	ValuePro	SMH30.3	30	.23 x .10 x .12	Gold39	.35
222991	Various	SMH32GT.3	32	.23 x .10 x .12	Gold/Tin39	.29
2076826	ValuePro	SMH34	34	.23 x .10 x .12	Gold39	.35
68339	ValuePro	SMH36	36	.23 x .10 x .12	Gold45	.35
160882	ValuePro	SMH40.3	40	.23 x .10 x .12	Gold59	.49
527654	AMP	4-102976-0	40	.32 x .09 x .12	Gold/Tin	2.49	2.25	1.95

* Dimension "A" has gold plating; dimension "C" has tin plating

Right Angle Double Row Male Headers

- Position: 4 is 2 rows of 2; 12 is 2 rows of 6 (example)

Part No.	Manufacturer	Product No.	Pos.	Size (A"xB"xC")	Plating	1	10	100
203908	ValuePro	923804DR	4	.23 x .10 x .12	Gold	* .09	\$.07
203917	ValuePro	923806DR.3	6	.23 x .10 x .12	Gold	* .19	.15
203924	ValuePro	923808DR	8	.23 x .10 x .12	Gold29	.25
203932	ValuePro	923810DR	10	.23 x .10 x .12	Gold29	.25
203941	ValuePro	923812DR	12	.23 x .10 x .12	Gold	* .09	.07
209930	Various	923814DRT	14	.23 x .10 x .12	Tin	* .09	.07
203959	ValuePro	923814DR	14	.23 x .10 x .12	Gold	* .15	.12
203967	ValuePro	923816DR	16	.23 x .10 x .12	Gold39	.29
203975	ValuePro	923818DR	18	.23 x .10 x .12	Gold35	.29
53576	ValuePro	923820DR.3	20	.23 x .10 x .12	Gold49	.39
53583	Various	9238260DR	26	.23 x .10 x .12	Gold55	.45
53605	ValuePro	923840DR.3	40	.23 x .10 x .12	Gold75	.65
53612	ValuePro	923850DR	50	.23 x .10 x .12	Gold75	.65
103413	ValuePro	923872DR	72	.23 x .10 x .12	Gold85	.69
139564	ValuePro	923880DR.3	80	.23 x .10 x .12	Gold	1.19	.99

Straight Double Row Male Headers on next page

RoHS compliant product

+ This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version.

Details on page 199.

.100" (2.54mm) Male Headers (Continued)

molex

JAMECO ValuePro

Straight Double Row Male Headers

• Position: 4 is 2 rows of 2; 12 is 2 rows of 6 (example)

*** Web Code: QCM**

* Order in multiples of 10

Part No.	Mfr.	Product No.	Pos.	Size (A"xB"xC") *	Plating	1	10	100
15156	Various	DMH04GT	4	.23 x .10 x .12	Gold/Tin
115027	Various	923804DS	4	.23 x .10 x .12	Gold
115035	ValuePro	923806DS	6	.23 x .10 x .12	Gold
15158	Various	DMH06T-30	6	.30 x .10 x .12	Tin
15747	Various	DMH06-30	6	.30 x .10 x .12	Gold
109516	Various	923808DS	8	.23 x .10 x .12	Gold
109517	ValuePro	7000-2x4SG	8	.23 x .10 x .12	Gold
67821	ValuePro	923810DS	10	.23 x .10 x .12	Gold/Tin
203810	ValuePro	923812DS	12	.23 x .10 x .12	Gold
118456	ValuePro	923814DS	14	.23 x .10 x .12	Gold
109568	ValuePro	923816DS	16	.23 x .10 x .12	Gold
2076877	Various	923818DS	18	.23 x .10 x .12	Gold
53480	ValuePro	923820DS	20	.23 x .10 x .12	Gold
203844	ValuePro	923824DS	24	.23 x .10 x .12	Gold
53495	ValuePro	923826DS	26	.23 x .10 x .12	Gold
2120292	OST	PH2-320/110-261	26	.30 x .10 x .12	Gold
203852	ValuePro	923828DS	28	.23 x .10 x .12	Gold
203861	ValuePro	923832DS	32	.23 x .10 x .12	Gold
53517	ValuePro	923834DS	34	.23 x .10 x .12	Gold
203888	ValuePro	923836DS	36	.23 x .10 x .12	Gold

* For sizes please reference pictures on previous page

Straight Double Row Male Headers (Continued)

*** Web Code: QCM**

Part No.	Mfr.	Product No.	Pos.	Size (A"xB"xC") *	Plating	1	10	100
203895	ValuePro	923838DS	38	.23 x .10 x .12	Gold
53532	ValuePro	923840DS	40	.23 x .10 x .12	Gold
53560	ValuePro	923850DS	50	.23 x .10 x .12	Gold
68574	ValuePro	923860DS	60	.23 x .10 x .12	Gold
103406	ValuePro	70002X36SG-R	72	.23 x .10 x .12	Gold
2120284	OST	PH2-230/135-805	80	.23 x .10 x .12	Tin
117197	ValuePro	923880DS	80	.23 x .10 x .12	Gold

C-Grid Dual Row, Vertical, High Temperature

- Contact resistance: 15mΩ max.
- Contacts: phosphor bronze
- Current: 3A
- Dielectric withstanding voltage: 1500V

*** Web Code: FCC**

Order in multiples of 10

Part No.	Mfr.	Part No.	Pos.	Size (A"xB"xC") *	Plating	10	100
514520	Molex	10-89-7162	16	.79 x .70 x .10	Gold



Straight Triple Row Male Headers

Part No.	Mfr.	Product No.	Pos.	Size (A"xB"xC") *	Plating	1	10	100
2076885	Various	933812TS	12	.23 x .10 x .12	Gold
2076893	Various	933824TS	36	.23 x .10 x .12	Gold

Male Headers Grab Bag

Part No.	Cross Ref.	Description	Wt. (lbs.)	1	10
2095138	GB204	100 assorted .100" male headers (breakway) Straight, right angle, single and double row	0.3

.100" (2.54mm) Standard and Friction Lock Headers



879588



*** Web Code: GBN**

Right Angle Friction Lock Headers

* Order in multiples of 10

Part No.	Mfr.	Product No.	Pos.	Size (A"xB"xC"xD")	Plating	1	10	100
233437	Molex	22-05-3021	2	.26 x .13 x .14 x .32	Tin
233445	Molex	22-05-3031	3	.26 x .13 x .14 x .32	Tin
348242	ValuePro	641216-3	3	.30 x .10 x .14 x .31	Gold
233453	Molex	22-05-3041	4	.26 x .13 x .14 x .32	Tin
233699	Molex	22-12-2044	4	.26 x .13 x .12 x .32	Gold
348251	ValuePro	641216-4	4	.30 x .10 x .14 x .31	Gold
233461	Molex	22-05-3051	5	.26 x .13 x .14 x .32	Tin
233470	Molex	22-05-3061	6	.26 x .13 x .14 x .32	Tin
348277	ValuePro	641216-6	6	.30 x .10 x .14 x .31	Gold
233496	Molex	22-05-3081	8	.26 x .13 x .14 x .32	Tin
348315	ValuePro	4-641216-0	10	.30 x .10 x .14 x .31	Gold

Standard Straight Post

* Order in multiples of 10

Part No.	Mfr.	Product No.	Pos.	Size (A"xB"xC")	Plating	1	10	100
347400	ValuePro	644659-9	9	.30 x .10 x .110	Tin
232240	Molex	22-03-2121	12	.30 x .13 x .135	Tin

† With retentive leg

molex

KK® Series .100" (2.54mm) Female Housings

*** Web Code: LBN**

- Contact resistance: 20mΩ max.
- Dielectric withstanding voltage: 1500VAC
- Insulation resistance: 50kMΩ
- Voltage: 250V

Housing Material:

- Contact retention to housing: 8 lbs. min.
- Contact insertion force: 1.5 lbs. max.
- Housing: nylon, UL94V-0
- Operating temperature: 0 to 75°C



234721



234801

Housing with Locking Ramp

* Order in multiples of 10

Part No.	Mfr.	Part No.	Pos.	1	10	100
234704	22-01-2027	2
234712	22-01-2037	3
234721	22-01-2047	4
234739	22-01-2057	5
234747	22-01-2067	6
234771	22-01-2107	10

Housing w/ Locking Ramp & Polarizing Ribs

* Order in multiples of 10

Part No.	Mfr.	Part No.	Pos.	1	10	100
234798	22-01-3027	2
234801	22-01-3037	3
234819	22-01-3047	4
234827	22-01-3057	5
234835	22-01-3067	6
234851	22-01-3087	8
234878	22-01-3107	10

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Housings, Headers & Crimp Terminals

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

molex® KK® Series .100" (2.54mm) Crimp Terminals

- Current: phosphor bronze – 4.0A max.; brass – 2.5A max.
- Insulation range: 0.062" (1.58mm) diameter max.
- Accommodates 22 to 30 AWG
- Material: 736456/736501/234923/234931: brass; 736595/462969/463005: phosphor bronze

★ Web Code: JCT



Bulk Packaged

Order in multiples of 10

Part No.	Mfr. Part No.	Plating	10	100	1000
736501	08-50-0113	Tin	\$.05	\$.04	\$.03
234923	08-50-0114	Tin	\$.06	\$.05	\$.04
234931	08-55-0102	15µ" gold	\$.15	\$.12	\$.11
736595	08-52-0123	Tin	\$.09	\$.08	\$.07
462969	08-65-0805	Tin (cat ear)	\$.09	\$.08	\$.07
2120495	2513T	Tin (cat ear)	\$.07	\$.06	\$.04
463005	08-65-0816	15µ" gold	\$.19	\$.15	\$.13

molex®

JAMECO ValuePro

.118" (3.0mm) Pitch Micro-Fit Housings and Headers

- Housing: polyester, UL94V-0
- Fully polarized to mating connector

★ Web Code: UBW



Receptacles

Single Row (Fig. 1)

* Order in multiples of 10

Part No.	Mfr.	Cross Ref. No.	Pos.	1	10	100
338351	ValuePro	43645-0200	2	\$.15	\$.12	\$.12

Double Row (Fig. 2)

Part No.	Mfr.	Product No.	Pos.	1	10	100
337682	ValuePro	43025-0600	6	\$.15	\$.12	\$.12
882921	Molex	43025-0800	8	\$.35	\$.29	\$.25
337703	ValuePro	43025-1000	10	\$.12	\$.09	\$.09
337834	ValuePro	43025-1400	14	\$.35	\$.29	\$.25
337869	ValuePro	43025-2000	20	\$.19	\$.15	\$.15
337877	ValuePro	43025-2400	24	\$.19	\$.15	\$.15

Plugs

Order in multiples of 10

Single Row, Panel Mount w/ Ears (Fig. 3)

Part No.	Mfr.	Cross Ref. No.	Pos.	10	100
338255	ValuePro	43640-0200	2	\$.09	\$.07
338271	ValuePro	43640-0300	3	\$.12	\$.09
338298	ValuePro	43640-0400	4	\$.12	\$.09
338319	ValuePro	43640-0500	5	\$.12	\$.09
338335	ValuePro	43640-0600	6	\$.12	\$.09

Single Row, Free Hanging (Fig. 4)

Part No.	Mfr.	Cross Ref. No.	Pos.	10	100
338263	ValuePro	43640-0201	2	\$.15	\$.12
338301	ValuePro	43640-0401	4	\$.12	\$.09
338327	ValuePro	43640-0501	5	\$.12	\$.09
338343	ValuePro	43640-0601	6	1.25	1.09

Double Row, Free Hanging (Fig. 5)

Part No.	Mfr.	Cross Ref. No.	Pos.	10	100
337800	ValuePro	43020-0201	2	\$.09	\$.07
337615	ValuePro	43020-0601	6	\$.09	\$.07
337658	ValuePro	43020-1001	10	\$.12	\$.09

KK® Series .100" (2.54mm) Pitch Crimp Terminal Housings

High Pressure

- Voltage: 250V
- Current: 2.5A
- Contact resistance: 20mΩ max.
- Dielectric withstanding voltage: 1500VAC
- Insulation resistance: 500k MΩ min.
- Housing: white nylon, UL04V-0

molex®



Order in multiples of 10

Part No.	Mfr. Part No.	Pos.	10	100
516200	10-11-2013	1	\$.09	\$.07
516242	10-11-2053	5	\$.09	\$.07

Crimp Terminal

- Female
- 22-30 AWG



Order in multiples of 10

Part No.	Mfr. Part No.	Plating	10	100	1000
736456	08-50-0005	Tin/copper	\$.15	\$.12	\$.09

Large Volume Order, Call us at 1-800-831-4242

.100" (2.54mm) Pitch SL™ Wire-to-Board Crimp Housings

Single Row

molex®

- Housing: black glass filled polyester, UL94V-0



Version A, Non-polarized

★ Web Code: VDD

Part No.	Mfr. Part No.	Pos.	1	10	100
884301	50-57-9002	2	\$.25	\$.22	\$.15

Version G, Positive Latch

* Order in multiples of 10

Part No.	Mfr. Part No.	Pos.	1	10	100
884328	50-57-9402	2	\$.19	\$.15	\$.15
884344	50-57-9403	3	\$.25	\$.22	\$.15

Female Crimp Terminals



Order in multiples of 10

Part No.	Mfr. Part No.	AWG	Plating	10	100
741685	16-02-0103	22-24	15µ" gold	\$.09	\$.08
741677	16-02-0086	22-24	Tin	\$.07	\$.06

Single Row Headers (Continued)

Right Angle, SMT – 15µ" gold (Fig. 9)

- Solderable retention clip

Part No.	Mfr.	Mfr. Part No.	Pos.	1	10	100
338415	Molex	43650-0210	2	\$1.59	\$1.45	\$1.29
338440	Molex	43650-0310	3	1.69	1.55	1.39
338474	Molex	43650-0410	4	1.95	1.79	1.65
338503	Molex	43650-0510	5	2.19	1.95	1.75
338538	Molex	43650-0610	6	2.29	2.09	1.95

Double Row Headers

* Order in multiples of 10

Right Angle, Snap-In Plastic Peg, PCB (Fig. 10)

Part No.	Mfr.	Product No.	Pos.	1	10	100
337893	ValuePro	43045-0202	2	\$.19	\$.15	\$.15
337973	ValuePro	43045-0402	4	\$.29	\$.25	\$.22
883317	Molex	43045-0400	4	\$.45	\$.39	\$.35
338044	ValuePro	43045-0600	6	\$.19	\$.15	\$.15
338052	ValuePro	43045-0602	6	\$.45	\$.39	\$.35
338554	ValuePro	43045-0800	8	\$.19	\$.15	\$.15
338116	ValuePro	43045-0802	8	\$.49	\$.45	\$.39
338562	ValuePro	43045-1000	10	\$.19	\$.15	\$.15
338167	ValuePro	43045-1002	10	\$.55	\$.49	\$.45
338212	ValuePro	43045-1200	12	\$.19	\$.15	\$.15
338221	ValuePro	43045-1202	12	\$.65	\$.59	\$.55
338571	ValuePro	43045-1400	14	\$.39	\$.35	\$.29
338597	ValuePro	43045-1600	16	\$.35	\$.29	\$.25
338618	ValuePro	43045-2202	22	1.35	1.19	1.09

*Tin † Gold

Continued on next page

We Ship the Same Day!

Just place your order by 6PM EST.



Sign up for the Jameco e-newsletter & receive the latest in product news, projects & special offers.
www.Jameco.com/GotMail

.118" (3.00mm) Pitch Micro-Fit Housings and Headers (Continued)

Double Row Headers (Cont.)

molex

JAMECO ValuePro

Figure line art on previous page

Right Angle, SMT (Fig. 11)

* Order in multiples of 10

• Solderable fitting nail provides retention to PCB

Part No.	Mfr.	Mfr. Part No.	Pos.	1	10	100
337906	Molex	43045-0209 \mathcal{R} *	2	\$.69	\$.65	\$.59
337914	Molex	43045-0211 \mathcal{R} †	2	1.95	1.75	1.59
337981	Molex	43045-0409 \mathcal{R} *	4	.95	.85	.75
337990	Molex	43045-0411 \mathcal{R} †	4	1.39	1.25	1.09
338061	Molex	43045-0609 \mathcal{R} *	6	.69	.65	.59
338124	Molex	43045-0811†	8	1.69	1.55	1.49

*Tin †Gold

Vertical, Polarizing Peg, PCB (Fig. 12)

Part No.	Mfr.	Cross Ref. No.	Pos.	1	10	100
337922	ValuePro	43045-0212 \mathcal{R} *	2	\$.12	\$.09	
337931	ValuePro	43045-0214 \mathcal{R} †	2	\$.15	.12	
338001	ValuePro	43045-0412 \mathcal{R} *	4	\$.15	.12	
338010	ValuePro	43045-0414 \mathcal{R} †	4	.19	.17	
338079	ValuePro	43045-0612 \mathcal{R} *	6	.12	.09	
338087	ValuePro	43045-0614 \mathcal{R} †	6	.29	.25	.22

*Tin †Gold

Vertical, Polarizing Peg, PCB (Fig. 12) (Cont.)

Part No.	Mfr.	Cross Ref. No.	Pos.	1	10	100
338132	ValuePro	43045-0812 \mathcal{R} *	8	\$.15	\$.12	
338141	ValuePro	43045-0814 \mathcal{R} †	8	.19	.17	
338175	ValuePro	43045-1012 \mathcal{R} *	10	.19	.15	
338183	ValuePro	43045-1014 \mathcal{R} †	10	.49	.45	.39
338239	ValuePro	43045-1212 \mathcal{R} *	12	.19	.15	
338247	ValuePro	43045-1214 \mathcal{R} †	12	.55	.49	.45

*Tin †Gold

Vertical, Solder Tab, SMT (Fig. 13)

Part No.	Mfr.	Mfr. Part No.	Pos.	1	10	100
337957	Molex	43045-0220 \mathcal{R} †	2	\$1.95	\$1.75	\$1.59
338028	Molex	43045-0418 \mathcal{R} *	4	.95	.85	.75
338108	Molex	43045-0620 \mathcal{R} †	6	2.69	2.49	2.25
338159	Molex	43045-0818 \mathcal{R} *	8	2.49	2.25	1.95
338191	Molex	43045-1018 \mathcal{R} *	10	1.39	1.25	1.09
338204	Molex	43045-1020 \mathcal{R} †	10	3.49	3.19	2.95

*Tin †Gold

.118" (3.00mm) Micro-Fit Crimp Terminals

Female (1)

Male (2)

A: phosphor bronze, tin
B: phosphor bronze, 15µ" gold
C: phosphor bronze, 30µ" gold



Order in multiples of 10

Part No.	Mfr.	Product No.	Type	AWG	10	100
337720	ValuePro	43030-0007 \mathcal{R}	1A	20-24	\$.09	\$.08
883093	Molex	43030-0007 \mathcal{R}	1A	20-24	.12	.09
337738	ValuePro	43030-0009 \mathcal{R}	1B	26-30	.12	.09
337746	ValuePro	43030-0010 \mathcal{R}	1A	20-24	.09	.08
337754	ValuePro	43030-0012 \mathcal{R}	1C	26-30	.19	.15
337762	ValuePro	43031-0007 \mathcal{R}	2A	20-24	.09	.08
337789	ValuePro	43031-0010 \mathcal{R}	2A	26-30	.05	.04

Tools for Micro-Fit Connectors



Part No.	Cross Ref. No.	Description	Length	1	5
338678	HT-225D \mathcal{R}	Crimp	8.25"	\$24.95	\$22.49
338669	11-03-0043	Extraction	3.0"	14.95	13.49

.156" (3.96mm) Headers, Housings and Crimp Terminals

- Wire-to-board applications
- End-to-end stackable styles
- Insulator: polyester, UL 94V-0
- Housing: nylon, UL 94V-0

*Web Code: HHT

molex

AMP

JAMECO ValuePro



Fig. 1

Fig. 2

Fig. 3

Fig. 4

Headers

* Order in multiples of 10

Straight Friction Lock – Brass/Tin (Fig. 1)

Part No.	Mfr.	Product No.	Pos.	1	10	100
879861	Molex	26-60-4020 \mathcal{R}	2	\$.15	\$.12	
231546	AMP	640445-2 \mathcal{R}	2	.09	.07	
879887	Molex	26-60-4030 \mathcal{R}	3	.19	.15	
231554	AMP	640445-3 \mathcal{R}	3	.09	.07	
104792	ValuePro	LMH4 \mathcal{R}	4	.15	.12	
879941	Molex	26-60-4060 \mathcal{R}	6	.29	.25	.19
104846	ValuePro	LMH10	10	.15	.12	

Right Angle Friction Lock – Copper/Tin (Fig. 2)

Part No.	Mfr.	Mfr. Part No.	Pos.	1	22	100
232400	AMP	640389-6 \mathcal{R}	6	\$.59	\$.55	\$.49

Crimp Terminals

- Plating: A: brass/tin;
B: phosphor bronze/tin

Order in multiples of 10

Part No.	Mfr.	Product No.	Plating	AWG	10	100
736481	Molex	08-50-0106 \mathcal{R}	A	18-20	\$.06	\$.05
462774	Molex	08-50-0165 \mathcal{R} †	A	18-20	.08	.07
736544	Molex	08-50-0189 \mathcal{R}	A	18-20	.06	.05
736552	Molex	08-52-0071 \mathcal{R}	B	18-20	.05	.04
736561	Molex	08-52-0072 \mathcal{R}	B	18-20	.08	.06
736587	Molex	08-52-0113 \mathcal{R} †*	A	18-20	.06	.05
1960687	Molex	08-70-1031	A	18-24	.08	.06
248866	AMP	640706-1	A	18-24	.25	.19
248874	AMP	640706-2 \mathcal{R}	A	18-24	.19	.15
248882	AMP	640707-1	A	18-24	.15	.12
248903	AMP	770522-1	B	18-24	.25	.19
78319	ValuePro	JS-5001-T \mathcal{R}	A	18-24	.05	.04

†Trifurcon *Cat ear

Housings

With Locking Ramp (Fig. 3)

* Order in multiples of 10

Part No.	Mfr.	Product No.	Pos.	1	10	100
236144	AMP	640250-2 \mathcal{R}	2	\$.09	\$.08	
236152	AMP	640250-3 \mathcal{R}	3	.09	.07	
463435	Molex	09-50-3031 \mathcal{R}	3	.15	.12	
104433	ValuePro	7900F-3 \mathcal{R}	3	.09	.08	
463443	Molex	09-50-3041 \mathcal{R}	4	.15	.12	
236161	AMP	640250-4 \mathcal{R}	4	.15	.12	
104716	ValuePro	7900F-4 \mathcal{R} †	4	.12	.09	
104724	ValuePro	7900F-5 \mathcal{R} †	5	.07	.05	
104732	ValuePro	7900F-6 \mathcal{R}	6	.15	.12	
104766	ValuePro	7900F-10 \mathcal{R} †	10	.09	.07	
463523	Molex	09-50-3121 \mathcal{R}	12	.35	.29	.25

† Use with crimp pin 78319, below left

With Locking Ramp & Polarizing Tabs (Fig. 4)

Order in multiples of 10

Part No.	Mfr.	Mfr. Part No.	Pos.	10	100
236321	AMP	770849-2 \mathcal{R}	2	\$.12	\$.09
236339	AMP	770849-3 \mathcal{R}	3	.15	.12

*Connector Tools — Enter Web Code VBW

.156" (3.96mm) JST Type Housings and Terminals



Housing (2124568)

Terminal

- Material: 94V-0 nylon
- Current rating: 7A (AC/DC)
- Voltage rating: 250V (AC/DC)
- Insulation resistance: 1000MΩ min.
- Withstanding voltage: 1500VAC/min.
- Use with MeanWell power supplies USP-225, USP-350, LPS-100, PPS-125, LPP-150, PPS-200, PS-35, LPS-75 and LP-100

Housings

Order in multiples of 10

Part No.	Cross Ref. No.	Circuits	10	100
2124550	9396-03 \mathcal{R}	3	\$.05	\$.04
2124568	9396-04 \mathcal{R}	4	.08	.07
2124584	9396-05 \mathcal{R}	5	.08	.07
2124592	9396-06 \mathcal{R}	6	.09	.08
2124605	9396-08 \mathcal{R}	8	.12	.10
2124613	9396-09 \mathcal{R}	9	.15	.13
2124621	9396-12 \mathcal{R}	12	.17	.15

Crimp Terminal

- 18-22 AWG
- Tin-plated brass

Order in multiples of 10

Part No.	Cross Ref. No.	Description	10	100
2124630	96T \mathcal{R}	Female	\$.04	\$.03

*More Housings Online — Enter Web Code CRH

Helping You Find What You Need


Can't find the product you're looking for?

Call us at 1-800-831-4242.



*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

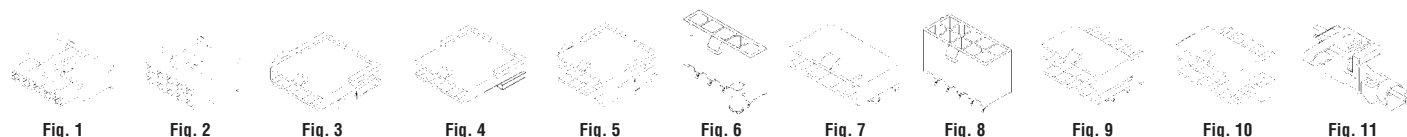

Receptacles

Single Row (Fig. 1)

Part No.	Mfr.	Cross Ref. No.	Pos.	1	10	100
364584	ValuePro	39-01-4030	3
			

Double Row (Fig. 2)

Part No.	Mfr.	Product No.	Pos.	1	10	100
364736	ValuePro	39-01-2020	2
303562	Molex	39-01-2020	2
364744	ValuePro	39-01-2040	4
303571	Molex	39-01-2040	4
364752	ValuePro	39-01-2060	6
303589	Molex	39-01-2060	6
364779	ValuePro	39-01-2100	10
364787	ValuePro	39-01-2120	12
364795	ValuePro	39-01-2140	14
303642	Molex	39-01-2180	18
364824	ValuePro	39-01-2200	20
364832	ValuePro	39-01-2220	22
303669	Molex	39-01-2220	22
364841	ValuePro	39-01-2240	24
303677	Molex	39-01-2240	24

* Not for use with strain relief

Plugs

Single Row, Panel Mount with Ears (Fig. 3)

Part No.	Mfr.	Product No.	Pos.	1	10	100
364613	ValuePro	39-01-4032	3
364621	ValuePro	39-01-4052	5
303829	Molex	39-01-4052	5

Single Row, Free Hanging (Fig. 4)

Part No.	Mfr.	Cross Ref. No.	Pos.	1	10	100
364630	ValuePro	39-01-4036	3
364656	ValuePro	39-01-4056	5

Double Row, Panel Mount w/ Ears (Fig. 5)

Part No.	Mfr.	Product No.	Pos.	1	10	100
364859	ValuePro	39-01-2021	2
303685	Molex	39-01-2021	2
364867	ValuePro	39-01-2041	4
303693	Molex	39-01-2041	4
364875	ValuePro	39-01-2061	6
303706	Molex	39-01-2061	6
364891	ValuePro	39-01-2101	10
303722	Molex	39-01-2101	10
364904	ValuePro	39-01-2121	12
303731	Molex	39-01-2121	12
364912	ValuePro	39-01-2141	14
303749	Molex	39-01-2141	14
364921	ValuePro	39-01-2161	16
303757	Molex	39-01-2161	16

Single Row Headers

* Order in multiples of 10

Vertical w/ Pegs & Drain Holes – Tin (Fig. 6)

Part No.	Mfr.	Product No.	Pos.	1	10	100
364672	ValuePro	39-30-2035	3
304573	Molex	39-30-2035	3
364681	ValuePro	39-30-2045	4
364699	ValuePro	39-30-2056	5

Right Angle w/ Pegs – Tin (Fig. 7)

Part No.	Mfr.	Product No.	Pos.	1	10	100
364701	ValuePro	39-30-3035	3
364710	ValuePro	39-30-3045	4
304611	Molex	39-30-3045	4
364728	ValuePro	39-30-3055	5

Double Row Headers

* Order in multiples of 10

Vertical w/o Pegs, w/o Drain Holes (Fig. 8)

Part No.	Mfr.	Product No.	Pos.	1	10	100
364939	ValuePro	39-28-1023	2
303845	Molex	39-28-1023	2
365051	ValuePro	39-29-0023	2
364947	ValuePro	39-28-1043	4
365069	ValuePro	39-29-0043	4
303976	Molex	39-29-0043	4
364955	ValuePro	39-28-1063	6
365077	ValuePro	39-29-0063	6
364963	ValuePro	39-28-1083	8
365085	ValuePro	39-29-0083	8
365093	ValuePro	39-29-0103	10
304004	Molex	39-29-0103	10
364980	ValuePro	39-28-1123	12
365106	ValuePro	39-29-0123	12
304012	Molex	39-29-0123	12
364998	ValuePro	39-28-1143	14
303909	Molex	39-28-1143	14
365114	ValuePro	39-29-0143	14
304021	Molex	39-29-0143	14
365000	ValuePro	39-28-1163	16
365122	ValuePro	39-29-0163	16
304039	Molex	39-29-0163	16
365018	ValuePro	39-28-1183	18
303925	Molex	39-28-1183	18
365131	ValuePro	39-29-0183	18
304047	Molex	39-29-0183	18
365149	ValuePro	39-29-0203	20
304055	Molex	39-29-0203	20
303941	Molex	39-28-1223	22
365157	ValuePro	39-29-0223	22
304063	Molex	39-29-0223	22
365042	ValuePro	39-28-1243	24
304071	Molex	39-29-0243	24

*Tin †Gold

Right Angle w/ Pegs (Fig. 9)

* Order in multiples of 10

Part No.	Mfr.	Product No.	Pos.	1	10	100
365173	ValuePro	39-30-1020	2
365325	ValuePro	39-30-1021	2
304207	Molex	39-30-1021	2
365181	ValuePro	39-30-1040	4
304098	Molex	39-30-1040	4
365333	ValuePro	39-30-1041	4
365190	ValuePro	39-30-1060	6
304223	Molex	39-30-1061	6
365202	ValuePro	39-30-1080	8
304119	Molex	39-30-1080	8
365350	ValuePro	39-30-1081	8
304231	Molex	39-30-1081	8
365211	ValuePro	39-30-1100	10
304127	Molex	39-30-1100	10
365229	ValuePro	39-30-1120	12
304135	Molex	39-30-1120	12
365376	ValuePro	39-30-1121	12
304258	Molex	39-30-1121	12
365237	ValuePro	39-30-1140	14
304143	Molex	39-30-1140	14
365384	ValuePro	39-30-1141	14
304266	Molex	39-30-1141	14
365245	ValuePro	39-30-1160	16
304274	Molex	39-30-1161	16
365392	ValuePro	39-30-1161	16
365253	ValuePro	39-30-1180	18
304160	Molex	39-30-1180	18
365405	ValuePro	39-30-1181	18
304282	Molex	39-30-1181	18
365261	ValuePro	39-30-1200	20
304291	Molex	39-30-1201	20
365270	ValuePro	39-30-1220	22
365421	ValuePro	39-30-1221	22
304303	Molex	39-30-1221	22
304194	Molex	39-30-1240	24
365430	ValuePro	39-30-1241	24
304311	Molex	39-30-1241	24

*Tin †Gold

Right Angle w/ Flange (Fig. 10)

Part No.	Mfr.	Product No.	Pos.	1	10	100
365448	ValuePro	39-29-1028	2
304320	Molex	39-29-1028	2
365561	ValuePro	39-39-5023	2
304442	Molex	39-29-5023	2
365456	ValuePro	39-29-1048	4
365579	ValuePro	39-29-5043	4
304346	Molex	39-29-1068	6
365587	ValuePro	39-29-5063	6
304469	Molex	39-29-5063	6
365472	ValuePro	39-29-1088	8
365595	ValuePro	39-29-5083	8
304477	Molex	39-29-5083	8
365481	ValuePro	39-29-1108	10

*Tin †Gold

Continued on next page

Quick and Easy Search

Our website offers thousands of data sheets and photos to assist you in finding the products you need.

.165" (4.19mm) Mini-Fit Jr.™ Type Connectors (Cont.)

Figure line art on previous page

Right Angle w/ Flange (Fig. 10) (Cont.)

		* Order in multiples of 10				
Part No.	Mfr.	Product No.	Pos.	1	10	100
365608	ValuePro	39-29-5103 [†]	10	\$1.25	\$1.09	\$.99
365499	ValuePro	39-29-1128 [†]	12
304371	Molex	39-29-1128 [†]	12
365616	ValuePro	39-29-5123 [†]	12	1.49	1.35	1.19
304493	Molex	39-29-5123 [†]	12	1.89	1.65	1.49
365501	ValuePro	39-29-1148 [†]	14
304389	Molex	39-29-1148 [†]	14	1.09	.99	.89
365510	ValuePro	39-29-1168 [†]	16
304397	Molex	39-29-1168 [†]	16	1.39	1.25	1.09
365632	ValuePro	39-29-5163 [†]	16	1.89	1.65	1.49
365528	ValuePro	39-29-1188 [†]	18
304400	Molex	39-29-1188 [†]	18	1.49	1.35	1.19
365641	ValuePro	39-29-5183 [†]	18	1.99	1.75	1.65
304522	Molex	39-29-5183 [†]	18	2.95	2.75	2.49
365536	ValuePro	39-29-1208 [†]	20
304418	Molex	39-29-1208 [†]	20	1.49	1.35	1.19
365659	ValuePro	39-29-5203 [†]	20	2.49	2.15	1.95
304531	Molex	39-29-5203 [†]	20	3.59	3.25	2.95
365544	ValuePro	39-29-1228 [†]	22
304426	Molex	39-29-1228 [†]	22	1.89	1.65	1.49
365667	ValuePro	39-29-5223 [†]	22	2.59	2.25	2.09
304549	Molex	39-29-5223 [†]	22	4.49	3.95	3.49
365552	ValuePro	39-29-1248 [†]	24
304434	Molex	39-29-1248 [†]	24	1.89	1.65	1.49
365675	ValuePro	39-29-5243 [†]	24	2.95	2.75	2.49
304557	Molex	39-29-5243 [†]	24	4.49	3.95	3.49

*Tin †Gold

Strain Relief (Fig. 11)

Part No.	Mfr.	Mfr. Part No.	Pos.	1	10	100
304645	Molex	15-04-0343 [†]	8	\$.85	\$.75	\$.65

Hand Tools for Mini-Fit Jr.™



- 304928: Crimp tool wire range from 14-24 AWG, 8.5"L
- 304936: Extraction tool, 3.5"L
- 308030: Cuts & strips 14-24 AWG, 8.3"L
- 227491: Cuts & strips 18-30 AWG, 8.3"L


Part No.	Mfr.	Mfr. Part No.	1	5
304928	Molex	63811-1000	\$49.95 \$44.95
304936	Molex	11-03-0044	19.95 18.95
308030	GC/Waldom	W-HT-1919	14.95 13.95
227491	GC/Waldom	W-HT-1921	14.95 13.95

Find data sheets easily on the product specification page. www.Jameco.com

.165" (4.19mm) Mini-Fit Jr.™ Type Terminals



*Web Code: CBX



- *Type: A: Tin over nickel over brass
B: 15μ" gold over nickel over brass
C: 30μ" gold over nickel over brass
D: Tin over nickel over phosphor bronze
E: Brass or copper (post plated tin over nickel)
F: 15μ" gold over nickel over phosphor bronze
G: 30μ" gold over nickel over phosphor bronze
H: Brass (post plated tin over nickel)
I: Phosphor bronze (pre-plated gold over nickel)

22-28 AWG

		* Order in multiples of 10				
Part No.	Mfr.	Product No.	Type*	1	10	100
304872	Molex	39-00-0047	2A
365798	ValuePro	39-00-0088	1C
401841	ValuePro	39-00-0098	1B
401752	ValuePro	39-00-0126	2D
365915	ValuePro	39-00-0166	2C
401728	ValuePro	39-00-0172	2B
304899	Molex	39-00-0184	2I
365907	ValuePro	39-00-0184	2G
401787	ValuePro	39-00-0197	2F
401699	ValuePro	39-00-0210	2A

18-24 AWG

		* Order in multiples of 10				
Part No.	Mfr.	Product No.	Type*	1	10	100
304733	Molex	39-00-0039	2A
304725	Molex	39-00-0041	1A
401859	ValuePro	39-00-0076	1B
401824	ValuePro	39-00-0121	1A
365886	ValuePro	39-00-0164	2C
401736	ValuePro	39-00-0170	2B
365851	ValuePro	39-00-0182	2G
401795	ValuePro	39-00-0195	2F
401701	ValuePro	39-00-0208	2A
304821	Molex	30490-1012	1I
304792	Molex	30490-2012	1I
884248	Molex	44476-111	2E
304776	Molex	44476-1112	2I
304784	Molex	44485-1212	2I

* Sold in 4000 piece reel

Part No.	Mfr.	Mfr. Part No.	Type*	4000
307993	Molex	39-00-0038	2A
307985	Molex	39-00-0040	1A

16 AWG

		* Order in multiples of 10				
Part No.	Mfr.	Product No.	Type*	1	10	100
304709	Molex	39-00-0096	1H
365704	ValuePro	39-00-0096	1C
401867	ValuePro	39-00-0099	1B
401832	ValuePro	39-00-0125	1A
365835	ValuePro	39-00-0168	2C
401744	ValuePro	39-00-0174	2B
365827	ValuePro	39-00-0186	2G
401808	ValuePro	39-00-0199	2F
401710	ValuePro	39-00-0212	2A
401779	ValuePro	39-00-0218	2D
304670	Molex	44476-3112	2H
304661	Molex	44478-3112	1E

.165" (4.19mm) Mini-Fit BMI™ Plug


- Housing: UL94V-2 Nylon 6/6
- Operating temp: -40°C to +105°C
- Mates w/ 5557/42385/42474/43760 series receptacles
- Use 5558/44475/444778 series terminals
- Dual row with panel mount ears



Part No.	Mfr.	Part No.	Pos.	1	10	100
741386		15-06-0245	24

.197" (5mm) Pitch SPOX™

- Voltage: 250V
- With locking ramp
- Contact resistance: 10mΩ max.
- Insulation res.: 1000MΩ min.
- Housing: nylon 6/6, UL 94V-2



Housings

Part No.	Mfr.	Part No.	Pos.	1	10	100
521560		10-63-3044	4
521578		10-63-3054	5

Vertical Headers with Friction Lock

Part No.	Mfr.	Part No.	Pos.	1	10	100
2099542		10-31-1028	2
519654		10-31-1058	5

.100" (2.54mm) Keyed Shrouded Headers & Connectors

CD-ROM 4-Pin

- Low profile
- Voltage rating: 250VAC/DC
- Current rating: 3A AC/DC
- Insulation res.: 1000MΩ min.
- Pin material: tin-plated brass
- Connector material: PBT, 30% glass
- Header material: PBT + 30% glass
- Withstanding volt.: 1000VAC/ 1 min.
- Recommend crimp tool P/N 99443, pg 161




Part No.	Description	1	10	100
152741	Straight header
152726	Rt. angle header
152734	Single w/ latch
181673	Female pins

† P/N 152734 requires 4 pins (P/N 181673)



.100" (2.54mm) Female Header Receptacles



- Gold-plated contacts (†tin-plated)

Single Row Right Angle (Side Entry)

Part No.	Mfr.	Contacts	1	10	100
2100321	ValuePro	8

Double Row Right Angle (Side Entry)

71159	ValuePro	20
-------	----------	----	------	------	------

Single Row Straight (Top Entry)

70755	ValuePro	8
200783	ValuePro	12
308592	ValuePro	16
308567	ValuePro	20

Double Row Straight (Top Entry)

70721	ValuePro	16
70827	ValuePro	20
105057	ValuePro	30
163862	ValuePro	34†
111705	ValuePro	40

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

AMP .100" (2.54mm) AMPLATCH™ Ribbon Connectors

Low-Profile Shrouded Headers with 0.150" End Dimension, Dual Row

- 0.120" solder tail
- 0.025" square posts
- Housing: black thermoplastic, UL94V-0 rated
- Contact: phosphor bronze

* Web Code: UCB



496085

Contact Plating:

- A: 30µ" gold in contact area
- B: 30µ" gold on mating area
- C: 15µ" gold in contact area



737740

Straight (no latch)

Part No.	Mfr. P/N	Pos.	Plating	1	10	100
496051	103309-1	10	A	\$.65	\$.59	\$.49
753571	5103309-2	14	B	1.35	1.19	1.05
496085	103308-5	20	C	1.09	.99	.89
496296	103308-6	26	C	1.25	1.09	.95
496114	103309-8	40	C	1.65	1.49	1.35

Right Angle (no latch)

Part No.	Mfr. P/N	Pos.	Plating	1	10	100
737740	103310-2	14	C	\$.85	\$.75	\$.65
737774	103310-6	26	C	1.95	1.75	1.49

.100" (2.54mm) IDC Ribbon Connectors

Center and Military Polarized Receptacles

- Accepts 28-26AWG solid or stranded cables
- Contact current rating: 1A continuous
- Housing, cover: 94V-0 rated thermoplastic, black
- Contacts: phosphor bronze, duplex plating

Contact Plating:

- A: 30µ" gold, 50µ" min. tin
- B: 15µ" gold, 100µ"-200µ" tin
- C: 15µ" gold, 100-200µ" tin lead, all over 50µ" min. nickel
- D: 30µ" gold, 100-200µ" bright tin lead, all over 50µ" min. nickel


AMP 3M



525317

525376

* Web Code: RDM



1578111

526045

Part No.	Mfr.	Mfr. Part No.	Pos.	Plating	1	10	100
901642	AMP	1658622-1	10	A	\$1.49	\$1.35	\$1.19
525309	AMP	746285-1	10	C	1.19	1.05	.95
742215	AMP	1658621-1	10	B	.95	.85	.75
1578082	3M	89110-0101	10	A	1.19	1.05	.95
525317	AMP	746285-2	14	C	1.39	1.25	.95
525325	AMP	746285-3	16	C	1.45	1.29	1.05
1578111	3M	89116-0101	16	A	.95	.85	.75
525333	AMP	746285-4	20	C	1.49	1.35	1.09
901482	AMP	1658621-4	20	B	1.59	1.45	1.25
525413	AMP	746288-6	26	D	1.49	1.35	1.19
525341	AMP	746285-6	26	C	1.49	1.35	1.19
1578171	3M	89126-0101	26	A	.95	.85	.75
525350	AMP	746285-8	34	C	1.79	1.49	1.29
525368	AMP	746285-9	40	C	1.95	1.75	1.55
525376	AMP	1-746288-0	50	D	2.85	2.55	2.29

Strain Relief for NOVO Receptacles

Order in multiples of 10

Part No.	Mfr.	Mfr. Part No.	Pos.	10	100
526045	AMP	499252-5	10	\$.19	\$.15

.100" (2.54mm) Straight Male Headers

Double Row w/ Standard Latch

* Web Code: VAQ

- 0.1" contact center
- Mount vertical
- Keying slot
- Use w/ IDC socket connectors, right below



71830

Part No.	Mfr.	Pins	1	10	100
117664	ValuePro	10-pin	\$.65	\$.55	\$.49
1928169	On Shore	16-pin	.49	.39	.29
71830	ValuePro	20-pin	.95	.85	.75
2076375	CW Ind.	20-pin	.95	.85	.65
71933	ValuePro	26-pin	1.29	1.15	.95
1928177	On Shore	34-pin	.65	.59	.49
1928185	On Shore	34-pin	.65	.59	.55
72216	ValuePro	50-pin	1.49	1.35	1.19

† Right angle

.100" (2.54mm) Low Profile Male Shrouded Headers

Straight Double Row

- Rating: 1A (max.) @ 250VDC
- Contact resistance: 15mΩ max.
- Contact: phosphor bronze, gold plated
- Features: UL recognized CSA certified; 0.025" square post mates with sockets on 0.100" x 0.100" grid
- Use with IDC socket connectors, right

68180

* Web Code: JAH

Part No.	Cross Ref. No.	Pos.	1	10	100
67812	7110-10SG	10	\$.49	\$.45	\$.39
2100304	7110-14SG	14	.49	.45	.39
68180	7110-16SG	16	.49	.45	.39
68292	7110-20SG	20	.55	.49	.39
68372	7110-26SG	26	.55	.45	.35
68583	7110-34SG	34	.89	.69	.49
181105	7110-40SG	40	1.29	.99	.79
2100312	7110-50SG	50	1.49	1.15	.89

*.200" Drive Power Connectors & Crimp Terminals Available Online — Enter Web Code ABU

*Latch DIP Plugs Online — Enter Web Code EAQ

*Four Wall Headers Online — Enter Web Code LDV

IDC Connector Crimping Tool

- Use for IDC socket connectors
- Crimping distance: 27.5mm to 6mm (with attachment)
- Size: 9.2"L x 3.0"W
- Weight: 1.1 lbs.



Part No.	Mfr. Part No.	1	10	25
73252	HT214	\$15.95	\$14.39	\$12.95

PANAVISE

Arbor Press, IDC Kit and Cable Cutter

2082601: 502 Arbor Press

- Precision ¼ ton (227kg) pressure
- 4 adjustable nylon gibs provide exceptional arm control
- Base footprint: 3.7" x 7" with 4 counter sunk holes
- 8" arm

2082601

2082610: 506 IDC Kit

- For low volume mass termination (up to 64-pin conductor wire) of various IDC connectors on ribbon cables

2082610



3M .100" (2.54mm) IDC Wiremount Socket Connectors

.100" x .100" for .050" Pitch Cables

- Insulation: glass filled polyester (PBT), gray, UL94V-0
- 100µ" nickel underplating & U-slot; 30µ" gold wiping area
- Copper alloy contacts
- Current rating: 1A
- Withstanding voltage: 1000V_{RMS}
- Insulation resistance: 1MΩ @ 500VDC
- Accepts 26-28AWG solid or stranded wires
- Open end, center bump, military



* Web Code: ADV

3000 Series With Strain Relief

Part No.	Mfr. Part No.	Pos.	1	10	100
1576407	3421-6620	20	\$.99	\$.89	\$.79

8000 Series With Strain Relief

- Contact: phosphor bronze, 30µ" nickel underplating
- Without center bump

Part No.	Mfr. Part No.	Pos.	1	10	100
1578074	89110-0001	10	\$.49	\$.45	\$.39


JAMECO .100" & 2mm IDC Socket Connectors

JAMECO EXCLUSIVE

Double Row

- Current rating: 1A
- Mates with 2 rows of .025" sq. or dia. posts on patterns of .100" centers (male headers, pg 74)
- Contact material: phosphor bronze w/ 1µ" gold flash on mating area, tin plated on termination area
- Industry standard IDC socket (plastic)
- Temp. rating: -55°C to +105°C
- Use crimp P/N 73252, below left

* Web Code: QAE



32564

Polarized

Part No.	Cross Ref. No.	Contacts	1	10	100
32492	8000-10	10	\$.29	\$.25	\$.19
153948	8000-14	14	.35	.29	.25
119467	8000-16	16	.39	.35	.29
32522	8000-20	20	.45	.39	.35
32564	8000-26	26	.49	.45	.39
32644	8000-34	34	.55	.49	.45
32679	8000-40	40	.59	.55	.49
100386	110-44	44 (2mm)	.29	.25	.19
32708	8000-50	50	.65	.59	.55
32759	8000-60	60	.89	.79	.69

Non-Polarized

* Order in multiples of 10

138376	8000-10NE	10	\$.35	\$.29	\$.25
138325	8000-20NE	20	*	.19	.15
138333	8000-26NE	26	.35	.29	.25
138341	8000-34NE	34	.39	.35	.29
138350	8000-40NE	40	.45	.39	.35

* Universal Connectors Online — Enter Web Code GAU

.100" IDC DIP Flat Cable Plugs *Web Code: KEF

- Mates with standard 14, 16, 20, 24, 26, 28 & 40-pin DIP sockets with 0.1" spacing
- Uses 28 AWG flat ribbon cable, pg 60
- Plastic with gold-plated contacts • Current rating: 1A

Part No.	Cross Ref.	Width	Contacts	1	10	100
42658	8200-14	0.3"	14	\$.45	\$.39	\$.35
42674	8200-16	0.3"	16	\$.55	\$.49	\$.45
104097	8200-20	0.3"	20	\$.65	\$.55	\$.49
42691	8200-24	0.6"	24	\$.75	\$.65	\$.55
99670	8200-28	0.6"	28	\$.85	\$.75	\$.65
42712	8200-40	0.6"	40	\$.95	\$.85	\$.75

.100" IDC Plug Connector Double Row EXCLUSIVE

- Shrouded header without mounting ears • Plastic
- Contact: gold-plated phosphor bronze
- Use with IDC socket for connectors, pg 80


Part No.	Cross Ref.	Contacts	1	10	100
29217	8400-50	50	\$1.49	\$1.35	\$1.09

IDC Centronics Connector

- Contact material: gold plated phosphor bronze; plastic casing
- Current rating: 1 amp
- Temp. rating: -55°C to +105°C
- Use 73252 IDC crimping tool, pg 80

Part No.	Description	1	10	100
13849	36-pin male	\$1.75	\$1.59	\$1.45

.100" (2.54mm) Non-Polarized Connector Housings & Crimp Pins



- Mates with 0.025" square post on pattern of 0.100" centers (male headers, pg 74)
- Current rating: 1A • Housing material: plastic
- Pin material: brass/tin plated • 26-22 AWG
- Temperature rating: -55°C to +105°C
- Use crimper P/N 159266, pg 161

Single Row * Order in multiples of 10

Part No.	Cross Ref. No.	Contacts	1	10	100
100812	SCH2	2	\$.15	\$.12	
157383	SCH3	3	\$.29	\$.25	\$.22
100803	SCH4	4	\$.29	\$.25	\$.19
163686	SCH5	5	\$.35	\$.29	\$.25
103212	SCH6	6	\$.39	\$.35	\$.29
103203	SCH8	8	\$.45	\$.39	\$.35
103191	SCH10	10	\$.49	\$.45	\$.39
103182	SCH20	20	\$.55	\$.49	\$.45
103158	SCH36	36	\$.59	\$.55	\$.49

Double Row *Web Code: SAM

Part No.	Cross Ref. No.	Contacts	1	10	100
103254	DCH8	8	\$.45	\$.39	\$.35
157421	DCH10	10	\$.49	\$.45	\$.39
157438	DCH14	14	\$.49	\$.45	\$.39
103238	DCH16	16	\$.49	\$.45	\$.39
103230	DCH20	20	\$.55	\$.49	\$.45
157462	DCH40	40	\$.49	\$.45	\$.39
157472	DCH50	50	\$.65	\$.59	\$.55

Crimp Pins for Single/Double Row Housings

Part No.	Cross Ref. No.	Description	10	100	500
100766	FCH1	Female pin	\$.15	\$.13	\$.09
145358	MCH1	Male pin	\$.19	\$.15	\$.12

AMPMODU™ .100" (2.54mm) Receptacle Housing & Contacts

Single Row, Non-Polarized, Crimp Snap-In (MOD IV)

- No PC with UMN
- Black thermoplastic, flame retardant

Part No.	Mfr.	Part No.	Pos.	Width	1	10	100
526871	87499-3	3	2	0.205"	\$.95	\$.85	\$.75
526889	87499-5	3	3	0.305"	\$.95	\$.85	\$.75
526897	87499-7	3	4	0.405"	\$.55	\$.49	\$.45

Standard Pressure Receptacle Contacts (MOD IV)

- Material: phosphor bronze
- No PC with UMN
- Plating:

Part No.	Mfr.	Part No.	Pos.	Width	1	10	100
527419	15µ" gold in contact area, 100µ" – 200µ" bright tin lead, all over 50µ" nickel	527419					
527486	Pre-plated 50µ" – 150µ" bright tin	527486					

Part No.	Mfr.	Part No.	1	10	100
527419	87523-6		\$.35	\$.29	\$.25
527486	1-87523-6		\$.25	\$.22	\$.15

AAIES DIP Headers

*Web Code: XBS

Series 600 Headers w/ Coined Contacts

- Standard cover/body material is red UL 94-HB glass filled nylon
- High temperature cover/body material is black UL 94V-0 4/6 nylon
- Contact plating: 100µ" min., tin
- Contact rating: 2A
- Operating temp.: 221°F (105°C) max.
- Fork contacts: accept up to .025" (.64mm) dia. leads

Part No.	Mfr. Part No.	Pos.	Width*	1	10	100
291120	08-600-10 <i>R</i>	8	0.3"	\$1.19	\$1.05	\$.95
291312	14-600-10 <i>R</i>	14	0.3"	1.49	1.29	1.05
291574	16-600-10 <i>R</i>	16	0.3"	1.65	1.45	1.15
291996	24-600-10 <i>R</i>	24	0.6"	2.55	2.25	1.85

* Center to center pin width

.100" DIP Header Plugs

- Gold-plated leads
- Header plugs: keyed corner to indicate pin 1
- U-shaped pin termination for easy component attachment
- Lead length: 0.188" • 0.1" spacing between leads

Part No.	Mfr. Part No.	Width	Pins	1	10	100
104337	08P-2 <i>R</i>	0.3"	8	\$.95	\$.85	\$.75
37130	14P-2 <i>R</i>	0.3"	14	1.39	1.25	.99
37331	16P-2 <i>R</i>	0.3"	16	1.95	1.75	1.49

PCB Centronics Connector

- Solder-type contacts
- Space between rows: 0.164"
- Space between pins: 0.1"
- Metal body
- PC mount

Part No.	Description	1	10	100
72151	36-contact F, rt angle	\$2.95	\$2.49	\$1.85

*PCB Connectors Online — Enter Web Code EEN

*Card Extenders Online — Enter Web Code PAA

*Keyboard Adapters Online — Enter Web Code RAV

.100" MTE AMPMODU Pin Housings

- Single row
- Latched polarization
- Mating lock connector
- 0.100" center line
- Black thermoplastic, UL94V-0

Part No.	Mfr. Part No.	Pos.	1	10	100
496392	103653-1	2	\$.35	\$.29	\$.25
496405	103653-2	339	.35	.29
496413	103653-3	439	.35	.29

PC Card-Edge Connectors

- Fits all PC boards
- 0.054" to 0.070" thick

Solder Eyelet 0.140" Spacing Between Rows

Part No.	Mfr.	Positions	1	10	100
422983	Cinch	10/20	\$2.49	\$2.25	\$2.09
39117	ValuePro	22/44	3.95	3.55	3.19

Solder Tail 0.200" Spacing Between Rows

Part No.	Mfr.	Positions	1	10	100
40694	ValuePro	31/62 (PC/AT)	\$.55	\$.49	\$.45
1945049	Various	50/100	\$.75	\$.69	\$.59

*Card Edge Connectors Online — Enter Web Code YEE

Jones Plugs and Sockets

Series 300 Multiple-Density Solder-Eyelet Connectors

- Insulation material: molded monoblock, black phenolic
- Contact material: plug – brass; socket – phosphor bronze
- Contact plating: cadmium
- Current rating: 10 amps
- Operating voltage: 250VAC max.
- Contact resistance: 16mΩ max.
- Hood material: UL 94V-0 rated thermoplastic

Sockets with Hood and 180° Clamp

Part No.	Mfr.	Part No.	Contacts	1	10
248807	S-302H-CCT	2	\$3.35	\$2.69	
248823	S-304H-CCT	4	4.95	4.25	
248831	S-306H-CCT	6	5.79	4.79	

Plugs with Hood and 180° Clamp

Part No.	Mfr.	Part No.	Contacts	1	10	100
248760	P-302H-CCT	2	\$2.95	\$2.65		
248786	P-304H-CCT	4	3.95	3.49		
248794	P-306H-CCT	6	4.49	3.95		
445982	P-315-CCT	15	6.95	5.95		

Series 2400 Multiple-Density Solder-Eyelet Connector

- Current rating: 15A
- Current resistance: 1mΩ max.
- Operating voltage: 250VAC
- Plug prongs are 0.250"W x 0.55"Th.
- For use in cable-to-cable and cable-to-panel applications
- Socket contacts have solder eyelets with 0.093" dia.
- Insulation material: molded monoblock, general purpose phenolic, black
- Contact plating: cadmium
- Contact material: plug-brass; socket-phosphor bronze
- Hood material: formed metal with dielectric liner

Plug with Hood and 180° Clamp

Part No.	Mfr. Part No.	Contacts	1	10	100
428197	P-2408H-CCT	8 ...	\$10.95	\$9.95	\$8.95
Socket with Hood and 180° Clamp					
444699	S-2408H-CCT	8	\$6.95	\$6.39	\$5.69

Socket with Hood and 180° Clamp

444699	S-2408H-CCT	8	\$6.95	\$6.39	\$5.69
--------	-------------	---	-------	--------	--------	--------

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Sockets, Receptacles, Plugs & Connectors

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

FT Connector Assembly SFP

Small Form-Factor Pluggable

AMP

- Right angle 0.8mm pitch
- Contact: phosphor bronze
- Housing: high-temperature LCP UL94V-0 rated, black
- Plating: 0.38µ" min. gold in contact area, 13µ" min. gold in solder area, 38µ" min. nickel underplate

Part No.	Mfr. Part No.	Positions	1	10	100
741010	1367073-1	20	\$1.49	\$1.35	\$1.25



Mini DIN & DIN Panel Mount Female Sockets

- With solder lugs
- Metal body

* Web Code: FAB



Part No.	Cross Ref. No.	Description	1	10	100
2076754	MDPM5	5-pin mini DIN	\$0.65	\$0.59	\$0.55
2076762	MDPM6	6-pin mini DIN	\$1.29	\$1.15	\$0.95
2076771	MDPM8	8-pin mini DIN	\$1.39	\$1.25	\$1.09
15844	DINJ5	5-pin DIN	\$0.95	\$0.75	\$0.65
15852	DINJ6	6-pin DIN	\$1.05	\$0.85	\$0.75
15861	DINJ8	8-pin DIN	\$1.19	\$0.95	\$0.79

Mini-DIN & DIN PC Mount Female Sockets



- Set back: 0.5"

119475: Plastic/metal body 29399: Plastic body

* Web Code: DMS

Unshielded (DIN) – Right Angle

Part No.	Product No.	Description	1	5	25
29399	RD5	5-pin DIN	\$0.69	\$0.59	\$0.45

Shielded (Mini DIN & DIN) – Right Angle

140791	MDR4S	4-pin mini DIN	\$0.35	\$0.29	\$0.25
2125819	MXS4 (SMT)	4-pin mini DIN	\$0.49	\$0.45	\$0.39
2076720	MDR5S	5-pin mini DIN	\$0.49	\$0.45	\$0.39
119475	MDR6S	6-pin mini DIN	\$0.89	\$0.79	\$0.69
207722	MDR8S	8-pin mini DIN	\$0.89	\$0.79	\$0.69
2076746	MDR9S	9-pin mini DIN	\$0.89	\$0.79	\$0.69
2077811	DRA5S	5-pin DIN	\$0.65	\$0.59	\$0.49
29410	RD8	8-pin DIN	\$0.65	\$0.59	\$0.49

Unshielded (DIN) – Straight

ADAM TECH

- Operating voltage: 20VDC max.
- Current rating: 2A max.
- Contact plating: tin over copper



Part No.	Mfr. Part No.	Description	1	10	100
2114132	DJN-003-B	3-pin DIN	\$0.49	\$0.45	\$0.39
2114141	DJN-004-B	4-pin DIN	\$0.55	\$0.49	\$0.45
2114159	DJN-005-B	5-pin DIN	\$0.59	\$0.55	\$0.49
2114167	DJN-006-B	6-pin DIN	\$0.65	\$0.59	\$0.55
2114175	DJN-007-B	7-pin DIN	\$0.69	\$0.65	\$0.59
2114183	DJN-008-B	8-pin DIN	\$0.75	\$0.69	\$0.65


The Best Warranty in the Industry

All Jameco purchases are guaranteed for a full 90 days and even longer for Jameco House Brands.

USB-A & B Connectors

* Web Code: DAZ

1.0 & 2.0 Female Connectors

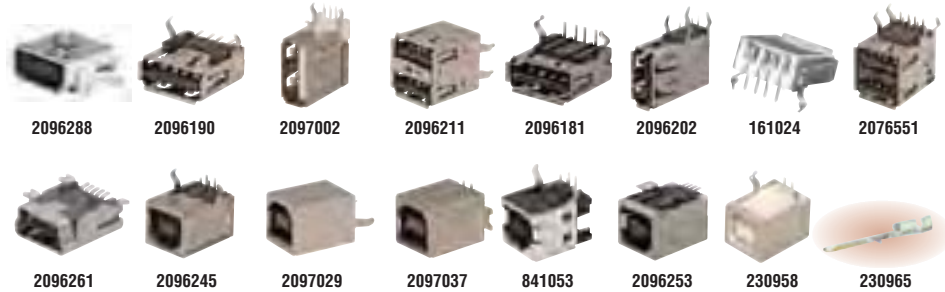

- PC mount right angle with board locks

* Order in multiples of 10

Part No.	Mfr.	Product No.	Description	1	10	100
2096288	Adamtech	MUSB-A-S-RA-TSMT	Mini USB-A, right angle, true surface mount	\$0.49	\$0.45	\$0.39
2096270	Adamtech	MUSB-AB1-S-RA-SMT	Mini USB-AB, right angle, surface mount	\$0.49	\$0.45	\$0.39
2096190	Adamtech	USB-A-S-RA-SMT	USB-A, right angle, surface mount	\$0.39	\$0.35	\$0.29
2097002	Adamtech	USB-A-S-RU-TH	USB-A, right angle upright, terminals horizontal	\$0.39	\$0.35	\$0.29
2096211	Adamtech	USB-A-D-VT	USB-A, dual port, vertical	\$0.45	\$0.39	\$0.35
2096181	Adamtech	USB-A-S-RA	USB-A, right angle	\$0.39	\$0.35	\$0.29
2096202	Adamtech	USB-A-S-RU	USB-A, right angle upright	\$0.49	\$0.45	\$0.39
2097011	Adamtech	USB-A-S-VT	USB-A, vertical	\$0.29	\$0.25	\$0.19
161024	ValuePro	1040	USB-A 1.0	\$0.89	\$0.79	\$0.69
2076551	KobiConn	UAR64-8W2100	USB-A 2.0, dual port	\$0.95	\$0.79	\$0.49
2114263	Adamtech	MUSB-B4-S-RA-TSMT	Mini USB-B, right angle, true surface mount	\$0.59	\$0.55	\$0.49
2096261	Adamtech	MUSB-B5-S-RA-SMT	Mini USB-B, right angle, surface mount	\$0.75	\$0.65	\$0.59
2096245	Adamtech	USB-B-S-RA	USB-B, right angle	\$0.29	\$0.25	\$0.19
2097029	Adamtech	USB-B-S-VT	USB-B, vertical	\$0.39	\$0.35	\$0.29
2097037	Adamtech	USB-B-VT-TSMT	USB-B, vertical, true surface mount	\$0.95	\$0.85	\$0.75
841053	AMP	292304-1	USB-B	\$1.49	\$1.35	\$1.19
2096253	Adamtech	USB-B-S-RA-SMT	USB-B, right angle, surface mount	\$0.49	\$0.45	\$0.39
230958	ValuePro	USB-B-S-RA-WT	USB-A 2.0, right angle, white insulator	\$0.95	\$0.89	\$0.79
159724	ValuePro	20-P025G	Male crimp pin for USB 2.0	*	\$0.07	\$0.05
230965	ValuePro	TATBA000K	Male crimp pin for USB 2.0	*	\$0.07	\$0.05



Mini-DIN & DIN Plugs & Receptacles

* Web Code: DAV



- Solder barrels w/ strain relief
- See pg 59 for cable

JAMECO EXCLUSIVE

Part No.	Pins	Type	1	10	100
142280	4	Mini DIN plug	\$0.75	\$0.69	\$0.59
142262	6	Mini DIN plug	\$0.95	\$0.85	\$0.75
177244	6	Mini DIN receptacle	\$0.95	\$0.85	\$0.75
111878	8	Mini DIN plug	\$1.09	\$0.89	\$0.75
177236	8	Mini DIN receptacle	\$0.75	\$0.65	\$0.59
15879	5	DIN plug	\$0.55	\$0.45	\$0.35
180873	5	DIN receptacle	\$0.75	\$0.59	\$0.55
15887	6	DIN plug	\$0.65	\$0.49	\$0.45
15895	8	DIN plug	\$0.69	\$0.55	\$0.49



PS/2 – USB Adapter

This adapter allows you to use your PS/2 compatible mouse and keyboard as USB compatible devices.

- USB - A Male to two PS/2 female connectors
- Color coded PS/2 connectors for keyboard & mouse

Part No.	Length	Housing	1	5	25
645351	13"	USB adapter	\$8.95	\$8.49	\$7.95


IEEE 1394 Firewire Connectors



- Operating voltage: 30VAC
- Current rating: 1A
- Insulation resistance: 100MΩ
- Rating: UL94V-0 • Single port
- Mounting style: through hole (except P/N 2096333 – surface mount)

Part No.	Mfr. Part No.	1	10	100
2096317	FWC-C-S-RA-1	\$0.39	\$0.35	\$0.29
2096333	FWC-C-S-RA-SMT-1	\$0.49	\$0.45	\$0.35
2096368	FWC-C-S-RU-2	\$0.49	\$0.45	\$0.39
2096376	FWC-C-S-VT-3	\$0.39	\$0.35	\$0.29

1 Right angle 2 Right angle, upright 3 Vertical



For IEEE Firewire Cables
See page 186

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

Receptacles, Plugs, Adapters & Gender Changers

ADAM TECH

Displayport Receptacles and Plugs

*Web Code: DPP

Displayport receptacles & plugs are royalty free products that can be used in any application where an HDMI connection was previously required.

- 15µ gold plating




Part No.	Mfr. Part No.	Description	Type	Mounting Style	1	5	100
2114191	DPC-F-SD-15	Displayport, receptacle, right angle	Solder	Through hole	\$2.49	\$2.25	\$1.95
2114204	DPC-F-S-RA-P-15	Displayport, receptacle, right angle	DIP	Surface mount	2.25	2.09	1.89
2114212	DPC-F-S-RA-SMT-P-15	Displayport, receptacle, right angle	SMT	Surface mount	2.25	2.09	1.89
2114247	MDPC-S-RA	Mini displayport, receptacle, right angle	DIP	Single port	1.95	1.75	1.59
2114255	MDPG-PLUG	Mini displayport, plug	—	—	4.95	4.49	3.95

Panel Bracket Cable Assemblies

- Standard back panel bracket
- Ribbon cable w/ header connector
- Length: 12"

*Web Code: RAX

355688: 1 serial port
149623: 1 parallel port
149614: 2 serial ports



Part No.	Description	1	10	100
355688	DB9M to 10-pin header F	\$3.95	\$3.49	\$2.95
1952265	DB9F to 10-pin header F	1.95	1.75	1.49
149614	DB9M to 10-pin header & DB25M to 10-pin header	3.95	3.49	2.95
149623	DB25F to 26-pin header F	3.95	3.49	2.95

JAMECO ValuePro D-Sub 9-Pin to 25-Pin Serial Adapters

*Web Code: AAA


- For use in AT or other computer systems that have 9-pin D-sub serial ports



664296: Thumbscrews on both sides

10321: For PC/XT systems with DB25 serial ports.

163740/153576: For PC/XT systems with DB25 serial ports.



Part No.	Description	1	10	100
10305	DB9 F to DB25 M	\$3.15	\$2.65	\$1.95
664296	DB9 M to DB25 M	.95	.85	.75
10321	DB9 M to DB25 F	4.49	3.95	3.65
163740	DB9 M to DB25 F, thumbscrews on DB9 side only	1.49	1.35	1.19
153576	DB9 M to DB25 F, thumbscrews on DB25 side only	2.95	2.49	1.95

Slim-Line D-Sub Gender Changers



For Confined Applications!

These revolutionary slim-line gender changers are only 0.69" wide, eliminating the space problems caused by standard gender changers. When plugged into your existing cable, they add only 0.44" to the cable. All-metal cases.

- Captive locking screw (male)
- Captive locking nut (female)
- Grounding tangs (male)
- Tin plated shells

*Web Code: YAB

Part No.	Description	1	10	100
18498	9-pin male to male	\$2.49	\$2.25	\$1.95
18489	9-pin female to female	2.49	2.25	1.95
119320	15-pin female to female HD	2.95	2.65	2.39
119301	15-pin male to male HD	2.95	2.65	2.39
18447	25-pin male to male	2.95	2.65	2.39
18420	25-pin female to female	2.95	2.65	2.39
170085	25-pin male to female (pass thru)	2.95	2.65	2.39

JAMECO ValuePro D-Sub Gender Changer

*Web Code: LAB

- Standard 9 and 25-pin D-sub male and female gender changers for interfacing two cables or connectors of the same gender



Part No.	Description	1	10	100
16643	D-sub 9-pin female	\$1.49	\$1.35	\$1.19

SCSI Adapter

125241: 50-pin ribbon header to HPDB50 female SCSI II

*Web Code: PAD



Part No.	Description	1	5	25
125241	50-pin header to HPDB50 F	\$4.69	\$4.29	\$3.89

Computer Card Brackets

- For securing cards into bus slots
- Fits PC/XT/AT cases
- Length: 4.75"
- See pg 68 for DB connectors



*Web Code: EAM

Part No.	Description	1	10	100
11755	Blank back panel	\$0.95	\$0.85	\$0.75
101733	For DB25 connector	.29	.25	.19
101831	For DB9/DB25 conn.	.75	.69	.59

JAMECO ValuePro Full Handshaking Null Modem Adapter

*Web Code: HAD

Self-contained null-modem (cross-over) adapters. Change any standard straight cable into a null cable quickly and easily.

- Internal pin configuration: 1-1, 2-3, 3-2, 4-5, 5-4, 6-20, 20-6, 7-7, 8-20



Part No.	Description	1	10	100
17224	DB25 F to DB25 F	\$3.49	\$3.15	\$2.85

Clearance Center




Can't find what you are looking for in the catalog? Check out the thousands of products online priced near cost.

Large Quantities Heavily Discounted
Factory Overruns / Jameco Excess Inventory
Discontinued Product Lines

www.Jameco.com/Clearance

Jameco Puzzler 8

by Forrest M. Mims III

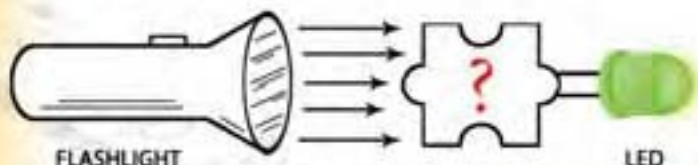

Go to: www.Jameco.com/clue8 to see if you got it right!

A Physics professor planned to illustrate a lecture with demonstrations of how light can be intercepted by certain phosphors or various optoelectronic sensors and transformed into entirely new light. He wanted an ultra-simple demonstration of how an LED would glow when biased by a forward current provided by a suitable sensor. He rummaged through his optoelectronic drawer and found two silicon solar cells, several cadmium sulfide photo resistors, a couple of AlGaAs red LEDs, some silicon phototransistors and half a dozen silicon photodiodes. In his parts cabinet he found some transistors, miniature chokes and assorted resistors and capacitors. How did he combine the smallest number of components to do what the phosphor card did?

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

IC Sockets & Single/Dual In-Line Strip Sockets

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE


ARRIS Low Profile ZIF Sockets

Series 526

*Web Code: UBX

- Body: UL 94V-0 glass-filled polyester thermoplastic
- Beryllium copper alloy spring tempered contacts w/ 200µ" (5.08µm) tin plating
- Contact res.: 10mΩ max. • Contact current: 2A
- Breakdown voltage: 1000VAC min.
- Center pins: .600" (15.24mm) • Zinc alloy cam
- Operating temp.: -67°F to 221°F (-55°C to 105°C)
- Suggested PCB hole size: .035" Dia. (0.89mm)

Part No.	Mfr. P/N	Pins	L" x W"	1	5	25
296789	24-526-10	24	1.45 x .75	\$6.95	\$6.29	\$5.69
102745	28-526-10	28	1.64 x .75	7.95	7.15	6.45
102753	40-526-10	40	2.24 x .75	9.75	8.79	7.89



ARRIS SOIC/SOJ to DIP Adapters

- Board material: 0.062" thick FR-4 w/ 1 oz. copper traces on both sides
- Brass alloy pins with 200µ" (5.08µm) min. tin plating
- Operating temperature: 221°F (105°C) max.
- Suggested PCB hole size: 0.028" Dia. (0.71mm)
- Center pins: 0.300" (7.62mm)

*Web Code: YBS

Part No.	Mfr. P/N	Pins	L" x W"	1	10	100
291208	08-350000-11RC	8	.400 x .46	\$5.95	\$5.35	\$4.79
291292	14-350000-11RC	14	.700 x .45	5.95	5.39	4.79
291515	16-350000-11RC	16	.800 x .45	6.39	5.75	5.15
291980	24-350000-11RC	24	1.20 x .45	6.59	5.95	5.35




ARRIS Series 800 Vertisocket

With Bifurcated Contacts

- Body material: UL 94-HB glass filled nylon
- Phosphor bronze spring tempered bifurcated contacts
- Contact current: 1.5A • Gold plated
- Contact plating: 100µ" (2.54µm) tin or 10µ" (.254µm) gold • Center pins: 0.200"
- Suggested PCB hole size: 0.044" Dia. (1.12mm)

Part No.	Mfr. P/N	Pins	L" x W"	1	10	100
291485	14-823-90	14	1.4 x .39	\$2.49	\$2.29	\$1.95




ARRIS High Temp. Universal ZIF Test Sockets

Series 6554

*Web Code: AAN

- Accepts devices on .300" to .600" (7.62mm to 15.24mm) centers
- 10: 100µ" tin over 50µ" nickel; -11: 10µ" gold over 50µ" nickel
- Operating temperature: -10: 221°F (105°C) – tin plating -11: 302°F (150°C) – gold plating
- Socket body: UL 94V-0 glass-filled PPS
- Beryllium copper contact plating
- Stainless steel handle • Center pins: 0.600"
- Insulation res.: 1000MΩ • Contact current: 1A
- Dielectric withstanding voltage: 1000VAC

Part No.	Mfr. P/N	Pins	L" x W"	1	5	25
103992	24-6554-10	24	1.8 x 0.9	\$7.75	\$6.95	\$6.29
104003	28-6554-10	28	2.0 x 0.9	8.95	7.95	6.95
104012	32-6554-10	32	2.1 x 0.9	9.95	8.95	7.95
104030	40-6554-10	40	2.5 x 0.9	11.95	10.75	9.69
295162	28-6554-11	28	1.4 x 0.9	14.95	13.95	12.95
295209	32-6554-11	32	1.6 x 0.9	11.95	10.95	9.95
295233	40-6554-11	40	2.0 x 0.9	15.95	14.49	12.95



ARRIS Universal SOIC to .600" DIP Adapter

Series 647

- Brass alloy female pin body with 200µ" (5.08µm) tin/lead plating
- Beryllium copper 4-fingered collet contact with 10µ" (0.25µm) gold over nickel plating
- Phosphor bronze alloy male pin with 200µ" (5.08µm) tin/lead plating • Contact current: 3A
- Suggested PCB hole size: 0.028" Dia.

Part No.	Mfr. P/N	Positions	1	5
295283	44-647-10	44	\$69.95	\$63.95



Audio/Video Adapter

- Converts impedance of video/audio signals (NTSC & PAL) to 100Ω for transmission over CAT 5 UTP cable
- Video trans. distance: 1000' color/2000' black/white
- Signal pair: Video (BNC), CAT pair 1 (RJ45)

Part No.	Description	1	5
210471	BNC/RJ45 with cable	\$12.95	\$11.95



JAMECO .100" Single-In-Line Machine Tooled Strip Sockets



- Machine tooled
- Solder tail or wire wrap
- Standard lead length: .160" • Single or double row

*Web Code: KAM

Part No.	Description	1	10	100
164822	4-pin straight single row	\$.75	\$.65	\$.59
138684	5-pin straight single row	.75	.65	.59
2100339	7-pin straight single row	.99	.89	.69
102201	10-pin straight single row	1.19	.95	.75
2100347	12-pin straight single row	1.29	1.09	.85
78642	30-pin straight single row	1.49	1.29	.95
175920	36-pin straight single row	1.75	1.59	1.29
101283	20-pin WW2 single row	1.95	1.75	1.59
104054	30-pin WW3 single row	2.95	2.59	2.39

† Lead length: .435" (2) * Lead length: .575" (3)



Machine Contact Dual-In-Line Female Sockets

- 0.100" centers
- Pin sleeve: tin
- Solder tail contact: .114" L
- Contact clip: gold



Part No.	Cross Ref. No.	Pins	1	10	100
212856	SA101000	10	\$.95	\$.85	\$.75
212863	SA121000	12	.75	.65	.59
212871	SA141000	14	.35	.29	.25
212880	SA161000	16	.55	.49	.45
184613	SA201000	20	.85	.75	.65
212901	SA221000	22	.55	.49	.45
212936	SA481000	48	1.25	1.09	.99

We're Listening to What You Need

Our goal is to provide you with more of what you want. Let us know how we can better serve your electronic needs. Send feedback to Management@Jameco.com.



High-Frequency Connectors & Adapters

RF Adapters

*Web Code: RFS



Part No.	Manufacturer	Product No.	Description	1	10	50
153454	ValuePro	SB-321	SMA female to BNC male	\$2.59	\$2.29	\$2.09
159469	ValuePro	CH-7830-N	SMA female to BNC female	3.59	3.09	2.89
153593	ValuePro	4288	SMA male to BNC male	3.95	3.55	3.19
159477	ValuePro	CH-7820-N	SMA male to BNC female	3.95	3.55	3.25
1951692	Amphenol Connex	242102	SMA in-line plug to BNC jack	3.69	3.29	2.95
1951713	Amphenol Connex	242113	SMA in-line jack to N plug	7.45	6.75	6.25
1951764	Amphenol Connex	242127	SMA female to MCX male	10.95	9.95	8.95
1951887	Amphenol Connex	2421124	SMA in-line plug to TNC jack	6.95	6.39	5.69
1951772	Amphenol Connex	242105	SMA in-line jack to TNC plug	5.49	4.95	4.49
1951852	Amphenol Connex	242131	N-female to TNC male	9.95	8.95	7.95
1951721	Amphenol Connex	242141	SMA jack to MMCX plug	12.95	11.95	10.95
1951748	Amphenol Connex	242149	BNC in-line jack to TNC plug	5.95	5.25	4.75
1951705	Amphenol Connex	242156	N-plug to F jack	9.95	8.95	7.95
1951781	Amphenol Connex	242185	BNC jack to SMB plug	9.95	8.95	7.95

Continued on next page

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



RF Adapters (Continued)

* Web Code: RFS

Part No.	Manufacturer	Product No.	Description	1	10	50
207168	ValuePro	BJ-7072	RCA female to BNC female	\$2.39	\$2.15	\$1.89
114789	ValuePro	BR312	RCA female to BNC male	1.59	1.25	1.15
207176	ValuePro	BJ-7055	RCA male to BNC male	2.95	2.55	2.25
114753	ValuePro	RB312	RCA male to BNC female	1.59	1.45	1.29
114770	ValuePro	200-108	BNC female to F connector male	1.79	1.59	1.39
174255	ValuePro	TBC-176	BNC male to F connector female	2.35	1.85	1.69
309657	ValuePro	200-045	RCA female to F male adapter	1.49	1.35	1.19



50Ω TNC Connectors

Part No.	Manufacturer	Mfr. Part No.	Description	1	10	50
658611	Amphenol Connex	122140	Right angle crimp/solder plug (RG-58/58A/58C/141/303)	\$2.49	\$2.25	\$1.95
296163	Amphenol Connex	122372	Straight crimp plug (RG-55/142/223/400)	1.25	1.09	.95
296155	Amphenol Connex	122108	Plug crimp-crimp (RG-58/141)	1.25	1.09	.95
2098275	Amphenol Connex	122108RP	Plug crimp-crimp reverse polarity (RG-58/141)	1.49	1.35	1.25



50Ω MMCX Connectors

Part No.	Manufacturer	Cross Ref. No.	Description	1	10	50
311686	ValuePro	908-43200	Right angle plug, crimp (RG-178/U)	\$2.49	\$2.25	\$1.99
311693	ValuePro	908-43300	Right angle plug, crimp (RG-174/188/316)	1.75	1.59	1.45

UHF Connectors & Adapters

* Web Code: UCA

Part No.	Manufacturer	Mfr. Part No.	Description	1	10	50
223837	Amphenol RF	83-1T	In-series T-adapter, jack-plug-jack	\$5.95	\$5.49	\$4.95
668377	Amphenol Connex	182106	PL-259 Straight adapter, nickel finish, phenolic insulator	3.25	2.95	2.75
668385	Amphenol Connex	182107	UG-175-U Reducing adapter, nickel finish, for 668377	.55	.49	.39

50Ω Type N Connectors

* Web Code: TNC


Part No.	Manufacturer	Product No.	Fig.	Description	1	10	50
697039	Amphenol RF	82-66	1	Jack-to-jack adapter, water tight	\$19.95	\$18.95	\$17.95
311619	ValuePro	82-202-1006	2	N-clamp plugs, for B9913/TWB301 cables	3.95	3.59	3.29
296454	Amphenol Connex	172100	3	Crimp plug captive contact (RG-58/58A/58C/141/303/LMR195/B7806A)	3.95	3.55	3.19
296489	Amphenol Connex	172103	4	Crimp jack captive contact (RG-58/58A/58C/141/303/LMR195/B7806A)	2.95	2.69	2.45
659278	Amphenol Connex	172119	5	Panel receptacle jack, solder terminal (all 50Ω coax cables)	5.95	5.49	4.95
659286	Amphenol Connex	172122	6	Plug-to-plug adapter (all 50Ω coax cables)	6.85	6.55	6.19
1956581	Amphenol Connex	172123A	7	Jack-to-jack adapter	3.49	3.19	2.95
659294	Amphenol Connex	172123	8	Jack-to-jack adapter	4.95	4.45	3.95
659307	Amphenol Connex	172124	9	Bulkhead jack-to-jack adapter	7.95	7.29	6.59
659315	Amphenol Connex	172126	10	Angled plug-to-jack adapter	8.95	7.95	7.29
296518	Amphenol Connex	172129	11	Bulkhead crimp jack captive contact (RG-174/188A/316/B7805A)	4.49	3.95	3.49
296569	Amphenol Connex	172138	11	Bulkhead solder jack, .085 semi-rigid (RG-405/U)	3.95	3.59	3.25
296585	Amphenol Connex	172165	11	Bulkhead crimp jack captive contact (RG-316/U double braided)	2.95	2.59	2.29
659235	Amphenol Connex	172173	12	Crimp panel jack captive contact (RG-174/188A/316/B7805A)	3.95	3.59	3.25
659171	Amphenol Connex	172180	13	Right angle crimp plug (RG-174/188A/316/B7805A)	4.95	4.49	3.95

* Use crimp tool 667921 (below)

75Ω "F" Connectors, Adapters & Terminators

* Web Code: FCA

Part No.	Manufacturer	Product No.	Fig.	Description	1	10	50
291531	ValuePro	200-028	14	Perma-seal, RG-6 coax	\$.79	\$.69	\$.65
291725	ValuePro	200-051	15	F-jack to jack (gold)	1.39	1.25	1.15
295371	ValuePro	200-053	16	F-panel mount jack to jack (nickel)	.29	.25	.19
295380	ValuePro	200-107	17	F-right angle jack to plug (nickel)	1.95	1.75	1.59
1952943	Foxconn	200-190	18	F-right angle PC mount jack (90° barrel)	.75	.69	.65
289887	ValuePro	200-035	19	F-crimp on for RG-6, nickel plated	.25	.22	.15
2098267	Amphenol Connex	222113	20	F-crimp plug, 75Ω, for RG-179U	.99	.89	.75
2099737	Various	25-7010	20	F-crimp on plug for RG-6, nickel plated, 2 pcs.	.59	.55	.49

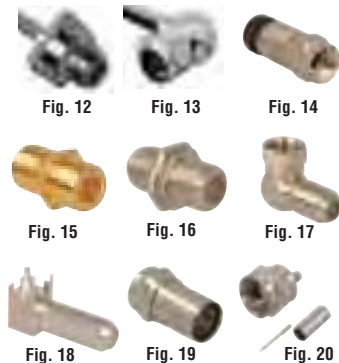


Universal Hand Crimp Tools

Part No.	Manufacturer	Product No.	Die Cavities (in.)	Cable Groups	1	5
667850	Amphenol Connex	47-10070	.255/.213/.068	RG-55/58/59/62/141/142/223/303/400 (BNC/TNC)	\$74.95	\$69.95
667905	Amphenol Connex	47-10150	.178/.128/.068	RG-174/188/316/179/187/180/195/178/196 (BNC/TNC)	74.95	69.95
667921	Amphenol Connex	47-10180	.255/.213/.100/.068/.052	5 cavity RG-58/59 N/BNC/TNC/SMA connectors	74.95	69.95
261745	ValuePro	DL-806A	.255/.213/.068	For RG-58/59, BNC/TNC connectors with 3/8" ferrule	17.95	15.95

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

50Ω/75Ω BNC Connectors and Adapters

* Web Code: BCA

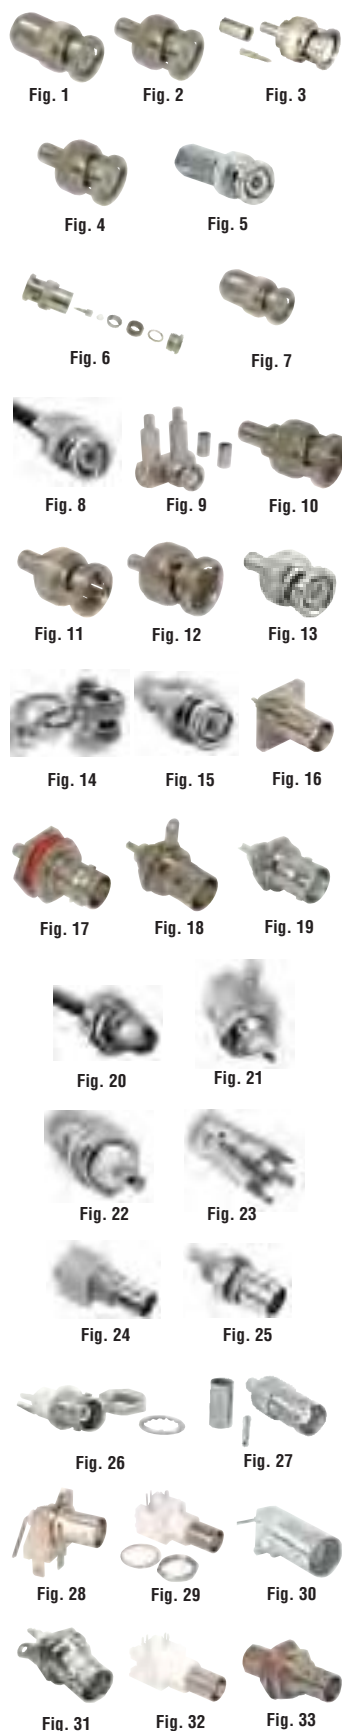

Plugs

Part No.	Manufacturer	Product No.	Fig.	Description	1	10	50
355099	ValuePro	31-2 \mathcal{R}	1	50Ω plug, clamp, for RG-58/141/142/400 (UG-88/U)	\$1.95	\$1.75	\$1.59
223431	Amphenol RF	31-202	1	50Ω plug, solder cup, for RG-141/58/58C/B7806A	2.95	2.59	2.35
355135	ValuePro	31-212	1	50Ω/75Ω plug, clamp, for RG-59/62/140/302	2.29	2.15	1.95
311378	ValuePro	31-315	2	50Ω plug, 3 pcs, crimp, for RG-174; 188/U	4.49	3.95	3.59
355216	ValuePro	31-315-RFX \mathcal{R}	1	50Ω plug, 3 pcs, crimp, for RG-174/U; 188A/U; 316/U	1.95	1.75	1.55
188349	Amphenol RF	31-315-RFX	1	50Ω plug, 3 pcs, crimp, for RG-174/U; 188A/U; 316/U	2.29	1.95	1.75
188306	Amphenol RF	31-320-RFX \mathcal{R}	1	50Ω plug, 3 pcs, crimp, for RG-58/58C/141/B7806A	1.49	1.25	1.15
355240	ValuePro	31-320-RFX	3	50Ω plug, 3 pcs, crimp, for RG-58/58C/141/B7806A	1.79	1.59	1.39
311394	ValuePro	31-321	4	50Ω plug, 3 pcs, crimp, for RG-59/U	2.29	1.95	1.75
311408	ValuePro	31-321-RFX	4	50Ω plug, 3 pcs, crimp, for RG-59	1.29	1.15	.95
135618	ValuePro	200-141	3	75Ω plug, 3 pcs, crimp, for RG-6	1.39	1.19	1.09
71781	ValuePro	200-142	5	75Ω plug, twist-on, for RG-59	1.25	1.15	.95
71271	ValuePro	200-143	3	75Ω plug, 3 pcs, crimp, for RG-59	1.15	.95	.89
119394	ValuePro	200-144	6	75Ω plug, clamp-on, for RG-59	.99	.89	.75
71482	ValuePro	200-145	3	50Ω plug, 3 pcs, crimp, for RG-58	1.65	1.49	1.45
108994	ValuePro	200-146	5	50Ω plug, twist-on, for RG-58	.69	.63	.55
355362	ValuePro	6775	7	50Ω plug, clamp, for RG-8/9/87A/213/214/225	2.49	2.25	2.09
295953	Amphenol Connex	112116 \mathcal{R} *	8	50Ω crimp plug, captive contact, for RG-58/58A/58C/141/303	1.49	1.35	1.19
296008	Amphenol Connex	112132 \mathcal{R}	8	50Ω crimp plug, captive contact, for RG-174/188A/316/B7805A	2.49	2.25	1.75
2098259	Amphenol Connex	112521 \mathcal{R}	3	50Ω plug, 3-PC, crimp, for Belden 1865A/8218/B1417B/B1164B/RG-B809	1.35	1.19	1.09
311319	ValuePro	68175-5RFX	4	50Ω/75Ω plug, 3 pcs, crimp, for RG-59	.99	.89	.79
311327	ValuePro	69475	7	50Ω/75Ω plug, clamp, for RG-174/179/187/188/316	.99	.95	.89
207183	ValuePro	BJ-70941	9	50Ω/75Ω male clamp-on, for RG-58/59	2.29	2.15	1.95
112110	ValuePro	G7409 \mathcal{R}	3	50Ω male with pin and ferrule, for RG-174	3.59	3.25	2.95
311511	ValuePro	31-7000	10	75Ω plug, 3 pcs, crimp, for RG-6/212; Belden 9290/89248	1.95	1.75	1.59
311520	ValuePro	31-70008-1000	10	75Ω plug, 3 pcs, crimp, for RG-59/62; Belden 8241/8263/8279/9209	3.95	3.49	2.95
311538	ValuePro	31-71000-RFX	11	75Ω plug, 3 pcs, crimp, for RG-6/212; Belden 9290/89248	1.49	1.35	1.19
311546	ValuePro	31-71008-RFX	11	75Ω plug, 3 pcs, crimp, for RG-59/62; Belden 8241/8263/8279/9209	1.49	1.35	1.19
311554	ValuePro	31-71013-RFX	12	75Ω plug, 3 pcs, crimp, for RG-179/179B/187A; Belden 9221	1.29	1.15	.99
311572	ValuePro	31-71032 \mathcal{R}	3	75Ω plug, 3 pcs, crimp, for RG-59/140; Belden 8241/8279	2.95	2.49	1.95
295970	Amphenol Connex	112119 \mathcal{R} *	8	75Ω crimp plug, captive contact, for RG-59/62/140/210	1.49	1.35	1.19
296016	Amphenol Connex	112133 \mathcal{R} †	8	75Ω crimp plug, captive contact, for RG-179/187/B9221	.99	.95	.89
2098241	Amphenol Connex	112491-10 \mathcal{R}	3	75Ω crimp plug, for 100MHz RGB cable	1.95	1.75	1.59

Terminators

Part No.	Manufacturer	Product No.	Fig.	Description	1	10	50
71458	ValuePro	B-611T	13	BNC male terminator (50Ω)	\$1.95	\$1.39	\$1.19
71790	ValuePro	200-177	13	BNC male terminator (75Ω, 5%)	1.65	1.29	1.09
658540	Amphenol Connex	202100 \mathcal{R}	14	Male cap with chain	1.49	1.35	1.19
658523	Amphenol Connex	202103 \mathcal{R}	15	50Ω terminator plug	2.25	1.89	1.69
658531	Amphenol Connex	202105 \mathcal{R}	15	75Ω terminator plug	1.35	1.25	1.19

Jacks

Part No.	Manufacturer	Product No.	Fig.	Description	1	10	50
355120	ValuePro	31-203 \mathcal{R}	16	50Ω jack, panel mount, solder cup	\$2.95	\$2.65	\$2.25
355224	ValuePro	31-318-RFX \mathcal{R}	17	50Ω bulkhead jack, crimp, for RG-174/U; 188A/U; 316/U	1.95	1.75	1.59
355178	ValuePro	31-221	18	50Ω jack, panel mount, solder cup (UG-1094/U)	1.95	1.75	1.59
223511	Amphenol RF	31-221 \mathcal{R}	19	50Ω jack, panel mount, solder cup	2.25	1.95	1.75
658427	Amphenol Connex	112424 \mathcal{R}	21	50Ω bulkhead jack, solder terminal	1.85	1.65	1.49
296067	Amphenol Connex	112431 \mathcal{R}	22	50Ω bulkhead jack, isolated, solder terminal	3.29	3.19	2.95
658380	Amphenol Connex	112505 \mathcal{R}	20	50Ω bulkhead jack, crimp, for RG-55/U; 142A/U; 223/U; 400/U	1.95	1.75	1.59
658443	Amphenol Connex	112538 \mathcal{R}	23	50Ω jack, PCB mount, for all 50Ω coax cables	1.39	1.25	1.09
493917	AMP	227161-3	24	50Ω jack, right angle, PCB	2.49	2.25	1.95
421331	AMP	227726-3	25	50Ω jack, isolated, solder	2.49	2.25	1.95
111561	ValuePro	200-148	26	Jack, isolated, panel mount	2.29	1.95	1.79
160929	ValuePro	B211F-58 \mathcal{R}	27	Jack, crimp type, for RG-58	1.49	1.25	1.15
161922	ValuePro	B211F-174 \mathcal{R}	27	Jack, crimp type, for RG-174	1.95	1.65	1.45
2077618	Various	BNC-CR	28	Jack, chassis PCB receptacle	.75	.65	.59
146511	ValuePro	CH-7044S \mathcal{R}	29	Jack, right angle, plastic insulation, PC mount, w/ washer & nut	2.69	2.39	2.05
161656	ValuePro	CH-7087D	30	Jack, right angle, metal, PC mount	1.95	1.75	1.49
71590	ValuePro	G18235 \mathcal{R}	31	Jack, panel mount (UG-1094A)	1.95	1.79	1.65
1952821	Foxconn	KDA1001-H0	32	Jack, right angle, plastic insulation, PC mount	.95	.89	.75
174290	ValuePro	TBC-090 \mathcal{R}	16	Jack, chassis mount	1.85	1.59	1.19
174297	ValuePro	TBC-101	33	Jack, twist on, bulkhead	.99	.95	.89

* Use tool 667850, pg 85 † Use tool 667905, pg 85

\mathcal{R} RoHS compliant product

+ This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version.

Details on page 199.

50Ω/75Ω BNC Connectors and Adapters (Continued)

* Web Code: **BCA**

Adapters/Couplers

Part No.	Manufacturer	Product No.	Fig.	Description	1	10	50
311344	ValuePro	31-10-RFX	1	50Ω jack, bulkhead	\$2.45	\$2.25	\$1.95
188429	Amphenol RF	31-208-RFX	2	Jack-plug-jack	4.25	3.75	3.39
363961	ValuePro	31-218	3	50Ω straight adapter, plug-plug (UG-491A/U)	3.95	3.55	3.19
188411	Amphenol RF	31-219-RFX	4	50Ω straight adapter, jack-jack	3.95	3.49	3.15
355152	ValuePro	31-219-RFX	4	50Ω straight adapter, jack-jack (UG-914/U)	3.25	2.39	2.09
311351	ValuePro	31-220N-RFX	5	50Ω bulkhead adapter, jack-jack	2.39	2.19	1.95
72629	ValuePro	200-150	6	Female to female/female T-adapter	1.95	1.75	1.55
118594	ValuePro	200-155	7	Male to female/female T-adapter	1.95	1.75	1.55
71909	ValuePro	200-160	8	Female/female coupler (UG-914)	1.29	.95	.85
148224	ValuePro	200-165	9	Coupler, jack-jack, panel mount	1.95	1.89	1.69
100597	ValuePro	40958-Y	10	Male to female/female T-adapter (180°)	6.95	6.25	5.65
658451	Amphenol Connex	112437	11	50Ω jack-to-jack bulkhead adapter (all 50Ω coax cables)	2.95	2.85	2.75
658507	Amphenol Connex	112445	4	50Ω straight adapter, jack-jack	2.69	2.49	2.25
2115485	Emerson	27-8140	3	50Ω T-adapter, jack-plug-jack	1.65	1.49	1.25
296083	Amphenol Connex	112446	4	75Ω straight adapter, jack-jack	2.25	1.89	1.69
658515	Amphenol Connex	112461	12	50Ω T-adapter, jack-plug-jack	2.39	2.19	1.95
117461	ValuePro	B-068	13	Male to female/female F-adapter (90°)	4.49	3.95	3.49
127343	ValuePro	B-311	3	Male/male coupler (UG-491B/U)	2.39	2.05	1.69
148232	ValuePro	B-332-IF	9	Coupler, jack-jack, isolated	1.95	1.75	1.49
127352	ValuePro	B-412	14	Male to female right angle (DG-306B/O)	3.79	2.85	2.15

SMA/SMB Connectors

* Web Code: **SET**

SMA Connectors (50Ω)

Part No.	Manufacturer	Product No.	Fig.	Description	Plating	1	10	50
157972	ValuePro	19-03F-4TGG	15	Straight crimp type male plug (RG-58)	Gold	\$3.95	\$3.59	\$3.29
145382	ValuePro	19-46G	16	Straight female PCB mount, 4 legs	Gold	3.95	3.59	3.29
145374	ValuePro	19-49G	17	90° female PCB mount, 4 legs	Gold	3.95	3.59	2.95
355283	ValuePro	901-143-6-RFX	18	Jack, right angle, PC mount	Gold	4.95	4.45	3.95
188509	Amphenol RF	901-144-8-RFX	16	Jack, right angle, PC mount	Gold	3.49	3.15	2.85
355292	ValuePro	901-9876-RFX	19	Straight plug, crimp (RG-58/U; RG-58C/U; 141)	Nickel	2.55	2.19	1.79
188488	Amphenol RF	901-9877-RFX	20	Straight plug, crimp (RG-174/U; RG-188A/U; RG-316/U)	Gold	2.95	2.65	2.39
355304	ValuePro	901-9877-RFX	20	Straight plug, crimp (RG-174/U; RG-188A/U; RG-316/U)	Gold	2.49	2.25	1.95
153366	ValuePro	4804	20	Straight crimp type male plug (RG-174)	Gold	2.95	2.65	2.39
296227	Amphenol Connex	132101	21	Straight cable plug w/ contact (RG-405U)	Gold	2.79	2.49	2.25
296251	Amphenol Connex	132105	22	Bulkhead feed-through jack (RG-405U)	Gold	3.49	3.19	2.95
296315	Amphenol Connex	132113	21	Straight crimp plug (RG-58/58A/58C/141/303)	Gold	2.69	2.39	2.19
296323	Amphenol Connex	132114	21	Straight crimp plug (RG-174/188/316/B7805A)	Gold	2.25	2.09	1.95
658849	Amphenol Connex	132118	23	Bulkhead crimp jack (RG-58/58A/58C/141/303)	Gold	3.49	3.19	2.95
296331	Amphenol Connex	132119	23	Bulkhead crimp jack (RG-174/188A/316/B7805A)	Gold	3.95	3.69	3.39
296366	Amphenol Connex	132123	24	Right angle crimp plug (RG-174/188A/316/B7815A)	Gold	4.49	3.95	3.69
296374	Amphenol Connex	132134	16	Straight jack, PCB	Gold	2.95	2.69	2.39
658996	Amphenol Connex	132136	17	Right angle jack, PCB	Gold	3.95	3.69	3.39
658961	Amphenol Connex	132198	25	Straight crimp jack (RG-316U double braided)	Gold	3.49	2.95	2.65
159531	ValuePro	CH-7814	26	Female panel mount, 4 mounting holes (G-58/174)	Gold	3.75	3.15	2.95
160022	ValuePro	CH-7815-G	27	Female panel mount, 2 mounting holes (RG-58/174)	Gold	4.79	3.75	3.55
160013	ValuePro	CH-7818-N	28	Panel mount feed thru, female-female	Nickel	4.95	4.25	3.75
153286	ValuePro	SMA-7813	29	Bulkhead solder female w/ washer, rear mount (RG-58/174)	Gold	2.95	2.65	2.39

* Use crimp tool 667905, pg 85

† Use crimp tool 667921, pg 85

‡ Solder cup

SMB Connectors

* Web Code: **SCS**


Part No.	Manufacturer	Product No.	Fig.	Description	Plating	1	10	50
444824	Cinch	SMB50-1301	30	50Ω jack, straight, PCB mount	Gold	\$3.39	\$3.09	\$2.89
659358	Amphenol Connex	142186	31	Straight crimp plug (RG-174/188A/316/B7805A)	Gold	4.95	4.49	3.95
167312	ValuePro	24-12-2TGG-R	32	Right angle jack, PCB mount	Gold	3.49	3.19	2.95
172364	ValuePro	24-07L-1-TGG	33	50Ω bulkhead crimp jack	Gold	3.69	3.29	2.95
172372	ValuePro	24-05L-1-TGG-R	34	50Ω cable crimp plug	Gold	2.95	2.65	2.39

SMA Adapters, Couplers & Terminator on next page

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com


87



SMA Adapters, Couplers and Terminator

Part No.	Manufacturer	Product No.	Fig.	Description	Plating	1	10	50
659032	Amphenol Connex	132168	1	50Ω plug-to-plug adapter	Gold	\$5.95	\$5.35	\$4.79
659041	Amphenol Connex	132169	2	50Ω jack-to-jack adapter	Gold	5.49	4.95	4.45
659059	Amphenol Connex	132170	3	50Ω jack-to-jack adapter, bulkhead feed-through	Gold	6.49	6.25	5.95
659083	Amphenol Connex	202112	4	Plug cap	Nickel	.99	.89	.79
161294	ValuePro	S-311-G	5	Straight coupler male-male	Gold	2.95	2.65	2.39
161307	ValuePro	S-412-G	6	Right angle coupler male-female	Gold	4.95	4.45	3.95
153294	ValuePro	SMA-7817	7	Straight coupler female - jack-to-jack	Gold	3.49	3.15	2.79

SMA/SMB 50Ω Coax Cables

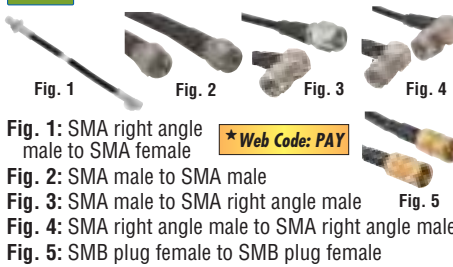

Part No.	Cable	Fig.	Lgth (ft.)	1	10	50
2099391	RG-58	1	0.5	\$1.95	\$1.75	\$1.59
159371	RG-58	2	2	4.95	4.49	3.95
159397	RG-58	2	6	5.95	5.35	4.75
169801	RG-174	2	0.5	4.75	4.25	3.75
163855	RG-174	2	1	4.95	4.49	3.95
153382	RG-174	2	2	4.95	4.49	3.95
153391	RG-174	2	4	5.25	4.75	4.25
159451	RG-174	2	6	7.95	6.95	6.25
175127	RG-174	3	0.5	4.95	4.49	3.95
175135	RG-174	3	1	4.95	4.49	3.95
175143	RG-174	4	0.5	4.95	4.49	3.95
175152	RG-174	4	1	5.95	5.35	4.75
175178	RG-174	5	1	4.95	4.49	3.95

BNC Male Coax Cables



Part No.	Description	1	10	50
176794	3' BNC to BNC	\$4.95	\$4.49	\$3.95
176815	6' BNC to BNC	5.25	4.75	4.25

RG59/U 75Ω CATV & Video Patch Cords

Part No.	Cross Ref. No.	Length (ft.)	1	10	50
86472	CRG59-1	1.5	\$3.49	\$3.19	\$2.89
85543	CRG59-6	6	3.69	3.25	2.95
102373	CRG59-12	12	4.95	4.49	3.95
262730	EBC-525	25	5.95	5.49	4.95
262748	EBC-550	50	7.95	6.95	6.29
262764	EBC-510	100	12.95	11.95	10.95

RG174/U 50Ω Network & Oscilloscope Cables

Part No.	Description	Length (ft.)	1	10	50
111473	RG174U3	3	\$4.95	\$4.49	\$3.95
111482	RG174U6	6	6.95	6.25	5.49

RG58/U 50Ω Network & Oscilloscope Cables

Part No.	Cross Ref. No.	Length (ft.)	1	10	50
181308	CRG58-1RR	1	\$3.95	\$3.55	\$3.19
102315	CRG58-1	1.5	3.95	3.55	3.19
256743	CBB-224-24	2	4.95	4.49	3.95
11404	CRG58-3	3	4.95	4.49	3.95
102331	CRG58-6	6	3.95	3.55	3.19
180822	CRG58-10	10	4.95	4.49	3.95
102350	CRG58-12	12	4.95	4.49	3.95
169818	CRG58-15	15	5.95	5.35	4.75
102357	CRG58-25	25	6.95	6.25	5.49
102365	CRG58-50	50	9.95	8.95	7.95
102381	CRG58-100	100	12.95	11.49	9.95

"F" Connector Patch Cables

- For use with cable TV and video



Part No.	Cross Ref. No.	Length (ft.)	1	10
287101	205-415BK	6	\$1.49	\$1.25
297668	205-440BK-GW1B	75	3.95	3.59

Part No.	Cross Ref. No.	Length (ft.)	1	10
85585	205-010BK	3	\$.49	\$.45

AVAGO

Fiber Optic Transceivers

Part No.	Mfr. Part No.	Description	1	5
1553336	HFBR-53A5VEM	850nm, SC duplex 3.3V, E shield	\$94.95	\$84.95
1553352	HFBR-5710LP	For gigabit ethernet	94.95	84.95
1584722	HFBR-5701LP	For gigabit ethernet & fiber channel	94.95	84.95

Miniature Link Package Transmitters

Part No.	Mfr. Part No.	Description	1	5
1584562	HFBR-1404Z	SMA, Tx high power	\$11.95	\$10.95
1552616	HFBR-1412	ST, Tx standard power	7.95	6.95
1552624	HFBR-1412T	ST, Tx standard power, threaded port	7.95	6.95
1552632	HFBR-1412TM	ST, Tx standard power, threaded/metal port	14.95	13.49
1584571	HFBR-1412TZ	ST, Tx standard power, threaded port	14.95	13.49
1552641	HFBR-1414	ST, Tx high power	9.95	8.95
1584597	HFBR-1414TZ	ST, Tx high power, threaded port	8.95	7.95

Miniature Link Package Receivers

Part No.	Mfr. Part No.	Description	1	5
1584642	HFBR-2402Z	SMA, Rx, 5MBd, TTL output	\$11.95	\$10.95
1552894	HFBR-2412	ST, Rx, 5MBd, TTL output	8.95	7.95

Discrete Optical Components

Part No.	Mfr. Part No.	Description	1	5
1552587	HFBR-1312T	32/160 MBd, 5000m, ST	\$19.95	\$18.95
1552595	HFBR-1312TZ	32/160 MBd, 5000m, ST	44.95	39.95
1552851	HFBR-2316T	32/160 MBd, 5000/2000m, ST	29.95	28.95
1552860	HFBR-2316TZ	32/160 MBd, 5000/2000m, ST	44.95	39.95

Fiber Optics

* Web Code: NBR



Versatile Link Package Transmitters

Part No.	Mfr. Part No.	Description	1	5
1552712	HFBR-1521	5MBd, 20 POF, -40°C to 85°C	\$6.95	\$6.39
1552739	HFBR-1523	40kBd, 110 POF, -40°C to 85°C	9.95	8.95
1552763	HFBR-1527	32/125MBd, 40/30 POF, 1000/100 HCS, 0°C to 70°C	9.95	8.95
1552771	HFBR-1528	10MBd, 100 POF, 900 HCS, 40°C to 85°C	5.95	5.49
1552798	HFBR-1532	1MBd, 45 POF, 0°C to 70°C	6.95	6.49

Versatile Link Package Receiver

Part No.	Mfr. Part No.	Description	1	5
1553109	HFBR-2532	1MBd, 45 POF, 0°C to 70°C	\$4.95	\$3.95

2-Channel Enclosed Encoder

Part No.	Mfr. Part No.	Description	1	5
1584538	HEDS-9100\$H00	2-ch, incremental encoder, 400CPR	\$12.95	\$11.95

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

10' Fiber Optic Cable

INDUSTRIAL FIBER OPTICS

*Web Code: QAA

- 1000µm core jacketed plastic fiber optic cable (10')

Part No.	Mfr. Part No.	1	10
171272	IF-C-E1000	\$5.95	\$5.35

Fiber Optic Lab Kit

INDUSTRIAL FIBER OPTICS

- 9 different activities
- Ideal for the lab environment
- Teaches the fundamentals of fiber

Part No.	Mfr. Part No.	1	5
169914	IF-LMH	\$59.95	\$49.95

3M Spring Connectors



- 285683: 2#22 to 2#12AWG, orange with blue skirt
- 285691: 2#18 to 2#8 to 5#12 AWG, red w/ yellow skirt
- 285704: 4#14 to 2#6 to 3#8 AWG, blue w/ gray skirt


* Order in multiples of 10

Part No.	Mfr. Part No.	1	10	100
285683	054007-43152	*	\$.15	\$.12
285691	054007-43154	*	.15	.12
285704	054007-43150	.29	.28	.19

EGE Telecom Splice Connectors

Provides clean, solid and rapid connection of wires to keep lines free of noise

169755: Y-type



Part No.	Color	AWG	Conductors	1	10	100
169747	Yellow	22-26	2	\$.25	\$.22	\$.15
169755	Red	19-26	3Y	.29	.25	.19

Wire Connectors



- Material: UL approved nylon 66, 94V2
- Strip wire before application
- Twist on type
- 182450/2121543: Nylon 66, 94-2 UL/CSA approved
- 140717: PE - metal inside


Order in multiples of 10

Part No.	Description	10	100	1000
140717	Wire IDC 22-18 AWG	\$.09	\$.07	\$.05
182511	Wire nut 16 AWG	.09	.07	.05
182450	Crimp 16-14 AWG	.19	.15	.12
2121543	Crimp 8-6 AWG	.25	.19	.15

* Requires crimping tool (P/N 72996, pg 91)

*Wire Caps Available Online — Enter Web Code QBZ

Helping You Find What You Need



Can't find the product
you're looking for?
Call us at 1-800-831-4242.

CINCH Double Row Barrier Blocks

- Insulation: molded mono block, general purpose phenolic, black, UL94V-1
- Screw material: steel with nickel over copper flash plating
- Solder terminal material: brass w/ electro-tin plating

*Web Code: YBM

140 Series 15A

- 3750-watts/terminal max.
- 16 AWG wire max.
- Size: 0.88"W x 0.41"H
- Screw: 5-40 x 3/16"
- Density: 0.375"



Part No.	Mfr. P/N	Pos.	Length	1	10	100
230973	2-140	2	1.41"	\$1.39	\$1.25	\$1.09
230981	3-140	3	1.78"	1.49	1.35	1.19
230990	4-140	4	2.16"	1.79	1.49	1.29
231010	6-140	6	2.91"	2.19	1.69	1.49
231036	8-140	8	3.66"	2.89	2.49	2.09
231052	10-140	10	4.41"	3.49	2.89	2.39
231061	12-140	12	5.16"	4.49	3.95	3.49
1775983	14-140	14	5.91"	4.59	3.39	3.09

141 Series 20A

- 5000-watts/terminal max.
- 14 AWG wire max.
- Size: 1.13"W x 0.5"H
- Screw: 6-32 x 1/4"
- Density: 0.438"



Part No.	Mfr. P/N	Pos.	Length	1	10	100
2100021	3-141	3	1.78"	\$1.39	\$1.19	\$.99
231378	4-141	4	2.50"	1.69	1.49	1.35
231394	6-141	6	3.38"	2.35	1.89	1.59
231415	8-141	8	4.25"	2.95	2.59	2.29
231431	10-141	10	5.13"	3.39	2.89	2.39
231440	12-141	12	6.00"	3.59	3.29	2.95

142 Series 30A

- 7500-watts/terminal max.
- 10 AWG wire max.
- Size: 1.312"W x 0.625"H
- Screw: 8-32 x 5/16"
- Density: 0.563"



Part No.	Mfr. P/N	Pos.	Length	1	10	100
440891	8-142	8	5.47"	\$4.95	\$4.49	\$3.95

Terminal Block Jumpers

For connecting between adjacent terminals or alternate terminals.

- 2-position
- Brass w/ nickel plating



Part No.	Mfr. Part No.	1	10	100
659382	140J-1 (140 series)	\$.25	\$.22	\$.19
448500	141J (141 series)	.35	.29	.25

JAMECO ValuePro European Terminal Blocks

- Number of poles: 12
- Terminal insert: brass metal alloy, nickel plated
- Material: polyamide 66 (nylon 66), UL94V-2, natural
- Screws: zinc plated, yellow chromed

*Web Code: CBJ

Part No.	Cross Ref.	Amps	AWG	1	10	100
2120161	ES0800/12DS	* 10A	16-20	\$1.29	\$1.19	\$1.05
2120170	ES01000/12DS	* 20A	12-20	1.39	1.29	1.15
215011	PA8HDS	†	20A	1.59	1.39	1.19
215029	PA10HDS	†	30A	1.95	1.79	1.59
215037	PA12HDS	†	35A	2.49	2.25	2.09

* 300V † 450V



Metric Double Row Terminal Blocks

- Body: black thermoplastic (UL94V-0)
- Terminals: brass tin plated
- Screws: steel nickel plated
- 12-18 AWG



207572

*Web Code: SBG

10A @ 600V

- Screw size: M3.0
- Size: 19.5mm W x 11.9mm H

Part No.	Cross Ref.	Pos.	Lgth (mm)	1	10	100
208857	GGE-10-4P	4	55	\$.95	\$.75	\$.69
208865	GGE-10-6P	6	74	1.29	1.15	.99
208873	GGE-10-8P	8	102.5	1.39	1.19	1.09
208900	GGE-10-10P	10	112	1.95	1.75	1.59
208882	GGE-10-12P	12	131	2.29	2.09	1.89

20A @ 600V

- Screw size: M3.5
- Size: 22.0mm W x 13.2mm H

Part No.	Cross Ref.	Pos.	Lgth (mm)	1	10	100
207538	GGE-20-4P	4	63.5	\$.89	\$.79	\$.65
207547	GGE-20-6P	6	85.3	1.59	1.39	1.25
207554	GGE-20-8P	8	107.1	1.79	1.59	1.45
207563	GGE-20-10P	10	128.9	2.19	1.95	1.85
207572	GGE-20-12P	12	150.7	2.95	2.59	2.29

KULKA® Double Row Terminal Block

- Base: general purpose phenolic; 150°C
- Screws: #6-32, binder head, phillips-slot
- Terminals: brass plated .437" (11 mm) centers
- 1100Vrms; 20A ratings; for 14-16 AWG wires
- Open block design
- Size: 1.12"W x 0.5"H



Part No.	Mfr. Part No.	Pos.	Length	1	10
188672	601GP8	8	4.25"	\$3.95	\$3.49

molex® BEAU Terminal Blocks

- 0.375" double row
- Wire AWG range: 12-24AWG
- Terminal: brass, nickel plated
- Insulator: thermoplastic, UL94V-0
- Screws: #6-32 steel, zinc chromate plate



Part No.	Mfr. Part No.	Beau No.	Pos.	1	10	100
659391	38770-0102	77002	2	\$1.29	\$1.15	\$.99
659411	38770-0104	77004	4	1.95	1.79	1.59
659454	38770-0108	77008	8	2.49	2.25	1.95
659489	38770-0112	77012	12	3.95	3.49	2.95



DIN Rail-Mounted Terminal Block & DIN Rail

- Molded thermoplastic
- 12-22 AWG
- Spacing: 5.06mm (.199")
- UL rated voltage and current: 600V @ 20A



Part No.	Mfr. Part No.	Type	1	10	100
237083	41296.2	SR2.5	\$.89	\$.79	\$.69
248736	2094.0(IM)	TS35 x 7.5	6.95	6.29	5.49

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

Terminal Blocks & Solderless Terminal Kit

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE



Terminal Blocks

NEW
MARKED IN PINK

• For detailed specifications, please see our website at www.Jameco.com



* Web Code: XBD

Part No.	Mfr.	Mfr. Part No.	Fig.	Term.	Terminal Spacing	Description	1	10	100
2094506	OST	OSTTE020161R	1	2	0.138"/3.5mm	Top screw	\$.29	\$.25	\$.19
2094522	OST	OSTTF020161R	2	2	0.138"/3.5mm	Side screw	.35	.29	.25
2120680	OST	OSTEH022160R	3	2	0.138"/3.5mm	Top screw	.49	.45	.39
2124411	OST	OSTTE040161R	1	4	0.138"/3.5mm	Top screw	.65	.59	.55
2094514	OST	OSTTE030161R	1	3	0.138"/3.5mm	Top screw	.39	.35	.29
2094531	OST	OSTTF030161R	2	3	0.138"/3.5mm	Side screw	.45	.39	.35
2120698	OST	OSTEH032160R	3	3	0.138"/3.5mm	Top screw	.75	.69	.65
2094565	OST	OSTTJ0231530R	4	2	0.150"/3.81mm	R/A screw	.65	.59	.55
2094602	OST	OSTTS02315A	5	2	0.150"/3.81mm	Top screw	.55	.49	.45
2094629	OST	OSTTS02315B	6	2	0.150"/3.81mm	Top screw	.55	.49	.45
2094645	OST	OSTTO023250R	7	2	0.150"/3.81mm	Vertical header	*	.19	.15
2094661	OST	OSTTO023251R	8	2	0.150"/3.81mm	R/A header	*	.19	.15
2094573	OST	OSTTJ0331530R	4	3	0.150"/3.81mm	R/A screw	.95	.85	.75
2094611	OST	OSTTS03315A	5	3	0.150"/3.81mm	Top screw	.88	.75	.69
2094637	OST	OSTTS03315B	6	3	0.150"/3.81mm	Top screw	.85	.75	.69
2094653	OST	OSTTO033250R	7	3	0.150"/3.81mm	Vertical header	.29	.25	.22
2094670	OST	OSTTO033251R	8	3	0.150"/3.81mm	R/A header	.29	.25	.22
2120621	OST	OSTTB020161R	2	2	0.197"/5mm	Side screw	.35	.29	.25
2094485	OST	OSTTA020161R	9	2	0.197"/5mm	Top screw	.29	.25	.19
2094549	OST	OSTTG0201600R	10	2	0.197"/5mm	45° angle screw	.35	.29	.25
160785	Dinkle	EK500V-02P	11	2	0.197"/5mm	Top screw	.59	.55	.45
164794	OST	OSTTH020160R	3	2	0.197"/5mm	Top screw	.65	.59	.49
99427	Dinkle	128V2P-R	12	2	0.197"/5mm	Top screw	.79	.59	.49
189676	OST	OSTTC020162R	13	2	0.197"/5mm	Top screw	.79	.59	.49
211067	Dinkle	EK500A-02P	14	2	0.197"/5mm	45° angle screw	.85	.75	.55
2120735	OST	OSTHT020080R	15	2	0.197"/5mm	45° angle screw	.69	.65	.59
2120639	OST	OSTTB030161R	2	3	0.197"/5mm	Side screw	.49	.45	.39
2094493	OST	OSTTA030161R	9	3	0.197"/5mm	Top screw	.39	.35	.29
2094557	OST	OSTTG0301600R	10	3	0.197"/5mm	45° angle screw	.55	.49	.45
2081203	Dinkle	ED500V-3P	16	3	0.197"/5mm	Top screw	.49	.45	.39
189668	OST	OSTTC030162R	13	3	0.197"/5mm	Top screw	.89	.79	.69
99398	Dinkle	DT128V3P	12	3	0.197"/5mm	Top screw	.95	.89	.79
160793	Dinkle	EK500V-03P	11	3	0.197"/5mm	Top screw	.95	.89	.79
164806	OST	OSTTH030160	3	3	0.197"/5mm	Top screw	.95	.89	.79
161059	Dinkle	EK500A-03P	14	3	0.197"/5mm	45° angle screw	1.15	.95	.85
2120743	OST	OSTHT030080R	15	3	0.197"/5mm	45° angle screw	.95	.85	.75
2124429	OST	OSTTA040161R	9	4	0.197"/5.0mm	Top screw	.55	.49	.45
2124437	OST	OSTTH040160R	3	4	0.197"/5.0mm	Top screw	.65	.59	.55
2124453	OST	OSTTC040162R	13	4	0.197"/5.0mm	Top screw	.55	.49	.45
2124470	OST	DT128V4P-R	12	4	0.197"/5.0mm	Top screw	.95	.89	.79
2124488	OST	EK500V-04P-R	11	4	0.197"/5.0mm	Top screw	.75	.69	.65
2124461	OST	EK500A-04P-R	14	4	0.197"/5.0mm	Top screw	.65	.59	.55
2094477	OST	OSTOP240200R	23	24	0.197"/5mm	1.3 x 1.0mm	1.19	1.09	.95
164815	OST	OSTOP240000R	23	24	0.197"/5mm	1.3 x 1.3mm	1.59	1.39	1.19
2120567	OST	OSTYC022150R	11	2	0.200"/5.08mm	Top screw	.45	.39	.35
2094688	OST	OSTOQ025450R	17	2	0.200"/5.08mm	Vertical header	*	.19	.15
2094709	OST	OSTOQ025451R	18	2	0.200"/5.08mm	Vertical header	*	.19	.15
2120647	OST	OSTTC022162R	1	2	0.200"/5.08mm	Top screw	.29	.25	.19
2094581	OST	OSTTJ025153R	19	2	0.200"/5.08mm	Top screw	.65	.59	.55
152347	OST	OSTTA024163R	20	2	0.200"/5.08mm	Top screw	.65	.55	.45
2094696	OST	OSTOQ035450R	17	3	0.200"/5.08mm	Vertical header	*	.19	.15
2094717	OST	OSTOQ035451R	18	3	0.200"/5.08mm	Vertical header	*	.19	.15
2120575	OST	OSTYC032150R	11	3	0.200"/5.08mm	Top screw	.55	.49	.45
2120655	OST	OSTTC032162R	1	3	0.200"/5.08mm	Top screw	.39	.35	.29
152355	OST	OSTTA0304163R	20	3	0.200"/5.08mm	Top screw	.49	.45	.39
2094590	OST	OSTTJ035153R	19	3	0.200"/5.08mm	Top screw	.89	.79	.69
249084	OST	EDZA750/30	21	3	0.200"/5.08mm	Top screw	2.19	1.95	1.75
2124445	OST	OSTTA044163R	20	4	0.200"/5.08mm	Top screw	.55	.49	.45
276672	Buchanan	6PCV-05-006	22	6	0.375"/9.53mm	Top screw	1.49	1.29	1.15



Fig. 1



Fig. 2




Fig. 3



Fig. 4



Fig. 5



Fig. 6




Fig. 7



Fig. 8



Fig. 9



Fig. 10



Fig. 11



Fig. 12



Fig. 13



Fig. 14



Fig. 15



Fig. 16



Fig. 17



Fig. 18



Fig. 19



Fig. 20



Fig. 21



Fig. 22



Fig. 23 (use w/ Fig. 11)

3M Electrical Connector Kit

• 79 pieces

Part No.	1	10
651954 R	\$9.95	\$8.95



171-Pc. Solderless Terminal Kit

170 Terminals and Connectors!

- Clear, hinged plastic box
- Use crimping tool P/N 72996, pg 91



Qty.	Description	Wire Gauge	Blade Size	Qty.	Description	Wire Gauge	Blade Size
10	Male spade	22-16	1/4"	10	Ring term.	16-14	#10
10	Male spade	16-14	1/4"	5	Ring term.	12-10	#10
10	Fem. spade	22-16	1/4"	5	Ring term.	12-10	#14
10	Fem. spade	16-14	1/4"	10	Spade term.	16-22	#6
10	Ring term.	22-16	#6	10	Spade term.	16-22	#8
10	Ring term.	22-16	#8	10	Spade term.	16-14	#10
10	Ring term.	16-14	#10	10	Butt conn.	16-22	—
15	Ring term.	16-14	#6	10	Butt conn.	16-14	—
10	Ring term.	16-14	#8	5	Butt conn.	12-10	—

Part No.	Product No.	1	10	25
10990	G1C175-R	\$14.95	\$13.49	\$11.95

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

AMP **molex**

JAMECO ValuePro

Terminals, Splices and Quick Connect/Disconnect

★ Web Code: TSQ



Ring Tongue Terminals

* Order in multiples of 10									
Part No.	Mfr.	Product No.	Fig.	Insul.	Stud Size	AWG	Color	1	10 100
302594	AMP	323912	1	Nylon	#2	26-22	Yellow *	\$.19 \$.15
302658	AMP	31880	1	Nylon	#4	22-16	Red25	.22 .15
302666	AMP	36152	2	Plastic	#6	22-16	Red25	.22 .15
103684	ValuePro	20483	2	Plastic	#6	22-16	Red *	.19 .15
302674	AMP	31890	2	Plastic	#8	22-16	Red *	.19 .15
844220	AMP	34104	3	Uninsul.	#4	22-16	— *	.15 .12
844289	AMP	34107	3	Uninsul.	#6	22-16	— *	.15 .12
844377	AMP	34111	3	Uninsul.	#8	22-16	— *	.15 .12
844406	AMP	34112	3	Uninsul.	#10	22-16	— *	.15 .12
302720	AMP	320619	1	Nylon	#6	16-14	Blue *	.15 .12
302746	AMP	36160	1	Nylon	#10	16-14	Blue *	.15 .12
302754	AMP	321045	1	Nylon	#1/4	16-14	Blue25	.22 .17
302797	AMP	35108	1	Nylon	#8	12-10	Yellow25	.22 .17
302800	AMP	35109	1	Nylon	#10	12-10	Yellow25	.22 .17
847560	AMP	36158	1	Nylon	#6	16-14	Blue25	.22 .17
302738	AMP	320565	2	Nylon	#8	16-14	Blue25	.22 .17

Spade Tongue Terminals

* Order in multiples of 10									
Part No.	Mfr.	Product No.	Fig.	Insul.	Stud Size	AWG	Color	1	10 100
302851	AMP	328394	4	Nylon	#2	22-16	Red *	\$.19 \$.17
2125780	3M	MOVU18-4FLK	4	Vinyl	#4	22-16	Red *	.19 .15
302869	AMP	327717	4	Nylon	#4	22-16	Red35	.29 .25
302877	AMP	34541	4	Nylon	#6	22-16	Red25	.22 .17
103588	ValuePro	SVS1-3.7	4	Vinyl	#6	22-16	Red *	.12 .09
302885	AMP	32053	4	Nylon	#8	22-16	Red55	.49 .45
842929	AMP	323127	5	Uninsul.	#6	22-16	—25	.22 .17
502879	Molex	19144-0001	6	PVC	#5-6	18-22	Red25	.22 .17
302906	AMP	35559	4	Nylon	#6	16-14	Blue25	.22 .17
302914	AMP	32059	4	Nylon	#8	16-14	Blue25	.22 .17
103596	ValuePro	SVM-2	4	Vinyl	#8	16-14	Blue *	.15 .12
302949	AMP	326859	4	Nylon	#6	12-10	Yellow	.39	.36 .33
302957	AMP	32588	4	Nylon	#8	12-10	Yellow	.39	.35 .29
511265	AMP	19144-0043	4	PVC	#10	12-10	Yellow	.25	.22 .17
502801	AMP	19141-0085	4	Uninsul.	#10	12-10	— *	.12 .09

Flanged Spade Tongue Terminals

Part No.	Mfr.	Mfr. Part No.	Fig.	Insul.	Stud Size	AWG	Color	1	10 100
302973	AMP	324608	7	PVC	#2	22-16	Red	.. \$.29	\$.25 \$.19
303010	AMP	320862	7	Nylon	#8	16-14	Blue25	.22 .17

Short Spring Spade Tongue Terminals

* Order in multiples of 10									
Part No.	Mfr.	Mfr. Part No.	Fig.	Insul.	Stud Size	AWG	Color	1	10 100
303087	AMP	52930	8	Nylon	#8	22-16	Red *	\$.17 \$.15
303132	AMP	52941	8	Nylon	#6	12-10	Yellow	... *	.17 .15
303141	AMP	52942	8	Nylon	#8	12-10	Yellow	.29	.25 .22
303159	AMP	52943	8	Nylon	#10	12-10	Yellow	.29	.25 .19

Spade Solderless Terminal Noninsulated

							Order in multiples of 10		
Part No.	Mfr.	Mfr. Part No.	Fig.	AWG	Material	Width (in.)	10	100	1000
502705	Molex	19141-0022	21	18-22	Copper	0.326	\$.09	\$.07	\$.05

See page 43 for Solderless Terminal Grab Bag (P/N 2082118).

Solderless Terminal Crimping Tool

- Crimps solderless terminals: 18-22 AWG red, 14-16 AWG blue and 10-12 AWG yellow



Part No.	Mfr. Part No.	Size	1	10	25
72996	HT303	9.0"L x 2.0"W
			\$22.49	\$18.95	\$14.49

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Butt & Knife Disconnect Splices

* Order in multiples of 10									
Part No.	Mfr.	Mfr. Part No.	Fig.	Insul.	Type	AWG	Color	1	10 100
303167	AMP	323994	9	Nylon	Butt	24-20	Natural	.. \$.49	\$.45 \$.39
303175	AMP	320559	9	Nylon	Butt	22-16	Red55	.49 .45
494469	Molex	19215-0009	10	Uninsul.	Butt	22-18	— *	.15 .12
491305	Molex	19164-0013	11	NiAC	Butt	22-18	Red45	.39 .35
503062	Molex	19154-0004	9	PVC	Butt	18-22	Red *	.15 .12
303183	AMP	320562	9	Nylon	Butt	16-14	Blue55	.49 .45
511530	Molex	19154-0030	9	PVC	Butt	12-10	Natural *	.17 .15
303221	AMP	35762	12	Nylon	Knife	12-10	Yellow99	.89 .79

Quick Connect/Disconnect Female Terminals

* Order in multiples of 10									
Part No.	Mfr.	Product No.	Fig.	Insul.	Size (ins.)	AWG	Color	1	10 100
303280	AMP	640903-1	13	Nylon	.250 x .032	22-18	Red	.. \$.25	\$.22 \$.15
489627	Molex	19003-0001*	14	Nylon	.250 x .032	22-18	Red *	.15 .12
489475	Molex	19002-0001	15	Nylon	.250 x .032	22-18	Red35	.29 .25
489758	Molex	19005-0001	14	Nylon	.250 x .032	22-18	Red29	.22 .15
303255	AMP	640917-1	13	Nylon	.187 x .020	22-18	Red25	.22 .15
489643	Molex	19003-0017*	14	Nylon	.187 x .032	22-18	Red25	.22 .15
461042	Molex	19019-0009	13	Nylon	.187 x .032	22-18	Red29	.25 .19
489635	Molex	19003-0011*	14	Nylon	.187 x .020	22-18	Red29	.22 .15
524197	AMP	2-520182-2	16	Nylon	.187 x .020	22-18	Red25	.22 .15
303247	AMP	640923-1	13	Nylon	.110 x .020	22-18	Red25	.22 .15
2121551	Various	QCD187	17	Nylon	.187 x .032	22-16	Clear *	.19 .15
109112	ValuePro	GFF1250	18	Vinyl	.250 x .032	22-16	Red25	.22 .15
103668	ValuePro	FVD1-250	13	Vinyl	.250 x .032	22-16	Red *	.15 .12
106922	ValuePro	FVD1-187	13	Vinyl	.187 x .032	22-16	Red *	.12 .09
303327	AMP	640905-1	13	Nylon	.250 x .032	16-14	Blue25	.22 .15
489766	Molex	19005-0005	14	Nylon	.250 x .032	16-14	Blue25	.22 .16
489678	Molex	19003-0040*	14	Nylon	.250 x .032	16-14	Blue *	.15 .12
489871	Molex	19007-0021*	19	Nylon	.250 x .032	16-14	Blue35	.29 .25
303301	AMP	640919-1	13	Nylon	.187 x .020	16-14	Blue *	.17 .15
489694	Molex	19003-0050*	14	Nylon	.187 x .020	16-14	Blue29	.22 .15
1963811	Molex	19003-0055	18	Nylon	.187 x .020	16-14	Blue29	.25 .19
303298	AMP	640929-1	13	Nylon	.110 x .020	16-14	Blue25	.22 .19
303343	AMP	640907-1	13	Nylon	.250 x .032	12-10	Yellow	.35	.29 .25
489774	Molex	19005-0010	14	Nylon	.250 x .032	10-12	Yellow	.35	.29 .25

* Translucent

Quick Connect/Disconnect Male Terminals Insulated


Part No.	Mfr.	Mfr. Part No.	Fig.	Insul.	Size (ins.)	AWG	Color	1	10 100
489723	Molex	19004-0001	15	Nylon	.250 x .032	22-18	Red	.. \$.29	\$.25 \$.19
489432	Molex	19001-0003	15	Nylon	.187 x .020	22-18	Red35	.29 .25
489731	Molex	19004-0005	15	Nylon	.250 x .032	16-14	Blue29	.25 .19

Printer Circuit Board Male Quick Connect

Part No.						Order in multiples of 10		
Mfr.	Mfr. Part No.	Fig.	Material	Size (ins.)	10	100	10000	
853927	AMP	63824-1	20	Tin/Copper	.250 x .032	\$.09	\$.08	\$.07

Solderless Terminal/Quick Connect Cable Assembly

- 2100056: #6 stud ring tongue terminal 22-16 AWG (fig. 1) and #6 stud spade tongue terminal 22-16 AWG (fig. 4)
- 2100081: #6 stud spade tongue terminal 22-16 AWG (fig. 4) and .250" quick connect/disconnect connector 22-16 AWG (fig. 14)
- 2100099: Dual cable, .250" quick connect/disconnect connector 22-16 AWG and .110" quick connect/disconnect connector 22-16 AWG (fig. 14)



Part No.	Product No.	Wire	Length	1	10	100	1000
2100056	STCA-11	18 AWG (green)	11"
				\$.59	\$.45	\$.39	\$.35
2100081	STQC-13	18 AWG (green)	13"
				.69	.55	.49	.45
2100099	QCDC-39	18 AWG (black & white)	39"
				.89	.65	.59	.49


Binary, Basic & Snap Switches

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

JAMECO ValuePro

Binary Coded Decimal (BCD) Switches

- Contact resistance: 100mΩ max.
- Contacts: gold plated BE-CU alloy
- Front snap-tab mounting w/ end plates
- Continuous load: 1 amp max.
- 28VDC @ 0.15A



Part No.	Manufacturer	Cross Ref. No.	Description	Dimensions (L" x W" x D")	Character Height	Pricing		
						1	10	100
26789	ValuePro	GPF311221	10-position pushbutton	1.2 x 0.3 x 1.7	0.19"	\$4.49	\$3.95	\$3.59
26761	ValuePro	PF31E10	End plates for 26789 (2)	1.2 x 0.2 x 1.1	—	.95	.85	.75
26818	ValuePro	GTF311211	10-position thumbwheel	1.2 x 0.3 x 1.9	0.25"	4.49	3.95	3.59
26771	ValuePro	TF31E10	End plate for 26818 (2)	1.2 x 0.2 x 1.3	—	.95	.85	.75

JAMECO ValuePro

Mini Pushbutton BCD Switch

- Operating temperature: -10°C to +65°C
- 28VDC @ 10A
- Break before make
- Switches snap together
- Positive logic ("0" all open output)
- Size L = 0.59", W = 0.30", S = 1"
- Character height: 0.12"



Part No.	Cross Ref.	Description	1	10	100
136558	MX061	10-position ...	\$2.95	\$2.59	\$2.29


* Web Code: UEM

HIGHLY

OMRON Honeywell

Miniature Basic Switches

- 3 terminals: common; normally open; normally closed
- Size: 1.10"L x 0.40"W x 0.63"H



Part No.	Manufacturer	Product No.	Fig.	Actuator Type	Contact Form	Contact Rating	Service Life (Mech./Elec.)	Terminal Type	Pricing		
									1	10	100
1945268	Zippy	VM-5	1	Long lever (2.0"L)	SPST	5A @ 125/250VAC	10M/1M	0.187" quick connect	\$1.19	\$0.95	\$0.75
2076244	Honeywell	V3-23-D8	2	Pin plunger	SPST-NO	5A @ 125VAC	50M/300k	0.183" quick connect	1.49	1.25	.95
187792	Omron	V-10G2-1C24K	3	Hinge lever (1.08"L)	SPDT-NC	0.1A @ 125VDC, 10A @ 250VAC	50M/300k	0.183" quick connect	2.49	2.19	1.95
187805	Omron	V-10G3-1C24K	4	Long hinge lever (2.01"L)	SPDT-NC	0.1A @ 125VDC, 10A @ 250VAC	50M/300k	0.183" quick connect	2.69	2.49	2.29
2117333	ValuePro	VM-05S-03D0-Z	3	Long lever (2.0"L)	SPDT-NC	5A @ 125/250VAC	50M/300k	0.185" quick connect	1.59	1.35	1.15
617844	GC Electronics	35-880	2	Lever actuator	SPDT	10A @ 125VAC	10M/100k	0.187" quick connect	2.95	2.75	2.59
159572	Highly Electric	VS10N051C	5	Hinge roller (0.60"L)	SPDT-NC	10A @ 125VAC/250VAC	10M/100k	0.250" quick connect	2.95	2.59	2.29
159581	Highly Electric	VS10N021C2	3	Hinge lever (1.05"L)	SPDT-NC	10A @ 125VAC/250VAC	10M/100k	0.183" quick connect	2.49	2.19	1.95
483284	Cherry	D44CR1RD	6	Hinge lever (1.24"L)	SPDT	10A @ 125/250VAC	6k	0.187" quick connect	2.95	2.59	2.29
1917099	Honeywell	V7-1C17D8	2	Pin plunger	SPDT	15.1A @ 125/250/277VAC	50M/300k	0.183" quick connect	2.95	2.59	2.29

HIGHLY


Mountain Switch

OMRON

Subminiature Basic Switches

- Economical, subminiature basic switch offers long service life
- Free from overtravel restrictions, permits easy setting
- Lead spacing: A = 0.35"; B = 0.29" • Dimensions: 0.78"L x 0.25"W x 0.40"H

* Web Code: MBE



Part No.	Manufacturer	Mfr. Part No.	Fig.	Actuator Type	Contact Form	Contact Rating	Service Life (Mech./Elec.)	Terminal Type	Pricing		
									1	10	100
188867	Omron	D2F-L	1	Hinge lever (0.5"L)	SPDT-NC	3A @ 125VAC, 2A @ 30VDC	1M/30k	Solder	\$1.19	\$1.05	\$0.95
187709	Omron	SS-5GL	2	Hinge lever (0.6"L)	SPDT-NC	5A @ 125VAC, 3A @ 250VAC	30M/200k	Solder	1.59	1.35	1.15
187733	Omron	SS-5GL2	3	Hinge roller (0.6"L)	SPDT-NC	5A @ 125VAC, 3A @ 250VAC	30M/200k	Solder	1.49	1.29	1.15
159599	Highly Electric	SS0505A	3	Hinge roller (0.7"L)	SPDT-NC	5A @ 125VAC, 3A @ 250VAC	30M/200k	Solder	1.39	1.25	1.09
187717	Omron	SS-5GL13	4	Simulated roller lever	SPDT-NC	5A @ 125VAC, 3A @ 250VAC	30M/200k	Solder	1.59	1.35	1.15
2097678	Mountain Switch	61-05-025RR-Q-EV	3	Roller lever (0.571"L)	SPDT-NC	5A @ 125VAC/250VAC	10M/100k	.110" quick connect	1.25	1.09	.99
2097651	Mountain Switch	61-05-033ST-Q-EV	2	Straight lever (0.653"L)	SPDT-NC	5A @ 125VAC/250VAC	10M/100k	.110" quick connect	1.09	.95	.85
2097627	Mountain Switch	61-05-104XX-Q-EV	5	Button (no lever)	SPDT-NC	5A @ 125VAC/250VAC	10M/100k	.110" quick connect	.75	.69	.63
2100048	Honeywell	311SM8094-H4	6	Straight lever (1.31")	SPDT	5A @ 250VAC, 5A @ 30VDC	1M/30k	.110" quick connect	2.25	1.95	1.75
2100030	Honeywell	311SM8095-H5	6	Straight lever (1.31")	SPDT	5A @ 250VAC, 5A @ 30VDC	1M/30k	.110" quick connect	1.95	1.75	1.59
2097731	Mountain Switch	61-10-060RR-Q-EV	3	Roller lever (0.571"L)	SPDT-NC	10.1A @ 125VAC/250VAC	10M/100k	.110" quick connect	1.49	1.35	1.19
2097715	Mountain Switch	61-10-055ST-EV	2	Straight lever (0.653"L)	SPDT-NC	10.1A @ 125VAC/250VAC	10M/100k	Solder	1.19	1.09	.95
2097694	Mountain Switch	61-10-249XX-Q-EV	5	Button (no lever)	SPDT-NC	10.1A @ 125VAC/250VAC	10M/100k	.110" quick connect	1.39	1.25	1.09

* Straight lever with flag actuator

Mountain Switch

Super Subminiature Snap Switches



Part No.	Manufacturer	Mfr. Part No.	Fig.	Actuator Type	Contact Form	Contact Rating	Service Life (Mech./Elec.)	Terminal Type	Pricing		
									1	10	100
2097598	Mountain Switch	13-03-070ST-EV	1	Straight lever (0.433"L)	SPDT-NC	3A @ 125VAC; 0.2A @ 60VDC	1M/15k	PCB	\$.95	\$.85	\$.75
2097580	Mountain Switch	13-03-050ST-EV	2	Straight lever (0.551"L)	SPDT-NC	3A @ 125VAC; 0.2A @ 60VDC	1M/15k	PCB	.95	.85	.75
2097601	Mountain Switch	13-03-045SR-EV	3	Simulated roller (0.614"L)	SPDT-NC	3A @ 125VAC; 0.2A @ 60VDC	1M/15k	PCB	.95	.85	.75

Magnetic Reed Switches

- NO (normally open)
- Contact form: SPST



Part No.	Product No.	Contact Rating	Size (L" x D")	Type	1	10	100
171872	MKA14103	0.5A @ 100VDC	0.53 x 0.1	Axial	\$.85	\$.65	\$.49
2099340	R1-27AAA	0.5A @ 180VDC/130VAC	1.81 x 0.07	Axial	.99	.89	.79
2099331	CM15-2025	0.5A @ 200VDC	1.36 x 0.15	SMT	.99	.89	.79
1951342	MKC-27103	1.0A @ 220VDC	2.24 x 0.1	Axial	1.49	1.35	1.19

Temperature Switch

- SPST-NC (Normally-Closed)
- Contact current: 5A
- Contact voltage: 120V
- Operational life: 100,000 cycles
- Contact resistance: 50MΩ or less
- Temp: 75°C (167°F) • 1.64"L leads
- PCB mount • UL/CSA approved



Part No.	Product No.	1	10	100
159636	7AM-202	\$.29	\$.25	\$.19

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



Pushbutton Switches

* Web Code: UBU



Part No.	Manufacturer	Product No.	Fig.	Pins	Mounting Hole Dia.	Contact Form () Momentary	Contact Rating	Dimensions (L" x W" x D")	Lead Spacing		Terminal Type	Button Color	Pricing		
									A"	B"			1	10	100
315521	ValuePro	R13-23B-Y	1	1	.480"	SPST off-on	3A @ 125VAC	1.38 (D) x 1.53 (T)	.18	—	Solder	Yellow	\$1.35	\$1.19	\$1.05
164523	Mountain Switch	1DS466R	1	2	.406"	SPST off-(on)	3A @ 125VAC	.50 x .50 x .60	.16	—	Solder	Red	2.95	2.65	2.35
315484	ValuePro	R13-23B-R	1	2	.480"	SPST off-on	3A @ 125VAC	1.13 (D) x 1.53 (T)	.20	—	Solder	Red	1.09	.95	.85
315492	ValuePro	R13-23B-B	1	2	.480"	SPST off-on	3A @ 125VAC	1.13 (D) x 1.53 (T)	.20	—	Solder	Black	1.09	.95	.85
315432	ValuePro	R13-23A-R	1	2	.480"	SPST off-(on)	3A @ 125VAC	1.13 (D) x 1.53 (T)	.20	—	Solder	Red	1.09	.95	.85
315651	ValuePro	R13-502A-05-BB	1	2	.500"	SPST off-(on)	3A @ 125VAC	.82 (D) x 1.02 (T)	.23	—	Solder	Black	1.79	1.59	1.39
315678	ValuePro	R13-502A-05-BG	2	2	.500"	SPST off-(on)	3A @ 125VAC	.82 (D) x 1.02 (T)	.20	—	Solder	Green	1.75	1.49	1.25
315660	ValuePro	R13-502A-05-BR	3	2	.500"	SPST off-(on)	3A @ 125VAC	.82 (D) x 1.02 (T)	.22	—	3Solder	Red	1.79	1.59	1.39
315791	ValuePro	R13-508A-05-BB	4	2	.630"	SPST off-(on)	3A @ 125VAC	.94 (D) x 1.16 (T)	.24	—	Solder	Black	2.49	2.25	1.95
315820	ValuePro	R13-508AL-05-BRR	4	4	.630"	SPST off-(on)	3A @ 125VAC	.93 (D) x 1.14 (T)	.21	.25	Solder w/ LED	Red	2.49	2.25	1.95
315599	ValuePro	R13-40A-R	5	2	.480"	SPST off-(on)	3A @ 125VAC	.98 (D) x 1.56 (T)	.20	—	Solder	Red	1.39	1.25	1.09
315580	ValuePro	R13-40B-B	5	2	.480"	SPST off-(on)	3A @ 125VAC	.87 (D) x 1.4 (T)	.20	—	Solder	Black	1.39	1.25	1.09
26623	ValuePro	MS102	6	2	.250"	SPST off-(on)	3A @ 125VAC	.65 (D) x 1.10 (T)	—	.14	Solder lugs	Red	.69	.59	.49
164566	Mountain Switch	MS402R	7	2	.172"	SPST off-(on)	.5A @ 125VAC	.60 (D) x .80 (T)	.08	—	Solder	Red	1.95	1.69	1.49
315643	ValuePro	R13-81-R	7	2	.203"	SPST off-(on)	.5A @ 125VAC	.44 (D) x .78 (T)	.08	—	PC terminal	Red	.95	.85	.75
71643	ValuePro	SWB210	8	2	.219"	SPST off-(on)	1A @ 120VAC	.36 x .20 x .33	.20	.20	PC right angle	Black	2.79	2.45	2.29
174414	ValuePro	R13-510A	9	2	.500"	SPST off-(on)	3A @ 125VAC	.82 (D) x 1.0 (T)	—	.167	Solder lugs	Red	.95	.85	.75
22218	Judco	J1882	10	2*	.375"	SPST off-(on)	2A @ 14VDC	.65 x .52 x .40	.25	—	5" Pigtail	Red	1.25	1.09	.95
171758	Apem	IPR3SAD2	11	2	.500"	SPST off-(on)	2A @ 250VAC	.76 (D) x 1.0 (T)	.19	—	Solder	Black	14.95	13.49	11.95
171766	Apem	IPC3SAD6	12	2	.500"	SPST off-(on)	2A @ 250VAC	.82 x .69 x .46	.19	—	Solder	Red	12.95	11.49	9.95
171774	Apem	AV191003C900	13	2	.750"	SPST off-(on)	2A @ 48VDC	.87 (D) x 1.2 (T)	.37	—	Screw	Silver	13.95	12.95	11.49
164494	Mountain Switch	DS450R	14	2	.406"	SPST off-on	3A @ 125VAC	.59 (D) x 1.2 (T)	.175	—	Solder	Red	3.95	3.49	3.19
164486	Mountain Switch	DS463R	14	2	.406"	SPST off-(on)	3A @ 125VAC	.59 (D) x 1.2 (T)	.175	—	Solder	Red	2.95	2.59	2.09
164582	Mountain Switch	DS016B	15	2	.469"	SPST off-(on)	1A @ 125VAC	.46 (D) x .88 (T)	.22	—	Solder	Black	2.19	2.09	1.99
164639	Mountain Switch	MS3120R	16	2	.295"	SPST off-(on)	.5A @ 125VAC	.31 (D) x 1.1 (T)	.175	—	Solder	Red	1.75	1.49	1.25
106112	Mountain Switch	DS412R	17	2	.734"	SPST off-(on)	3A @ 110VAC	.66 (D) x .63 (T)	.275	—	Solder lugs	Red	1.75	1.49	1.25
164671	Mountain Switch	NS801M0	18	2	.492"	SPST off-(on)	1A @ 125VAC	1.0 (D) x 1.1 (T)	.213	—	Solder terminal	Black	3.95	3.49	3.19
26649	ValuePro	MS103	6	2	.250"	SPST on-(off)	3A @ 125VAC	.65 (D) x 1.10 (T)	—	.17	Solder lugs	Black	.59	.49	.45
22200	Judco	J1881	10	2*	.375"	SPST on-off, Alt ¹	2A @ 14VDC	.65 x .52 x .40	.25	—	5" Pigtail	White	1.29	1.15	1.05
172700	Arctic	MPS1SPSTBLWH	19	2	—	SPST (on/off)	.05A @ 24VDC	.38 x .20 x .10	.10	—	Solder terminal	White	.35	.29	.25
315380	ValuePro	PA102A1-B	20	2	.250"	SPST on-(off)	6A @ 125VAC	1.2 (D) x 1.7 (T)	.185	—	Solder	Black	1.95	1.69	1.49
315388	ValuePro	PA101A1-R/BL	20	2	.250"	SPST on-off	6A @ 125VAC	1.2 (D) x 1.7 (T)	.185	—	Solder	Red	1.75	1.59	1.39
355451	ValuePro	J1881	21	2*	.375"	SPST on-off, Alt ¹	2A @ 14VAC	.65 x .52 x .40	.25	—	5" Pigtail	White	.75	.69	.65
447072	Apem	TP32Y0030050	20	3	.250"	SPST on-on	4A @ 20VAC	0.7 (D) x 0.8 (T)	.11	—	Solder	Black	.45	.35	.29
200774	C&K Switch	TP12SH8AQE	22	3	.219"	SPDT off-(on)	1A @ 120VAC	.32 x .20 x .33	.20	.10	PC right angle	Black	2.95	2.59	2.09
72645	AlcoSwitch	TPC11FGRA2	8	3	.203"	SPDT off-(on)	1A @ 125VAC	.32 x .26 x .37	.20	.20	PC right angle	Red	1.25	.99	.85
1839705	Honeywell	AML22C8C2AA	23	5	.750"	SPDT (on)-off	3A @ 125VAC	.80 x .80 x 1.8	.228	.177	Solder	††	19.95	17.95	15.95
2125771	C&K Switch	8125-SD9AV1BR	24	3	.250"	SPDT on-(off)	.02A@20VAC/DC	.50 x .27 x .38	—	.10	Solder right angle	White	.79	.69	.59
202999	Various	BB16	22	3	.250"	SPDT on-on	1A @ 28VAC	.39 x .35 x .35	.18	.10	Solder right angle	White	.79	.69	.59
596799	C&K Switch	U811SHZGE	25	3	.250"	SPDT on-(on)	1A @ 120VAC	.50 x .27 x .41	.185	—	Solder	††	1.95	1.69	1.49
121305	ValuePro	GPB006-WH	25	3	.250"	SPDT on-(on)	1A @ 120VAC	.52 x .27 x .38	—	.185	Solder lugs	White	3.49	3.15	2.79
28063	ValuePro	PB126	25	3	.250"	SPDT on-(on)	5A @ 120VAC	.52 x .28 x .38	—	.185	Solder lugs	Red	3.49	3.15	2.79
154878	Eaton Corp.	PS11-123	26	3	.250"	SPDT on-(on)	5A @ 125VAC	.50 x .27 x .37	—	.14	Solder right angle	Red	1.49	1.29	1.09

* Lead wires 1 Alt = alternate action \$ Subminiature † With red neon lamp (5V) †† Cap is not included

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

Cord, Slide & Toggle Switches

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Switchcraft®

Cord-Switch®



★ Web Code: CSH

- Maximum cable diameter: .375"
- Plastic insulation
- Copper alloy plated housing and switch bushing

Part No.	Mfr. Part No.	Contact Form () momentary	Button Color	1	10	50
297502	ED903	SPDT off-(on)	Red	\$12.95	\$11.49	\$10.49



Inline Cord Switch



- Contact form: SPST on-off
- Terminal: solder
- Contact rating: 6A @ 20VDC
- Black plastic body

Part No.	Mfr. Part No.	1	10	100
621270	35-1851-BU	\$3.49	\$3.19	\$2.89

Switch Grab Bags

- Assorted – toggle, pushbutton, rocker and slide switches

Part No.	Product No.	No. of Pcs.	Wt. (lbs.)	1	10	18235
18235	GB165	50	0.4	\$8.95	\$7.95	
135378	GB165LB	150	1.0	\$19.95	\$17.95	



The Best Warranty in the Industry

All Jameco purchases are guaranteed for a full 90 days and even longer for Jameco House Brands.

Slide Switches

- Two mounting flanges
- Top actuation
- 6/6 nylon plastic housing
- Nylon actual
- Phenolic insulated



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5




★ Web Code: LAP

Part No.	Manufacturer	Product No.	Fig.	Pins	Contact Form	Contact Rating	Dimensions (L" x W" x D")	Lead Spacing		Housing Material	Lead Length	Actuator Height	Pricing		
								A"	B"				1	10	100
202770	Various	74650-009	1	6	SPDT on-on	0.1A @ 30VDC	.35"L x .70"W x .30"D	.17	.20	Plastic	.16"	.32"	\$.29	\$.25	\$.19
588220	C&K Switches	OS102011MA1QN1	2	3	SPDT on-on	0.2A @ 30VDC	.34"L x .17"W x .15"D	—	.08	Metal	.11"	.16"	.39	.35	.29
621325	GC Electronics	35-202-BU	3	3	SPDT on-on	0.3A @ 30VAC	.44"L x .22"W x .18"D	.14	—	Metal	.14"	.16"	1.79	1.59	1.39
109171	ValuePro	G4050X-R	4	3	SPDT on-on	0.5A @ 50VDC	.22"L x .45"W x .23"D	—	.12	Plastic	.17"	.15"	.35	.29	.25
204142	C&K Switches	4102021MLOY	5	3	SPDT on-on	2.0A @ 28VDC	.77"L x .40"W x .37"D	—	.19	Plastic	.19"	.17"	.29	.25	.19
161817	ValuePro	MS-306-R	3	6	DPDT on-on	0.3A @ 6VDC	.35"L x .14"W x .14"D	.10	.10	Plastic	.14"	.08"	.59	.49	.45
2076210	CWI	GF126-1093	3	6	DPDT on-on	0.5A @ 125VDC	1.0"L x .41"W x .30"D	.19	.29	Metal	.25"	.20"	.69	.59	.49

Standard Toggle Switches


- Medium duty
- Mounting hole dia.: 1/2"



3-pin



2-pin or 4-pin



6-pin



Fig. 1



Fig. 2



Fig. 3



Fig. 4




Fig. 5

★ Web Code: NAJ

Part No.	Manufacturer	Product No.	Fig.	Pins	Contact Form	Contact Rating (A @ VAC)	Dimensions (L" x W" x D")	Lead Spacing			Terminal Type	Lever Type	Pricing		
								A"	B"	C"			1	10	100
76241	ValuePro	SWM128	1	2	SPST on-off	4 @ 125 & 2 @ 250	1.00 x .56 x .52	.23	—	—	Solder lugs	Round	\$1.79	\$1.59	\$1.35
76232	ValuePro	SWM125	2	2	SPST on-off	6 @ 125 & 3 @ 250	1.00 x .53 x .51	.23	—	—	6" lead wire	Round	2.19	1.89	1.69
317825	ValuePro	R13-25A2-01	3	2	SPST on-off	10 @ 125 & 6 @ 250	1.14 x .59 x .62	.38	.38	—	.250" quick connect	Metal	2.49	2.19	1.89
318027	ValuePro	R13-28A-06	3	2	SPST on-off	15 @ 125 & 10 @ 250	1.33 x .75 x .75	.45	.61	.45	M3 screw	Round	1.79	1.59	1.45
318002	ValuePro	R13-28A-01	3	2	SPST on-off	15 @ 125 & 10 @ 250	1.33 x .75 x .75	.45	.61	.45	.250" quick connect	Round	2.49	2.19	1.89
621499	GC Electronics	35-3005	4	2	SPST on-off	20 @ 125	.92 x .64 x .40	—	.47	—	.250" quick connect	Bat brass	2.95	2.59	2.29
158060	ValuePro	JKN32	1	4	SPDT on-off	4 @ 125 & 2 @ 250	1.00 x .56 x .52	.23	—	.23	Solder lugs	Round	1.19	1.05	.89
318086	ValuePro	R13-28C-01	3	3	SPDT on-on	15 @ 125 & 10 @ 250	1.33 x .75 x .75	.45	.61	.45	.250" quick connect	Round	1.69	1.49	1.25
318094	ValuePro	R13-28C-05	3	3	SPDT on-on	15 @ 125 & 10 @ 250	1.33 x .75 x .75	.45	.61	.45	Solder	Round	1.69	1.49	1.25
318107	ValuePro	R13-28C-06	3	3	SPDT on-on	15 @ 125 & 10 @ 250	1.33 x .75 x .75	.45	.61	.45	M3 screw	Round	1.69	1.49	1.25
317892	ValuePro	R13-25C1-05	5	3	SPDT on-on	10 @ 125 & 6 @ 250	1.14 x .59 x .62	.38	.38	—	Solder	Plastic	1.69	1.49	1.25
317913	ValuePro	R13-25C2-05	5	3	SPDT on-on	10 @ 125 & 6 @ 250	1.14 x .59 x .62	.38	.38	—	Solder	Metal	1.69	1.49	1.25
317884	ValuePro	R13-25C1-01	5	3	SPDT on-on	10 @ 125 & 6 @ 250	1.14 x .59 x .62	.38	.38	—	.250" quick connect	Plastic	1.69	1.49	1.25
317905	ValuePro	R13-25C2-01	5	3	SPDT on-on	10 @ 125 & 6 @ 250	1.14 x .59 x .62	.38	.38	—	.250" quick connect	Metal	1.75	1.49	1.25
317931	ValuePro	R13-25D1-05	2	3	SPDT on-off-on	10 @ 125 & 6 @ 250	1.14 x .60 x .62	.34	.34	—	Solder lugs	Paddle	1.75	1.49	1.25
318123	ValuePro	R13-28D-01	3	3	SPDT on-off-on	15 @ 125 & 10 @ 250	1.33 x .75 x .75	.45	.61	.45	.250" quick connect	Round	2.19	1.89	1.69
318141	ValuePro	R13-28D-06	3	3	SPDT on-off-on	15 @ 125 & 10 @ 250	1.33 x .75 x .75	.45	.61	.45	M3 screw	Round	3.79	3.19	2.95
158078	ValuePro	JKN3CC	1	6	DPDT on-on	10 @ 125 & 6 @ 250	1.19 x .76 x .73	.44	.59	.44	Screw lugs	Round	1.29	1.15	1.05
76260	ValuePro	SWM126	1	6	DPDT on-on	5 @ 125 & 3 @ 250	1.10 x .77 x .60	.30	.60	.30	Solder lugs	Round	1.75	1.59	1.45
318060	ValuePro	R13-28B-06	3	6	DPDT on-on	15 @ 125 & 10 @ 250	1.33 x .75 x .75	.45	.61	.45	M3 screw	Round	1.95	1.75	1.59
318043	ValuePro	R13-28B-01	3	6	DPDT on-on	15 @ 125 & 10 @ 250	1.33 x .75 x .75	.45	.61	.45	.250" quick connect	Round	3.95	3.39	2.49
318052	ValuePro	R13-28B-05	3	6	DPDT on-on	15 @ 125 & 10 @ 250	1.33 x .75 x .75	.45	.61	.45	Solder	Round	3.95	3.39	2.49
317850	ValuePro	R13-25B1-05	5	6	DPDT on-on	10 @ 125 & 6 @ 250	1.14 x .79 x .62	.40	.40	.40	Solder lugs	Paddle	1.95	1.75	1.59
567761	Various	SWM127	3	6	DPDT on-off-on	10 @ 125 & 5 @ 250	1.18 x .77 x .75	.40	.60	.40	M3 screw	Round	3.95	3.39	2.49
317972	ValuePro	R13-25E1-05	5	6	DPDT on-off-on	10 @ 125 & 6 @ 250	1.14 x .59 x .62	.38	.38	—	Solder	Plastic	1.95	1.75	1.59

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.




JAMECO ValuePro

Miniature Toggle Switches

★ Web Code: PAJ

- Mounting hole diameter: 1/4"
- Includes: Mounting hardware



Part No.	Mfr.	Product No.	Fig.	Pins	Contact Form () Momentary	Contact Rating (A @ VAC)	Dimensions (L" x W" x D")	Lead Spacing			Terminal Type	Lever Type	Pricing		
								A"	B"	C"			1	10	100
317228	JVP	1MS9T1B1M1QE	1	2	SPST on-off	5 @ 120 & 2 @ 250	.50 x .27 x .35	—	0.190	—	Solder lugs	Round	\$1.95	\$1.75	\$1.59
76523	JVP	JMT113	1	2	SPST on-off	6 @ 125 & 3 @ 250	.52 x .32 x .38	—	0.185	—	Solder lugs	Round	1.39	1.25	1.09
317287	JVP	1MS9T6B11M1QE	2	3	SPST on-off	5 @ 120 & 2 @ 250	.50 x .27 x .35	—	0.185	—	Solder lugs	Flat	1.49	1.35	1.19
777768	C&K	T101MHZQE	1	3	SPDT on-on	3 @ 120	.32 x .20 x .34	—	0.100	—	Solder lugs	Round	5.95	5.49	4.95
26332	JVP	MPC123R	1	3	SPDT on-on	6 @ 125 & 3 @ 250	.52 x .32 x .37	—	0.185	—	PC straight	Round	1.89	1.75	1.49
21936	JVP	JMT123	1	3	SPDT on-on	6 @ 125 & 3 @ 250	.52 x .32 x .38	—	0.185	—	Solder lugs	Round	1.55	1.25	1.09
75854	JVP	SWM132	1	3	SPDT on-on	6 @ 125 & 3 @ 250	.52 x .32 x .38	—	0.185	—	Solder lugs	Round	1.55	1.25	1.09
317236	JVP	1MS1T1B1M1QE	2	3	SPDT on-on	5 @ 120 & 2 @ 250	.50 x .27 x .35	—	0.185	—	Solder lugs	Round	1.39	1.25	1.09
317295	JVP	1MS1T6B11M1QE	2	3	SPDT on-on	5 @ 120 & 2 @ 250	.50 x .27 x .35	—	0.185	—	Solder lugs	Flat	1.49	1.35	1.09
317279	JVP	1MS2T1B1M1QE	2	3	SPDT on-(on)	5 @ 120 & 2 @ 250	.50 x .27 x .35	—	0.185	—	Solder lugs	Round	1.49	1.25	1.09
317332	JVP	1MS2T6B11M1QE	2	3	SPDT on-(on)	5 @ 120 & 2 @ 250	.50 x .27 x .35	—	0.185	—	Solder lugs	Flat	1.75	1.59	1.39
22833	JVP	MS102F1-R	2	3	SPDT on-on	6 @ 125 & 3 @ 250	.52 x .28 x .36	—	0.185	—	Solder lugs	Flat	1.49	1.35	1.09
71597	JVP	SWM148	3	3	SPDT on-on	6 @ 125 & 3 @ 250	.52 x .32 x .38	—	0.133	0.51	PC right angle	Round	.99	.89	.79
75871	JVP	SWM145	4	3	SPDT on-on	6 @ 125 & 3 @ 250	.52 x .32 x .38	—	0.185	0.20	PC right angle	Round	1.49	1.35	1.09
567744	C&K	7105-S-H3-C-P-I	2	3	SPDT (on)-off-(on)	5 @ 125	.50 x .27 x .35	—	0.185	—	PC straight	Round	1.25	1.09	.79
21910	JVP	JMT121	1	3	SPDT on-off-on	6 @ 125 & 3 @ 250	.52 x .32 x .38	—	0.185	—	Solder lugs	Round	1.35	1.25	1.09
26315	JVP	MPC121	1	3	SPDT on-off-on	6 @ 125 & 3 @ 250	.52 x .32 x .37	—	0.185	—	PC straight	Round	1.29	1.15	1.05
317244	JVP	1MS3T1B1M1QE	2	3	SPDT on-off-on	5 @ 120 & 2 @ 250	.50 x .27 x .35	—	0.185	—	Solder lugs	Round	1.75	1.59	1.39
317308	JVP	1MS3T6B11M1QE	2	3	SPDT on-off-on	5 @ 120 & 2 @ 250	.50 x .27 x .35	—	0.185	—	Solder lugs	Flat	1.75	1.59	1.39
317252	JVP	1MS4T1B1M1QE	2	3	SPDT (on)-off-(on)	5 @ 120 & 2 @ 250	.50 x .27 x .35	—	0.185	—	Solder lugs	Round	1.75	1.59	1.39
317316	JVP	1MS4T6B11M1QE	2	3	SPDT (on)-off-(on)	5 @ 120 & 2 @ 250	.50 x .27 x .35	—	0.185	—	Solder lugs	Flat	1.49	1.25	1.09
317261	JVP	1MS5T1B1M1QE	2	3	SPDT on-off-(on)	5 @ 120 & 2 @ 250	.50 x .27 x .35	—	0.185	—	Solder lugs	Round	1.75	1.59	1.39
317324	JVP	1MS5T6B11M1QE	2	3	SPDT on-off-(on)	5 @ 120 & 2 @ 250	.50 x .27 x .35	—	0.185	—	Solder lugs	Flat	1.75	1.59	1.39
2077044	JVP	MTS-103AA	3	3	SPDT on-off-on	6 @ 125 & 3 @ 250	.52 x .32 x .39	—	0.149	0.51	PC right angle	Round	.99	.89	.79
317404	JVP	1MD9T1B1M1QE	5	6	DPST on-off	5 @ 120 & 2 @ 250	.50 x .45 x .35	0.19	0.185	—	Solder lugs	Round	1.75	1.49	1.25
75900	JVP	SWM133	6	6	DPDT on-on	6 @ 125 & 3 @ 250	.52 x .52 x .38	0.20	0.185	—	Solder lugs	Round	1.79	1.59	1.35
21979	JVP	JMT223	6	6	DPDT on-on	6 @ 125 & 3 @ 250	.52 x .52 x .38	0.20	0.185	—	Solder lugs	Round	1.49	1.25	1.09
26367	JVP	GTS112-P	6	6	DPDT on-on	6 @ 125 & 3 @ 250	.52 x .50 x .41	0.20	0.157	—	PCB	Round	1.49	1.25	1.09
317412	JVP	1MD1T1B1M1QE	5	6	DPDT on-on	5 @ 120 & 2 @ 250	.50 x .45 x .35	0.19	0.185	—	Solder lugs	Round	1.95	1.75	1.49
317472	JVP	1MD1T6B11M1QE	5	6	DPDT on-on	5 @ 120 & 2 @ 250	.50 x .45 x .35	0.19	0.185	—	Solder lugs	Flat	1.95	1.75	1.49
317455	JVP	1MD2T1B1M1QE	5	6	DPDT on-(on)	5 @ 120 & 2 @ 250	.50 x .45 x .35	0.19	0.185	—	Solder lugs	Round	1.49	1.25	1.09
317519	JVP	1MD2T6B11M1QE	5	6	DPDT on-(on)	5 @ 120 & 2 @ 250	.50 x .45 x .36	0.19	0.185	—	Solder lugs	Flat	1.75	1.49	1.25
22859	JVP	GTS172BLK	5	6	DPDT on-on	6 @ 125 & 3 @ 250	.52 x .52 x .38	0.20	0.185	—	Solder lugs	Flat	1.55	1.25	1.09
202964	◆	WI24	3	6	DPDT on-off-(on)	6 @ 125 & 3 @ 250	.50 x .50 x .46	0.15	0.150	0.055	PC right angle	Round	.99	.89	.79
75951	JVP	SWM130	6	6	DPDT (on)-off-(on)	6 @ 125 & 3 @ 250	.52 x .52 x .38	0.20	0.185	—	Solder lugs	Round	1.49	1.25	1.09
26358	JVP	MPC221	6	6	DPDT on-off-on	6 @ 125 & 3 @ 250	.52 x .52 x .38	0.20	0.185	—	PC straight	Round	1.49	1.25	1.09
21952	JVP	GTS114	6	6	DPDT on-off-on	6 @ 125 & 3 @ 250	.52 x .52 x .38	0.20	0.185	—	Solder lugs	Round	1.55	1.25	1.09
317439	JVP	1MD4T1B1M1QE	5	6	DPDT (on)-off-(on)	5 @ 120 & 2 @ 250	.50 x .45 x .35	0.19	0.185	—	Solder lugs	Round	1.75	1.49	1.25
317498	JVP	1MD4T6B11M1QE	5	6	DPDT (on)-off-(on)	5 @ 120 & 2 @ 250	.50 x .45 x .35	0.19	0.185	—	Solder lugs	Flat	1.95	1.75	1.59
317447	JVP	1MD5T1B1M1QE	5	6	DPDT on-off (on)	5 @ 120 & 2 @ 250	.50 x .45 x .35	0.19	0.185	—	Solder lugs	Round	1.75	1.49	1.25
317501	JVP	1MD5T6B11M1QE	5	6	DPDT on-off-(on)	5 @ 120 & 2 @ 250	.50 x .45 x .35	0.19	0.185	—	Solder lugs	Flat	1.75	1.49	1.25
317421	JVP	1MD3T1B1M1QE	5	6	DPDT on-off-on	5 @ 120 & 2 @ 250	.50 x .45 x .35	0.19	0.185	—	Solder lugs	Round	1.95	1.75	1.49
317490	JVP	1MD3T6B11M1QE	5	6	DPDT on-off-on	5 @ 120 & 2 @ 250	.50 x .45 x .35	0.19	0.185	—	Solder lugs	Flat	1.95	1.75	1.49
22841	JVP	GTS164BLK	5	6	DPDT on-off-on	6 @ 125 & 3 @ 250	.52 x .52 x .38	0.20	0.185	—	Solder lugs	Flat	1.49	1.25	1.09
620576	GCE	35-009	6	6	DPDT on-on-on	5 @ 125	.50 x .45 x .40	.23	.15	—	Solder	Bat brass	3.95	3.59	3.19
547436	ALC	MTA306D	6	9	3PDT on-on	6 @ 125 & 3 @ 250	.70 x .51 x .45	0.19	0.190	—	Solder lugs	Round	10.95	9.95	8.95

**Clearance
Center**



Can't find what you are looking for in the catalog?
Check out the thousands of products online priced near cost.

Large Quantities Heavily Discounted

Factory Overruns - Jameco Excess Inventory - Discontinued Product Lines

www.Jameco.com/Clearance

* ALC = AlcoSwitch | C&K = C&K Switches | GCE = GC Electronics | JVP = Jameco ValuePro | ◆ Manufacturer Varies

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

4 LEVELS OF SAVINGS		
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN
		DOLLAR SALE

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

Subminiature Toggle, Rocker & Specialty Switches

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Subminiature Toggle Switches

JAMECO ValuePro

- Mounting hole diameter: 7/32"
- Pre-tinned leads
- Metal construction

Includes: Mounting hardware

Fig. 1



Fig. 2




Fig. 3



*Web Code: NAN

Part No.	Manufacturer	Product No.	Fig.	Pins	Contact Form () Momentary	Contact Rating	Dimensions (L" x W" x D")	Lead Spacing		Terminal Type	Type	Pricing		
								A"	B"			1	10	100
72161	ValuePro	SW1501	1	2	SPST on-off	1.5A @ 250VAC	.33 x .21 x .33	.10	—	Solder lugs	Round	\$1.29	\$1.15	\$1.05
2121199	ValuePro	DS-4T1B1A1	1	3	SPST on-off	1.5A @ 250VAC	.33 x .21 x .33	.10	.10	Solder lugs	Round	1.29	1.15	1.05
106067	ValuePro	SWP124	2	3	SPDT on-on	0.3A @ 5VDC	.25 x .33 x .40	.20	.10	PC right angle	Round	1.89	1.75	1.49
567752	Fujisoku	AT1D-6M3	2	3	SPDT on-on	0.5A @ 48VDC/VAC	.37 x .22 x .33	.10	—	PC right angle	Round	1.09	.79	.59
75969	ValuePro	SWM136	1	3	SPDT on-on	3A @ 125VAC	.33 x .21 x .33	.10	—	Solder lugs	Round	1.69	1.49	1.29
72557	ValuePro	GTS304	1	3	SPDT on-off-on	1.5A @ 250VAC	.32 x .20 x .28	.10	—	Solder lugs	Round	1.35	1.25	1.09
2076228	C&K (sealed)	ET05J6ABE	2	3	SPDT (on)-off-(on)	4A @ 20VDC/VAC	.32 x .32 x .20	.20	.08	PC right angle	Round	.75	.59	.49
75977	ValuePro	SWM137	3	6	DPDT on-on	1.5A @ 250VAC	.33 x .37 x .33	.17	.10	Solder lugs	Round	1.49	1.35	1.09
138907	ValuePro	SW1503	3	6	DPDT on-off-on	3A @ 120VAC	.36 x .37 x .33	.17	.10	Solder lugs	Round	1.55	1.25	1.09

JAMECO ValuePro

Panel Mount Rocker Switches



*Web Code: VBU



Standard Appliance Rocker Switches

Part No.	*Mfr.	Product No.	Pins	Contact Form () Momentary	Contact Rating (A @ VAC)	Dimensions (L" x W" x D")	Lead Space		Rocker Color	Terminal Type	Mounting Type	Pricing		
							A"	B"				1	10	100
316451	JVP	R13-243A-02	2	SPST on-off	8 @ 125	.83 x .37 x .85	0.35	—	Black	.187" quick connect	Panel mount	\$.89	\$.79	\$.69
577221	CHY	RRA22H3BBBN	2	SPST on-off	10 @ 125	.69 x .51 x .64	0.35	—	Black	.187" quick connect	Panel mount	.95	.85	.75
2120196	JVP	HF-606	2	SPST on-off	10 @ 125	.83 x .59 x .55	0.27	—	Black	.187" quick connect	Panel mount	.79	.69	.59
1945276	PRO	BR-12A-55S	2	SPST on-off	10 @ 125	.83 x .59 x .59	0.31	—	Lt. gray	5.5" wire leads	Panel mount	.39	.29	.25
1945284	PRO	R13-66	2	SPST on-off	10 @ 125	.83 x .59 x .55	0.31	—	Dk. gray	5.5" wire leads	Panel mount	.39	.29	.25
316128	JVP	R13-73B-R-02	3	SPST on-off	10 @ 125	.83 x .59 x .87	0.35	0.35	Red illum.	.187" quick connect	Panel mount	1.49	1.35	1.19
316136	JVP	R13-73B-Y-02	3	SPST on-off	10 @ 125	.83 x .59 x .87	0.35	0.35	Yellow illum.	.187" quick connect	Panel mount	.95	.79	.69
196154	JVP	R30NSA-B/B	2	SPST on-off	15 @ 125	1.07 x .42 x .77	0.45	—	Black	.250" quick connect	Panel mount	.69	.65	.55
316014	JVP	R13-66A-B-02	2	SPST on-off	16 @ 125	.83 x .59 x .63	0.31	—	Black	.187" quick connect	Panel mount	.95	.85	.75
316022	JVP	R13-66A-R-02	2	SPST on-off	16 @ 125	.83 x .59 x .63	0.31	—	Red	.187" quick connect	Panel mount	.95	.85	.65
316048	JVP	R13-66B-G-02	3	SPST on-off	16 @ 125	.83 x .59 x .47	0.31	0.31	Green illum.	.187" quick connect	Panel mount	1.19	1.05	.89
1945241	ITW	163-099-029	3	SPDT	12 @ 250	1.2 x .55 x .59	0.26	0.26	Black	.250" quick connect	Panel mount	.35	.25	.15
316072	JVP	R13-66D-02	3	SPDT on-off-on	16 @ 125	.83 x .59 x .47	0.31	0.31	Black	.187" quick connect	Panel mount	.95	.85	.75
617473	GCE	35-695	3	SPDT (on)-off-(on)	16 @ 125	.93 x .43 x .62	0.34	0.56	Black	.250" quick connect	Panel mount	4.95	4.49	3.95
316111	JVP	R13-73A2-B-02	4	DPST on-off	10 @ 125	.83 x .59 x .87	0.20	0.34	Black	.187" quick connect	Panel mount	1.49	1.35	1.19
316153	JVP	R13-73C-R-02	4	DPST on-off	10 @ 125	.83 x .59 x .87	0.20	0.34	Black	.187" quick connect	Panel mount	1.29	1.15	.95

Miniature Rocker Switch

617369	JVP	35-676	6	DPDT on-off-on	8 @ 125	—	0.18	0.22	Red	Solder lug	Panel mount	\$4.95	\$4.49	\$3.95
--------	-----	--------	---	----------------	---------	---	------	------	-----	------------	-------------	--------	--------	--------

Specialty Switches



Pull Chain Switch • Current rating: 6A @ 20VAC/VDC; 3A @ 120VAC

Part No.	*Mfr.	Mfr. Part No.	Contact Form	Actuator	Terminal Type	1	10	100
617764	GCE	35-864	SPST on-off	3 1/2" pull chain	6" wires	\$3.69	\$3.29	\$2.95

Magnetic Proximity

- Current rating: 0.5A @ 20VAC/VDC; 0.08A @ 120VAC, P/N 588123/588182/588131: 30VAC @ .3A

Part No.	*Mfr.	Mfr. Part No.	Contact Form	Actuator	Terminal Type	1	10	100
617529	GCE	35-752	SPDT NO/NC	Use magnet	Leaded SD	\$4.95	\$4.49	\$3.95
617545	GCE	35-756	SPDT NO/NC w/o magnet	Need magnet	Screw term., 1/4" gap, surface mount	6.95	6.29	5.69
588123	C&K	MPS20WGW	SPST NO	Use magnet	Screw term., 1" gap, surface mount	10.95	10.49	9.95
588182	C&K	MPS9WGW	SPST NO	Use magnet	Lead wires, 22AWG, 12"L	8.95	7.95	7.49
588131	C&K	MPS45WGW	SPST NO	Use magnet	Lead wires, 22AWG, 12"L	6.29	5.79	5.35

Knife Switch

- Current rating: 0.5A @ 6VDC • Mounting hole: 3.4mm

Part No.	*Mfr.	Mfr. Part No.	Contact Form	Actuator	Terminal Type	1	10	100
617490	GCE	35-730	DPDT on-off-on	Plastic handle	Screw terminal, 0.6" gap/1.25" gap	\$5.95	\$5.35	\$4.79

Switch Assortment Kit

SAVE \$64

- 20-drawer component cabinet (319600), 20 clear plastic drawers (319601), 20 clear dividers (319611), pg 173 and 30 adhesive labels for drawers to identify parts in kit
- 10 ea. miniature toggle switches (76523, 21936, 21910, 26332, 26315, 21979, 21952, 26367, 26358), pg 95
- 10 ea. slide switches (109171), pg 94
- 10 ea. pushbutton switches (26623, 26649), pg 93
- 10 ea. DIP switches (38818, 38843), pg 97
- 10 ea. tactile switches (153252), pg 98

Part No.	Description	Wt. (lbs.)	1	5
85059	150 pcs. switch kit	5.0	\$99.95	\$89.95

We're Listening to What You Need

Send feedback to
Management@Jameco.com.

* CHY = Cherry | C&K = C&K Switches | GCE = GC Electronics | JVP = Jameco ValuePro | ITW = Illinois Tool | PRO = Pronic Electronic | ♦ Manufacturer Varies

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

EGE Rotary DIP Switches

- Gold plated contacts to ensure reliable, low resistance connection
- Fully sealed construction
- Terminals: PC pin leads
- Life: 10,000 cycles min.
- Op. force: 500g-cm max.
- Lead spacing: A = 0.1"; B = 0.3"
- Material: UL94V-0 grade
- Max. switching load rating: 25mA @ 24VDC
- Size: .39"W x .39"D x .20"H • Top adjustment



139636
★ Web Code: UAX

Part No.	Mfr. Part No.	Type	Pos.	1	10
139636	ERD110RSZ	BCD	10 \$2.89	\$2.59
139652	ERD116RSZ	HEX	16 2.95	2.65

Standard, Low Profile, Piano & Right Angle DIP Switches

Compatible Socket Chart,
see page 18 for Sockets



Switch	Socket	Switch	Socket
2-position	112193	7-position	112214
3-position	112193	8-position	112222
4-position	112206	9-position	112231
5-position	112214	10-position	38608
6-position	112214	12-position	112282

★ Web Code: UCY

• Switch contacts: SPST (except P/N 2122781 – DPST)

• Piano switches have raised lever

94H Series Rotary DIP Switches

- Make & break rating: 30mA @ 30VDC for 10,000 cycles
- Contact res.: 50mΩ max.
- Type: BCD 10-position
- Carrying current rating: 100mA @ 50VDC
- Insulation resistance: 5,000MΩ min.
- Contact material: 30μ" gold over 50μ" nickel



Part No.	Mfr. Part No.	Actuator	1	10
697071	94HAB10RAT	Flush right angle ..	\$1.95	\$1.75
788555	94HBB10T	0.270", straight	2.49	2.25

JAMECO ValuePro Rotary Switches

- Contact rating: 30VDC @ 0.3A; except P/N 2099631: 125VAC @ 0.3A
- Insulation resistance: 10MΩ min.
- Mounting hole diameter: 3/8"; except P/N 2099631: 0.348"
- Contact resistance: 30mΩ
- Material: solid brass bushings, slotted aluminum shafts (except for P/N 2099631: D-type and P/N 622352); round, plated frame, plastic contact wafer (except for P/N 622352/2099631 – phenolic casing)
- Make before break; except P/N 2099631: break before make
- Solder eyelet lugs
- Shaft size: 0.46"L x 0.25" Dia.; except P/N 622352: 1.5"L x 0.25" Dia. and P/N 2099631: 0.34"L x 0.25" Dia.



★ Web Code: DAM

Includes: Washer and nut

Part No.	Product No.	Poles	Pos.	1	10	100
101532	G3SR026	1	12 \$0.95	\$0.85	\$0.75
622352	35-376†	1	12 2.95	2.65	2.39
2099631	SR2511-0205	2	595	.85	.75
101574	G3SR022	2	695	.85	.75
101566	G3SR023	3	495	.85	.75
101558	G3SR024	4	395	.85	.75

† Solder eyelet style

C&K A Series Rotary Switches

- 1.5"H flatted actuator
- 3/8-32 threaded mounting style
- Solder lug terminals
- Dielectric strength: 1000Vrms
- 15,000 make & break cycles
- Contacts and terminals: brass, silver plated
- Contact resistance: 20mΩ typical @ 2-4VDC
- Contact rating: 2.5A @ 125VAC; 250mA @ 250VDC
- Housing/actuator: glass filled 6/6 nylon (UL94V-0)



Part No.	Mfr. Part No.	Type	Pos.	1	10
576501	A11215RNZQ	SP, 300 index	12	\$6.95	\$6.25
576421	A20615RNZQ	DP, 300 index	6	6.95	6.25

Part No.	Product No.	*Mfr.†	Type†	Pos.†	1	10	100
2122781	78F02	GRY	1,5	2	\$0.69	\$0.59	\$0.49
1951385	206-2LP	♦	2,6	2	.69	.59	.45
2076156	SDAX-2RX-X	BNS	3,5	2	.59	.45	.39
109059	206-2-VP-R	JVP	3,5	2	.79	.69	.59
206359	206-3	♦	1,5	3	.65	.55	.45
202472	ADF03	ALC	2,6	3	.59	.49	.45
696802	DP-04B	JVP	1,4	4	.95	.85	.75
38818	206-4	♦	1,5	4	.59	.55	.49
38820	DT-04VP	JVP	1,5	4	.75	.65	.59
696950	78B04ST	GRY	1,5	4	1.15	1.05	.85
2082231	3-4356405	AMP	1,7	4	.79	.69	.59
696888	76SB04	GRY	1,7	4	.95	.89	.79
206499	DPS804	FJT	2,4	4	.69	.59	.49
139003	206-4LP	JVP	2,5	4	.75	.65	.55
2076164	SDAX-4RX-X	BNS	3,5	4	.59	.45	.39
2076181	SDAX-4RX-T	BNS	3,5	4	.69	.59	.49
2082249	JS8805	♦	1,6	5	.59	.49	.39
2082505	206-517	♦	1,7	5	.59	.49	.45
2082513	206-518	AMP	1,8	5	.59	.49	.45
2076674	DPL-06KT	♦	1,4	6	.69	.59	.49
38826	206-6	JVP	1,5	6	.89	.79	.69
2076201	A6D-6100LP	OMN	2,6	6	.69	.59	.45
38834	206-7	♦	1,5	7	.95	.89	.79

*1. Standard; 2. Low Profile; 3. Right Angle; 4. Piano Style; 5. Slide Raised; 6. Slide Flush; 7. Rocker Raised; 8. Rocker Flush

JAMECO ValuePro Tri-State DIP Switch

- Pre-tinned leads
- Two isolated buses
- Labeled tri-state positions (+, 0, -)
- Switch contacts: bused, tri-state
- Compatible socket, use P/N 37373, pg 18



Part No.	Cross Ref. No.	Positions	Contact Rating	1	10	100	500
138992	ETA108E	8	24VDC @ 25mA \$1.95	\$1.75	\$1.49	\$1.25

SMT Low Profile DIP Switches

★ Web Code: SDS

- Insulation resistance: 1000MΩ (min.) across open switch & between adjacent closed switch
- Contact resistance: 100mΩ initial
- Dielectric strength: 300VAC for 1 min.
- Gold plated beryllium copper contacts, gold flash coated terminals
- Bottom seal/top tape seal
- Non-switching rating: 100mA or 50VDC max.
- Length: 0.246"




Part No.	Manufacturer	Product No.	Positions	Type	1	10	100
2076199	Grayhill	90HB104SR	4	SPST \$0.35	\$0.25	\$0.19
546759	Various	3-435668	5	SPST39	.29	.25
1945022	Various	SMT-6PDS	6	SPST49	.35	.29

JAMECO ValuePro SPST Round Keylock Switches

- Used in computer and other security systems
- Mounting hole = 0.75" (except P/N 106650 = 0.5")
- Key removable from 2 positions
- Two keys
- 105832: All keys are different; 196649: All keys are alike
- Includes: Mounting nut

JAMECO EXCLUSIVE

★ Web Code: RAN



Part No.	Cross Ref. No.	No. Flat, Dia.	Length	Terminal	Voltage/Current	1	10	100
106650	KS4B	2, 0.21"	0.55"	Barrel	125VAC/3A	\$4.55	\$4.09	\$3.55
105832	KS3B	2, 0.66"	1.48"	0.25" quick connect	125VAC/6A	4.95	4.49	3.95
196649	3313E-M	2, 0.66"	1.48"	0.25" quick connect	125VAC/6A	4.95	4.49	3.95

* ALC = Alcoswitch | AMP = AMP/Tyco | BNS = Bourns | C&K = C&K Switches | CTS = CTS | FJT = Fujitsu | GRY = Grayhill | JVP = Jameco ValuePro | OMN = Omron | ♦ Manufacturer Varies

★ For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

Keypad & Tactile Switches

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

12-Button Keypads

- Contact resistance: 200Ω max.

Numeric

- 8-pin & 10-pin .100" header
- 10 pin w/ multicolor wires
- Contact rating: 12VDC @ 20mA
- Life test: 1,000,000 cycles per key
- Size: 3.0"L x 2.2"W x 0.6"H (8-pin) white
- Size: 2.5"L x 2.1"W x 0.4"H (10-pin) black

2082206



Part No. Description 1 10 100

190562	8-pin header keypad	\$6.95	\$6.25	\$4.95
2081828	10-pin wire keypad	4.95	4.49	3.95
2082206	10-pin header keypad	5.95	4.95	4.49

Alpha/Numeric

- 8-pin solder pad .100" header
- Contact rating: 24VDC @ 20mA
- Life test: 2,000,000 cycles per key
- Nickel metal form factor and keys
- Size: 4.36"L x 1.56"W x 0.62"H
- Recommended conn.: P/N 103191 header



Part No. Description 1 10 100

2113455	2x6 keypad	\$18.95	\$16.95	\$15.49
---------	------------	---------	---------	---------

16-Button Indoor/Outdoor Keypads

- 9-pin .100" headers
- Compatible with MOS, TTL and DTL (10Ω max.)
- Contact rating: 24VDC @ 10mA resistive
- Fully sealed snap-dome contact
- Life test: 3,000,000 cycles per key
- Size (housing): 4.7"W x 1.7"H x 0.4"T
- Recommended connector: P/N 103191 header & 100766 pin, pg 81

196171



152063

Part No. Description 1 10 100

196171	2x8 matrix keypad	\$14.95	\$13.49	\$12.49
152063	4x4 matrix keypad	14.95	13.49	12.49

*Keypads Online — Enter Web Code XBA

16-Button Numeric Keypad

- 8-pin solder pad
- Life test: 1,000,000 life cycles per key
- 8-pin male header connector included
- Size: 3.0"L x 2.8"W x 0.6"H



Part No. Description Contact Rating Contact Resis. 1 10 100

169245	4x4 keypad	24VDC @ 20mA	200Ω max.	\$9.95	\$8.95	\$7.95
--------	------------	--------------	-----------	--------	--------	--------

Tactile Switches

*Web Code: QBF

- Bounce time: 10 msec.
- SPST momentary ON
- Lead type: PC
- Contact resistance: 100mΩ



Fig. 1



Fig. 2




Fig. 3



Fig. 4




Fig. 5



Fig. 6



Fig. 7



Fig. 8



Fig. 9

* Order in multiples of 10

Part No.	*Mfr.	Product No.	Fig.	Pins	Dimensions (ins.)				Lead Spacing		Contact Rating (mA @ VDC)	Button Color	Pricing		
					L	W	D	C	A"	B"			1	10	100
1586074	PAN	EVQ-PAG04K	1	4	.24	.24	.14	.05	.17	.26	20 @ 12	Black	\$.29	\$.25	\$.19
199726	PAN	EVQ11A04M	2	2	.24	.24	.14	.03	.20	.17	20 @ 15	White	.35	.29	.25
2095120	PAN	EVQ11L07K	2	2	.24	.24	.14	.11	.20	—	20 @ 15	Black	.35	.29	.25
119011	JVP	KT1B1CM	1	4	.24	.24	.15	.03	.17	.25	20 @ 15	Black	.29	.25	.19
149948	JVP	KT11P4CM	3	4	.24	.24	.15	.13	.17	.25	20 @ 15	Black	.29	.25	.19
122973	JVP	DTS1212	4	4	.47	.47	.18	—	.20	.50	20 @ 15	Black	.35	.29	.25
155249	JVP	KRS-3550-BK	5	2	.24	.14	.15	—	—	.27	50 @ 12	Black	.35	.29	.25
155256	♦	KRS-3550-WH	5	2	.24	.14	.15	.03	—	.26	50 @ 12	White	.35	.29	.25
153252	JVP	SDT620K	1	4	.24	.24	.15	.06	.17	.25	50 @ 12	Black	.29	.25	.19
155380	JVP	KRS-1273B	6	4	.47	.47	.14	.14	.17	.53	50 @ 12	Brown	.39	.35	.29
153251	ESW	TL1105-A+	1	4	.24	.24	.15	.06	.17	.25	50 @ 12	Black	*	.19	.15
202956	♦	KSM06330	7	2	.24	.24	.15	.38	.11	.18	50 @ 24	Red	*	.19	.15
162886	OMN	B3F-1000	1	4	.24	.24	.13	.03	.17	.25	50 @ 24	White	.29	.25	.19
1953575	OMN	B3F-3122	8	4	.29	.29	.25	.06	.17	.28	50 @ 24	Gray	.29	.25	.19
2076261	OMN	B3E-1100-Red*	7	4	.24	.24	.19	.07	.17	.25	50 @ 24	Red	.49	.39	.29
2076287	OMN	B3E-1300-Green*	7	4	.24	.24	.19	.07	.17	.25	50 @ 24	Green	.49	.39	.29
2076252	ITT	KSC121JB	9	4	.24	.24	.10	—	.15	.26	50 @ 32	Gray	*	.19	.15
2076148	♦	KFC-A12-A	1	4	.47	.47	.15	.08	.17	.50	100 @ 50	Black	.39	.35	.29

* Illuminated

♦ See switch cap below



155389



155409

Order in multiples of 10

Tactile Switch Caps

Part No.	*Mfr.	Cross Ref. No.	Description	Dimensions	Material	For Use With	10	100	1000
155389	JVP	KRS-CAP-A	Square	.47"L x .47"W x .16"H	Plastic	P/N 155380	\$.15	\$.12	\$.09
155409	JVP	KRS-CAP-B	Round	.50"Dia. x .25"H	Plastic	P/N 155380	.15	.12	.09



We Ship the Same Day!
Just place your order by 6PM EST.

Relays

DIP Relays

*Web Code: QAN

- Logic control levels
- Long life with reliable operation
- Excellent for PCB applications
- Compatible with IC sockets
- Compact design/construction
- Moisture resistant



106463



1860088



2081377




Fig. 1




Fig. 2




Fig. 3




Fig. 4




Fig. 5




Fig. 6




Fig. 7

Part No.	Manufacturer	Product No.	Fig.	Contact Form	Coil Voltage	Coil Ohms	Contact Voltage	Contact Current	Pins	Jameco Socket	Dimensions (L" x W" x H")	Leads (A" x B" x C")	Pricing		
													1	10	100
106463	Excel	201A05	1A	SPST-NO	5VDC	500	100VDC	0.5A	8	37162	.78 x .25 x .20	.10 x .40 x .30	\$2.49	\$2.19	\$1.95
138431	Excel	2D1A05	1B	SPST-NO	5VDC	500	100VDC	0.5A	8	37162	.77 x .30 x .22	.10 x .40 x .30	2.49	2.19	1.95
1860088	Hamlin Breed	HE3621A0510	—	SPST-NO	5VDC	1000	200VDC	0.5A	4†	—	.75 x .20 x .30	.20 x .60	1.19	.95	.89
173914	Aromat	DS2YE-S-DC5V	2C	DPDT	5VDC	125	125VAC/100VDC	0.5A/1.25A	8	37401	.79 x .38 x .44	.18 x .28 x .29	2.19	1.95	1.75
139977	ValuePro	RSB5S	2C	DPDT	5VDC	125	120VAC/30VDC	1A/2A	8	37373	.79 x .39 x .37	.20 x .40 x .30	2.49	2.19	1.95
2081414	KEST	KS2E-M-DC5	2C	DPDT	5VDC	128	125VAC/28VDC	1A/2A	8	37373	.83 x .40 x .48	.20 x .30 x .30	2.49	2.19	1.95
2081377	KEST	KS2E-M-DC12	2C	DPDT	12VDC	708	125VAC/28VDC	1A/2A	8	37373	.83 x .40 x .48	.20 x .30 x .30	2.49	2.19	1.95
99311	Aromat (NAIS)	DS2Y-S-DC12V	2C	DPDT	12VDC	720	110VAC/30VDC	0.3A/1A	8	37373	.79 x .40 x .43	.20 x .40 x .30	2.49	2.19	1.95
2081406	KEST	KS2E-M-DC24	2C	DPDT	24VDC	1440	125VAC/28VDC	1A/2A	8	37373	.83 x .40 x .48	.20 x .30 x .30	2.49	2.19	1.95
136549	Aromat	DS4E-M-DC5V	3D	4PDT	5VDC	62.5	125VAC/30VDC	0.6A/2A	14	112301	1.40 x .40 x .36	.20 x .30 x .30	6.95	6.25	5.75

† SIP


* ESW = E-Switch Inc. | ITT = ITT Cannon | JVP = Jameco ValuePro | OMN = Omron | PAN = Panasonic | ♦ Manufacturer Varies

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

Small PC Mount Relays

Designed for the appliance and temperature control markets, these relays are also well suited for automotive load management.

- Mechanical life: 10 million operations
- Electrical life: 100,000 operations
- Dielectric strength: 1500V_{RMS} (between contact and coil)

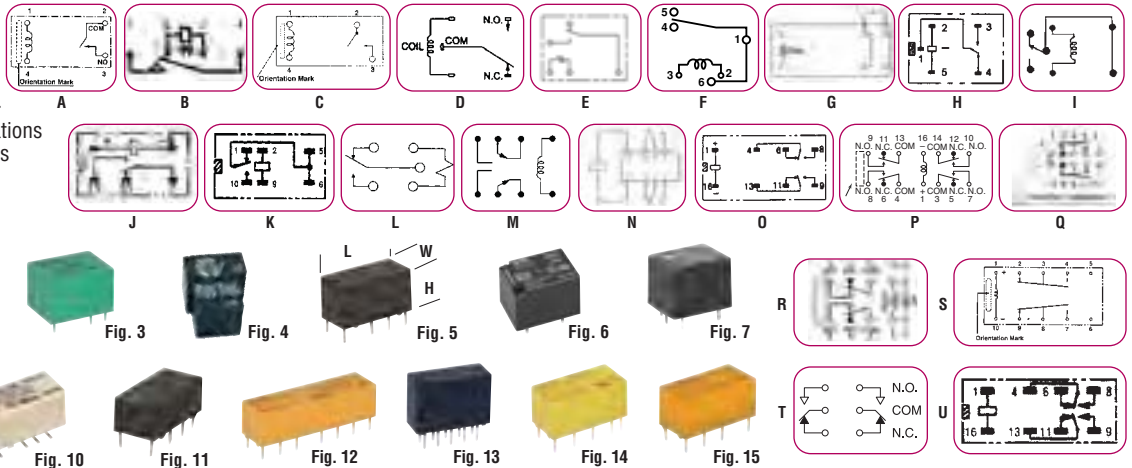

Part No.	Manufacturer	Mfr. Part No.	Potter & Brumfield Cross Reference	Fig.	Contact Form	Coil Voltage	Coil (Ohms)	Contact Current	Contact Voltage	Pins	Dimensions (L" x W" x H")	Pricing		
												1	10	50
2077394	Fujitsu	JV-3S-KT	—	1A	SPST-NO	3VDC	45	5A	250VAC/30VDC	4	.69 x .39 x .49	\$2.29	\$2.09	\$1.89
1860070	Hamlin	HE3621A0500	—	1B	SPST-NO	5VDC	500	1A	200VDC	4	.75 x .19 x .30	1.19	.99	.89
2077271	Fujitsu	FTR-F2AL006T	—	1C	SPST-NO	6VDC	145	5A	250VAC/30VDC	4	.95 x .43 x .98	1.49	1.29	1.09
2077378	Fujitsu	FBR161NED006-WB	—	2D	SPST	6VDC	100	10A	120VAC/30VDC	5	.85 x .63 x .63	1.49	1.29	1.09
2120217	Bestar	BS-114	—	3E	SPST	12VDC	320	10A	120VAC/30VDC	5	.85 x .63 x .63	2.95	2.75	2.49
145753	Rayex*	L90A-12W	T90S1D12-12	4F	SPST	12VDC	155	30A/20A	240VAC/28VDC	5	1.2 x 1.0 x .77	2.95	2.75	2.49
2125350	Panasonic	ALZ21B24	—	5G	SPST	24VDC	1440	16A	440VAC	6	1.13 x .49 x .62	2.95	2.75	2.49
134949	Rayex	L90-5W	T90S5D12-5	4F	SPDT	5VDC	27	20A	240VAC/28VDC	6	1.3 x 1.1 x .80	2.29	2.09	1.89
187151	Omron	G5LE-1DC5	—	2H	SPDT	5VDC	63	10A/8A	120VAC/30VDC	5	.90 x .65 x .75	1.49	1.29	1.09
843155	Panasonic	JS1-5V	T7C5SD-05	6D	SPDT	5VDC	69.4	10A/5A	250VAC/100VDC	5	.87 x .63 x .63	1.19	1.09	.95
174450	Rayex	LU-5	T81H5D215	7I	SPDT	5VDC	125	1A/2A	120VAC/24VDC	6	.60 x .40 x .45	1.95	1.69	1.49
187418	Omron	G6E-134P-ST-US-DC5	—	8J	SPDT	5VDC	125	.4A/2A	125VAC/30VDC	5	.63 x .39 x .33	2.95	2.75	2.49
187240	Omron	G5V-1-DC5	T5C-105L3H	8K	SPDT	5VDC	166.7	.5A/1A	125VAC/24VDC	6	.50 x .30 x .40	2.29	2.09	1.89
454563	Hasco	KLTIC12DC9	—	7L	SPDT	9VDC	225	12A	120VAC/28VDC	5	.73 x .59 x .61	1.75	1.49	1.25
144186	Velleman	JZC-22F	VR15M121C	7L	SPDT	12VDC	337	15A	120VAC/28VDC	5	.80 x .64 x .80	2.95	2.75	2.49
174432	Rayex	LEG-12F	T7CS5D12	7L	SPDT	12VDC	400	15A	120VAC/24VDC	5	.76 x .62 x .60	1.89	1.59	1.49
184461	Omron	G5V-1-DC12	—	8K	SPDT	12VDC	960	.5A/1A	125VAC/24VDC	6	.50 x .30 x .40	2.29	2.09	1.89
172937	Nais (Aromat)	JS1-12V	T72M5D121-12	6D	SPDT	12VDC	400	10A/5A	125VAC/24VDC	5	.85 x .62 x .63	1.19	1.09	.95
2078186	Fujitsu	FBR161NED012	T7CS5D-12	7D	SPDT	12VDC	400	10A	125VAC/30VAC	5	.80 x .60 x .60	1.95	1.69	1.49
843201	Nais (Aromat)	JW1FSN-DC24V	RTB14024F	9D	SPDT	24VDC	1100	10A/10A	250VAC/30VDC	5	1.11 x .49 x .78	1.95	1.69	1.49
187400	Omron	G6E-134P-ST-US-DC48	—	8J	SPDT	48VDC	5760	.4A/2A	125VAC/30VDC	5	.63 x .39 x .33	3.95	3.59	3.29
215909	Potter & Brumfield	RKA-7DZ-12	—	8M	DPST-NO	12VDC	270	5A/5A	250VAC/24VDC	6	1.16 x .57 x 1.05	1.95	1.69	1.49
15051	Panasonic	AGQ200A4HZ	SMD-PKG	10M	DPDT	4.5VDC	145	.3A/1A	125VAC/30VDC	8	.417 x .283 x .213	1.49	1.35	1.19
2077255	NEC	EE2-4.5NUL-X	SMD-PKG	10M	DPDT	4.5VDC	145	.5/2A	125VAC/30VDC	8	.59 x .30 x .35	1.49	1.29	1.09
2095390	Axicom	V23079A1011B301	—	5N	DPDT	4.5VDC	145	2A	250VAC/220VDC	10	.57 x .28 x .39	1.95	1.75	1.49
2077415	Fujitsu	BA-5W-K	—	11M	DPDT	5VDC	100	.5A/1A	125VAC/30VDC	8	.59 x .29 x .38	2.19	1.89	1.49
187282	Omron	G6A-234PSTUSDC5	C93416	11O	DPDT	5VDC	125	.3A/1A	125VAC/30VDC	8	.80 x .33 x .40	3.95	3.59	3.29
842953	Panasonic	DS2E-S-DC5V	—	12P	DPDT	5VDC	125	2A	125VAC/30VDC	8	.79 x .39 x .39	3.95	3.59	3.29
843649	Panasonic	TXA2SA-5V	—	10M	DPDT	5VDC	178	2A	30VDC	8	.59 x .29 x .22	1.95	1.69	1.49
2081650	NEC	EC2-5NJ	—	5M	DPDT	5VDC	178	2A	220VAC/220VDC	8	.59 x .30 x .37	2.49	2.25	1.95
15034	Panasonic	TN2-5VDC	—	13Q	DPDT	5VDC	178	.5A/1A	125VAC/30VDC	10	.55 x .22 x .39	2.49	2.25	1.95
2077263	Siemens	V23079-F1101-B301	SMD-PKG	10M	DPDT	5VDC	357	5A	250VAC/220VDC	10	.57 x .28 x .41	1.95	1.69	1.49
2120516	Panasonic	DS2Y-SL2-DC6V	—	14R	DPDT	6VDC	200	2A	250VAC/220VDC	10	.79 x .39 x .37	1.95	1.69	1.49
2077386	Fujitsu	AL-D9W-K	—	11S	DPDT	9VDC	45	.5A/1A	125VAC/30VDC	10	.55 x .35 x .20	2.95	2.75	2.49
174378	Rayex	LM2-12D	RKA5DZ12	1M	DPDT	12VDC	270	5A	250VAC/30VDC	8	1.2 x .48 x 1.0	2.49	2.25	1.95
187258	Omron	G5V-2-DC12	—	5T	DPDT	12VDC	288	.5A/2A	125VAC/30VDC	8	.81 x .40 x .45	2.85	2.49	2.19
842873	Panasonic	DS2E-ML2-DC12V	—	15T	DPDT	12VDC	400	2A	250VAC/220VDC	10	.79 x .39 x .39	3.95	3.75	3.35
2078215	Omron	G2VN-234P-US	—	11O	DPDT	24VDC	1600	.5A/1.5A	120VAC/30VDC	8	.77 x .39 x .401	2.19	1.89	1.49
200740	Omron	G5V-2-HI	—	5U	DPDT	24VDC	2800	.5A/1A	125VAC/24VDC	8	.81 x .40 x .45	2.29	2.09	1.89
2078274	Fujitsu	FBR46D024	—	11O	DPDT	24VDC	2880	.5A/1A	120VAC/30VDC	8	.63 x .39 x .33	1.49	1.29	1.09

* Manufacturer may vary # SIP package † SMD package †† Latching

★ For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Solid State, Enclosed & Reed Relays

4 LEVELS OF SAVINGS		
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN
		DOLLAR SALE

DC/AC and DC/DC Solid State Relays

* Web Code: DBA



Part No.	Mfr.	Mfr. Part No.	Control Voltage	Type	Contact Form	Contact Voltage	Contact Current	Pins	Fig.	Terminal Type	Agency Approval	Dimentions (L" x W" x H")	Pricing		
													1	10	50
Solid State Relays DC/AC Type															
164988	Sharp	S101S02	1.2VDC@20mA	DC/AC	SPST	125VAC	1.5A	4	1	Solder lead	UL/CSA	0.9 x .16 x .63	\$3.95	\$3.39	\$2.95
164996	Sharp	S202TA1	1.2VDC@20mA	DC/AC	SPST	200VAC	2.0A	4	1	Solder lead	UL/CSA	0.9 x .16 x .63	5.95	5.49	4.95
153059	Rayex	RSR2ND-A24003	4-32VDC	DC/AC	SPST	240VAC	3A	4	2	Solder lead	UL	1.7 x 0.4 x 2.0	8.95	7.95	7.49
162342	Excel	ESR51024-010	3-32VDC	DC/AC	SPST	240VAC	10A	4	3	Screw terminal	UL	1.7 x 1.1 x 2.3	18.95	16.95	15.49
186992	Omron	G3NA-210B-DC5-24	5-24VDC	DC/AC	SPST	240VAC	10A	4	4	Screw terminal	UL/CSA	1.7 x 1.1 x 2.3	16.95	15.95	14.95
187004	Omron	G3NA-220B-DC5-24	5-24VDC	DC/AC	SPST	240VAC	20A	4	4	Screw terminal	UL/CSA	1.7 x 1.1 x 2.3	19.95	17.95	15.95
162369	Excel	ESR51024-025	3-32VDC	DC/AC	SPST	240VAC	25A	4	3	Screw terminal	UL	1.7 x 1.1 x 2.3	27.95	24.95	21.95
162406	Excel	ESR51024-040	3-32VDC	DC/AC	SPST	240VAC	40A	4	3	Screw terminal	UL	1.7 x 1.1 x 2.3	24.95	22.49	19.95
192815	COSMO	KSD240AC8	4-32VDC	DC/AC	SPST	250VAC	40A	4	5	Screw terminal	—	1.8 x 0.6 x 2.3	19.95	17.95	15.95
175214	Kyoto	KB20C02A	3-32VDC	DC/AC	SPST	280VAC	2A	4	6	Solder lead	CE	1.4 x 0.3 x 1.5	6.95	5.95	5.49
127790	Crydom	D2W202F	13-32VDC	DC/AC	SPST	280VAC	2A	4	7	Solder lead	UL/CSA	1.7 x 0.4 x 1.3	9.95	8.95	7.95
176698	Kyoto	KB20C06A	3-32VDC	DC/AC	SPST	280VAC	6A	4	6	Solder lead	CE	1.4 x 0.3 x 0.9	10.89	9.79	8.69
176719	Kyoto	KD20C40AX	3-32VDC	DC/AC	SPST	280VAC	40A	4	8	Screw terminal	UL/CE	1.7 x 0.9 x 2.3	19.95	17.95	15.95
176736	Kyoto	KD20C75AX	3-32VDC	DC/AC	SPST	280VAC	75A	4	8	Screw terminal	UL/CE	1.7 x 0.9 x 2.3	34.95	31.49	28.95
Solid State Relays DC/DC Type															
172591	Kyoto	KF0602D	3-32VDC	DC/DC	SPST	60VDC	2A	4	6	Solder lead	CE	1.4 x 0.3 x 0.9	\$9.95	\$8.95	\$7.95
175222	Kyoto	KF0604D	3-32VDC	DC/DC	SPST	60VDC	4A	4	6	Solder lead	CE	1.5 x 0.3 x 0.9	9.95	8.95	7.95
176648	Kyoto	KG1005D	3-32VDC	DC/DC	SPST	120VDC	5A	4	8	Screw terminal	CE	2.3 x 1.7 x 0.9	24.95	22.49	19.95
176655	Kyoto	KG1010D	3-32VDC	DC/DC	SPST	120VDC	10A	4	8	Screw terminal	CE	2.3 x 1.7 x 0.9	24.95	22.49	19.95
1630987	Infineon	LH1500AAB	—	DC/DC	SPST	350VDC	0.15A	6	9	SOIC-6	UL/CSA	.34 x .26 x .15	2.49	2.19	1.9N5






OptoMOS® Solid State Relays

* Web Code: WDX

Fig. 1

Fig. 2


Part No.	Mfr. Part No.	Package	Description	Fig.	Load Voltage (V)	Current Handling (mA)	On-Resistance (Ω)	Isolation Voltage (Vrms)	Input Control Current (mA)	Off-State Leakage (μA)	Switching Speed (on/off) (ms)	Pricing		
1583041	LCA710	DIP-6	Single pole, 1-Form-A	1A	60	1000	0.5	3750	10	1	2.5/0.25	\$4.95	\$4.49	\$3.95
1582997	LCA110	DIP-6	Single pole, 1-Form-A	1B	350	120	35	3750	2	1	3/3	1.85	1.65	1.49
1582989	LBA110S	SOIC-8	Dual single pole, 1-Form-A	2C	350	120	35	3750	2	1	3/3	3.59	3.29	3.09
1582903	LAA110	DIP-8	Dual single pole, 1-Form-A	1D	350	120	35	3750	5	1	3/3	3.49	3.09	2.75



Potter & Brumfield Equivalent Plastic Enclosed Construction Relays

VF Series

- Dielectric strength: 500VDC (between contact & coil)
- Operating temp.: -35°C to +85°C
- Contact current: 40A
- Coil voltage: 12VDC
- Terminal type: quick connect
- Normally open (NO)
- Dimensions: 1.1"L x 1.1"W x 1.0"H



* Web Code: PBB



Part No.	Mfr.	Product No.	P&B Cross Ref. No.	Fig.	Contact Form	Coil Ohms	Coil Voltage	Contact Schematic	Pins	Pricing		
2094178	Sanyou	SARL-112DMFK	VF7-41F11	1	SPST-NO	80	12VDC	1	4	\$5.95	\$5.49	\$4.95
1810179	Rayex	LD1A-12BP	—	2	SPST-NO	80	12VDC	3	4	1.79	1.59	1.45
171460	Rayex	LD1A-12F	—	3	SPST-NO	80	12VDC	3	4	2.95	2.69	2.39
171442	Rayex	961A-1A12D	—	2	SPST-NO	80	12VDC	3	4	2.49	2.19	1.89
171522	Rayex	LD5F	VF4-45D11	3	SPDT	14	5VDC	2	5	1.95	1.75	1.55
148583	Rayex	LD12F	VF4-85F11	1	SPDT	78	12VDC	2	5	2.95	2.59	2.29
2094135	Sanyou	SARL-112D	VF4A-15F11	2	SPDT	80	12VDC	2	5	3.49	3.19	2.79
2094151	Sanyou	SARL-112DF	VF45A-45F11	1	SPDT	80	12VDC	2	5	3.49	3.19	2.79
171433	Various	961A-1C-12DM	VF4-81F11	1	SPDT	90	12VDC	2	5	2.95	2.59	2.29
2094186	Sanyou	SARL-125D	VF4A-15F11	2	SPDT	320	24VDC	2	5	2.95	2.59	2.29
2094194	Sanyou	SARL-124DF	VF4A-45H11	1	SPDT	320	24VDC	2	5	3.49	3.19	2.79

* PCB terminals † Comes with a removable clip

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

Reed Type Relay

- Contact form: SPST-NO
- Terminal type: PCB Solder
- Contact voltage: 111448: 120VAC/60VDC; 2099358: 150VAC/VDC
- Coil voltage @ Contact Rating: 111448: 5VDC @ 0.25A; 2099358: 12VDC @ 0.1A
- Dimensions: 111448: 1.0"L x 0.37"W x 0.38"H; 2099358: 0.82"L x 0.25"W x 0.27"H




Part No.	Product No.	Pins	1	10	50
111448	BR-1050	4	\$1.95	\$1.75	\$1.49
2099358	2900-0043	5	5.95	5.49	4.95

Relay Socket with Coil Diode

VF Series

* Web Code: DBA

- 14 AWG: 2 black & 1 blue wire; 18 AWG: 1 black & 1 red wire (7.5" length)
- Contact voltage/current: 12V/20A
- Diode coil suppression
- Use with P/N 148583, left



Part No.	Product No.	1	10	50
170624	RSD03	\$2.29	\$2.09	\$1.89

For complete specifications
visit www.Jameco.com

General Purpose Power Relays

Part No.	Mfr.	Product No.	Contact Form	Rating	Contact Rating	Coil Resis.	Contact Type	1	10	50
454571	Omron	G7L-1A-TUB-CB-DC24	SPST-NO	24VDC @ 79mA	25A, 220VAC	303Ω	.250" quick connect	\$7.95	\$6.95	\$5.95
611928	P&B	T9AP1D52-48-03	SPST-NO	48VDC @ 21mA	30A, 240VAC	2304Ω	Quick connect .187" for coil/.250" for contacts	3.95	3.69	3.39
137358	ValuePro	953-1C12DM-R	SPDT	12VDC @ 77mA	20A, 240VAC/28VDC	155Ω	Quick connect .110" for coil/.250" for contacts	2.49	2.19	1.95
552462	P&B	PRD-7AG0-120	DPST-NO	120VAC @ 85mA	30A, 240VAC	290Ω	Screw: #8-32 for main; #6-32 for contacts	29.95	27.49	25.95
183791	Master	GH-2C-12D	DPDT	12VDC @ 170mA	30A, 240VAC	70Ω	Screw down terminals	12.95	11.49	10.95
551881	P&B	PRD-11AG0-120	DPDT	120VAC @ 85mA	30A, 240VAC	1200Ω	Screw: #8-32 for main; #6-32 for contacts	44.95	39.95	34.95



General Purpose Blade and Octal Relays

- UL/CSA approved
- Industry standard termination for quick installation
- Wide range of coil voltages for industrial and commercial applications



*Web Code: ACF



Part No.	*Mfr.	Product No.	Fig.	Contact Form	Coil Voltage	Contact Rating	Coil Resis. (Ω)	Coil Current (mA)	Mating Socket*		Pricing		
									Standard	DIN Rail	1	10	50
2096122	Magnecraft	781XAXM4L-12D	1	SPDT ¹	12VDC	20A @ 120VAC/28VDC	188	100	—	—	\$5.95	\$5.49	\$4.95
282440	P&B	KRPA-5DG-24	2	SPDT	24VDC	10A @ 240VAC	472	51	282132	282159	17.95	16.95	15.95
2119996	Omron	G2R-1-E-ASI	3	SPDT	24VDC	16A @ 250VAC; 16A @ 30VDC	1100	21.8	—	—	4.95	4.49	3.95
2096131	Magnecraft	781XAXM4L-24A	1	SPDT ¹	24VAC	20A @ 120VAC/28VDC	180	100	—	—	5.95	5.49	4.95
498671	P&B	KUEP-11D15-12	4	DPDT	12VDC	3A @ 150VDC; 10A @ 240VAC	80	150	282124	282175	6.95	6.29	5.75
2093079	Omron	LY2F-DC12	1	DPDT	12VDC	10A @ 24VDC; 10A @ 110VAC	160	75	PT08	175531	5.95	5.39	4.79
139766	Rayex	MK2P-I	5	DPDT	12VDC	10A @ 28VDC; 10A @ 240VAC	120	10	141145	141145	6.95	6.29	5.75
282378	P&B	KRPA-11DG-12	2	DPDT ²	12VDC	10A @ 240VAC	120	100	282132	282159	11.95	10.95	9.95
172719	ValuePro	LB2-12DS-R	1	DPDT	12VDC	12A @ 30VDC; 12A @ 240VAC	160	75	175531	282191	5.95	5.49	4.95
2095875	Magnecraft	782XBX4M4L-12D	3	DPDT ¹	12VDC	12A @ 28VDC; 15A @ 120VAC	160	100	—	—	7.95	7.25	6.49
282255	P&B	K10P-11D15-12	6	DPDT	12VDC	15A @ 30VDC; 15A @ 120VAC	160	75	282191	282191	8.95	7.95	6.95
282386	P&B	KRPA-11DG-24	2	DPDT ²	24VDC	10A @ 240VAC	472	51	282132	282159	12.95	11.95	10.95
2095867	Magnecraft	782XBX4M4L-24D	3	DPDT ¹	24VDC	12A @ 28VDC; 15A @ 120VAC	650	100	—	—	7.95	7.25	6.49
175565	ValuePro	LB2-24DS-R	1	DPDT	24VDC	12A @ 30VDC; 12A @ 240VAC	650	37	175531	282191	5.95	5.49	4.95
282263	P&B	K10P-11D15-24	6	DPDT	24VDC	15A @ 30VDC; 15A @ 120VAC	650	37	282191	282191	8.95	7.95	6.95
301073	P&B	KRPA-11DG-110	2	DPDT ²	110VDC	10A @ 240VAC	10,000	11.5	282132	282159	10.95	9.95	9.49
175573	ValuePro	LB2-110AS	1	DPDT ²	110VAC	12A @ 30VDC; 12A @ 240VAC	3,900	28	175531	282191	6.95	6.29	5.49
139740	Beta	BTAB-2C-J-CW-120VAC	5	DPDT	120VAC	10A @ 28VDC; 10A @ 240VAC	1,700	122	141145	141145	6.95	6.29	5.49
2095859	Magnecraft	782XBX4M4L120A	3	DPDT ¹	120VAC	12A @ 28VDC; 15A @ 120VAC	4,430	100	—	—	8.95	7.95	6.95
282247	P&B	K10P-11A15-120	6	DPDT	120VAC	15A @ 30VDC; 15A @ 120VAC	3,900	11	282191	282191	7.95	7.29	6.49
301217	P&B	KRPA-14DN-24	2	3PDT	24VDC	10A @ 28VDC; 6A @ 250VAC	472	51	282141	282167	12.95	11.95	10.95
282301	P&B	KHAU-17D11-12	7	4PDT	12VDC	3A @ 120VAC/28VDC (max)	160	100	496958	282183	6.95	6.29	5.75
291507	ValuePro	LB4H-120-R	1	4PDT	12VDC	5A @ 30VDC; 5A @ 240VAC	160	75	175557	175557	4.95	4.49	3.95
2095891	Magnecraft	7782XDX2M4L-12D	3	4PDT ¹	12VDC	8A @ 28VDC; 10A @ 120VAC	160	100	—	—	7.95	7.25	6.49
175602	ValuePro	LB4H-24DS-R	1	4PDT	24VDC	5A @ 30VDC; 5A @ 240VAC	650	37	175557	175557	4.95	4.49	3.95
282319	P&B	KHAU-17D12-24	7	4PDT	24VDC	5A @ 120VAC/28VDC (max)	650	52	496958	282183	6.95	6.29	5.75
2095939	Magnecraft	782XDX2M4L-24D	3	4PDT	24VDC	8A @ 28VDC; 10A @ 120VAC	650	100	—	—	7.95	7.25	6.49
282280	P&B	KHAU-17A11-24	7	4PDT	24VAC	3A @ 120VAC/28VDC (max)	160	52	496958	282183	6.95	6.29	5.49
2095921	Magnecraft	782XDX2M4L-24A	3	4PDT	24VAC	8A @ 28VDC; 10A @ 120VAC	180	100	—	—	9.95	8.95	7.95
175611	ValuePro	LB4H-110AS-R	1	4PDT ²	110VAC	5A @ 30VDC; 5A @ 240VAC	3,900	28	175557	175557	4.95	4.49	3.95
2095912	Magnecraft	782XDX2M4L-120A	3	4PDT	120VAC	8A @ 28VDC; 10A @ 120VAC	4,430	100	—	—	7.49	6.75	5.95

* For sockets see below † PCB 1 = Push to test button, bi-polar LED status lamp, ID write-on label, flag indicator 2 = Silver-cadmium oxide, no lamp

Blade and Octal Relay Sockets

*Web Code: TEM

Part No.	Mfr.	Product No.	Relay Series	Pins	Contact Form	Type	1	10	50
141145	Beta	PF-083A	BT1A1	8	DPDT	Combo [†]	\$3.95	\$3.69	\$3.39
175531	ValuePro	27E895	K10	8	DPDT	Combo [†]	3.95	3.69	3.39
282191	P&B	27E895	K10	8	DPDT	DIN Rail	6.49	5.95	5.49
282132	P&B	27E122	KRP/KRPA	8	DPDT	Standard	4.95	4.69	4.39
282167	P&B	27E892	KRP/KRPA	11	3PDT	DIN Rail	9.95	8.95	7.95
282175	P&B	27E121	KUP/KUEP/KUMP	11	3PDT	Din Rail	10.95	9.95	8.95
282141	P&B	27E123	KRP/KRPA	11	3PDT	Standard	6.95	6.29	5.59
282124	P&B	27E121	KUP/KUEP/KUMP	11	3PDT	Standard	6.95	6.29	5.59
175557	ValuePro	27E894	KHUA	14	4PDT	DIN Rail	3.49	3.19	2.79
282183	P&B	27E894	KHA/KHS/PT	14	4PDT	DIN Rail	8.95	7.95	7.29
496958	P&B	27E166	KHA/KHUA	14	4PDT	Standard	11.95	10.95	9.95



† Combo: DIN Rail or Screw Terminal

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above



CNT Series Multifunction, Digital Time Delay Relay/Counter

- Maximum count: 1 to 999; 10 to 9,990; 100 to 99,900
- Maximum count rate: 100 counts per second • DPDT
- Rating: 10A @ 30VDC or 277VAC resistive
- 11-pin octal style plug

Power Requirement: 10W @ 240VAC/VDC;
5W @ 120VAC/VDC; 1W @ 24VAC/VDC

Part No.	Mfr. Part No.	Voltage	1	5
282239	CNT-35-96	24-240VAC/VDC	\$139.95	\$125.95



CDB Series CMOS IC Time Delay Relay

- Timing ranges: 0.1 seconds to 180 seconds • DPDT
- Contact rating: 10A @ 30VDC or 277VAC resistive
- Electrical life: 10,000 operations min. @ rated load

Power Requirement: AC or DC – typically less than 3W

Part No.	Mfr. Part No.	Voltage	Time (sec)	Pins	Price
497299	CDB-38-70004	120VAC	0.6 – 60	8	\$175.95



***Bistable, Impulse Relays Online — Enter Web Code QDR**



Beta Electric General Purpose Relay

BTA2 Series Quick Connect Blade Terminal

Flat terminals (0.187" x 0.020") for standard plug-in mounting; also accepts quick-connect receptacles or direct soldering.

- Contact rating: 120VAC/28VDC @ 13A; 240VAC @ 10A
- 3PDT • 11-pin • Ambient operating temperature: -30°C to +50°C
- Size: 1.5"L x 1.4"W x 2.2"H



Part No.	Mfr. Part No.	NTE Cross Ref.	Coil Voltage	1	10
139854	BTA2-3C-24VDC	R10-14D10-24	24VDC	\$4.95	\$4.49

***I/O Module Relays Online — Enter Web Code TBW**





Quick and Easy Search

Our website offers thousands of data sheets and photos to assist you in finding the products you need.

CdS Photocells

***Web Code: CBG**

- Generate variable signal based on detection of light levels • Cadmium Sulfide (CdS) • Operating temperature: -30°C to +70°C • Soldering: 230°C for 3 seconds
- Applications:** Auto-focus lenses, exposure meters, contrast controls for TVs, dimmer or light switches, flame detectors, electronic toys, street lamp switches, optocouplers

 202438	Part No.	Cross Ref. No.	Rating		Resistance (Ω)		Size (inches)		Lead Spacing (inches)	Lead Length (inches)	Pricing			
			Vp	mW	Dark	Light	A	B			1	10	100	500
 120299	202366	CDS0029001	150	90	300k	4k	0.14	0.17	0.10	1.02	\$1.49	\$1.35	\$1.19	\$0.95
	120310	CDS0029004	150	90	2M	27k	0.14	0.17	0.10	1.44	1.49	1.35	1.19	.95
	202391	CDS0029203	150	90	10M	5k	0.14	0.17	0.10	1.02	1.49	1.35	1.19	.95
	202382	CDS0029008	150	90	20M	10k	0.14	0.17	0.10	1.02	1.49	1.35	1.19	.95
	202403	CDS0018001	150	100	200k	3k	0.17	0.20	0.13	1.02	.89	.79	.69	.59
	202420	CDS0018003	150	100	500k	16k	0.17	0.20	0.13	1.02	.99	.89	.79	.69
	202411	CDS0018006	150	100	5M	80k	0.17	0.20	0.13	1.02	.99	.89	.79	.69
	120301	CDS0037001	200	150	300k	3k	0.25	0.29	0.20	1.02	1.79	1.59	1.45	1.19
	202438	CDS0037004	200	150	500k	15k	0.25	0.29	0.20	1.02	1.49	1.35	1.19	.95
120299	CDS0045001	350	400	300k	8k	0.37	0.43	0.30	1.44	1.79	1.59	1.45	1.19	
	202454	CDS0045003	350	400	1M	12k	0.37	0.43	0.30	1.44	1.79	1.59	1.45	1.19

NTC Thermistors

- Typical applications: temperature measurement/control/compensation; power supply fan control; PCB temperature monitoring
- Max. allowable power (@ 250°C): 0.55W
- Thermal dissipation factor: 6.5mW/°C (@ 250°C)
- Resistance value allowable difference: 10%



***Web Code: RBG**

Part No.	Product No.	Resistance (Ω @ 25°C)	B Constant (25/50°C >10%)	Temp. Coef. @ 25°C (%/°C)	Pricing		
					1	10	100
207521	NTC-101	100	3100	-3.5	\$4.49	\$3.39	\$3.35
207511	NTC-201	200	3100	-3.5	.49	.39	.35
207483	NTC-102	1k	3800	-4.3	.49	.39	.35
207466	NTC-302	3k	3900	-4.4	.49	.39	.35
207441	NTC-502	5k	3900	-4.4	.49	.39	.35
207037	NTC-103	10k	4100	-4.6	.49	.39	.35
207002	NTC-503	50k	4200	-4.7	.49	.39	.35
206991	NTC-104	100k	4400	-4.9	.49	.39	.35
206982	NTC-1204	200k	4500	-5.1	.49	.39	.35



Reed-Based Magnetic Proximity Sensor

- Hermetically sealed contacts
- Zero power consumption
- Contact resistance: 0.2Ω max.
- Suitable for AC/DC circuits
- Breakdown voltage: 200VDC min.
- Operating temp. range: -40°C to 105°C
- Max. switching voltage: 175VDC @ 0.5A



- SPST NO
- 10-watt
- Typical op. time: 0.6ms

Part No.	Mfr. Part No.	Description	1	10	25
482417	AS201901	Magnetic actuator	\$2.95	\$2.69	\$2.49
513359	MP201901	Magnetic sensor	2.95	2.59	2.29



See page 195 for Parallax Sensors and Sensor Kits.



Actuator Magnet Speed & Proximity Sensor

- Aluminum housing
- Adjustable thread mounting stud
- Operating range: -40°C to 150°C

***Web Code: MAS**



Part No.	Mfr. Part No.	Pole	1	10
482370	AS101001	South facing	\$4.29	\$3.95



Digital Hall-Effect Magnetic Proximity Sensors

Flange Mount • Applications: door position sensing, flow sensing, pedal switch

- Capable of millions of operations
- Reverse battery protection to -24VDC
- Output saturation voltage max.: 400mV
- Meets IEC529 IPX5 for water protection
- Output wire: 3-wire sink
- Operating voltage range: 4.5-24VDC

513252

***Web Code: CCC**

Part No.	Mfr. Part No.	Supply Curr. Max. (mA)	Output Curr. Max. (mA)	Op. Point Gauss (max.)	Rel. Point Gauss (min.)	Function	Pricing		
							1	10	25
513252	MP101401	5.2	20	185 (south)	60 (south)	Unipolar switch	\$4.95	\$4.49	\$3.95
513261	MP102103	12	25	300 (north)	195 (north)	Switch	5.95	5.49	4.95

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



Inductive Proximity Switch Sensors

Cylindrical and Square Styles

- Operating voltage range: 10-30VDC
- Nominal operating voltage: 12VDC
- Normally open output
- Switching frequency: 1.5kHz
- Current consumption: 10mA max.
- Sensing target: inductive type – magnetic metal
- Sensing distance: $\pm 10\%$ (tin)
- Fast response
- Short-circuit protected
- Pre-tinned pigtail
- 6' long cable
- LED status indicator

* Web Code: MAX



Part No.	Mfr. Part No.	Output Circuit	Effec. Dist. (Iron)	Standard Target (Iron) (mm)	Dimensions (L x Dia.)	Mounting Hole (ins.)	Pricing		
							1	5	25
421147	CS12-02N-1	NPN	0-1.6mm	12 x 12 x 1	2.2" x 0.83"	0.67	\$15.95	\$14.95	\$13.95
421155	CS12-05N-1	NPN	0-0.4mm	12 x 12 x 1	2.4" x 0.88"	0.67	15.95	14.95	13.95
167020	TS12-02N-1	NPN	0-1.6mm	12 x 12 x 1	1.8" x 0.46"	0.46	19.95	17.95	15.95
248858	TS12-02P-1	PNP	0-1.6mm	12 x 12 x 1	1.8" x 0.46"	0.46	19.95	17.95	15.95
155547	S18-05N-1	NPN	0-4.0mm	18 x 18 x 1	1.4"Lx1.4"Wx0.7"H	0.112	11.95	10.95	9.95
421163	CS18-05N-1	NPN	0-0.4mm	18 x 18 x 1	2.1" x 1.10"	0.95	19.95	17.95	15.95
421171	CS18-08N-1	NPN	0-6.4mm	18 x 18 x 1	2.4" x 1.10"	0.95	19.95	17.95	15.95
421251	S25-07N-1	NPN	0-5.6mm	25 x 25 x 1	1.4" x 1.50"	0.98	15.95	14.95	13.95
421180	CS30-10N-1	NPN	0-12mm	30 x 30 x 1	2.3" x 1.40"	1.40	24.95	23.95	22.95
421227	TS30-10N-1	NPN	0-8.0mm	30 x 30 x 1	2.4" x 1.10"	1.10	24.95	23.95	22.95

Photo Electric Sensor

Part No.	Mfr. Part No.	Output Circuit	Effec. Dist. (Iron)	Standard Target (Iron) (mm)	Dimensions (L x Dia.)	Mounting Hole (ins.)	1	5	25
421260	WE-T3AD	NPN	0-5.0mm	≥ 8 mm Dia.	2.6" x 0.708"	0.71	\$36.95	\$33.95	\$31.95



Hall-Effect Magnetic Proximity Sensor

- With Snap-Fit Mount
- Output: 3-wire sink
- Solid state reliability
- Operating voltage range: 4.75-24VDC
- Immune to dust, dirt, & moisture
- No mechanical contacts to wear out
- Digital output compatible with all logic families
- South pole sensitive or bi-polar latch
- Operating temp. range: -40°C to 85°C
- Output saturation voltage max.: 400mV
- Reverse polarity protection to -24V

* Web Code: CCC

Part No.	Mfr. Part No.	Supply Curr. Max. (mA)	Output Curr. Max. (mA)	Op. Point Gauss (max.)	Rel. Point Gauss (min.)	Wire	Pricing		
							1	5	25
513244	MP101301	4	25	300	60	24AWG x 1m	\$4.95	\$4.49	\$3.95



Magnetic Proximity Sensors

- Omnipolar, magnetically activated switch
- Zero power consumption
- Hermetically sealed
- Breakdown voltage: 200VDC min.
- Contact resistance: 0.2 Ω max.
- Operating temp. range: -40°C to 105°C
- Can be approached by any magnet from any angle with either pole

- 513279: Aluminum Threaded Housing
- Immune to hostile environments
- Suitable for AC/DC circuits
- 513308: Cylindrical Plastic Housing
- Resistant to dirt and moisture

Part No.	Mfr. Part No.	Contact Form	Power (W)	Switching Volt. Max. (VDC)	Switching Curr. Max. (A)	Op. Time Typical (ms)	Pricing		
							1	5	25
513279	MP200701	SPST NO	10	175	0.5	0.6	\$7.95	\$7.29	\$6.69
513308	MP201701	SPST NO	10	175	0.5	0.5	2.39	2.15	1.95



Pressure Sensor

- Pressure range: 0-2.5 kPa
- Operating voltage: 5V @ <10mA
- Max. excitation voltage: 8V
- 1/8" diameter tubing is applicable
- Pressure media: non-corrosive gas
- Pre-calibration of offset volt. & span
- Maximum load pressure: twice rated pressure
- On-chip amplification and temp. compensations
- Volt-level output
- Size: .55"L x .47"W x .20"H

* Web Code: CBF

Part No.	Mfr. Part No.	1	5	25
196103	XFPN-025-KPGRNW1	\$12.95	\$11.49	\$9.95



Pressure Sensor

Typical applications: air movement control, level indicators, leak detection, robotics and industrial controls.

- Case type: 867
- Pressure output: 0-50kPa
- Output: 4.7V
- Operating voltage: 5VDC @ 7mA
- To convert kPa to PSI: 1kPa = 0.1450377PSI

Part No.	Mfr. Part No.	1	5	25
321293	MPX5050DP	\$19.95	\$18.49	\$16.95

Solid State Digital Position Sensor

- High output current capability -50mA absolute max.
- Oper. temp. range: -40°C to 150°C
- Supply volt.: 3.8VDC to 30VDC
- 3-pin SIP package
- Output type: sink
- Output volt./curr.: 40mV/20mA max.
- Supply current: 10mA max.

Part No.	Mfr. Part No.	Type	1	10	100
1915915	SS466A	Latching	\$1.09	\$0.99	\$0.85



Hall Effect Sensor

- Supply voltage: 25V
- Supply current: 6mA (typ.)
- Output on current: 50mA
- Output off voltage: 25V
- Operating temp.: -40°C to 150°C

Part No.	Product No.	1	10	100
1871879	OH180U	\$2.75	\$2.49	\$1.95



Gear Tooth Speed Sensor

Commercial Grade Hall-Effect

- Operating voltage range: 4.5-24VDC
- Output type: sink
- Output current: 25mA max.
- Supply current: 6mA max.
- Barrel length: 1.0"
- Output voltage: 400mV max.
- Thread: 15/32" – 32
- Wire: 20 AWG x 1m
- Reverse battery protection from 24VDC
- Operating temperature range: -40°C to 125°C

Part No.	Mfr. Part No.	1	5	25
512401	GS100701	\$24.95	\$22.95	\$20.95

Liquid Level Sensors

Combine the control box and sensor to activate a water valve. When the sensor is triggered by a tank in either full or empty condition, it will trigger an output status change.

* Web Code: LLS

Part No.	Description	1	5	25
176250	24VDC	\$9.95	\$7.95	\$7.49
2119742	180VDC	16.95	15.95	15.49



Membrane Sensors/Potentiometers

Membrane potentiometers are resistive elements or CARBON position feedback sensors with a sealed encasement and a non-conductive simple wiper assembly that connects the top and bottom circuit. By pressing the wiper down on the top circuit to close the connection with the bottom circuit, the linear sensor produces the desired electrical output. The membrane potentiometer can also be actuated through a manual control.

- Thinnest linear stroke sensor: <0.5mmH
- Sealed at IP65
- Simple application
- Ideal for low form factor applications
- Best priced linear stroke sensor on the market

Part No.	Mfr. Part No.	Description	1	10
2082636	SP7182	50mm	\$14.95	\$13.49
2082652	SP7183	100mm	14.95	12.95
2082679	SP7184	200mm	19.95	17.95
2082708	SP7186	500mm	29.95	26.95
2082716	SP7186	Rotary	16.95	15.49
2082724	WP688	Wiper	3.49	3.19

Load Cell Sensors & Speakers

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Honeywell

Relative Humidity Sensor

- Linear volt. output vs %RH
- Voltage supply: 4 to 5.8VDC
- High accuracy
- Accuracy (best fit straight line): $\pm 3.5\%$ RH
- Direct input to a controller or other device is made possible by this sensor's linear voltage output
- 3-pin SIP
- Operating temp.: -40°C to 85°C
- Current supply: 500 μA max.
- Designed specifically for high volume OEM

* Web Code: WEG



Part No.	Mfr. Part No.	Description	1	5	25
1860248	HH-4000-003	0.10" lead pitch SIP w/ calibration & data printout	\$26.95	\$22.95	\$21.95

Ultrasonic Sensor Sets


Motion or Distance Sensing, Transmitter/Receiver Set

- Frequency: 40kHz $\pm 1.0\text{kHz}$
- Aluminum case
- 136654: • Capacitance: 2000pF $\pm 30\%$
- Transmitter: bandwidth 4.0kHz @ 112dB, sound pressure level 119dB @ 40 $\pm 1.0\text{kHz}$
- Receiver: bandwidth 3.5kHz @ -71dB, min. sensitivity 65dB @ 40 $\pm 1.0\text{kHz}$ (R=3.9k Ω)
- 139492: • Capacitance: 2000pF $\pm 20\%$
- Transmitter: bandwidth 5.0kHz @ 100dB, sound pressure level 112dB @ 40 $\pm 1.0\text{kHz}$
- Receiver: bandwidth 5.0kHz @ -75dB, min. sensitivity 67dB @ 40 $\pm 1.0\text{kHz}$ (R=3.9k Ω)
- 2120268: • Capacitance: 1250pF $\pm 20\%$
- Bandwidth: 4.0kHz @ -73dB
- Transmitter sensitivity: 41kHz @ 67dB
- Receiver sensitivity: 40kHz @ 67dB (R=3.9k Ω)

* Web Code: CAU



136654



139492



2120268

NEW
MARKED IN PINK

Part No.	Product No.	Case Size	Lead Length/Spacing	1	10	100
136654	40TR16F	0.47"H x 0.62"Dia.	0.39"	\$7.95	\$6.95	\$5.95
139492	40TR12B	0.30"H x 0.43"Dia.	0.28"	7.95	6.95	5.95
2120268	EFR40K2	0.47"H x 0.62"Dia.	0.35"	8.95	7.95	6.95



Dynamic & Ceramic Earphones

* Web Code: EHS

Fig. 1



Fig. 2



Fig. 3



Part No.	Mfr. Part No.	Fig.	Type	Impedance (Ω)	Plug	Cord Length (ft.)	Color	Pricing		
								1	10	100
2098460	25DE035-ROX	1	Dynamic	8 $\pm 20\%$	3.5mm	3	Gray	\$1.25	\$1.09	\$0.99
2098443	25DE024-ROX	1	Dynamic	8 $\pm 20\%$	2.5mm	6	Gray	.99	.95	.89
2098451	25DE034-ROX	1	Dynamic	8 $\pm 20\%$	3.5mm	6	Gray	.99	.95	.89
2098427	25CR035-ROX	2	Ceramic	20M min.	3.5mm	3	Tan	2.29	2.09	1.95
2098435	25CR060-ROX	3	Ceramic	20M min.	Tinned	3	Tan	2.49	2.25	1.95

Avago Ambient Light Optical Sensor

A low-cost analog output ambient light photo sensor in a miniature chip LED lead-free surface mount package. It has a spectrally suited phototransistor, which peaks in human luminosity curve.



* Web Code: ZZZ

- Supply voltage: 2.4V to 5.5V
- Oper. temp.: -40°C to 85°C
- Light current ratio: 1.2
- Fall time: 0.8 ms
- Rise time: 0.95 ms
- Dark current: 50mA

Part No.	Product No.	1	10	100
1548511	APDS-9002-021	\$0.95	\$0.85	\$0.65



Flex Sensor



- Max. resistance: 30k Ω to 40k Ω , proportional to the degree of flexing or bending
- Length: 4.5"
- Applications: virtual reality data gloves, robotic, bio-metric, physics and engineering

Part No.	Nominal Res.	1	10
150551	10k Ω	\$12.95	\$11.49

Bidirectional Flex Sensor



As the Bi Flex Bend Sensor is bent in either direction, the resistance gradually decreases. It is pressure sensitive and may also be used as a force or pressure sensor.

- Nominal resistance: 20k - 50k Ω
- Dimensions: 4.5"L x .375"W x .038"T
- Temp. range: -45°F to 125°F

NEW
MARKED IN PINK

Part No.	Mfr. Part No.	1	5	25
2124867	FLX-01-M	\$9.95	\$8.95	\$7.95

Have A Large Volume Order That Requires Special Pricing? Call us at 1-800-831-4242

DOLLAR SALE

Over 5,000 SKUs
Over 15 Million Parts in Stock
In Lots of up to 1000 Pieces
Priced Below a Dollar.

Look for pricing shaded in blue throughout the catalog and for a larger selection go to:


Jameco.com/MakesCents

EXPERIMENTING WITH A LUMINESCENT "CAPACITOR"

by Forrest M. Mims III

Luminescent materials are similar to capacitors as they can be "charged" with light, slowly releasing light but with a wavelength range that may not equal charging light. The difference is the discharge cycle of the luminescent material is spontaneous. Although a capacitor may experience some leakage, it's designed to discharge through some other external component.

Experiment with a self-discharging luminescent "capacitor" by using a CdS photoresistor or silicon photodiode to detect the light given off by a luminescent material after it has been charged by exposure to light. This recipe will get you started.

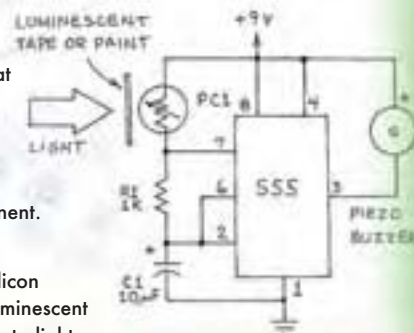

WWW.JAMECO.COM/FMR8

JAMECO ValuePro

Magnetic Transducers (Speakers)

* Applied voltage: 1/2 duty, square wave

* Web Code: JMT

Part No.	Manufacturer	Product No.	Fig.	Oper. Volt. (V/mA)	Volt. Range	Frequency (Hz)	Impedance (Ω)	Sound (dB)	Dimensions (H x Dia.)	Pricing		
										1	10	100
207918	ValuePro	DB105GFPN	1	1.5/30	1 - 2	2048	16	75	.22" x .47"	\$.99	\$.85	\$.69
1537408	Various	QMB-01	2	1.5/15	—	2048	30	80	.53" x .63"	.99	.85	.69
106500	ValuePro	SBT-1205	3	5/40	3 - 8	2400	38	85	.40" x .48"	1.29	1.15	.99
138740	ValuePro	DBX05-PN	3	5/40	3 - 8	2400	47	85	.35" x .46"	1.29	1.15	.99
138722	ValuePro	DB111A-PN	3	1.5/10	1 - 2	2048	50	80	.32" x .46"	1.29	1.15	.99
673871	ValuePro	PRT-1205	3	5/40	3 - 8	2400	470	90	.35" x .46"	.79	.65	.49
673774	ValuePro	SBT-1612	2	12/40	6 - 18	2048	200	85	.53" x .62"	.99	.85	.69



Fig. 1



Fig. 2




Fig. 3

Piezo Transducers (Speakers)

* Web Code: JPT

Part No.	Manufacturer	Product No.	Fig.	Rated Voltage	Max. Current	Res Frequency	Sound (dB)	Dimensions (H x Dia.)	Pricing		
									1	10	100
1956784	Velleman	TV4	1	1.5Vp-p	1.5mA	4kHz	75	0.2mm x 50mm	\$2.95	\$2.59	\$2.35
1956776	Velleman	TV1	2	1.5Vp-p	1.5mA	4kHz	85	6mm x 30mm	1.95	1.75	1.59
2098540	Kobitone	PB220-ROX	3	3Vp-p	3mA	2kHz	70	3.2mm x 10mm	1.09	.95	.79
2098523	Kobitone	PB140-ROX	4	5Vp-p	5mA	4kHz	80	6.8mm x 13.8mm	1.29	1.15	.99
2098558	Kobitone	PB160-ROX	5	9Vp-p	7mA	4kHz	80	4mm x 16.5mm	1.19	1.09	.89
2098531	Kobitone	PB102-ROX	6	10Vp-p	5mA	3.2kHz	70	26.5mm x 22mm	1.29	1.15	.99
2099702	Kobitone	256-PB315*	7	10Vp-p	7mA	4kHz	82	7.6mm x 17mm	1.29	1.15	.99
2099711	Kobitone	256-PB012*	2	10Vp-p	8mA	6kHz	88	4mm x 24mm	1.29	1.15	.99
2099729	Kobitone	256-PB015*	3	10Vp-p	9mA	5kHz	80	4mm x 16.5mm	1.29	1.15	.99
2098566	Kobitone	AZ-3025E-W-LF	2	10Vp-p	9mA	2.5kHz	86	9.5mm x 30mm	1.29	1.15	.99
336276	ValuePro	PT-1250W	3	12Vp-p	2mA	4kHz	75	4.3mm x 13.5mm	1.49	1.25	.95
336314	ValuePro	PT-2038FW	8	12Vp-p	3mA	4kHz	80	4.5mm x 24mm	1.49	1.25	.95
2077280	Panasonic	24C411	4	15Vp-p	2mA	4kHz	85	6mm x 24mm	1.49	1.25	.95

* Requires external drive



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5




Fig. 6



Fig. 7



Fig. 8

Piezo Buzzers (Annunciators)

* Web Code: JPB

Part No.	Manufacturer	Product No.	Fig.	Tone	Oper. Volt. (V/mA)	Volt. Range	Sound (dB)	Freq. (Hz)	Dimensions (H x Dia.)	Pricing		
										1	10	100
2081246	Shogyo	SEP-220A5	1	Single	3/11	1.5 - 6	85	3000	16mm x 24mm	\$2.19	\$1.95	\$1.75
335557	ValuePro	MSR320	2	Single	3-20/3-16	3 - 20	90	3400	.39" x .91"	2.75	2.55	2.29
337535	ValuePro	SNP428	3	Single	4-28/3-16	4 - 28	76	2900	.85" x 1.64"	2.49	2.25	1.95
1956696	Velleman	SV4/5-S	4	Single	5/25	3 - 6	87	3200	.30" x .47"	3.39	3.09	2.79
2081959	Floyd Bell	UC-05-515-P	5	Single	5/30	5 - 15	96	2100	1.08" x 1.40"	3.95	3.59	3.19
2098611	Kobitone	15210-ROX	1	Single	6/6	3 - 15	90	4000	0.335" x 0.543"	2.95	2.75	2.49
336989	ValuePro	SC616N	6	Single	6-16/6-22	6 - 16	95	2900	1.28" x 1.69"	1.95	1.75	1.55
1956741	Velleman	SVM06	7	Single	6/20	3 - 7	75	300-500	.91"L x .63"W x .59"H	1.95	1.75	1.55
337210	ValuePro	SC628D	6	Single	6-28/5-18	6 - 28	75	1900	1.25" x 1.69"	1.95	1.75	1.49
2098654	Kobitone	35C5-ROX	8	Single	6/40	3 - 15	110	2800	1.02" x 1.65"	4.75	4.25	3.75
2098638	Kobitone	27C0-ROX	9	Single	9/8	3 - 20	97	3500	0.552" x 1.22"	3.29	2.95	2.59
196357	Various	AL-175	10	Single	12/5.8	3 - 16	86	4000	.30" x .54"	1.75	1.49	1.25
1956725	Velleman	SV8	1	Single	12/6	3 - 16	85	4000	.30" x .55"	1.95	1.75	1.59
138713	ValuePro	32S4120-PN	10	Single	12/7	3 - 16	80	4000	.30" x .54"	2.45	2.25	1.95
673900	ValuePro	SEP-1172	11	—†	12/7	3 - 28	81	3300	16mm x 31.4mm	.95	.85	.69
2099690	Kobitone	256-PB313	12	Continuous†	12/7	3 - 28	82	3600	.413" x 1.18"	1.49	1.25	1.09
336639	ValuePro	SBM618PU	13	—†	12/8	3 - 28	90	2900	16mm x 42mm	.99	.95	.89
2120452	ValuePro	DB-E238	1	Single	12/8	3 - 20	85	2900	16mm x 23.8mm	2.95	2.65	2.29
1956688	Velleman	SV4	14	Single	12/12	4 - 15	90	2800	.79" x 1.10"	1.49	1.25	1.19
1956750	Velleman	SVM12	7	Single	12/15	7 - 17	75	300-500	.91"L x .63"W x .59"H	1.95	1.75	1.65
1956670	Velleman	SV2	15	Single	12/15	4 - 15	85	2800	.57" x 1.10"	.99	.95	.89
1956709	Velleman	SV4/12-S	4	Single	12/15	8 - 16	85	3200	.30" x .47"	.99	.95	.89
335927	ValuePro	PK-20A38P	1	Single**	12/15	3 - 24	95	3800	18mm x 23mm	2.95	2.59	2.29
335505	ValuePro	MAS800	16	Single	12/50	9 - 12	103	2800	15.2mm x 26mm	1.95	1.75	1.49
32602	ValuePro	11S3240-R	17	Single	24/15	1 - 27	95	2900	1.4" x 1.7"	4.95	4.45	4.29
1956768	Velleman	SVM24	7	Single	24/20	16 - 30	75	300-500	.91"L x .63"W x .59"H	1.95	1.75	1.59
76021	ValuePro	7S3240-LA	17	Single	24/20	1.5 - 28	95	3200	1.0" x 1.1"	3.95	3.49	2.95
249498	ValuePro	1103120-LF-TA	17	Dual#	12/25	4 - 16	95	2900	34.5mm x 43.5mm	2.95	2.65	2.39
1956661	Velleman	SV1	18	Dual	12/30	1 - 13	105	2900	1.02" x 1.77"	3.95	3.75	3.49
123538	ValuePro	11D3240-R	17	Dual#	24/20	4 - 28	80	2900	1.4" x 1.7"	4.19	3.79	3.39
336997	ValuePro	SC616NJ	17	Pulse	6-16/6-22	6 - 16	95	2900	1.28" x 1.69"	2.95	2.59	2.35
335855	ValuePro	PK-12N40P	1	Pulse	12/10	3 - 15	83	4100	8mm x 14mm	2.95	2.59	2.29
2117430	DB Products	7P3120LF-LA	19	Pulse	12/10	3 - 15	90	3200	.98" x 1.10"	3.55	3.19	2.49
336049	ValuePro	PK-27N36W	6	Pulse	12/15	3 - 28	90	3500	10mm x 30mm	2.55	2.19	1.95

† Requires driver circuit

** Press fit: panel hole - 27mm (1.06")

Continuous or fast pulse



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5



Fig. 6



Fig. 7



Fig. 8



Fig. 9



Fig. 10



Fig. 11



Fig. 12



Fig. 13




Fig. 14



Fig. 15



Fig. 16



Fig. 17




Fig. 18



Fig. 19

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Buzzers, Sirens & Speakers

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

JAMECO ValuePro

Mechanical/Electromechanical Buzzers

* Web Code: MEB

Part No.	Manufacturer	Cross Ref. No.	Fig.	Oper. Volt. (V/ma)	Voltage Range	Frequency (Hz)	Sound (dB)	Dimensions	Pricing		
									1	10	100
335370	ValuePro	AST200	1	3/80	2-5	2731	85	8.7"sq. x 4.2"H	\$.99	\$.89	\$.75
140695	ValuePro	63S1120-LA	2	12/25	9-15	400	75	1.3"L x 0.7"W x 0.6"H	1.95	1.59	1.29
335345	ValuePro	ASI301	1	5/30	4-7	2400	90	.5"L x .5"W x .4"H	.89	.79	.65
335353	ValuePro	ASI401	1	12/30	8-15	2400	90	.5"L x .5"W x .4"H	.89	.79	.65
335388	ValuePro	AST500	1	1.5	1.2-3	2400	85	.5"L x .5"W x .4"H	.85	.75	.59
76065	ValuePro	TDB05-PN	3	5/30	4-7	2300	85	.35"H x .46"Dia.	2.95	2.75	2.55
24872	ValuePro	63S109LA	2	9/30	6-12	400	75	1.3"L x 0.7"W x 0.6"H	1.49	1.35	1.19




JAMECO ValuePro

Piezo Sirens

* Web Code: POS

Part No.	Manufacturer	Product No.	Fig.	Oper. Volt. (V/ma)	Voltage Range	Frequency (Hz)	Sound (dB)	Dimensions	Pricing		
									1	10	100
336225	ValuePro	PS-562	1	12/40	5-15	2500/3500	100	16mm x 42mm Dia.	\$4.95	\$4.49	\$3.95
207993	ValuePro	SL15R3120LA	2	12/250	6-16	3500	105	2.3"L x 1.8"W x 1.6"H	4.95	4.49	3.95
207889	ValuePro	18R3120	3	12/120	9-15	1500/3100	105	3.4"L x 2.2"W x 1.3"H	5.95	5.49	4.95
148152	Various	YC-321-1	4	12/300	2-12	3000	108	2.5"L x 2.8"Dia	7.95	6.95	5.95
2123733	Velleman	SV/PS5R	5	12/1300	6-12	900/4000	125	3.9"L x 4.3"Dia	12.95	11.95	10.95



Flat Element, Square Speakers

- Excellent for alarms or other voice uses
- Stainless steel diaphragm

* Web Code: XAE

Part No.	Product No.	Dimensions (Dia." x D")	Input		Impedance (Ω)	Output SPL (dB)	Frequency Range (Hz)	Element Size (Dia." x H")	Pricing		
			Nom (W)	Max (W)					1	10	100
34025	GSP02-R	1.2 x 0.2	0.4	0.8	8	70	1300-8000	1.2 x 0.1	\$2.25	\$1.95	\$1.49
76030	AZ40S	1.6 x 0.2	0.4	0.8	8	70	600-6000	1.6 x 0.1	1.95	1.69	1.49
673766	AZ50S	1.9 x 0.2	0.4	0.8	8	70	500-6000	1.9 x 0.1	1.75	1.49	1.19



Alnico Round, Square and Rectangular Speakers

* Web Code: EAL

Part No.	Product No.	Fig.	Dimensions (Dia." x D")	Input		Impedance (Ω)	Output SPL (dB)	Frequency Range (Hz)	Magnet Size (Dia." x H")	Pricing		
				Nom (W)	Max (W)					1	10	100
2099614	31204	1	4.05 x 1.6	1.0	2.0	4	95	300-1200	0.9 x 0.6	\$2.49	\$2.25	\$1.95
135765	RA2425	2	2.2 x 0.8	0.25	0.5	8	87	400-4000	0.5 x 0.4	1.59	1.45	1.09
88411	A0200	2	2.0 x 0.8	0.2	0.4	8	87	430-4500	0.5 x 0.4	2.29	1.95	1.75
111588	B0102	1	1.7 x 0.6	0.1	0.3	8	83	500-5500	0.5 x 0.4	2.39	2.19	1.95
2115442	K7048202	3	1.6Lx2.8Wx0.9H	3.0	3.0	8	82	310-12000	0.87 x 0.29	3.49	3.09	2.75
135812	A1527C02	3	1.6Lx2.8Wx1.2H	2.0	5.0	8	82	450-20000	0.5 x 0.5	4.49	3.95	3.59
2077301	25S9024	2	2.25 x 0.77	0.2	0.2	8	90	450-4000	0.9 x 0.8	1.95	1.69	1.49
1954834	NMB-0030†	2	1.8 x 0.5	0.5	1.0	8	87	550-6000	0.9 x 0.2	2.49	2.25	1.95
2081676	FM009A*	1	4.0 x 1.6	15.0	30.0	8	102	900-6000	2.8 x 7.3	3.95	3.59	3.19
1950972	I-826-219**	4	8.2Lx2.2Wx2.0H	1.0	13.0	8	95	30-20000	1.5 x 2.8	6.95	6.29	5.49
2081220	TP-252††	2	2.6 x 0.875	0.5	1.0	16	89	400-4000	0.9 x 0.5	1.95	1.75	1.59
1954826	R11-49††	1	2.9 x 1.2	0.5	1.0	16	89	300-7500	0.9 x 0.4	1.95	1.75	1.59
1954842	609-0033††	3	3.6Lx2.0Wx1.5H	1.0	3.0	16	89	200-3000	0.9 x 0.7	2.95	2.59	2.39
1954851	R-A162††	1	4.0 x 1.5	1.0	2.0	16	89	200-3500	0.9 x 0.6	2.49	2.25	1.95
307820	UF1082	5	1.73 x 0.275	0.5	1.0	40	80	200-6000	0.8 x 0.1	2.49	2.19	1.95

* Indoor/outdoor mylar diaphragm (closed back) ** Sony LCD plasma replacement speaker (actual size: 6"H x 2.15"W x 1.94"D) † Pair of wire leads (2) 11"/10" †† With wire leads

- For computer case use
- Paper diaphragm
- Large magnet
- Wide frequency response
- Pre-tinned solder lugs



Micro Round and Rectangular Speakers

* Web Code: TBX

Part No.	Product No.	Dimensions (Dia." x D")	Input (W)		Impedance (Ω)	Magnet Size (Dia." x H")	Output SPL (dB)	Frequency Range (Hz)	Pricing		
			Nom.	Max.					1	10	100
2099825	H73	0.80 x .115	0.1	0.2	8	0.47 x 0.03	78	800-7000	\$1.59	\$1.45	\$1.09
2099606	SP801W	1.05 x 0.35	0.1	0.2	8	0.67 x 0.17	78	320-7500	1.75	1.49	1.25
2095242	35CS088-M75NA	1.4Lx1.3Wx0.2H	0.2	0.3	8	0.44 x 0.10	80	550-6700	1.95	1.75	1.49
307871	GC0401M	1.57 x 0.67	0.2	0.3	8	0.71 x 0.43	80	600-8000	1.25	1.09	.99
2081191	5000375-00	2.00 x 0.34	0.2	1.5	8	0.63 x 1.14	85	600-3000	1.49	1.25	.95
1956590	TR-050F-R	2.00 x 0.70	0.5	1.0	16	1.25 x 0.34	85	500-5000	1.49	1.29	1.09
138861	GC0201	0.80 x 0.169	0.1	0.2	32	0.26 x 0.06	78	800-7000	1.25	.95	.75
2099593	SP452W	2.25 x 0.5	0.1	0.2	45	0.68 x 0.17	86	150-9000	1.49	1.25	1.19
355514	YGD40A-50	1.57 x 0.40	0.5	1.0	50	0.72 x 0.43	89	600-5200	1.95	1.69	1.49



30mm PCB Mountable Speakers

- Ideal for PC board mounting
- Mylar diaphragm
- Power (nominal/max.): 0.15W/0.2W
- Solder leads

Part No.	Size (H x Dia.)	Impedance	Pin Spacing	Freq. Range	SPL (dB)	1	10	100
2095234	0.57" x 1.24	8Ω	0.69"	700-4kHz	82	\$1.75	\$1.49	\$1.25
135722	0.50" x 1.17"	8Ω	0.59"	700-5kHz	82	1.75	1.49	.99
2099817	0.47" x 1.16"	100Ω	0.58"	1.1kHz ±20%	95	1.49	1.25	1.09



The Best Warranty in the Industry

All Jameco purchases are guaranteed for a full 90 days and even longer for Jameco House Brands.

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

Round Ferrite Speakers

*Web Code: TAT

Part No.	Manufacturer	Product No.	Dimensions (Dia. x D")	Input (W)		Impedance (Ω)	Output SPL (dB)	Frequency Range (Hz)	Magnet Size (Dia. x H")	Pricing		
				Nom.	Max.					1	10	100
320135	Various	C35128A†	2.0 x 0.7	0.2	0.4	8	83	420 - 5000	1.3 x 0.4	\$1.49	\$1.25	\$1.09
135589	Various	FE200	2.0 x 0.7	0.2	0.4	8	83	420 - 5000	1.3 x 0.4	1.49	1.25	1.09
320362	ValuePro	TR-057F-R	2.0 x 0.7	0.25	0.5	8	86	900 - 9000	1.3 x 2.5	1.49	1.25	1.09
10840	ValuePro	FE201	2.2 x 0.7	0.2	0.4	8	88	400 - 4500	1.3 x 0.4	1.95	1.69	1.49
2081254	Star	FR-05202-01	2.0 x 1.15	3.0	5.0	8	85	100 - 5000	1.6 x 0.5	2.49	2.25	1.95
1954800	Regal	R-F163†	3.0 x 1.3	1.5	3.0	16	89	200 - 3000	1.8 x 0.4	1.95	1.69	1.49
2099585	Various	RF-608E	2.2 x 0.7	1.0	2.0	48	86	300 - 3000	1.3 x 0.4	1.95	1.69	1.49
2081844	Various	20-220-NSR†	2.0 x 0.7	0.1	0.2	50	86	300 - 3000	1.3 x 0.4	1.95	1.69	1.49

† With lead wires

- Pre-tinned speaker lugs
- Anodized metal surfaces
- Braided copper voice coil leads
- Paper diaphragm
- Large magnet

For speaker wire, see page 61



Square Ferrite Speakers

*Web Code: EDT

Part No.	Manufacturer	Product No.	Dimensions (Dia. x D")	Input (W)		Impedance (Ω)	Output SPL (dB)	Frequency Range (Hz)	Magnet Size (Dia. x H")	Pricing		
				Nom.	Max.					1	10	100
99996	ValuePro	FEB204	2.6 x 0.9	3.0	4.0	4	95	300 - 14000	1.8 x 0.5	\$2.69	\$2.39	\$2.05
135694	ValuePro	FEB200	2.0 x 0.7	0.2	0.3	8	82	500 - 6000	1.3 x 0.5	1.95	1.69	1.49
2099833	Various	964000-002	2.6 x 0.8	0.2	0.3	8	97	500 - 6000	1.3 x 0.4	1.95	1.69	1.49
1954818	Various	TQ-100F-R	4.0 x 1.4	6.0	8.0	8	97	800 - 10000	1.8 x 0.5	2.95	2.59	2.39
31959	ValuePro	FEB216	2.6 x 0.8	0.2	0.4	16	85	330 - 8000	1.3 x 0.5	2.69	2.39	2.15
2099577	Various	SP83W	3.0 x 1.5	2.0	3.0	8	90	300 - 10000	1.8 x 0.6	2.95	2.59	1.95

- Pre-tinned speaker lugs
- Anodized metal surfaces
- Braided copper voice coil leads
- Paper diaphragm
- Large magnet




Omni-Directional Electret Condenser Microphone Cartridges

Applications: Tape recorders, intercoms, hearing aids, telephone and answering devices, sonic controlled toys and sensors

*Web Code: QBW

Part No.	Manufacturer	Product No.	Sensitivity	Frequency (Hz)	Max. Op. Volt.	Stand Op. Volt.	Max. Current	Sensitivity Reduction	S/N Ratio	Impedance	Terminals	Size (H x Dia.)	Pricing			
													1	10	100	1000
1950948	ValuePro	AMF-097A40-NB1-LF	-60 ±3dB	50-16,000	10VDC	3.0VDC	0.5mA	-3dB @ 3V	>58dB	>2.2kΩ	PC pin leads	.27" x .39"	\$.89	\$.79	\$.69	\$.59
136574	ValuePro	WM-60PC	-54 ±2dB	20-12,000	12VDC	4.5VDC	0.5mA	-3dB @ 3V	>40dB	>2.2kΩ	PC pin leads	.30" x .38"	.95	.89	.75	.59
320179	Various	EM-99	-64 ±2dB	20-12,000	12VDC	4.5VDC	0.5mA	-3dB @ 3V	>40dB	>2.2kΩ	PC pin leads	.27" x .39"	.85	.75	.69	.65
2099622	ValuePro	C2034A	-46±2dB	20-12,000	12VDC	4.5VDC	0.5mA	-3dB @ 1.5V	60dB	2.2kΩ	PC pin leads	.27" x .37"	.85	.75	.69	.59



Hardware

Spacers & Electronic Hardware Kit

Includes 2700 pcs. (27 types) Spacers, Nuts, Flat, Tooth & Lock Washers and Slotted Pan Head Screws

SAVE \$59

100 each Spacers	100 each Hex nuts	100 each Flat	100 each Int. tooth	100 each Split lock	100 each PH machine screws
—	2-56	#2	#2	#2	2-56 x 1/4, 1/2
4-40	4-40	#4	#4	#4	4-40 x 1/4, 1/2
6-32	6-32	#6	#6	#6	6-32 x 1/4, 1/2
8-32	8-32	#8	#8	#8	8-32 x 1/4, 1/2
Part No.	Description		Wt. (lbs.)		
108433	2700 pcs. hardware kit		7.5	\$99.95	\$89.95



Thumbscrews

Aluminum

*Web Code: VBZ

Fig. 1 393976

Fig. 2 394071

Part No.	Mfr. Part No.	Fig.	Thread	Thread Length	Length	1	10	100
393976	7100-A	1	4-40	5/16"	5/8"	\$.95	\$.75	\$.65
394063	7125-A	2	6-32	3/8"	9/16"	.95	.75	.65
394071	7128-A	2	8-32	3/8"	9/16"	.75	.69	.59

Clearance Center

www.Jameco.com/Clearance

Aluminum & Brass Round Spacers

*Web Code: TBQ

• Finish: 1 = Aluminum iridite clear 2 = Brass zinc clear chromate • ID (Internal Diameter): #4 = .115"; #6 = .140" * Order in multiples of 10

3/16" Outer Diameter

Part No.	Mfr. Part No.	Length	ID	1	10	100
392956	1107-4-B-12 ²	1/8"	#4	\$.29	\$.25	\$.19
392964	1108-4-B-12 ²	3/16"	#4	.29	.25	.19
392972	1109-4-B-12 ²	1/4"	#4	.29	.25	.19
392981	1110-4-B-12 ²	5/16"	#4	.29	.25	.19
392983	1111-4-AL-7 ¹	3/8"	#4	* .19	.15	
392999	1111-4-B-12 ²	3/8"	#4	.29	.25	.19
393001	1112-4-B-12 ²	7/16"	#4	.35	.29	.25
393019	1113-4-B-12 ²	1/2"	#4	.35	.29	.25
393027	1115-4-B-12 ²	5/8"	#4	.39	.35	.29
392930	1116-4-A-7 ¹	11/16"	#4	.29	.25	.19
393035	1116-4-B-12 ²	11/16"	#4	.29	.25	.19
393043	1117-4-B-12 ²	3/4"	#4	.39	.35	.29

1/4" Outer Diameter

Part No.	Mfr. Part No.	Length	ID	1	10	100
393158	1122-4-B-12 ²	1/8"	#4	* .19	\$.15	

1/4" Outer Diameter (Continued)

Part No.	Mfr. Part No.	Length	ID	1	10	100
393061	1123-4-AL-7 ¹	3/16"	#4	* .19	\$.15	
393166	1123-4-B-12 ²	3/16"	#4	* .19	.15	
393369	1123-6-B-12 ²	3/16"	#6	* .19	.15	
393272	1124-6-AL-7 ¹	1/4"	#6	.25	.22	.15
393377	1124-6-B-12 ²	1/4"	#6	* .19	.15	
393086	1125-4-A-7 ¹	5/16"	#4	* .19	.15	
393182	1125-4-B-12 ²	5/16"	#4	* .19	.15	
393290	1125-6-AL-7 ¹	5/16"	#6	* .19	.15	
393385	1125-6-B-12 ²	5/16"	#6	* .19	.15	
393095	1126-4-A-7 ¹	3/8"	#4	* .19	.15	
393191	1126-4-B-12 ²	3/8"	#4	* .19	.15	
393297	1126-6-A-7 ¹	3/8"	#6	* .19	.15	
393393	1126-6-B-12 ²	3/8"	#6	* .19	.15	
393203	1127-4-B-12 ²	7/16"	#4	* .19	.15	
393300	1127-6-A-7 ¹	7/16"	#6	* .19	.15	

1/4" Outer Diameter (Continued)

Part No.	Mfr. Part No.	Length	ID	1	10	100
393406	1127-6-B-12 ²	7/16"	#6	* .19	\$.15	
393115	1128-4-A-7 ¹	1/2"	#4	* .19	.15	
393211	1128-4-B-12 ²	1/2"	#4	* .19	.15	
393319	1128-6-A-7 ¹	1/2"	#6	* .19	.15	
393414	1128-6-B-12 ²	1/2"	#6	* .19	.15	
393123	1133-4-A-7 ¹	13/16"	#4	* .19	.15	
393220	1133-4-B-12 ²	13/16"	#4	.29	.25	.19
393326	1133-6-A-7 ¹	13/16"	#6	* .19	.15	
393422	1133-6-B-12 ²	13/16"	#6	.29	.25	.19
393131	1134-4-A-7 ¹	7/8"	#4	* .19	.15	
393238	1134-4-B-12 ²	7/8"	#4	.35	.29	.25
393335	1134-6-A-7 ¹	7/8"	#6	* .19	.15	
393431	1134-6-B-12 ²	7/8"	#6	.39	.35	.29
393140	1136-4-A-7 ¹	1.0"	#4	* .19	.15	
393246	1136-4-B-12 ²	1.0"	#4	.39	.35	.29

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above




Threaded Standoffs

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

.187"/.250" Aluminum, Brass & Steel Hex Threaded Standoffs

* Web Code: TBQ

- Finish:
- 1 Brass (plain)
- 2 Aluminum iridite (clear)
- 3 Brass bright tin plate
- 4 Stainless steel
- 5 Zinc clear chromate
- 6 Chrome

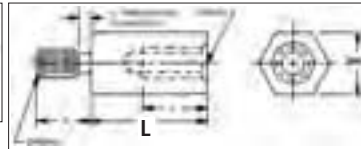

Hex Female Standoffs

* Order in multiples of 10

.187" Hex 4-40 Thread (Fig. 1)

Part No.	*Mir.	Product No.	Length of L	Pricing		
				1	10	100
175636	♦	2052-440S0 ⁶	.187"	\$.25	\$.22	\$.15
133613	RAF	2053-440AL7 ²	.250"	.29	.25	.19
102796	JVP	14-552 ³	.250"	.35	.29	.25
133640	RAF	2057-440AL7 ²	.500"	.39	.35	.25
139792	RAF	2058-440AL7 ²	.563"	.29	.25	.19
133648	RAF	2059-440AL7 ²	.625"	.29	.25	.19
133656	RAF	2061-440AL7 ²	.750"	.39	.35	.29
139185	RAF	2065-440AL7 ²	1.00"	.55	.49	.35

.250" Hex 6-32 Thread (Fig. 1) (Continued)

Part No.	*Mir.	Mfr Part No.	Length of L	Pricing		
				1	10	100
143441	RAF	2124-632AL7 ²	1.75"	\$.79	\$.69	\$.55
387495	RAF	2140-632A7 ²	4.00"	1.95	1.75	1.49
387508	RAF	2144-632A7 ²	5.00"	1.95	1.75	1.49
387516	RAF	2148-632A7 ²	6.00"	2.95	2.49	2.25
387524	RAF	2152-632A7 ²	7.00"	2.95	2.49	2.25
387532	RAF	2156-632A7 ²	8.00"	2.95	2.49	2.25
387541	RAF	2160-632A7 ²	9.00"	2.95	2.49	2.25
387559	RAF	2164-632A7 ²	10.0"	2.95	2.49	2.25

Hex Male/Female Standoffs

.187" Hex 4-40 (Fig. 2) (A: .250"; B: .187")

Part No.	*Mir.	Mfr Part No.	Length of L	Pricing		
				1	10	100
393458	RAF	4501-440AL7 ²	.250"	\$.45	\$.39	\$.35
393466	RAF	4503-440AL7 ²	.375"	.35	.29	.25
393474	RAF	4505-440AL7 ²	.500"	.45	.39	.35
2125202	RAF	4508-440BR7 ³	.709"	.35	.25	.19
393491	RAF	4509-440AL7 ²	.750"	.39	.35	.29
393503	RAF	4513-440AL7 ²	1.00"	.49	.45	.35

.187" Hex 6-32 Thread (Fig. 2) (A: .375"; B: .250")

Part No.	*Mir.	Mfr Part No.	Length of L	Pricing		
				1	10	100
393546	RAF	4503-632AL7 ²	.375"	\$.35	\$.29	\$.25
393554	RAF	4508-632AL7 ²	.500"	.39	.35	.29
393571	RAF	4509-632AL7 ²	.750"	.35	.29	.25
393588	RAF	4513-632AL7 ²	1.00"	.45	.39	.29

.250" Hex 4-40 Thread (Fig. 2) (A: .250"; B: .187")

Part No.	*Mir.	Product No.	Length of L	Pricing		
				1	10	100
77586	RAF	4530-440AL7 ²	.250"	\$.35	\$.29	\$.25
1582330	KEY	8713 ⁵	.250"	.55	.49	.35
77594	RAF	4532-440AL7 ²	.375"	.45	.35	.19
393845	RAF	4532-440-B-12L ⁵	.375"	.35	.29	.25
111756	RAF	4534-440AL7 ²	.500"	.45	.39	.29
139214	RAF	4536-440AL7 ²	.625"	.45	.39	.29
139222	RAF	4538-440AL7 ²	.750"	.49	.45	.35
139231	RAF	4542-440AL7 ²	1.00"	.55	.49	.45
128566	RAF	4546-440AL7 ²	1.25"	.49	.45	.39
393895	RAF	4546-440B12 ⁵	1.25"	.75	.69	.59
166546	RAF	4550-440AL7 ²	1.50"	.75	.69	.59
393909	RAF	4550-440B12 ⁵	1.50"	.55	.49	.39
618020	♦	S440MF1.5 ²	1.50"	.25	.22	.15

.250" Hex 6-32 Thread (Fig. 2) (A: .375"; B: .250")

Part No.	*Mir.	Product No.	Length of L	Pricing		
				1	10	100
133542	RAF	4530-632AL7 ²	.250"	\$.45	\$.39	\$.25
2095103	♦	4530-632-BR7 ³	.250"	.39	.29	.19
133568	RAF	4532-632AL7 ²	.375"	.45	.39	.25
77607	RAF	4534-632AL7 ²	.500"	.45	.39	.25
77623	RAF	4538-632AL7 ²	.750"	.55	.49	.39
77650	RAF	4542-632AL7 ²	1.00"	.65	.59	.49
393959	RAF	4542-632B12 ⁵	1.00"	.55	.49	.45
206623	♦	SP14SS125 ⁴	1.25"	1.39	1.25	.95
393968	RAF	4546-632B12 ⁵	1.25"	.85	.75	.65

.250" Hex 4-40 Thread (Fig. 1)

Part No.	*Mir.	Product No.	Length of L	Pricing		
				1	10	100
139193	RAF	2100-440A7 ²	.250"	\$.25	\$.22	\$.15
1944353	♦	4-40BHEX ¹	.250"	*	.08	.07
77501	RAF	2102-440AL7 ²	.375"	.29	.25	.19
393693	RAF	2102-440B12 ⁵	.375"	.59	.55	.35
134763	RAF	2103-440AL7 ²	.437"	.39	.35	.19
108371	RAF	2104-440AL7 ²	.500"	.45	.39	.25
393713	RAF	2104-440B1 ⁵	.500"	.35	.29	.25
77519	RAF	2106-440AL7 ²	.625"	.49	.45	.25
393721	RAF	2106-440B12 ⁵	.625"	.35	.29	.25
133605	RAF	2108-440AL7 ²	.750"	.45	.39	.25
393731	RAF	2108-440B12 ⁵	.750"	.49	.45	.39
1944370	♦	.2504-40BHEX ¹	.750"	*	.08	.07
139205	RAF	2112-440A7 ²	1.00"	.29	.25	.19
393749	RAF	2112-440B12 ⁵	1.00"	.49	.45	.39
1944388	♦	.2506-32BHEX ¹	1.00"	*	.08	.07
387401	RAF	2148-440A7 ²	6.00"	1.95	1.75	1.49
387428	RAF	2152-440A7 ²	7.00"	2.95	2.49	2.25
387444	RAF	2156-440A7 ²	8.00"	2.95	2.49	2.25
387452	RAF	2160-440A7 ²	9.00"	2.95	2.49	2.25
387461	RAF	2164-440-A7 ²	10.0"	2.95	2.49	2.25

.250" Hex 8-32 Thread (Fig. 1)

Part No.	*Mir.	Mfr Part No.	Length of L	Pricing		
				1	10	100
387567	RAF	2100-832A7 ²	.250"	*	\$.19	\$.15
387575	RAF	2102-832A7 ²	.375"	*	.19	.15
387663	RAF	2140-832A7 ²	4.00"	1.95	1.75	1.49
387671	RAF	2144-832A7 ²	5.00"	1.95	1.75	1.49
387680	RAF	2148-832A7 ²	6.00"	2.95	2.49	2.25
387698	RAF	2152-832A7 ²	7.00"	2.95	2.49	2.25
387701	RAF	2156-832A7 ²	8.00"	2.95	2.49	2.25
387719	RAF	2160-832A7 ²	9.00"	2.95	2.49	2.25
387727	RAF	2164-832A7 ²	10.0"	2.95	2.49	2.25

.250" Hex 10-32 Thread (Fig. 1)

Part No.	*Mir.	Mfr Part No.	Length of L	Pricing		
				1	10	100
387735	RAF	2100-1032A7 ²	.250"	\$.95	\$.85	\$.75
387743	RAF	2102-1032A7 ²	.375"	.95	.85	.75
387840	RAF	2144-1032A7 ²	5.00"	1.95	1.75	1.49
387858	RAF	2148-1032A7 ²	6.00"	2.49	2.25	1.95
387866	RAF	2152-1032A7 ²	7.00"	2.49	2.25	1.95
387874	RAF	2156-1032A7 ²	8.00"	2.95	2.49	2.25
387882	RAF	2160-1032A7 ²	9.00"	2.95	2.49	2.25
387891	RAF	2164-1032A7 ²	10.0"	2.95	2.49	2.25

.250" Hex 6-32 Thread (Fig. 1)

Part No.	*Mir.	Product No.	Length of L	Pricing		
				1	10	100
77535	RAF	2100-632AL7 ²	.250"	\$.29	\$.25	\$.19
1582398	♦	6-32BHEX ¹	.250"	*	.08	.07
133591	RAF	2102-632A7 ²	.375"	.29	.25	.19
1582400	♦	6-32BHEX ¹	.375"	*	.08	.07
77543	RAF	2104-632AL7 ²	.500"	.29	.25	.19
393772	RAF	2104-632B12 ⁵	.500"	.35	.29	.25
77552	RAF	2106-632AL7 ²	.625"	.45	.39	.25
77570	RAF	2108-632AL7 ²	.750"	.45	.39	.25
77578	RAF	2112-632AL7 ²	1.00"	.49	.45	.29
143407	RAF	2120-632A7 ²	1.50"	.59	.55	.39
393811	RAF	2120-632B12 ⁵	1.50"	.75	.69	.65

.250" Round Threaded Standoffs

* Web Code: TBQ

- Aluminum or Brass † Finish: Iridite (clear); ¹ per MIL-C-5541-D; ² brass (plain)

.250" Round 4-40 Thread Female

* Order in multiples of 10

Part No.	*Mir.	Metal†	Length	Pricing		
				1	10	100
1945102	♦	Alum ¹	.250"	\$.45	\$.39	\$.25
1944468	♦	Brass ²	.250"	*	.08	.07
1944564	♦	Alum ¹	.500"	.35	.29	.25
1944476	♦	Brass ²	.500"	*	.08	.07
1945129	♦	Alum ¹	.750"	*	.08	.07
1944484	♦	Brass ²	.750"	*	.08	.07
1944599	♦	Alum ¹	1.00"	.55	.49	.39

.250" Round 6-32 Thread Female

* Order in multiples of 10

Part No.	*Mir.	Metal†	Length	Pricing		
				1	10	100
1944610	♦	Alum ¹	.250"	*	\$.15	\$.12
1944492	♦	Brass ²	.250"	*	.08	.07
1944628	♦	Alum ¹	.375"	*	.15	.12
1944505	♦	Brass ²	.375"	*	.08	.07
1945145	♦	Alum ¹	.500"	.39	.35	.29
1944521	♦	Brass ²	.500"	*	.08	.07
1944644	♦	Alum ¹	.750"	.29	.25	.19
1944652	♦	Alum ¹	1.00"	*	.08	.07

Ceramic Donut Magnet

★ Web Code: **BAG**

SAE Hardware

Slotted Pan Head Machine Screws

Part No.	Screw Size	Thread	Length (in.)	100 piece multiples	
				100	1000
38173	2-56	Std	.250	\$.05	\$.04
2094320	2-56	Std	.375	.05	.04
2094338	2-56	Std	.500	.05	.04
40952	4-40	Std	.250	.04	.03
40970	4-40	Std	.375	.04	.03
106810	4-40	Std	.500	.04	.03
106543	6-32	Std	.250	.04	.03
42446	6-32	Std	.375	.04	.03
42438	6-32	Std	.500	.04	.03
2094346	8-32	Std	.250	.06	.05
106817	8-32	Std	.375	.06	.05
106797	8-32	Std	.500	.06	.05

Phillips Pan Head Machine Screws

Part No.	Screw Size	Thread	Length (in.)	100 piece multiples	
				100	1000
2094354	2-56	Std	.250	\$.05	\$.04
2094371	2-56	Std	.500	.05	.04
2094389	4-40	Std	.250	.04	.03
2094397	4-40	Std	.375	.04	.03
2094400	4-40	Std	.500	.04	.03
2094418	6-32	Std	.250	.04	.03
2094426	6-32	Std	.375	.04	.03
2094434	6-32	Std	.500	.04	.03
2094442	8-32	Std	.250	.06	.05
2094451	8-32	Std	.375	.06	.05
2094469	8-32	Std	.500	.06	.05

Phillips Round Head Machine Screws

Part No.	Screw Size	Thread	Length (in.)	100 piece multiples	
				100	1000
2095111	6-32	Std.	.197	\$.04	\$.03
2082978	6-32	Std	.250	.04	.03

Phillips Button Head Sheet Metal Screws

Part No.	Screw Size	Thread	Length (in.)	100 piece multiples	
				100	1000
2100072	8	Std.	.375	\$.05	\$.04
2100101	6	Std	.375	.05	.04

Miscellaneous Hardware



Part No.	Description	* Order in multiples of 10		
		1	10	100
2100208	Terminal lug, #4 stud washer, 0.470"L (tin)	* .12	\$.10	
2099745	Terminal lug, #4 stud washer, 0.465"L	* .15	.12	
1581695	Offset leg, 6-32 3/8" screw terminal; 0.55"L	* .19	.15	
2099753	Terminal lug, #8 stud washer, 0.605"L	* .19	.15	
1581572	Terminal lug, #6 stud Lockwasher, 0.865"L	.25	.22	.15
1582410	Single terminal turret .187"L x .109"Th (mtg hole: .078")	* .19	.15	

★ RAF Electronic Hardware Online — Web Code **RAF**

• Zinc-plated steel

Hex Nuts

Part No.	Screw Size	Thread	Diameter (in.)	100 piece multiples	
				100	1000
38165	2-56	Std	.183	\$.03	\$.02
40943	4-40	Std	.243	.03	.02
42420	6-32	Std	.306	.03	.02
51553	8-32	Std	.344	.03	.02

Flat Washers

Part No.	Screw Size	Diameter (in.)	100 piece multiples	
			100	1000
2094725	2	.188	\$.03	\$.02
211131	4	.237	.03	.02
106826	4	.281	.04	.03
106833	6	.373	.04	.03
106842	8	.375	.05	.04

Split Lock Washers

Part No.	Screw Size	Diameter (in.)	100 piece multiples	
			100	1000
106789	2	.172	\$.03	\$.02
40977	4	.242	.03	.02
42463	6	.240	.03	.02
51609	8	.279	.03	.02

Internal Tooth Lock Washers

Part Number	Screw Size	Length (in.)	100 piece multiples	
			100	1000
2094733	2	.200	\$.05	\$.04
106850	4	.258	.05	.04
106868	6	.277	.05	.04
106877	8	.323	.05	.04

Fender Washers

Part No.	Screw Size	Diameter (in.)	100 piece multiples	
			100	1000
401146	#10	1	\$.08	\$.07
401154	1/4"	1.25	.08	.07
401162	5/16"	1.5	.08	.07
401171	3/8"	1.5	.08	.07
401189	1/2"	2	.15	.12

Adhesive Rubber Feet

These durable, pressure sensitive, adhesive-backed urethane bumpers adhere quickly and resist marring and staining on surfaces and give excellent skid and abrasion resistance.

★ Web Code: **FAV**

Part No.	Cross Ref. No.	Type	Fig.	Pack	W" x H"	Order in multiples of 10		
						1	10	50
2119718	BS-34-100BL	Black cylindrical	1	100	.38 x .13	\$4.95	\$4.75	\$4.49
2118897	BS-5-100BL	Black cylindrical	2	100	.50 x .06	5.49	5.29	4.95
142658	SJ5012BLKC	Black cylindrical	1	100	.50 x .14	6.95	5.95	5.49
2118862	BS-34-100CL	Clear cylindrical	3	100	.38 x .13	4.95	4.75	4.49
2118900	BS-5-100CL	Clear cylindrical	4	100	.50 x .06	5.49	5.29	4.95
651911	SJ5312CLR56	Clear cylindrical	3	56	.50 x .14	4.95	4.49	3.95
651920	SJ5412WHT56	White cylindrical	3	56	.50 x .14	6.95	6.25	5.49
126981	SJ5023BLK4	Black square tapered	5	4	.81 x .30	.95	.85	.75
142666	SJ5023BLKC	Black square tapered	5	100	.81 x .30	14.95	13.49	12.49
142771	SJ5008BLKC	Black square tapered	6	100	.50 x .12	7.95	5.95	4.95
142682	SJ5018BLKC	Black square tapered	7	100	.50 x .23	10.95	8.95	7.95
2118889	BS-32-100CL	Clear square tapered	8	100	.50 x .12	5.95	5.75	5.49
2118871	BS-7-100BL	Black hemisphere	9	100	.34 x .09	4.49	4.25	3.95
651903	SJ5302CLR96	Clear hemisphere	10	96	.31 x .09	7.95	7.09	5.85
651938	SJ6553CLR132	Clear hexagonal cone	11	132	.43 x .12	6.95	6.25	5.49
2081385	GB201	100 assorted sizes & types of bumpers & rubber feet				8.95	7.95	6.95

Instrumentation Handles

1954797: Round aluminum black anodized

- 6-32 thread-on 1.25" centers (2)
- Size: 1.4"L x 1.0"H x 0.187"D

216821: Oval aluminum

- 10-32 thread-on 3.00" centers (2)
- Size: 3.3"L x 1.3"H x 0.30"D

Part No.	Mfr.	Product No.	1	10	100
1954797	Keystone	9116	\$1.49	\$1.25	\$.95
216821	Various	8358-1032-B-5	3.95	3.75	3.49

2" General Duty Rigid Caster

- Polyolefin wheels give mobility to heavy loads on smooth surfaces
- Mounting bracket 3"L x 1-3/4"W
- Impervious to water and resists chemicals
- Long wearing, light weight and non-marking
- 125 lb. load rating per caster • Caster swivels 360°

Part No.	Description	1	10	25
2082169	2-1/2" ground clearance	\$1.95	\$1.75	\$1.49

4-40 Mounting Angle Brackets

- Material: zinc plated steel
- 1581530: Both holes 4-40 threaded
- 2082581: One hole 4-40 threaded

Part No.	Size (L" x W" x H")	1	10	100
1581530	.375 x .25 x .353	\$.29	\$.25	\$.19
2082581	.548 x .50 x .506	.35	.29	.25

PCB & Fan Mounting Hardware

- Snap "on"
- Nylon
- ★ Web Code: **PSF**

Part No.	Product No.	Size (in.)	Holes	1	10	100
28337	CS1016	1.2L x 0.6W	.2"	\$.15	\$.12	
129252	PCST2	0.9L x 0.4Dia.	.2"/.3"	.19	.15	
148056	PCST3	0.8L x 0.5W	.1"/.2"	.12	.10	
156831	CS-10	0.68L x 0.32Dia.	.14"	.19	.15	
2100064	SR1036*	1.5L x .38Lip	.167"	.15	.12	

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

1.5VDC – 24VDC Motors

*Web Code: FBN



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5



Fig. 6



Fig. 7



Fig. 8




Fig. 9



Fig. 10



Fig. 11



Fig. 12



Fig. 13



Fig. 14



Fig. 15



Fig. 16



Fig. 17



Fig. 18



Fig. 19

Part No.	Manufacturer	Product No.	Fig.	Nominal Voltage (VDC)	Voltage Range (VDC)	@ Maximum Efficiency			Efficiency	Terminal Type	Shaft Dia. (in.)	Shaft Length (in.)	Size Dia. x Depth (in.)	Pricing		
						Current (Amps)	Speed (RPM)	Torque (g-cm)						1	10	100
231917	ReliaPro	FE-260-2670	1	1.5	1.5-3	0.66	3700	10.5	42.9	0.12"/solder	0.078	0.314	0.937 x 1.063	\$2.25	\$1.95	\$1.75
238465	ReliaPro	RF-310TA-11400 (CW)	2	2.5	1-6	0.06	2190	3.3	75.0	0.05"/solder	0.078	0.70	0.962 x 0.712	2.95	2.65	2.39
238458	ReliaPro	RF-300CA-11400 (CW)R	3	3	1-6	0.065	2400	4.3	56.4	3" wires	0.078	0.19	0.96 x 0.491	3.95	3.49	2.95
1950930	ReliaPro	RF-300CA-11400-22R	3	3	1.2-6	0.073	2970	3.8	55.0	3" wires	0.078	0.22	0.96 x 0.489	3.95	3.49	2.95
154915	Star Motor	ST130-12240-38	4	3	1.5-3	0.17	3588	7.4	55.0	0.09"/solder	0.08	0.37	0.79 x 1.13	1.25	1.09	.99
1939589	Mabuchi Motor	FF-130RH-15210	5	3	1-4	0.17	4280	5.8	50.0	0.08"/solder	0.08	0.24/0.21	0.79 x 0.98	1.95	1.75	1.59
1951449	ReliaPro	QJT-260-18130	1	3	1.5-4.5	0.46	4780	10.0	40.0	0.12"/solder	0.078	0.314	0.944 x 1.071	1.55	1.39	1.25
231925	ReliaPro	FE-260-2295	1	3	1.5-4.5	0.63	6850	14	53.9	0.12"/solder	0.078	0.314	0.937 x 1.063	1.55	1.39	1.25
154923	Star Motor	ST-130-22770	4	3	1.5-3	1.150	12500	10.3	40.0	0.09"/solder	0.08	0.37	0.79 x 1.13	1.45	1.29	1.15
211246	Mabuchi Motor	RC-260RA-2670	6	4.5	3-4.5	1.430	15290	21.8	53.0	0.11"/solder	0.08	0.28	0.93 x 1.06	1.49	1.35	1.19
238511	Mabuchi Motor	RF-500TB-12560	7	6	1.5-12	0.08	2180	11.6	50.6	0.08"/solder	0.078	0.385	1.259 x 0.767	3.95	3.49	2.75
231829	ReliaPro	PC-280-16210	8	6	3-12	0.28	4260	18	47.6	0.08"/solder	0.078	0.433	0.944 x 1.200	2.49	2.25	1.95
231781	ReliaPro	PC-130F-12240	9	6	3-9	0.25	6800	7	33.4	0.08"/solder	0.078	0.377	0.803 x 0.984	1.95	1.75	1.59
232144	ReliaPro	FF-050S-11170R	10	7	1.5-9	0.17	8500	7	51.3	0.08"/solder	0.059	0.433	0.61 x 1.059	2.95	2.65	2.39
177498	Mabuchi Motor	RC280RA-2485R	11	7.2	3-14	1.180	14260	33.3	57.0	0.11"/solder	0.08	0.43	0.95 x 1.20	2.25	1.95	1.75
2095533	Mabuchi Motor	RK-270SH-16175	12	9	4.5-18	0.370	6320	32.5	—	0.08"/solder	0.08	0.344	0.96 x 1.21	2.49	2.25	1.95
231802	ReliaPro	PC-130F-10370	9	9	6-12	0.15	6410	8.5	43.9	0.08"/solder	0.078	0.377	0.803 x 0.984	1.75	1.59	1.39
1955669	Canon	DN26-T41NIB	13	12	4-12	0.25	2200	34.33	—	0.11"/solder	0.08	0.30	1.01 x 1.00	1.19	.99	.79
174693	Johnson Electric	21226-384221R	14	12	9-14	0.015	3000	85.06	—	0.11"/solder	0.08	0.69	0.97 x 1.19	2.95	2.65	2.39
232013	ReliaPro	MD5-12160R	15	12	12-24	0.30	4000	34.3	39.1	0.12"/solder	0.091	0.622	1.082 x 1.279	2.25	1.95	1.75
231732	ReliaPro	PC-130SF-09480R	9	12	6-24	0.11	4800	12.3	49.6	0.08"/solder	0.078	0.377	0.803 x 0.984	2.35	2.09	1.85
238473	ReliaPro	RF-370CA-15370	16	12	3-12	0.17	4840	187	75.0	0.08"/solder	0.078	0.346	0.960 x 1.213	5.45	4.95	4.25
206949	Nichibo	QJT360S14280	17	12	9-30	0.35	4930	44.5	52.0	0.11"/solder	0.09	0.45	1.09 x 1.30	2.95	2.75	2.25
667411	ReliaPro	HRF-370CA-12V	14	12	6-15	0.13	5100	20.0	64.0	0.08"/quick conn.	0.08	0.523	0.960 x 1.20	1.55	1.39	1.25
231750	ReliaPro	PC-130SF-09400R	9	12	6-24	0.15	5130	14.3	42.5	0.08"/solder	0.078	0.377	0.803 x 0.984	1.49	1.35	1.19
2081908	Mabuchi Motor	FK260SA-10400	5	12	0-15	0.13	5330	16.33	58.4	0.08"/solder	0.08	0.474	0.952 x 1.06	.95	.85	.75
231896	ReliaPro	FE-260-08450	1	12	6-12	0.11	5560	10.3	46.6	0.12"/solder	0.078	0.314	0.937 x 1.063	1.55	1.39	1.25
1586031	Mabuchi Motor	FK-260SA	5	12	12-24	0.027	5800	14.8	55.0	0.08"/solder	0.08	0.42	0.96 x 1.06	1.09	.95	.85
232005	ReliaPro	UC-280S-19160R	9	12	6-12	0.57	9000	46.6	63.4	0.08"/solder	0.078	0.433	0.944 x 1.200	2.55	2.29	1.95
2125528	Mabuchi Motor	RS-385SH	12	12	6-24	0.89	8170	80.5	62.5	0.11"/solder	0.09	0.56	1.47 x 1.08	1.95	1.75	1.59
1810099	Mabuchi Motor	FK-260SA (14280)	5	12	12-24	0.063	8600	14.8	55.0	0.08"/solder	0.08	0.43	0.96 x 1.06	.99	.89	.79
2081895	Mabuchi Motor	FC-280ST-18180*	9	12	8-15	0.16	9700	54.3	59.08	Wire/push-in	0.08	0.45	0.95 x 1.32	.95	.85	.75
232022	ReliaPro	MD5-1885R	15	12	6-18	0.74	9820	53.5	60.7	0.11"/solder	0.091	0.622	1.082 x 1.279	2.95	2.65	2.29
232040	ReliaPro	MD5-2070R	15	12	6-12	1.20	12150	62.2	54.1	0.12"/solder	0.091	0.622	1.082 x 1.279	2.55	2.29	1.95
1708351	Nichibo	KD35FN-6531FB	11	12	9-15	1.1	13500	2259	43.0	0.15"/quick conn.	0.128	0.68	1.5 x 2.4	2.95	2.65	2.25
232047	ReliaPro	MD5-2445	15	12	6-12	2.05	19850	79.7	66.0	0.12"/solder	0.091	0.622	1.082 x 1.279	2.75	2.49	2.25
2082177	Johnson Electric	H615-66430	18	13.5	5.0-13.5	1.44	18300	40.6	68.4	0.11"/solder	0.124	0.75	1.4 x 2.23	2.49	2.25	1.95
2082185	Johnson Electric	H615-65050	18	13.6	5.0-13.6	1.44	4575	99.2	—	0.11"/solder	0.124	0.65	1.4 x 1.96	1.95	1.75	1.55
137412	Johnson Electric	3E3151A3	11	14.4	—	1.84	2300	70.8	76.0	20" wires	0.125	0.35	1.40 x 1.96	2.25	1.95	1.75
232101	ReliaPro	MD5-1980AS-AA	19	24	12-24	1.43	22600	88.5	60.9	0.24"/solder	0.091	0.512	1.083 x 1.279	3.95	3.55	2.95
1586040	Mabuchi Motor	RS365PH-11240	18	24	9-28	0.07	10700	411	62.5	0.11"/solder	0.09	0.49	1.08 x 1.28	2.95	2.65	2.39
137614	Johnson Electric	684823A	11	24	—	0.10	2300	78	61.0	0.8"/quick conn.	0.125	0.53	1.40 x 1.96	2.25	1.95	1.75
2120461	Mabuchi Motor	RS385PH	15	24	—	0.261	2225	11.08	59.8	0.11"/solder	0.09	0.64	1.15 x 1.5	2.25	1.95	1.75

*Reverse



Hi-Torque

2125157	ReliaPro	O-B62R	20	12	6-12	0.4	300	2016	—	0.14"/solder	0.157	0.43	0.86 x 2.0	\$36.95	\$34.95	\$33.25
2125165	ReliaPro	O-B104R	20	12	6-12	0.4	155	17786	—	0.14"/solder	0.157	0.43	0.86 x 2.0	41.95	39.95	37.95
2125173	ReliaPro	O-BPK51R	21	12	6-12	0.1	190	28515	—	0.11"/solder	0.236	0.64	1.33 x 3.07	59.95	56.95	53.95
237391	ReliaPro	29SYT003	22	13.5	13.5	13	18000	509	—	Quick connect	0.125	1.003	1.141 x 2.283	6.25	5.59	4.95


RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

6, 12 & 24VDC Reversible Gear Head Motors

- Solder-type terminal
- High torque construction
- Dielectric strength: 300VDC
- Insulation resistance: 10MΩ
- Oil bearing design for long service life

HN27GD Series

Part No.	Cross Ref. No.	Rated Voltage (VDC)	Operating Range (VDC)	@ Maximum Efficiency			Gear Ratio	Gear Case Size Dia. x Length (in.)	Motor Size Dia. x Depth (in.)	Shaft Size Dia. x Length (in.)	Pricing		
				Current (mA)	Speed (RPM)	Torque (g-cm)					1	5	25
167039	GH12-0953Y	12	4.5 - 24	90	9	1200	188:1	1.0 x 0.9	1.1 x 1.0	.16 x .60	\$18.95	\$16.95	\$15.25
249480	GH12-1213Y7-0	12	4.5 - 24	51	90	460	70:1	1.1 x 0.6	1.0 x 0.9	.16 x .60	19.95	18.95	17.95
167047	GH12-1828Y	12	4.5 - 24	195	31	1300	90:1	1.1 x 1.3	1.1 x 0.8	.16 x .60	23.95	21.55	19.45



HN27GD Series

GH30GM Series


Part No.	Cross Ref. No.	Rated Voltage (VDC)	Operating Range (VDC)	@ Maximum Efficiency			Gear Ratio	Gear Case Size Dia. x Length (in.)	Motor Size Dia. x Depth (in.)	Shaft Size Dia. x Length (in.)	Pricing		
				Current (mA)	Speed (RPM)	Torque (g-cm)					1	5	25
153438	GH12-1045Y	12	3.0 - 12	90	13	800	200:1	0.9 x 1.0	1.1 x 0.6	.16 x .70	\$18.95	\$16.95	\$15.25
170642	GH12-1828Y-10	12	6.0 - 24	105	8	3500	332:1	1.2 x 1.2	1.2 x 0.9	.16 x .70	26.95	24.25	21.95
159418	GH12-1921Y	12	4.5 - 12	200	25	2000	132:1	1.2 x 1.2	1.2 x 0.9	.16 x .70	25.95	23.25	20.95
162191	GH12-1324Y225	12	4.5 - 12	145	190	300	30:1	1.0 x 0.9	1.1 x 0.6	.16 x .70	17.95	15.95	14.35



GH30GM Series

32GM Series

Part No.	Cross Ref. No.	Rated Voltage (VDC)	Current (mA)	Speed (RPM)	Torque (g-cm)	Gear Ratio	Gear Case Size Dia. x Height (in.)	Motor Size Dia. x Depth (in.)	Shaft Size Dia. x Length (in.)	Pricing		
										1	5	25
253403	32-009	6	64	2.7	2500	450:1	1.9 x 0.41	1.3 x 0.9	.30 x .70	\$19.95	\$17.95	\$15.95
253323	32-004	6	44	6	1500	200:1	1.9 x 0.41	1.3 x 0.9	.30 x .70	14.95	13.49	11.95
253307	32-002	6	38	8	1200	150:1	1.9 x 0.41	1.3 x 0.9	.30 x .70	19.95	17.95	15.95



32GM Series

38GM Series

253534	38-010	12	97	24	7500	250:1	1.46 x 1.0	1.3 x 0.9	.24 x .50	\$21.95	\$19.75	\$17.75
253526	38-009	12	93.5	36	5400	167:1	1.46 x 1.0	1.3 x 0.9	.24 x .50	18.95	16.95	15.35
253518	38-008	12	87.5	40	4800	150:1	1.46 x 1.0	1.3 x 0.9	.24 x .50	18.95	16.95	15.35
253500	38-007	12	82	60	3200	100:1	1.46 x 0.7	1.3 x 0.9	.24 x .50	19.95	17.95	15.95
253497	38-006	12	80	66	2100	90:1	1.46 x 0.7	1.3 x 0.9	.24 x .50	19.95	17.95	15.95
253489	38-005	12	76	110	1300	56:1	1.46 x 0.7	1.3 x 0.9	.24 x .50	18.95	16.95	15.35
253471	38-004	12	74	120	1100	50:1	1.46 x 0.7	1.3 x 0.9	.24 x .50	14.95	13.45	11.95
253446	38-001	12	61.8	600	350	10:1	1.46 x 0.7	1.3 x 0.9	.24 x .50	21.95	19.75	17.75




38GM Series

GH35GM Series Plastic Gears

Part No.	Cross Ref. No.	Rated Voltage (VDC)	Operating Range (VDC)	@ Maximum Efficiency			Gear Ratio	Gear Case Size Dia. x Length (in.)	Motor Size Dia. x Depth (in.)	Shaft Size Dia. x Length (in.)	Pricing		
				Current (mA)	Speed (RPM)	Torque (g-cm)					1	5	25
155012	GH12-1926Y	12	4.5 - 12	250	2	6000	3000:1	1.3 x 0.9	1.5 x 1.1	.23 x .90	\$21.95	\$19.95	\$17.95
155821	GH12-1830Y-P	12	4.5 - 12	220	4.5	4500	1000:1	1.3 x 0.9	1.5 x 1.0	.23 x .90	22.95	20.49	18.49
155839	GH12-1641T-L	12	3.0 - 12	250	20	3000	270:1	1.3 x 0.9	1.5 x 0.8	.23 x .90	25.95	23.35	20.95
152911	GH12-1926Y	12	4.5 - 12	172	40	2370	100:1	1.3 x 1.0	1.5 x 0.7	.24 x .90	24.95	22.45	19.95
155855	GH12-1641T-F	12	3.0 - 12	250	71	1000	60:1	1.3 x 0.9	1.4 x 0.9	.23 x .90	24.95	22.45	19.95
151441	GH12-1632TI	12	4.5 - 12	275	57	2200	100:1	1.3 x 0.9	1.5 x 0.7	.23 x .90	21.95	19.95	17.95
155863	GH12-1926Y-F	12	4.5 - 12	300	70	1000	60:1	1.4 x 0.7	1.3 x 1.0	.24 x .70	24.95	22.45	19.95
161374	GH12-1345T	12	4.5 - 12	185	116	650	30:1	1.3 x 0.9	1.5 x 0.7	.23 x .90	23.95	21.49	19.49
161382	GH12-1634T	12	4.5 - 12	293	145	850	30:1	1.3 x 0.9	1.4 x 0.7	.23 x .90	21.95	19.95	17.95
164786	GH12-1640Y	12	4.5 - 24	120	220	180	10:1	1.3 x 0.9	1.4 x 0.7	.23 x .90	28.95	25.95	22.95
176050	GH12-1640Y00	24	12 - 24	340	1.8	6000	3000:1	1.3 x 0.9	1.5 x 1.1	.23 x .90	22.95	20.49	18.49
11799	CB5M-24	24	6 - 24	110	14.6	1800	—	1.3 x 1.0	1.4 x 1.1	.196 x .375	11.95	10.75	9.49
176032	GH24-1640Y06	24	12 - 24	340	50	2000	90:1	1.3 x 0.9	1.4 x 0.7	.23 x .90	24.95	22.45	19.95
176023	GH24-1640Y19	24	12 - 24	340	148	1000	30:1	1.3 x 0.9	1.4 x 0.7	.23 x .90	24.95	22.45	19.95



155012



155013
GH35GM Series

GH35GM Series Metal Gears

Part No.	Cross Ref. No.	Rated Voltage (VDC)	Operating Range (VDC)	Current (mA)	Speed (RPM)	Torque (g-cm)	Gear Ratio	Gear Case Size Dia. x Length (in.)	Motor Size Dia. x Depth (in.)	Shaft Size Dia. x Length (in.)	Pricing		
											1	5	25
155013	HN-GH12-1632T-R-M	12	4.5 - 12	250	2	6000	3000:1	1.3 x 0.9	1.5 x 1.1	.23 x .90	\$21.95	\$19.95	\$17.95
155822	GH12-1830Y-P-R-M	12	4.5 - 12	250	4.5	4500	1000:1	1.3 x 0.9	1.5 x 1.0	.23 x .90	22.95	20.65	18.55
151442	HN-GH12-1632T-R-M	12	4.5 - 12	275	57	2200	100:1	1.3 x 0.9	1.5 x 0.7	.23 x .90	21.95	19.95	17.95
155864	GH12-1926Y-F-R-M	12	4.5 - 12	300	70	1000	60:1	1.3 x 0.9	1.4 x 0.9	.24 x .70	21.95	19.95	17.95

120VAC Gear Motor


6.0 RPM - 2.9 Watt

- Operating voltage: 120VAC @ 60Hz
- Torque: >3.6 kg-cm
- Screw down tabs for mounting (2.3" diagonal mounting hole space)
- Typical applications: air conditioner turnleaf motor, microwave turnplate motor



Gear Head Motor

- Current @ 6V: 57mA
- Stall current @ 6V: 633mA
- Stall torque @ 6V: 59.26 in. oz.
- Gear ratio: 143:1
- RPM @ 6V: 80



Part No.	Product No.	Shaft Dia./Length	Connector	Size	1	5	25	Part No.	Mfr. P/N	Size (L"xW"xH")	1	5	25
213488	SOTYZ-R	0.27" x 0.65"	12" wires	2.0"D x 1.0"T	\$14.95	\$13.45	\$11.95	400995	GM8	2.2 x 1.9 x 0.9	\$8.75	\$7.75	\$6.95

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

JAMECO ReliaPro

1.3VDC & 3VDC Vibrating Motors

• Typical applications: cellular phones, pagers and toys



Fig. 1




Fig. 1



Fig. 2



Fig. 3



Fig. 4




Fig. 4

JAMECO
EXCLUSIVE

★ Web Code: NBC

Part No.	Cross Ref. No.	Fig.	Operating Voltage (VDC @ mA)	Operating Range (VDC)	Rated RPM @ VDC	Lead Length (in.)	Motor Size (A x B) (Dia. x Depth)	Shaft Size (C x D) (Dia. x Length)	Pricing		
									1	10	100
175062	OTL-7AL	1	1.3 @ 62	0.70 - 1.60	7000 @ 1.3	0.7	0.28 x 0.67	0.10 x 0.18	\$4.55	\$3.95	\$3.69
256357	7ZK642	2	1.3 @ 70	1.00 - 1.60	7500 @ 1.3	4.7	0.28 x 0.66	0.18 x 0.22	3.49	2.95	2.65
175396	OTL-4AL	3	1.3 @ 65	0.70 - 1.60	8500 @ 1.3	0.75	0.16 x 0.55	0.15 x 0.23	4.75	4.25	3.85
256306	6ZK003	2	1.3 @ 80	0.85 - 1.60	8500 @ 1.3	1.0	0.23 x 0.39	0.10 x 0.10	3.35	2.95	2.65
256322	6ZK211	4	1.3 @ 80	0.80 - 1.60	8500 @ 1.3	PC terminal	0.27 x 0.48	0.11 x 0.11	2.75	2.49	2.25
256365	7ZK692	2	3.0 @ 60	2.40 - 3.00	6500 @ 3.0	4.7	0.28 x 0.66	0.18 x 0.22	4.65	4.19	3.75
256382	7ZK681	2	3.0 @ 60	2.40 - 3.60	7500 @ 3.0	1.1	0.28 x 0.66	0.12 x 0.16	4.65	4.19	3.75
256314	6ZK053	2	3.0 @ 75	1.60 - 3.60	8500 @ 3.0	1.0	0.23 x 0.39	0.10 x 0.10	3.25	2.95	2.65
256331	6ZK261	4	3.0 @ 75	2.40 - 3.00	8500 @ 3.0	PC terminal	0.27 x 0.48	0.11 x 0.11	3.25	2.95	2.65

Stepper & Servo Motor Controllers

Multi-Stepper Motor Control Board

- Current-mode coil driver up to 2A/45V
- 11 analog channels, A/D converter, 12-bit resolution
- 24-bit position register; can be read while motor is moving
- High-speed serial communication interface 9.6kbps-230.4kbps
- Linear acceleration/deceleration capability up to 8500 step/sec.
- Full step (monophasic and biphasic), half step and external driver modes
- Simultaneous/independent control of up to 4 stepper motors in a single board (16 stepper motors by daisy chaining 4 boards)
- 26 digital I/O and two SPI interfaces for control of external devices
- Size: 7.7"L x 5.0"W x 1.0"W

★ Web Code: VBA



Shown w/ motors
- not included



Sport232-ST One Axis Stepper Motor Controller & DAC Board

- Shaft encoder capabilities for close loop applications
- Home, limit CW/CCW, abort, pulse and direction output signals
- 4-channels with signal conditioning 0 to 2.5V, 0 to 10V
- Linear acceleration/deceleration, profile movements through 128 bytes internal FIFO
- Full, half steps (monophasic, bi-phasic)
- 8 digital I/O and 8 analog inputs with 12-bit resolution
- Free 32-bit DLL for Windows 9x/NT/2000/XP, Linux and Labview



32-Bit Stepper Motor Controller One Axis

- Controls one bipolar stepper motor with 32-bit absolute position
- Multiple boards may share same serial line (RS485 only)
- Full, half or wave step modes
- 2 channel general purpose 8-bit A/D input port for reading 0 to 5V
- Interface to PC through RS232 or RS485 @ 2400-19,200bps
- 4-bit digital input for home limits
- Addressable up to 255 boards
- Size: 4.4"L x 2.3"H • Weight: 0.7 lbs.



Includes: Manual and sample code software

Part No.	Mfr. Part No.	1	5
168729	ST400NT-R10	\$399.95	\$379.95

Part No.	Mfr. Part No.	1	5
355047	Sport232-ST	\$164.95	\$156.75

Part No.	Mfr. Part No.	1	5
153621	STP-100	\$149.95	\$134.95

KAE

Industrial Motion Controllers for Brush, Brushless & Stepper Motors

323942: • For brush-type DC motors with 2 or 3 channel incremental encoders

- P.I.D. Servo control, trapezoidal position profiling, velocity mode, 32-bit resolution
- Integrated 12 to 48VDC supply power amplifier @ 3A continuous, 6A peak
- Limit switch inputs, general purpose analog input, PWM, DIR output for use with external amps

323951: • For 3-phase brushless motors with hall effect sensors or conventional DC brush-type motors

- Amplifier capable of driving 6A continuously @ up to 48VDC
- High current amplifier: 7A continuous, 10A peak, 12 to 48VDC supply
- Support for linear & circular interpolation using the PIC-SERVO CMC chipset

184997: • Trapezoidal position profiling, velocity mode, up to 50,000 steps per second

- Full/half step bipolar chopper drive, 2A per phase, 7.5 to 46VDC supply
- Integrated indexer and driver for 2 or 4 phase stepper motors

Part No.	Mfr. Part No.	Description	Size (L x W x H)	1	5
323942	KAE-TOV10-BDV1	PIC-SERVO motor control board	3.1" x 2.1" x 0.9"	\$159.95	\$151.95
323951	KAE-TOV10-BD3PHV1	PIC-SERVO 3-phase motor control board for brush or brushless motors	3.1" x 3.1" x 0.9"	239.95	227.95
184997	PIC-STEP	PIC-STEP motor control board	3.1" x 2.1" x 0.9"	159.95	151.95

323942

184997

323951

★ Web Code: QBV

Playstation® 2 Servo Motor Controller Interface

The controller features an integrated power supply that allows you to use available power supplies, batteries, wall transformers, or anything from 6V to 30V, either AC or DC. The IPS will regulate the power to run your servo motors efficiently. Power is supplied through on-board 2.5mm jack.

A 2.5mm plug is provided for connecting your own power supply.

- 5 amp servo motor controller
- Allows manual control of up to 6 servo motors
- Servo motor speed proportional to tilt of joystick
- Rumble feature activates when limit of rotation is reached (clockwise or counter-clockwise)
- Uses Playstation® PS2 wired or wireless controller (not included)
- Servo motors not included

Part No.	Mfr. Part No.	Description	1	5
2124875	PS-SMC-06-05A	Playstation® 2 servo motor controller interface	\$119.95	\$113.95



NEW
MARKED IN PINK

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

JAMECO ReliaPro

Bipolar & Unipolar Stepper Motors

★ Web Code: UBN

Jameco offers the industry's widest variety of off-the-shelf two-phase bipolar and four-phase unipolar stepper motors for your precision applications. Be sure to check out the wide selection of 2 to 24VDC models below.

- Ball bearings
- Dielectric strength: 500V, 50Hz/minute
- Insulation resistance: 100MΩ @ 500VDC
- 18" lead wires
- Ambient temp.: -10°C to +55°C
- Use P/N 161998, pg 194, for shaft coupler





Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5



Fig. 6



Fig. 7



Fig. 8



Fig. 9



Fig. 10



Fig. 11

Part No.	Mfr.	Product No.	Fig.	Drive System	Voltage (VDC)	Step Angle	Phase Res. (Ω)	Curr. (mA)	Phase Inductance (mH)	Detent Torque (g-cm)	Holding Torque (g-cm)	Mounting Hole Space (in.)	Mounting Holes (in.)	Shaft Dia. (in.)	Shaft Length (in.)	Motor Dia. (in.)	Motor Depth (in.)	Wt. (lbs.)	Pricing		
																			1	5	25
237569	JRP	57BYG009	1	Unipolar	2.4	1.8	1	2400	1.5	—	5914	1.86	0.20	0.25	0.83	2.29	2.20	1.40	\$24.95	\$22.49	\$19.95
237614	JRP	57BYGH801	2	Unipolar	3.3	1.8	2.2	1500	22	—	5608	1.86	0.20	0.25	0.83	2.24	2.01	1.32	31.95	28.95	25.95
1581231	ORM	PX243M-01AA	3	Unipolar	4	0.9	8.4	670	10	—	793	1.79	0.08	0.195	0.88	1.67	1.27	0.46	19.95	17.95	15.95
237552	JRP	57BYG008	1	Unipolar	4	1.8	3.1	1300	4.4	—	4996	1.86	0.20	0.25	0.83	2.29	2.01	1.30	31.95	28.95	25.95
237607	JRP	57BYGH001	2	Unipolar	5	1.8	5	1000	—	—	3976	1.86	0.20	0.25	0.83	2.24	1.61	1.10	36.95	33.25	29.95
237825	JRP	25BY4801	4	Unipolar	5	7.5	10	500	—	45	110	1.38	0.14	0.08	0.35	0.98	0.56	0.07	9.95	8.95	7.95
223870	JRP	57BYG070	1	Unipolar	5.4	1.8	3.6	1500	6	977	8974	2.65	0.20	0.25	0.80	2.20	2.20	2.00	29.95	26.95	24.25
237631	JRP	57BYGH803	2	Unipolar	6.3	1.8	4.2	1500	—	—	14276	1.86	0.20	0.25	0.83	2.24	2.99	2.43	59.95	53.95	48.95
171601	♦	PF35T48L4*	5	Unipolar	7	7.5	20	350	9	40	680	1.68	0.14	0.078	0.47	1.38	0.58	0.15	2.95	1.95	1.75
172646	JRP	42BYG205	1	Unipolar	9.6	1.8	75	480	15	220	2300	1.73	0.10	0.20	0.90	1.70	1.40	0.50	19.95	17.95	15.95
224022	JRP	42BYG016	6	Unipolar	12	1.8	75	160	40	150	900	1.73	0.10	0.20	0.70	1.70	1.30	0.50	21.95	19.75	17.75
155433	JRP	42BYG228	6	Unipolar	12	1.8	30	400	23	220	2000	1.73	0.10	0.20	0.90	1.70	1.50	0.50	20.95	18.95	16.95
237543	JRP	57BYG007	1	Unipolar	12	1.8	32	380	30	—	2957	1.86	0.20	0.25	0.83	2.29	1.61	1.00	24.95	22.49	19.95
238538	JRP	42BYGH404	7	Unipolar	12	1.8	30	400	25	250	3200	1.22	0.10	0.20	0.95	1.67	1.89	0.60	21.95	19.75	17.75
162027	JRP	57BYG084	1	Unipolar	12	1.8	20	600	22	725	6000	2.65	0.20	0.25	1.00	2.20	2.00	1.30	35.95	32.25	28.95
237876	JRP	25BY4809	4	Unipolar	20	7.5	50	400	16	45	155	1.42	0.35	0.08	0.22	0.98	0.87	0.10	4.95	4.49	3.95
238115	JRP	35BY48B08	8	Unipolar	24	7.5	75	320	38	65	270	1.65	0.13	0.08	0.35	1.38	0.59	0.15	8.49	7.49	6.75
237729	JRP	42BY48H07	9	Unipolar	24	7.5	85	280	78	130	780	1.95	0.14	0.12	0.39	1.65	0.87	0.27	6.95	6.25	5.49
237497	JRP	39BYG101-01	6	Bipolar	2.7	1.8	6.8	400	6.5	150	650	1.22	0.10	0.20	0.75	1.54	0.79	0.26	16.95	15.25	13.75
2120479	♦	RDS3000	10	Bipolar	4	1.8	4	1000	10	—	3600	1.21	0.09	0.195	0.312	1.67	1.62	0.40	14.95	13.49	11.95
237490	JRP	39BYG001	6	Bipolar	5	1.8	5	1000	—	150	1800	1.22	0.10	0.20	0.91	1.54	1.34	0.44	19.95	17.95	15.95
237578	JRP	57BYG061	1	Bipolar	6	1.8	12	500	24	—	3569	1.86	0.20	0.25	0.83	2.29	1.61	1.00	37.95	33.95	30.75
237519	JRP	42BYG017	6	Bipolar	6.3	1.8	15	420	16	150	1400	1.22	0.10	0.20	0.51	1.67	1.34	0.50	19.95	17.95	15.95
237454	JRP	39BYG201	6	Bipolar	9.6	1.8	20	480	—	200	1000	1.22	0.10	0.20	0.20	1.54	0.98	0.44	18.95	17.95	16.95
155460	JRP	42BYG023	6	Bipolar	12	1.8	30	400	36	220	2100	1.73	0.10	0.20	0.60	1.70	1.30	0.50	20.95	18.95	17.45
237472	JRP	39BYG401A	6	Bipolar	12	1.8	30	400	32	200	2100	1.22	0.10	0.20	0.95	1.54	1.34	0.44	21.95	19.75	17.75
1585653	JPN	KP35FM2-044	11	Bipolar	24	1.8	8	500	7.8	90	700	1.45	0.09	0.197	0.90	1.62	1.05	0.32	5.95	5.35	4.85

* 171601: Dual shaft with 10 tooth gear

** 155460: Dual shaft

MOTION

Motor Solutions in Motion

- Easy to set up; easy to use
- Daisy chainable on a 4 wire bus
- USB/RS232/RS485 Inetface available

4-Axis Stepper Controller & Driver

- Full-featured 4-axis 32-bit position controller with power drivers
- Four independent 1-Amp chopper (PWM) drives
- Operates from 9-30V
- RS-485 and USB communication via virtual comm port
- On-board EEPROM for user program storage
- Daisy-chain up to 16 units
- Stand alone operation with no connection to a PC
- 12 ADC inputs, half/branch on ADC value
- Milliohm FETs; runs cool
- Dimensions: 2.25"L x 2.25"W x 0.7"H



NEW
MARKED IN PINK

USB Stepper Controller & Driver

- Full-featured 1-axis 32-bit position controller with power drive
- 0.5A power drive
- Operates from 9-30V or USB port
- USB communication via virtual comm port
- On-board EEPROM for user program storage
- Daisy-chain up to 16 units
- Stand alone operation with no connection to a PC
- 4 inputs, 2 outputs, half/branch on input status
- Milliohm FETs; runs cool
- Dimensions: 2.0"L x 1.0"W x 0.5"D



NEW
MARKED IN PINK

Inch-Size Stepper Controller & Driver

- Go Left, Go Right upon switch closure
- 1 Amp chopper (PWM) drive
- Operates from 9-30V
- Potentiometer-settable speed and current
- No programming required
- Acceleration programmable via resistor change.
- 2 direction and 2 limit switch inputs
- Milliohm FETs; runs cool
- Dimensions: 1.0"L x 1.0"W x 0.5"D



NEW
MARKED IN PINK

Part No.	Product No.	1	5	Part No.	Product No.	1	5	Part No.	Product No.	1	5
2123291	EZ4AXIS	\$389.95	\$369.95	2123303	STEPPER-STICK-CD	\$164.95	\$156.95	2123311	Intelli-Inch-LR	\$74.95	\$69.95

* JRP = Jameco ReliaPro | JPN = Japan Servo | ORM = Orient Motor | ♦ Manufacturer Varies

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

Servo Motors & Solenoids

NAME BRANDS	4 LEVELS OF SAVINGS		
	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Scott Edwards Electronics, Inc.

Serial Servo Controller Module

- Controls 8 pulse-proportional servos
 - Receives serially at 2400 or 9600 baud
 - Module is addressable, allowing two units to share the same line to control a total of 16 servos
 - Connections to serial input can be established using a modular jack (P/N 115554, pg 61) or modular adapter from DB9 to RJ11 (P/N 114738, pg 62)
 - Size (PCB): 1.9"L x 1.4"W
 - One-year warranty
- | Part No. | Description | 1 | 5 |
|----------|-------------|---------|---------|
| 151001 | Mini SSC II | \$43.95 | \$41.75 |

Continuous Rotation Servos

Controlled easily from a BASIC Stamp or SX chip I/O pin using PBASICs or SX/B's PULSOUT commands

- 4-6VDC @ ~190mA
- 2110692/283021: PARALAX 283039
- 283039: Holds position over 180° range; standard servo
- 283039: Bi-directional continuous rotation and includes an adjustable potentiometer port to center the servo

Part No.	Mfr. Part No.	Size (L" x W" x H")	1	5
283021	900-00005	2.2 x 0.8 x 1.6	\$14.95	\$13.95
283039	900-00008	2.2 x 0.8 x 1.6	14.95	13.49
2110692	900-00014	0.9 x 0.37 x 0.61	19.95	17.95

Servo Motors and Accessories

- + pulse width 1500usec neutral control system
- Operating voltage range: 4.8V to 6V

Motors

Part No.	Mfr. Part No.	Oper. Speed (4.8V@no load)	Stall Torque @ 4.8V (kg.cm)	Direction	Operating Angle	Current Drain (mA, idle/ mA no load)	Dimensions (L" x W" x H")	Pricing	
								1	5
395760	HS-322HD	.19sec/60°	3.0	Clockwise	40°/one side pulse	7.4/160	2.1 x 0.8 x 1.4	\$12.95	\$11.49
358635	HS-311	.19sec/60°	3.0	Clockwise	40°/one side pulse	7.4/160	1.5 x 0.8 x 1.1	16.95	15.95
358619	HS-805BB	.19sec/60°	19.9	Clockwise	45°/one side pulse	8/700	2.6 x 1.2 x 1.3	59.95	56.95
395786	HS-422	.21sec/60°	3.3	Clockwise	45°/one side pulse	8/150	1.6 x 0.8 x 1.4	19.95	18.95
2124980	HS-485HB	.22sec/60°	4.8	Clockwise	45°/one side pulse	8/150	1.6 x 0.8 x 1.5	16.95	15.95
2124971	HS-645MG	.24sec/60°	7.7	Clockwise	45°/one side pulse	8.8/350	1.6 x 0.8 x 1.5	34.95	31.49
166351	HS-755HB	.28sec/60°	11.0	Clockwise	40°/one side pulse	8/230	2.3 x 1.1 x 2.0	44.95	42.95

Accessories

Part No.	Description	1	5
358811	Servo gripper, 1.3" opening (compatible with all servos above)	\$19.95	\$18.95
400400	Servo gearbox, 2:1 ratio, for use with P/N 358619	34.95	29.95
400418	Servo gearbox, 4:1 ratio, for use with P/N 358619	34.95	29.95
396279	3 color servo wire (red, black, yellow), 22-20, 50'	15.95	14.49

12VDC Solenoid Valve

- Current: 350mA
- Operating voltage: 12VDC
- Dimensions: 1.2"L x 0.92" Dia.
- Air leakage: 4psi, 1c.c./min. max.
- 0.250" quick disconnect terminals
- Operational temp.: -29°C to 85°C



*Web Code: MEJ

Part No.	Product No.	1	5	25
169835	TAV-0829-R	\$9.95	\$8.95	\$7.95

12VDC Power Solenoid

- 12VDC
- 4Ω coil
- Handles a 225A load
- Intermittent 50% duty cycle
- 1/4-20 copper studs
- Contractors power solenoid
- 2.25" mounting centers
- Size: 1.86" x 3" base



*Web Code: MEJ

Part No.	Product No.	1	5	25
1585645	93285	\$3.95	\$3.49	\$2.95

JAMECO ReliaPro

12VDC & 24VDC Continuous Push/Pull Solenoids

*Web Code: MEJ



Part No.	*Mfr.	Product No.	Type	Volt. (VDC)	Coil Res. (±10%) (Ω)	Power Consump. (W)	Holding Force (lbs. @20°C)	Stroke (in.)	Dimensions Length x Dia. (in.)†	Shaft Dia. (in.)	Wt. (lbs.)	Pricing		
												1	5	25
1919351	JRP	SMO-0415S12STD	Open frame-push	12	180	0.8	0.026	0.20	0.6 x 0.4 x 0.3	0.157	0.02	\$16.95	\$15.25	\$13.75
1919385	JRP	SMO-0420S12STD	Open frame-push	12	120	1.2	0.04	0.10	0.8 x 0.5 x 0.4	0.060	0.02	14.95	13.49	11.95
1919377	JRP	SMO-0415L12STD	Open frame-pull	12	120	1.2	0.04	0.10	0.8 x 0.5 x 0.4	0.157	0.02	9.95	8.95	7.95
1919393	JRP	SMO-0420L12STD	Open frame-pull	12	120	1.2	0.04	0.10	0.8 x 0.5 x 0.4	0.070	0.02	8.95	7.95	6.95
262247	JRP	SMO-0520L12STD	Open frame-pull	12	90	1.6	0.16	0.24	0.8 x 0.6 x 0.5	0.200	0.04	9.95	8.95	7.95
1919414	JRP	SMO-0630L12STD	Open frame-pull	12	60	2.4	0.187	0.10	1.2 x 0.8 x 0.6	0.060	0.10	14.95	13.49	11.95
262263	JRP	SMO-0837L12STD	Open frame-pull	12	36	4.0	1.10	0.24	1.5 x 1.0 x 0.8	0.310	0.21	9.95	8.95	7.95
262272	JRP	SMO-0837S12STD	Open frame-pull	12	36	4.0	1.10	0.24	1.5 x 1.0 x 0.8	0.08/0.31*	0.21	10.95	9.95	8.75
262290	JRP	SMO-1253L12AA	Open frame-pull	12	24	6.0	3.31	0.24	2.1 x 1.8 x 1.1	0.472	0.46	9.95	8.95	7.95
262167	JRP	SMT-1325L12STD	Tubular-pull	12	36	4.0	0.11	0.47	1.0 x 0.5	0.200	0.05	14.95	13.45	11.95
142464	JRP	SMT-1130L12A	Tubular-pull	12	36	4.0	0.63	0.40	1.6 x 0.4	0.150	0.04	12.95	11.49	9.95
1919422	JRP	SMT-1632L12STD	Tubular-pull	12	26.6	5.5	0.88	0.06	1.6 x 0.6	0.196	0.10	12.95	11.49	9.95
1919191	♦	121E18711	Tubular-pull	24	44	12.8	1.00	1.00	2.3 x 1.0	0.430	0.40	6.95	6.25	5.59
215141	JRP	SMT-2251L24AA	Tubular-pull	24	60	10.0	4.00	1.00	3.0 x 1.0	0.440	0.40	13.95	12.55	11.29
149754	JRP	SMT-1325S12A	Tubular-push	12	36	4.0	0.75	0.47	1.9 x 0.5	0.063	0.05	19.95	17.95	15.95
149762	JRP	SMT-1632S12A	Tubular-push	12	21	7.0	1.50	0.24	2.5 x 0.6	0.098	0.10	16.95	15.25	13.75
262175	JRP	SMT-2551S24STD	Tubular-push	24	57.6	10.0	1.43	0.71	2.0 x 1.0	0.118	0.38	14.95	13.49	11.95
262191	JRP	SMT-3257S24STD	Tubular-push	24	44	13.0	6.80	0.70	2.3 x 1.3	0.160	0.65	23.95	21.49	18.95
262211	JRP	SMT-3864S24STD	Tubular-push	24	34	17.0	1.32	1.18	2.52 x 1.50	0.157	1.0	21.95	19.95	17.95
1919203	LEX	191172-001	Stroke-push	12	45	7.3	—	0.125	1.0 x 0.5	0.060	0.1	3.45	3.09	2.75

† Open frame type dimensions: L" x W" x H" * Dual shaft

* JRP = Jameco ReliaPro | LEX = Ledex | ♦ Manufacturer Varies

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

DC Brushless Tubeaxial Fans & Blowers

Call for additional OEM PRICING – we carry major manufacturers.

DC Brushless Tubeaxial Fans & Blowers

★ 5V Web Code: TAS



★ 12V Web Code: LBZ



mm to Inches Conversion Chart

mm	6.8	10	15	20	25	28	30	32	35	38	40	45	51	60	76	80	92	95	97	120	127	150	172
Inches	0.27	0.40	0.60	0.80	1.00	1.10	1.18	1.26	1.40	1.50	1.60	1.80	2.00	2.36	2.99	3.15	3.63	3.74	3.82	4.69	5.00	5.90	6.77

Part No.	Manufacturer	Mfr. Part No.	Voltage (VDC)	Size mm (W x H x D)	Air Flow (CFM)	Bearing	Current (mA)	Power (Watts)	Agency Approvals	Noise (dBA)	Connection (Leads)	Pricing			
												1	10	50	100
2095285	Adda	AD1505LX-K90	5	15 x 15 x 6	0.1	Hypro	50	0.25	CE	9.6	5.5"	\$10.95	\$9.95	\$8.95	\$7.95
2099809	Sunon	KDE0501PDB3-8	5	20 x 20 x 8	1.2	Ball	80	0.4	UL/CUL	21	5.5"	8.95	7.95	6.95	6.25
2095277	Adda	AD2005LX-G70	5	20 x 20 x 10	0.6	Hypro	80	0.4	UL/CUL/CSA/TUV/CE	20	5.5"	8.95	7.95	6.95	6.25
131247	Adda	AD0205LX-G50	5	25 x 25 x 10	1.8	Sleeve	100	0.5	UL/CSA/CE	15.6	5.5"	14.95	13.49	11.95	10.95
695050	Sunon	GM0502PFV2-8	5	25 x 25 x 10	3.0	Vapo	80	0.4	UL/CUL	16	5.5"	12.95	11.49	9.95	8.95
1708481	Sunon	KDE0502PHB3-8 (MS)	5	25 x 25 x 15	1.8	Ball	80	0.4	UL/CUL	16	4"	10.95	9.95	8.95	7.95
1928311	Adda	AD0305LB-K70	5	30 x 30 x 6.8	2.5	Ball	60	0.3	UL/CUL/TUV/CE	30	6"	6.95	6.25	5.59	4.95
2099497	Adda	AD0305MX-K70	5	30 x 30 x 6.8	3.3	Hypro	120	0.6	UL/CSA/TUV/CE	27.9	5.5"	8.95	7.95	6.95	6.25
1951211	Sunon	KDE0503PEV1-8 (MSN)	5	30 x 30 x 6.8	4.9	Vapo	180	0.9	UL/TUV/CE	28	6"	7.95	6.95	6.25	5.59
1951220	Sunon	KDE0503PEB3-8 (MSN)	5	30 x 30 x 6.8	4.9	Ball	180	0.9	UL/TUV/CE	28	6"	9.95	8.95	7.95	6.95
2099489	Adda	AD0305HX-G50	5	30 x 30 x 10	4.2	Hypro	170	0.85	UL/CUL/TUV/CE	30.7	5.5"	8.95	7.95	6.95	6.25
1950534	Sunon	KDE0503PFB1-8V	5	30 x 30 x 10	5.1	Ball	180	0.7	UL/TUV	22.5	5"	9.95	8.95	7.95	6.95
2120031	Sunon	GM0503PEV1-8N.GN	5	30 x 30 x 10	5.5	Vapo	140	0.7	UL/CSA/TUV	23	6"	9.95	8.95	7.95	6.95
2095293	Adda	AD305HB-D50	5	30 x 30 x 15	3.7	Ball	130	0.65	UL/CUL/TUV/CE	22.5	11"	9.95	8.95	7.95	6.95
1708457	Sunon	KDE0504PEB3-8 (MS)	5	40 x 40 x 6.8	3.5	Ball	90	0.45	UL/CUL/TUV	20	6"	8.95	7.95	6.95	5.95
1928361	Adda	AD0405MB-K90 (S)	5	40 x 40 x 6.8	5.5	Ball	90	0.45	UL/TUV/CE	25	6"	10.95	9.95	8.95	7.95
1928353	Adda	AD0405HB-K90	5	40 x 40 x 6.8	6.0	Ball	120	0.6	UL/CUL/TUV/CE	30	5"	11.95	10.95	9.95	8.95
1581249	Sunon	KDE0504PFB3-8	5	40 x 40 x 10	4.6	Ball	70	0.35	UL/CUL	23.5	12"	6.95	6.25	5.59	4.95
196373	Sunon	KD0504PFB2-8	5	40 x 40 x 10	5.5	Ball	90	0.5	UL/CUL	23	12"	8.95	7.95	6.95	5.95
2121295	Adda	AD0405MB-G76	5	40 x 40 x 10	5.7	Ball	110	0.40	UL/CSA/TUV/CE	20	11" ¹	8.95	7.95	6.95	5.95
1928370	Adda	AD0405HS-G70	5	40 x 40 x 10	6.7	Sleeve	190	0.95	UL/CUL/TUV/CE	25	3" w/conn	5.95	5.35	4.79	4.39
1581265	Sunon	KDE0504PFS1-8	5	40 x 40 x 10	7.0	Sleeve	110	0.6	UL/CUL	27	12"	6.95	6.25	5.59	4.95
1951238	Sunon	KDE0504PFB1-OC	5	40 x 40 x 10	7.5	Ball	200	1.0	UL/CE	28	12"	7.95	6.95	6.25	5.59
1952741	Elina	KDC050420MB	5	40 x 40 x 20	6.8	Ball/Sleeve	210	1.0	UL/CUL/TUV	25.5	12"	7.95	6.95	6.25	5.59
2120057	Sunon	KD0504PKB2(2).GN	5	40 x 40 x 20	7.7	Dual ball	142	0.7	UL/CSA/TUV	22	12"	7.95	6.95	6.25	5.59
1951406	Delta	AFB0405HD-R00	5	40 x 40 x 20	8.5	Ball	400	2.0	UL/CUL/TUV/CE	33	12" ¹	6.95	6.25	5.59	4.95
2095251	Adda	AD4505MX-K90	5	45 x 45 x 6	7.1	Hypro	120	0.6	CE	25.5	5.5"	8.95	7.95	6.95	6.25
136494	Delta	AFB0505LA	5	51 x 51 x 10	7.4	Ball/Sleeve	80	0.4	UL/CE/CSA/VDE	26	11"	6.95	6.25	5.59	4.95
1950500	Sunon	KDE0505PFB1-8	5	51 x 51 x 10	10.2	Ball	170	0.9	UL/TUV	31.5	12"	8.95	7.95	6.95	6.25
136275	Delta	BFB0505L [†]	5	51 x 51 x 15	2.5	Ball	140	0.7	UL/CE/CSA/VDE	26.5	12"	9.95	8.95	7.95	6.95
136283	Elina	KDC050515MB	5	51 x 51 x 15	12.7	Ball/Sleeve	380	4.0	UL/CE/CUL/TUV	28	11"	7.95	6.95	5.95	4.95
1809936	Sunon	KD0505PHB2 (GN)	5	51 x 51 x 15	12.7	Ball	180	0.8	UL/CUL/TUV/CE	27.8	12"	9.95	8.95	7.95	6.95
1809944	Sunon	KDE0506PHB3	5	60 x 60 x 15	15.2	Ball	240	1.2	UL/CUL/TUV/CE	26.5	12"	8.95	7.95	6.95	6.25
2081756	Adda	AD0605HB-D71GL	5	60 x 60 x 15	16.6	Ball	370	1.8	UL/CUL/CE	32	6"	6.95	5.95	5.25	4.95
1708431	Sunon	KD0506PHB2	5	60 x 60 x 15	18.5	Ball	380	1.9	UL/CUL/TUV/CE	32	12"	9.95	8.95	7.95	6.95
1951414	Delta	AFB0605HD	5	60 x 60 x 20	16.6	Ball	240	1.2	UL/CUL/TUV/CE	28	12"	8.95	7.95	6.95	6.25
355493	Sunon	KD0506PTS3	5	60 x 60 x 25	15.9	Sleeve	230	1.2	UL/CUL/CE	26.7	6.5" w/conn	5.95	5.25	4.59	3.95
134869	Delta	AFB0605M	5	60 x 60 x 25	16.2	Ball	220	1.1	UL/CE/CSA/TUV	24.5	12"	6.95	6.25	5.59	4.95
1951078	Mechatronics	F6025E05B2-FS	5	60 x 60 x 25	24	Ball	700	3.5	UL/CUL	36	12" ²	8.95	7.95	6.95	6.25
1951086	Mechatronics	F8025E05B2-FS	5	80 x 80 x 25	46	Ball	800	4.0	UL/CUL	32	12" ²	9.95	8.95	7.95	6.95
1951094	Mechatronics	E9225M05B2-FS	5	92 x 92 x 25	44	Ball	560	2.8	UL/CUL	32	12" ²	8.95	7.95	6.95	6.25
1951107	Mechatronics	F1238L05B2-FS	5	120 x 120 x 38	94	Ball	800	4.0	UL/CUL	36	12" ²	10.95	9.95	8.95	7.95
2095269	Adda	AD2012LX-K70	12	20 x 20 x 6	0.6	Hypro	60	0.72	CE	19.5	5.5"	8.95	7.95	6.95	6.25
2100363	Adda	AD0212LX-K50-LF	12	25 x 25 x 6	1.8	Hypro	60	0.3	UL/CUL/TUV/CE	20.5	5.5"	9.95	8.95	7.95	6.95
2095306	Adda	AD0212MB-K50 (S)	12	25 x 25 x 6	2.4	Ball/Sleeve	90	1.08	UL/CUL/TUV/CE	26	5.5"	11.95	10.95	9.95	8.95
1951641	Adda	AD0212LB-G50 (GL)	12	25 x 25 x 10	1.8	Ball	70	0.84	UL/CUL/CE	15.6	5.5"	10.95	9.95	8.95	7.95
2121316	Adda	AD0212MX-G50GL	12	25 x 25 x 10	2.3	Hypo	80	0.4	UL/CUL/TUV/CE	23.1	5.5"	10.95	9.95	8.95	7.95
1708449	Sunon	KDE1202PFB1-8 (V)	12	25 x 25 x 10	3.1	Ball	83	1.0	UL/CUL	33	6"	10.95	9.95	8.95	7.95
212767	Sunon	KDE1203PFB3-8 (V)	12	30 x 30 x 10	3.2	Ball	50	0.6	UL/CE	18.5	6"	8.95	7.95	6.95	6.25
1708465	Sunon	KDE1203PFB2-8 (MS)	12	30 x 30 x 10	4.2	Ball	66	0.8	UL/CUL	25	6"	8.95	7.95	6.95	6.25
212784	Sunon	KDE1203PFB1-8V	12	30 x 30 x 10	5.1	Ball	75	0.9	UL/CUL/TUV/CE/VDE	27	4"	7.95	6.95	6.25	5.79
212783	Sunon	KDE1203PFB1-8	12	30 x 30 x 10	5.1	Ball	75	0.9	UL/CUL/TUV/CE/VDE	27	5.9"	9.95	8.95	7.95	6.95
1928134	Adda	AD0312HB-D50	12	30 x 30 x 15	4.2	Ball	110	1.3	UL/CUL/TUV/CE	22.5	3" w/conn	6.95	6.25	5.59	4.95
212741	Sunon	KDE1235PFB2-8	12	36 x 36 x 10	4.5	Ball	60	0.8	UL/CUL/TUV/CE/VDE	21	5.9"	9.95	8.95	7.95	6.95
212760	Sunon	GM1235PFV1-8	12	36 x 36 x 10	7.0	Vapo	80	1.0	UL/CUL/TUV/CE	28	6"	14.95	13.49	11.95	10.95
1951490	Adda	AD0412HB-K90	12	40 x 40 x 6.8	6.0	Ball/Sleeve	80	1.0	UL/CUL/TUV/CE	30	5.5"	8.95	7.95	7.19	6.49
2099500	Adda	AD0412HB-K96	12	40 x 40 x 6.8	6.0	Ball	80	0.72	UL/CUL/TUV/CE	30	5.5" ¹	8.95	7.95	6.95	6.25
2100013	Delta	AFB0405LD	12	40 x 40 x 10	3.9	Ball	60	0.3	UL/CSA/VDE/CE	25	13" ²	5.95	5.35	4.79	4.29

¹ 3 leads; speed sensor ² 3 leads; locked rotor protection (These functions are optional, if needed) [†] Blower

Fans continued on next page

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

DC Brushless Tubeaxial Fans & Blowers

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Call for additional OEM PRICING – we carry major manufacturers.

DC Brushless Tubeaxial Fans & Blowers (Continued)



★ 12V Web Code: LBZ

mm to Inches Conversion Chart

mm	6.8	10	15	20	25	28	30	32	35	38	40	45	51	60	76	80	92	95	97	120	127	150	172
Inches	0.27	0.40	0.60	0.80	1.00	1.10	1.18	1.26	1.40	1.50	1.60	1.80	2.00	2.36	2.99	3.15	3.63	3.74	3.82	4.69	5.00	5.90	6.77



1585291



1950446



125006



114682

Part No.	Manufacturer	Mfr. Part No.	Voltage (VDC)	Size mm (W x H x D)	Air Flow (CFM)	Bearing	Current (mA)	Power (Watts)	Agency Approvals	Noise (dBA)	Connection (Leads)	Pricing			
												1	10	50	100
1950526	Sunon	KD1204PFS3H	12	40 x 40 x 10	4.2	Sleeve	60	0.7	UL/TUV	22	12"	\$5.95	\$5.35	\$4.79	\$4.29
2095314	Adda	AD0412LX-G70	12	40 x 40 x 10	4.7	Hypro	70	0.84	UL/CUL/TUV/CE	14	12"	6.95	6.25	5.59	4.95
210797	Sunon	KD1204PFV3	12	40 x 40 x 10	4.9	Vapo	60	0.6	UL/CUL/TUV/CE	24	12"	6.95	6.25	5.59	4.95
279611	Toyo	T401012VH	12	40 x 40 x 10	5.8	Ball	90	1.1	UL/CUL/TUV/CE	33.5	12"	4.95	4.49	3.95	3.59
1585469	Y.S. Tech	FD1240107B-2N	12	40 x 40 x 10	6.6	Ball	90	1.08	UL/CUL/TUV	29	6"	4.95	4.49	3.95	3.59
1928054	Adda	AD0412HB-G70	12	40 x 40 x 10	6.7	Ball	100	1.2	UL/CUL/TUV/CE	25	2.5" w/conn	5.95	5.35	4.79	4.29
2100380	Adda	AD0412HX-G71-LF	12	40 x 40 x 10	6.7	Hypo	100	1.2	UL/CUL/TUV/CE	25	10" 2	7.95	6.95	6.25	5.59
290010	Adda	AD0412HB-G70	12	40 x 40 x 10	6.7	Ball	100	1.2	UL/CUL/TUV/CE	25	10" w/conn	9.95	8.95	7.95	6.95
212717	Sunon	KDE1204PFV2.11.MS.A.GN	12	40 x 40 x 10	7.0	Vapo	80	1.0	UL/CUL/TUV/CE/VDE	27	12"	6.95	6.25	5.59	4.95
1950139	Sunon	KDE1204PFS2-11	12	40 x 40 x 10	7.0	Sleeve	92	1.1	UL/CUL/TUV/CE	27	12"	6.95	6.25	5.59	4.95
2081924	Sunon	KDE1204PFB2	12	40 x 40 x 10	7.5	Ball	90	1.1	UL/CUL/TUV/CE	30	12"	8.95	7.95	6.95	5.95
189691	Sunon	KD1204PFS1-11.GN	12	40 x 40 x 10	8.0	Sleeve	60	0.7	UL/CUL/TUV/CE	30	12"	7.95	7.19	6.49	5.79
212725	Sunon	KDE1204PFV1	12	40 x 40 x 10	8.3	Vapo	110	1.4	UL/CUL/TUV/CE/VDE	34.4	12"	6.95	6.25	5.59	4.95
1708473	Sunon	KDE1204PFVX11.MS.A	12	40 x 40 x 10	9.5	Vapo	150	1.8	UL/CUL/TUV	39	12"	4.95	4.49	3.95	3.59
136178	Adda	AD0412MS-G70	12	40 x 40 x 20	5.0	Sleeve	110	1.32	UL/CSA	23	9"	5.95	5.39	4.79	4.29
1809856	Sunon	GM1204PKV3-A	12	40 x 40 x 20	6.3	Vapo	50	0.6	UL/CSA/TUV	18	12"	6.95	6.25	5.59	4.95
195899	Sunon	KDE1204PKS2	12	40 x 40 x 20	6.5	Sleeve	70	0.9	UL/CSA/TUV	25.5	12"	4.95	4.49	3.95	3.59
279620	Toyo	T402012H	12	40 x 40 x 20	6.7	Ball	70	0.84	UL/CUL/TUV/CE	26.2	12"	6.95	6.25	5.59	4.95
2120065	Sunon	KD1204PKB2(2).GN	12	40 x 40 x 20	7.7	Dual ball	62	0.7	UL/CSA/TUV	22	12"	6.95	6.25	5.59	4.95
687754	Sunon	KDE1204PKSX-8	12	40 x 40 x 20	9.5	Sleeve	90	1.1	UL/CSA	28	11"	6.95	6.25	5.59	4.95
2099518	Adda	AD0412UB-C51	12	40 x 40 x 20	9.9	Ball	180	2.16	UL/CUL/TUV/CE	36.1	11"	7.95	6.95	6.25	5.59
2082100	Sunon	KDE1204PKBX-8	12	40 x 40 x 20	10	Ball	90	1.1	UL/TUV/CE	29.4	4"	7.95	6.95	6.25	5.59
2099841	Delta	EFB0412VHD-R00	12	40 x 40 x 20	10.1	Dual ball	120	1.4	UL/CSA/VDE/CE	32.5	12" 2	9.95	8.95	7.95	6.95
1928118	Adda	AD4012HB-C50	12	40 x 40 x 20	10.5	Ball	100	1.2	UL/CUL/TUV/CE	31.9	12"	9.95	8.95	7.95	6.95
1585291	Sunon	GM1204PKVX-A	12	40 x 40 x 20	10.8	Vapo	130	1.6	UL/CUL/CSA	27.5	5"	6.95	6.25	5.59	4.95
2082089	Sanyo Denki	109P0412H302	12	40 x 40 x 28	11.3	Ball	195	2.3	UL/CSA/TUV	37	3.75"	6.95	6.25	5.59	4.95
2095162	Sunon	PMD1204PQBX-A(2)F	12	40 x 40 x 28	23.5	Ball	570	6.8	UL/CE	51.5	3" w/conn 1	12.95	11.49	9.95	8.95
1951246	Sunon	PMD1204PQBX-A(2)	12	40 x 40 x 28	23.5	Ball	570	6.8	UL/CE	51.5	12"	14.95	13.49	11.95	10.95
1951254	Sunon	PMD1204PQBX-A(2)F	12	40 x 40 x 28	23.5	Ball	570	6.8	UL/CE	51.5	12" 1	14.95	13.49	11.95	10.95
1950753	Comair Rotron	CR4512MB-G70	12	45 x 45 x 10	6.9	Ball	70	0.8	UL/CUL/CE/TUV	21.6	12"	6.95	6.25	5.59	4.95
2095322	Adda	AD4512HX-G70	12	45 x 45 x 10	9.1	Hypro	90	1.08	UL/CUL/TUV/CE	27.4	11"	7.95	6.95	6.25	5.59
2100371	Adda	AD0512LX-G70LF	12	51 x 51 x 10	9.0	Hypro	60	0.72	UL/CSA/TUV/CE	20	11"	5.95	5.35	4.79	4.29
1918809	Jamicon	KF0510B1M	12	51 x 51 x 10	9.27	Ball	80	0.8	UL/CUL/TUV/CE	26.6	10.5"	5.95	5.35	4.79	4.29
2095331	Adda	AD0512HX-G70	12	51 x 51 x 10	10.5	Hypro	120	1.4	UL/CUL/TUV/CE	24	11"	5.95	5.35	4.79	4.29
2095349	Adda	AD0512MB-G76	12	51 x 51 x 10	10.5	Ball	120	1.4	UL/CUL/TUV/CE	24	11" 1	7.95	6.95	6.25	5.59
1950446	Sunon	KD1205PFB1(2)H	12	51 x 51 x 10	11.4	Ball	130	1.6	UL/TUV	34.7	12"	7.95	6.95	6.25	5.59
2100419	Adda	AD0512HB-G70-LF	12	51 x 51 x 10	11.8	Ball	90	1.08	UL/CSA/TUV/CE	27	11"	8.95	7.95	6.95	6.25
125006	Nidec	A33999-16	12	51 x 51 x 15	4.0	Ball	170	2.04	UL/CE	46	11"	8.95	7.95	6.95	6.25
139601	Adda	AD0512HS-D71	12	51 x 51 x 15	12	Sleeve	100	1.2	UL/CSA/CE	29	5"	5.95	5.35	4.79	3.95
139602	Adda	AD0512HS-D71-R	12	51 x 51 x 15	12	Sleeve	100	1.2	UL/CSA/CE	29	12"	9.95	8.95	7.95	6.95
2099534	Adda	AD5012MX-D71	12	51 x 51 x 15	12.6	Hypro	100	1.2	UL/CUL/TUV/CE	29	5.5"	7.95	6.95	6.25	5.59
1809813	Sunon	GM1205PHV1-AR	12	51 x 51 x 15	17	Vapo	130	1.5	UL/CUL/TUV/CE	33	12" 2	7.95	6.95	6.25	5.59
2095357	Adda	AD0612HB-G70	12	60 x 60 x 10	14.5	Ball	150	1.8	UL/CUL/TUV/CE	32	11"	9.95	8.95	7.95	6.95
1946025	Evercool	EC6010M12CA	12	60 x 60 x 10	15.5	Ball	160	1.9	UL/CE/TUV	30	9" 1	8.95	7.95	6.95	6.25
2115522	Everflow	R126010DU	12	60 x 60 x 10	19.41	Ball	250	3	UL/CE/TUV	37	9" w/ conn 1	8.95	7.95	6.95	6.25
1928046	Adda	AD0612LX-D70GL	12	60 x 60 x 15	12	Hypro	90	1.08	UL/CUL/TUV/CE	27.2	8"	5.95	5.59	4.95	4.49
2078178	Delta	AFB0612MB	12	60 x 60 x 15	13.4	Ball	80	0.96	UL/CUL/TUV/CE	29	12"	7.95	6.95	6.25	5.59
195945	Adda	AD612MS-D71GL	12	60 x 60 x 15	14.2	Sleeve	110	1.32	UL/CSA/TUV/CE	28.8	6"	8.95	7.95	6.95	6.25
249069	Jamicon	JF0615B1H-000-243	12	60 x 60 x 15	15.7	Ball	170	2.04	UL/CUL/TUV/CE	34	12"	9.95	8.95	7.95	6.95
2121308	Adda	AD0612HB-D70GL	12	60 x 60 x 15	16.6	Ball	130	1.56	UL/CSA/TUV/CE	32.4	11" w/ conn	9.95	8.95	7.95	6.95
687771	Sunon	KDE1206PHS1	12	60 x 60 x 15	21	Sleeve	150	1.8	UL/CSA/TUV/CE	36	11"	6.95	6.25	5.59	4.95
1585400	Sunon	KDE1206PHB1	12	60 x 60 x 15	21	Ball	150	1.8	UL/CSA/CE	37.5	11"	10.95	9.95	8.95	7.95
144161	Adda	AD0612LB-C70GL	12	60 x 60 x 20	12.6	Ball	80	1.0	UL/CSA/TUV	22.7	6"	9.95	8.95	7.95	6.95
1928126	Adda	AD0612HB-C70GL	12	60 x 60 x 20	16.3	Ball	160	1.92	UL/CSA/TUV/CE	31	12"	9.95	8.95	7.95	6.95
189595	Sunon	KD1206PKS2	12	60 x 60 x 20	16.5	Sleeve	150	1.8	UL/CSA/TUV/CE	31	12"	7.95	6.95	6.25	5.59
119635	Delta/Fonsan	DFD0612H	12	60 x 60 x 20	17.7	Ball	150	1.3	UL/CE/CSA/VDE	30	12"	6.95	6.25	5.59	4.95
2120073	Sunon	KD1206PKB2(2).F.GN	12	60 x 60 x 20	19	Dual ball	88	1.1	UL/CUL/TUV	29	12" 1	7.95	6.95	6.25	5.59
114682	Delta	AFB0612VHD	12	60 x 60 x 20	30	Ball	270	2.4	UL/CE/CSA/VDE	39.5	12"	8.95	7.95	6.95	6.25
2120081	Sunon	KDE1206PTV3.13.MS.AF.GN	12	60 x 60 x 25	16	Vapo	110	0.7	UL/CSA/TUV	21	12" 1	7.95	6.95	6.25	5.59
1810101	Japan Servo	TUDC12Z4F-022	12	60 x 60 x 25	19	Ball	140	1.8	UL/CSA/TUV	32	5" w/ conn	5.95	5.39	4.79	4.29
2095197	Delta	DFB0612H	12	60 x 60 x 25	19.4	Ball	120	1.4	UL/CE/CSA/VDE	30	12"	7.95	6.95	6.25	5.59

1 3 leads; speed sensor 2 3 leads; locked rotor protection (These functions are optional, if needed) † Blower

RoHS compliant product

+ This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version.

Details on page 199.

Call for additional OEM PRICING – we carry major manufacturers.

DC Brushless Tubeaxial Fans & Blowers (Continued)



★ 12V Web Code: LBZ



2099446		1810030		1928100										1809995			
Part No.	Manufacturer	Mfr. Part No.	Voltage (VDC)	Size mm (W x H x D)	Air Flow (CFM)	Bearing	Current (mA)	Power (Watts)	Agency Approvals	Noise (dBA)	Connection (Leads)	Pricing					
												1	10	50	100		
102947	Jamicon	JF0625S1H	12	60 x 60 x 25	20.5	Sleeve	230	2.7	UL/CUL/TUV	33.6	12"	\$6.95	\$6.25	\$5.59	\$4.95		
150422	Jamicon	JF0625B1H	12	60 x 60 x 25	21.4	Ball	230	2.7	UL/CSA/TUV	30.5	10"	8.95	7.95	6.95	6.25		
195911	Sunon	KD1206PTS1AGN	12	60 x 60 x 25	21.7	Sleeve	190	2.3	UL/CSA/TUV	34	12"	9.95	8.95	7.95	6.95		
2099526	Adda	AD0612XB-A74GL	12	60 x 60 x 25	31.4	Ball	380	4.56	UL/CSA/TUV/CE	42.9	12" ¹	9.95	8.95	7.95	6.95		
123941	Nidec	D07R-12TL018	12	70 x 70 x 15	19.8	Ball	80	0.96	UL/CSA	27	23" ²	10.95	9.95	8.95	7.95		
2125561	AVC	DE07015R12U	12	70 x 70 x 15	43	Hydro	700	8.4	UL/CE/TUV	46	8" w/ conn.	11.95	10.95	9.95	8.95		
2099446	Adda	AD7512LB (2A) [†]	12	76 x 76 x 30	6.9	Ball	110	1.32	UL/CUL/TUV/CE	29	15" w/conn ²	9.95	8.95	7.95	6.95		
132951	Shicoh	A0815-12HV	12	80 x 80 x 15	18.4	Ball/Sleeve	200	2.4	—	32	12" ¹	6.95	6.25	5.59	4.95		
2099462	Adda	AD0812LB-D70	12	80 x 80 x 15	20	Ball	120	1.44	UL/CSA/TUV/CE	19.6	6" w/conn	6.95	6.25	5.59	4.95		
401269	Delta	AFB0812LB	12	80 x 80 x 15	24.7	Ball	140	1.68	UL/CSA/TUV	27.5	10"	8.95	7.95	6.95	6.25		
1950163	Sunon	KD1208PHB3H	12	80 x 80 x 15	25.5	Ball	120	1.4	CE	28	12"	8.95	7.95	6.95	6.25		
109082	Adda	AD0812HS-D71	12	80 x 80 x 15	29	Sleeve	190	2.3	UL/CSA/TUV/CE	31.4	12"	9.95	8.95	7.95	6.95		
1708570	Sunon	KD1208PHB1-AH	12	80 x 80 x 15	35	Ball	240	2.9	UL/CUL/TUV/CE	39.5	12"	10.95	9.95	8.95	7.95		
2095365	Adda	AD0812XX-D71	12	80 x 80 x 15	39.4	Hypro	350	4.2	UL/CSA/TUV/CE	42	11"	10.95	9.95	8.95	7.95		
141921	Adda	AD0812HB-C70	12	80 x 80 x 20	27.3	Ball	240	2.9	UL/CSA/CE	34	12"	10.95	9.95	8.95	7.95		
2081748	Sunon	KDE1208PKV1.13.MS.A	12	80 x 80 x 20	36	Vapo	130	1.6	UL/CUL/TUV/CE	38	12"	10.95	9.95	8.95	7.95		
688597	NMB	3110GL-B4W-B19	12	80 x 80 x 25	24.7	Ball	100	1.2	UL/CSA/TUV/CE	22	7" w/ conn. ¹	5.95	5.35	4.79	4.29		
2125544	Cool Master	A8025-25BB-3BN-PI	12	80 x 80 x 25	30.8	Dual Ball	150	1.8	UL/CSA/TUV/CE	30.6	12" w/ conn. ²	5.95	5.35	4.79	3.95		
1952759	Max Flow	MF8025D1-LSPS	12	80 x 80 x 25	31.1	Sleeve	130	1.56	UL	29	7" w/ conn.	5.95	5.39	4.79	4.29		
123530	Adda	AD0812MS-A70GL	12	80 x 80 x 25	32	Sleeve	150	1.8	UL/CSA/TUV	28.3	12"	7.95	6.95	6.25	5.59		
2125552	Cool Master	BP802512M	12	80 x 80 x 25	33	Ball	160	1.92	UL/CE/UR	29	12" w/ conn. ²	6.95	6.25	5.59	4.95		
1955010	NMB	3110KL-04W-B40	12	80 x 80 x 25	35.3	Ball	200	2.40	UL/CSA/TUV/CE	31	13"	6.95	6.25	5.59	4.95		
2125843	Vastech	RDH8025B	12	80 x 80 x 25	35.7	Ball	170	2.0	UL/CSA/CE	33	11"	6.95	6.25	5.59	4.95		
1950147	Sunon	KD1208PTB2(2)HM	12	80 x 80 x 25	36	Ball	160	2.1	UL/CE/TUV	29	11" ¹	7.95	6.95	6.25	5.59		
1810030	Sanyo Denki	109R0812H4011	12	80 x 80 x 25	36.4	Ball	130	1.56	UL/CSA/TUV	29	12" ¹	6.95	6.25	5.59	4.95		
1537387	Sunon	KD1208PTB2(13).2.GN	12	80 x 80 x 25	37	Ball	110	1.3	UL/CUL/TUV/CE	32	11.5" w/ conn.	7.95	6.95	6.25	5.59		
1928038	Adda	AD0812HS-A70GL	12	80 x 80 x 25	38.6	Sleeve	250	3.0	UL/CSA/TUV/CE	34.4	12"	5.95	5.35	4.79	4.29		
1928100	Adda	AD0812HX-A70GL	12	80 x 80 x 25	38.6	Hydro wave	250	3.0	UL/CSA/TUV/CE	34	12"	5.95	5.35	4.79	4.29		
2078194	Adda	AD0812HS-A73	12	80 x 80 x 25	38.6	Sleeve	250	3.0	UL/CSA/TUV	34.3	12" ¹	6.95	6.25	5.59	4.95		
662661	NMB-MAT	FBA08A12H1BS	12	80 x 80 x 25	39.6	Hydro wave	173	2.1	UL/CSA/TUV	32	12" ²	5.95	5.35	4.79	3.95		
2125835	Globe	B01138812H-3M	12	80 x 80 x 25	39.8	Ball	230	2.76	UL/CSA/TUV/CE	32.6	10" w/ conn. ¹	6.95	6.25	5.59	4.95		
1585477	Sunon	KD1208PTS1-13	12	80 x 80 x 25	40	Sleeve	160	1.9	UL/CUL/TUV/CE	33	12"	5.95	5.35	4.79	4.49		
1950569	Sunon	KD1208PTS1 H.M	12	80 x 80 x 25	40	Sleeve	160	2.6	UL/CE	33	12" ¹	5.95	5.35	4.79	4.39		
1708490	Sunon	KDE1208PTB1-13.MS(2)A	12	80 x 80 x 25	41	Dual Ball	150	1.8	UL/CUL/TUV/CE	35	12"	7.95	6.95	6.25	5.59		
206181	Sunon	KDE1208PTS1-6	12	80 x 80 x 25	42	Sleeve	220	2.6	UL/CSA/TUV/CE	34	9"	7.95	6.95	6.25	5.59		
355401	ReliaPro	RDH80025B1	12	80 x 80 x 25	42	Ball	230	2.8	UL/CUL/TUV/CE	28.6	12"	8.95	7.95	6.95	6.25		
2081271	Sunon	KDE1208PTB1-6(OCM)	12	80 x 80 x 25	42.5	Ball	220	2.6	UL/CUL/TUV/CE	36.5	12" ¹	5.95	5.35	4.76	4.29		
102955	Sunon	KD1208PTB1-6(OC)	12	80 x 80 x 25	42.5	Ball	220	2.6	UL/CUL/TUV/CE	36.5	3.5"	6.95	6.25	5.59	4.95		
249148	Sunon	KDE1208PTB1-6(OC)	12	80 x 80 x 25	42.5	Ball	220	2.6	UL/CUL/TUV/CE	36.5	12"	7.95	6.95	6.25	5.59		
2120225	Y.S. Tech	FD128025HS	12	80 x 80 x 25	43.7	Sleeve	230	2.76	UL/CSA/TUV	33.5	13"	6.95	6.25	5.59	4.95		
2100401	Adda	AD0812UB-A72GL	12	80 x 80 x 25	43.8	Ball	300	3.6	UL/CUL/TUV/CE	40	11" ²	8.95	7.95	6.95	6.25		
1918729	Jamicon	JF0825S1SR	12	80 x 80 x 25	45.5	Sleeve	260	3.12	UL/CUL/TUV/CE	35.8	12" w/ conn.	7.95	6.95	6.25	5.59		
421526	Panasonic	FBA08A12U-1AZ	12	80 x 80 x 25	47	Sleeve	360	4.32	UL/CSA	38.2	11"	7.95	6.95	6.25	5.59		
1809995	Sunon	KDE1208PTB6-6A(318)	12	80 x 80 x 25	50.6	Ball	360	4.3	UL/CUL/TUV/CE	40.5	12"	13.95	12.49	10.95	9.95		
2081078	Jamicon	JF0825B1UR	12	80 x 80 x 25	52	Dual Ball	370	4.4	UL/CUL/TUV/CE	40	12"	11.95	10.95	9.95	8.95		
2081692	Y.S. Tech	NFD128125BB-2F	12	80 x 80 x 25	59.2	Dual Ball	450	5.4	UL/CUL/TUV	44	20" w/ conn. ¹	12.95	11.49	10.49	9.49		
695682	Comair Rotron	O30615/ST12B3	12	80 x 80 x 32	34	Ball	280	3.4	UL/CUL/TUV/CE	40.9	12"	19.95	17.95	16.25	14.49		
107406	EBM Papst	8312GHL	12	80 x 80 x 32	39.4	Sleeve	330	4.0	UL/CE/CSA/VDE	43	12"	14.95	13.49	11.95	10.95		
1951166	Nidec	TA350DC-M33416-16	12	92 x 92 x 25	28	Ball	110	1.32	UL/CSA	19.5	11"	7.95	6.95	6.25	5.59		
1928089	Adda	AD0912LS-A70GL	12	92 x 92 x 25	32.4	Sleeve	130	1.6	UL/CUL/TUV/CE	23.5	12"	5.95	5.25	4.59	3.95		
1952783	Nidec	TA350DC-M34138-34	12	92 x 92 x 25	35	Ball	160	1.92	UL/CSA	26.4	10" w/ conn. ³	6.95	6.25	5.59	4.95		
1952257	AVC	C9025S12L	12	92 x 92 x 25	37.2	Sleeve	150	1.8	UL/CUL/TUV/CE	26.2	5.5" ¹	7.95	6.95	6.25	5.59		
1928097	Adda	AD0912LX-A70GL	12	92 x 92 x 25	37.9	Hypro	120	1.44	UL/CUL/TUV/CE	26.5	12"	9.95	8.95	7.95	6.95		
1928003	Adda	AD0912MB-A71GL	12	92 x 92 x 25	44.2	Ball	170	2.0	UL/CUL/TUV/CE	32.7	12"	9.95	8.95	7.95	6.95		
1952880	Nidec	TA350DC-M33422-57G4	12	92 x 92 x 25	48	Ball	290	3.48	UL/CSA	35	10" w/ conn. ⁴	6.95	6.25	5.59	4.95		
154641	Nidec	TA350DC-M33422-16	12	92 x 92 x 25	48	Ball	290	3.5	UL/CSA	43	12"	9.95	8.95	7.95	6.95		
1952935	Sunon	KD1209PTB2-6	12	92 x 92 x 25	48	Dual Ball	500	2.1	UL/CSA/TUV/CE	32	25" w/ conn. ⁴	10.95	9.95	8.95	7.95		
2115565	Sunon	KD1209PTS1.13.GN	12	92 x 92 x 25	49	Sleeve	160	1.9	UL/CUL/TUV/CE	34	11"	10.95	9.95	8.95	7.95		
190984	Sunon	KD1209PTB1-6A	12	92 x 92 x 25	51	Ball	220	2.6	UL/CSA/TUV	34	12"	10.95	9.95	8.95	7.95		
207061	AVC	C9025S12H	12	92 x 92 x 25	52	Sleeve	160	3.8	UL/CUL/TUV/CE	34	6" w/ conn. ¹	7.95	6.95	5.95	4.95		
1952767	NMB	3610KL-04W-B56PS9	12	92 x 92 x 25	54.7	Ball	315	3.8	UL/CSA/TUV/CE	41	7" w/ conn. ⁵	6.95	5.95	4.95	3.95		

¹ 3 leads; speed sensor ² 3 leads; locked rotor protection ³ 4 leads; wired for Dell proprietary PWM circuit control w/ tach (blue), lock rotor (yellow) & fan guard ⁴ Temperature sensor

⁵ 5 leads; locked rotor with 2 separate ground if needed (These functions are optional, if needed) [†] Blower

Fans continued on next page

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

DC Brushless Tubeaxial Fans & Blowers



Call for additional OEM PRICING – we carry major manufacturers.

DC Brushless Tubeaxial Fans & Blowers (Continued)

* 12V Web Code: LBZ



* 24V Web Code: QEF

mm to Inches Conversion Chart

mm	6.8	10	15	20	25	28	30	32	35	38	40	45	51	60	76	80	92	95	97	120	127	150	172
Inches	0.27	0.40	0.60	0.80	1.00	1.10	1.18	1.26	1.40	1.50	1.60	1.80	2.00	2.36	2.99	3.15	3.63	3.74	3.82	4.69	5.00	5.90	6.77

Part No.	Manufacturer	Mfr. Part No.	Voltage (VDC)	Size mm (W x H x D)	Air Flow (CFM)	Bearing	Current (mA)	Power (Watts)	Agency Approvals	Noise (dBA)	Connection (Leads)	Pricing			
												1	10	50	100
1952951	NMB	3610KL-04W-B56PS6	12	92 x 92 x 25	55	Ball	315	3.8	UL/CSA/TUV/CE	41	9" w/ conn. ²	\$7.95	\$6.95	\$5.95	\$4.95
102963	Nidec	TA350DC-M33503-55	12	92 x 92 x 25	56	Ball	400	4.8	UL/CSA	45	8"	7.95	6.95	5.95	4.95
1951481	Delta/Dell	AFC0912DE-U4218	12	92 x 92 x 38	160	Dual Ball	2500	30	UL/CSA/TUV/CE	63	10" w/ conn. ³	12.95	11.49	9.95	8.95
644893	Evercool	EC9733M12S-B [†]	12	97 x 92 x 33	19.4	Sleeve	200	2.4	UL/CE/TUV	30	8" w/ conn.	10.95	9.95	8.95	7.95
2081297	Delta	BFB1012H [†]	12	97 x 94 x 33	25.4	Dual Ball	800	9.6	UL/CSA/VDE/CE	52	6"	12.95	11.49	9.95	8.95
2081641	Delta	BFB1012H [†]	12	97 x 94 x 33	25.4	Dual Ball	800	9.6	UL/CSA/VDE/CE	52	11"	12.95	11.49	9.95	8.95
207062	Sony	SFF22C [†]	12	100 x 104 x 35	21	Ball	900	10.8	UL/CSA	51	15" w/ conn. ¹	11.95	10.95	9.95	8.95
174140	Common Wealth	FP108MS3	12	120 x 120 x 25	54	Sleeve	140	1.7	UL/CSA/TUV/CE	25	12"	12.95	11.49	10.49	9.49
689231	Sunon	KDE1212PTS3-6A	12	120 x 120 x 25	67	Sleeve	200	2.4	UL/CUL/TUV/CE	35	12"	10.95	9.95	8.95	7.95
227901	Common Wealth	FP-108M-S1-B	12	120 x 120 x 25	80	Ball	330	4.0	UL/CSA/VDE/CE	42	12"	14.95	13.49	11.95	10.95
363848	Mechatronics	E1225H12B	12	120 x 120 x 25	82	Ball	385	4.62	UL/CUL/TUV	40	3.5"	9.95	8.95	7.95	6.95
1928020	Adda	AD1212HB-A71GL	12	120 x 120 x 25	85.2	Ball	370	4.5	UL/CUL/TUV/CE	39.1	12"	12.95	11.49	9.95	8.95
1952231	Turbofan	TA1225E12BS	12	120 x 120 x 25	93	Ball	580	7.0	UL/CSA/TUV	44	13"	10.95	9.95	8.95	7.95
1928011	Adda	AD1212US-A71GL	12	120 x 120 x 25	98.6	Sleeve	500	6.0	UL/CUL/TUV/CE	39.1	2" w/ conn.	5.95	5.39	4.79	3.95
2081705	T&T	1225H12B-PF1	12	120 x 120 x 25	119	Ball	800	9.6	UL/CUL/TUV/CE	47.5	21" w/ conn. ¹	11.95	10.95	9.95	8.95
2082097	Delta	BFB1212VH [†]	12	120 x 120 x 32	40	Ball	1250	15	UL/CSA/VDE/CE	57	13"	12.95	11.49	9.95	8.95
2082151	Comair Rotron	MC12B3QDN	12	120 x 120 x 32	102	Ball	660	7.9	UL/CSA/CE	47.8	12" ²	14.95	13.49	11.95	10.95
868109	Comair Rotron	MC12B7	12	120 x 120 x 32	102	Ball	660	7.9	UL/CUL/TUV/CE	47.9	12"	14.95	13.49	11.95	10.95
1580289	EBM Pabst	4212/2	12	120 x 120 x 38	97.1	Ball	360	4.3	UL/CSA/VDE/CE	45	12" ¹	39.95	37.95	35.95	33.95
1585389	Japan Servo	CNDC12B4C-016	12	120 x 120 x 38	99	Ball	380	4.6	UL/CSA/TUV	40	12"	9.95	8.95	7.95	6.95
94626	Sunon	KD1212PMB1-6A	12	120 x 120 x 38	108	Ball	570	6.8	UL/CUL/TUV/CE	42	12"	12.95	11.49	10.95	9.95
1954703	Mechatronics	F1238H12B2-FS	12	120 x 120 x 38	112	Ball	440	5.3	UL/TUV	41	10" w/ conn. ²	11.95	10.95	9.95	8.95
1952791	NMB	4715KL-04W-B46	12	120 x 120 x 38	118	Ball	900	8.4	UL/CSA/TUV/CE	47	6" w/ conn. ²	7.95	6.95	6.25	5.59
1955028	NMB	4715KL-04W-B49	12	120 x 120 x 38	118	Ball	700	8.4	UL/CSA/TUV/CE	46	12" w/ conn. ¹	9.95	8.95	7.95	6.95
2125860	Comair Rotron	MS12K3	12	120 x 120 x 38	127	Ball	920	11	UL/TUV/CE	53.4	12"	14.95	13.49	11.95	10.95
2120313	Comair Rotron	GDA1238-12BB	12	120 x 120 x 38	128	Ball	600	7.2	UL/TUV/CE	43.5	8" ¹	10.95	9.95	8.95	7.95
2099972	Delta	AJB1212SHE-4F1A	12	120 x 120 x 38	152	Ball	750	9.0	UL/CSA/VDE/CE	55.5	48" w/ conn. ⁶	9.95	8.95	7.95	6.95
1537467	Comair Rotron	QJ12B7X	12	172 x 150 x 51	235	Ball	2260	25.2	UL/CSA/TUV/CE	54.3	12" ²	22.95	19.95	17.95	15.95
1928281	Adda	AD0424HB-G70	24	40 x 40 x 10	6.7	Ball	90	2.16	UL/CUL/TUV/CE	25	7" w/ conn.	11.95	10.95	9.95	8.95
1951473	Delta	AFB0424MD	24	40 x 40 x 20	7.0	Ball	60	1.44	UL/CSA/TUV/CE	30	2" w/ conn.	7.95	6.95	6.25	5.59
100910	Sunon	KDE2404PKV2	24	40 x 40 x 20	7.7	Vapo	33	0.8	UL/CUL/TUV	21	12"	9.95	8.95	7.95	6.95
2100398	Adda	AD0424MB-C50LF	24	40 x 40 x 20	8.5	Ball	70	1.68	UL/CUL/TUV/CE	28.5	12"	9.95	8.95	7.95	6.95
1951502	Adda	AD0424HB-C56	24	40 x 40 x 20	10.1	Ball	90	2.16	UL/CUL/TUV/CE	31.9	12" ¹	10.95	9.95	8.95	7.95
1708422	Sunon	KDE2406PHS3	24	60 x 60 x 15	15	Sleeve	50	1.2	UL/CUL/TUV/CE	31	12"	7.95	6.95	6.25	5.59
687818	Sunon	KDE2406PHB2	24	60 x 60 x 15	18	Ball	56	1.3	UL/CUL/TUV/CE	31	11"	10.95	9.95	8.95	7.95
212652	Delta/Fonsan	DFD0624H	24	60 x 60 x 20	17.7	Ball	100	2.4	UL/CE/CSA/TUV	30	12"	6.95	6.25	5.59	4.95
140661	NMB	2408NL-05W-B60	24	60 x 60 x 20	18.4	Ball	100	2.4	UL/CSA/TUV/CE	31	2" w/ conn.	5.95	4.95	4.49	3.95
1951191	Sunon	KDE2406PKV2MS.AGN	24	60 x 60 x 20	18.5	Vapo	90	1.1	UL/CE	27.5	11"	7.95	6.95	6.25	5.59
1954922	NMB	2410ML-05W-B10	24	60 x 60 x 25	14	Ball	60	1.44	UL/CSA/TUV/CE	23	13"	7.95	6.95	5.59	4.95
198961	Jamicon	JF0625B2M	24	60 x 60 x 25	18	Ball	130	3.1	UL/CSA/TUV/CE	28.5	10"	8.95	7.95	6.95	6.25
1952177	Japan Servo	TUDC2424P-029	24	60 x 60 x 25	19	Ball	80	1.8	UL/CSA/TUV	32	12" ²	7.95	6.95	6.25	5.59
212628	Adda	AD0624HS-A70GL	24	60 x 60 x 25	23.2	Sleeve	150	3.6	UL/CSA/TUV/CE	32.3	17" w/ conn.	6.95	6.25	5.59	4.95
1928337	Adda	AD624HX-A70GL	24	60 x 60 x 25	23.2	Hypro	150	3.6	UL/CSA/TUV/CE	32.3	12"	6.95	6.25	5.59	4.95
2081799	Nidec	TA225DC-M33516-16	24	60 x 60 x 25	25	Ball	180	4.3	UL/CSA	37	12"	7.95	6.95	6.25	5.59
1928071	Adda	AD0624HB-A70GL	24	60 x 60 x 25	25	Ball	150	3.6	UL/CSA/TUV/CE	33.9	12"	8.95	7.95	6.95	6.25
1809848	Sunon	PMD2406PTB1-A	24	60 x 60 x 25	35.8	Ball	220	5.3	UL/CUL/TUV/CE	48.8	12"	9.95	8.95	7.95	6.95
1928345	Adda	AD0824HX-D71L	24	80 x 80 x 15	29	Hypro	130	3.12	UL/CUL/TUV/CE	33.5	12"	9.95	8.95	7.95	6.95
1809864	Sunon	PMD2408PMB1-A	24	80 x 80 x 25	24	Ball	400	9.6	UL/CUL/TUV	55.2	12"	7.95	6.95	6.25	5.59
290029	Jamicon	JF0825B2M	24	80 x 80 x 25	31.7	Ball	130	3.1	UL/CUL/TUV/CE	29.3	10"	9.95	8.95	7.95	6.95
136161	Jamicon	JF0825B2H	24	80 x 80 x 25	39.2	Ball	150	3.6	UL/CSA/TUV	31	12"	9.95	8.95	7.95	6.95
1809952	Sunon	KDE2408PTB1-6A	24	80 x 80 x 25	42.5	Ball	110	2.6	UL/CUL/TUV/CE	36.5	12"	9.95	8.95	7.95	6.95
1928388	Adda	AD0824UB-A72GL	24	80 x 80 x 25	50	Ball	260	6.24	UL/CUL/CE	41	12" ²	8.95	7.95	6.95	6.25
1580422	EBM Pabst	8314/12	24	80 x 80 x 32	31.8	Ball	245	2.5	UL/CUL/CSA/VDE	36	11" w/ conn. ¹	12.95	11.49	9.95	8.95
206965	Sunon	PMD2408PMB2-A	24	80 x 80 x 38	74.5	Ball	300	7.2	UL/CUL/CSA/VDE	52	12"	19.95	17.95	15.95	14.49
1951051	Mechatronics	E9225L24B1-FS	24	92 x 92 x 25	35	Ball	85	2.04	UL/CUL	27	12" ¹	7.95	6.95	6.25	5.59
1708502	Sunon	KDE2409PTS3-6	24	92 x 92 x 25	39	Sleeve	112	2.7	UL/CUL/TUV/CE	27	12"	8.95	7.95	6.95	6.25
1928329	Adda	AD0924HX-A70GL	24	92 x 92 x 25	50	Hypro	150	3.6	UL/CUL/TUV/CE	33.7	12"	9.95	8.95	7.95	6.95
695042	Sunon	KD2409PTB1-13AGN	24	92 x 92 x 25	51	Ball	140	3.4	UL/CE/TUV	37	12"	10.95	9.95	8.95	7.95

¹ 3 leads; speed sensor ² 3 leads; locked rotor protection ³ 4 leads; wired for Dell proprietary PWM circuit control w/ tach (blue), lock rotor (yellow) & fan guard

⁴ 4 leads; all black tach/speed w/ connector (These functions are optional, if needed) [†] Blower

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

DC Brushless Tubeaxial Fans, Blowers, Power Cords, Guards & Filters

Call for additional OEM PRICING – we carry major manufacturers.

DC Brushless Tubeaxial Fans & Blowers (Continued)

*24V Web Code: QEF



*48V Web Code: MAJ



153411



212661



1952960



1952775

Part No.	Manufacturer	Mir. Part No.	Voltage (VDC)	Size mm (W x H x D)	Air Flow (CFM)	Bearing	Current (mA)	Power (Watts)	Agency Approvals	Noise (dBA)	Connection (Leads)	Pricing			
												1	10	50	100
1928302	Adda	AD0924US-A71GL	24	92 x 92 x 25	57.8	Sleeve	210	5.04	UL/CUL/TUV/CE	38.6	12"	\$10.95	\$9.95	\$8.95	\$7.95
104890	EBM Pabst	3314/12	24	92 x 92 x 32	47.1	Ball	140	3.4	UL/CE/TUV	37	12" ¹	11.95	10.95	9.95	8.95
1951465	Delta	FFB0924VHE	24	92 x 92 x 38	85	Ball	280	6.7	UL/CSA/VDE/CE	47	12"	12.95	11.49	9.95	8.95
2115557	Sunon	KD2412PTB3-6A.GN	24	120 x 120 x 25	69	Ball	120	2.9	UL/CUL/TUV/CE	35.5	12"	12.95	11.49	9.95	8.95
1809881	Sunon	KD2412PTB1-6A	24	120 x 120 x 25	90	Ball	220	5.3	UL/CUL/TUV/CE	44.5	12"	13.95	12.49	10.95	9.95
1951115	Nidec	TA450DC-A34350-16	24	120 x 120 x 25	92	Ball	180	4.32	UL/CSA	40.4	10"	11.95	10.95	9.95	8.95
2120129	Sunon	PMD2412PTB3-A(2).GN	24	120 x 120 x 25	120	Dual ball	280	6.7	UL/CSA/TUV	48	12"	12.95	11.49	9.95	8.95
153411	Sunon	KD2412PMB2-6A	24	120 x 120 x 38	98	Ball	230	5.5	UL/CSA/TUV	36.5	12"	17.95	15.95	14.49	12.95
694444	Jamicon	JF1238S2MR-R	24	120 x 120 x 38	101.3	Sleeve	220	5.28	UL/CSA/TUV/CE	39.1	9"	13.95	12.49	10.95	9.95
694524	Jamicon	JF1238B2MR-R	24	120 x 120 x 38	101.3	Ball	220	5.28	UL/CSA/TUV/CE	39.1	9"	15.95	14.49	12.95	11.49
107394	EBM Pabst	4294GH	24	120 x 120 x 38	108	Sleeve	220	5.3	UL/CE/CSA/TUV	49	Terminals	14.95	13.49	11.95	10.95
694532	Jamicon	JF1238B2HR-R	24	120 x 120 x 38	118.7	Ball	310	7.44	UL/CSA/TUV/CE	43.8	9.5"	17.95	15.95	14.49	12.95
1809910	Sunon	KD2412PMSX-6A	24	120 x 120 x 38	119	Sleeve	300	7.2	UL/CUL/TUV/CE	45	12"	12.95	11.49	9.95	8.95
297959	Delta [†]	BFB1224HE	24	125 x 126 x 34	27.2	Ball	340	8.1	UL/CE/CSA/TUV	50.5	12"	12.95	11.49	9.95	8.95
212662	EBM Pabst	6424/R-139	24	172 x 150 x 51	241	Ball	750	18	UL/CUL/TUV	57	24" ⁴	19.95	17.95	15.95	14.49
212661	EBM Pabst	6224N/8HT	24	172 Round x 51	241.3	Ball	750	18	UL/CE/CSA/VDE	55	12" ⁴	19.95	17.95	15.95	14.49
212644	Delta	AFB0948L	48	92 x 92 x 25	37	Ball	50	2.44	UL/CSA/TUV/CE	25	12"	14.95	13.49	11.95	10.95
2120137	Sunon	PMD4809PMB3-A(2).GN	48	92 x 92 x 38	91.7	Dual ball	120	5.8	UL/CSA/TUV	50.3	12"	15.95	14.49	12.95	11.49
212653	Delta [†]	BFB1248HH	48	120 x 120 x 32	35.3	Ball	220	10.5	UL/CSA/CE/VDE	54	12"	12.95	11.49	9.95	8.95
1952960	Comair Rotron	MC48B6QDNX	48	120 x 120 x 32	102	Ball	180	8.4	UL/CSA/TUV/CE	48	11" w/ conn. ¹	12.95	11.49	9.95	8.95
1951457	Delta	EFB1248HHF	48	120 x 120 x 32	120	Ball	140	6.72	UL/CSA/TUV/CE	50.5	6" w/ conn.	14.95	13.49	11.95	10.95
1952775	Orion	OD1232-48HB	48	120 x 120 x 32	120	Ball	180	8.6	UL/TUV/CE	51	12" ³	15.95	14.49	12.95	11.49
2120145	Sunon	PMD4812PMB1-A(2).GN	48	120 x 120 x 38	190	Dual ball	400	19.2	UL/CSA/TUV	54	12"	17.95	15.95	14.95	12.95
1951422	Delta	FFB1248HE-ROO	48	120 x 120 x 38	190	Ball	500	24	UL/CSA/TUV/CE	59	12" w/ conn. ²	17.95	15.95	14.49	12.95
689063	EBM Pabst	W2G115-AG75-85	48	127 x 127 x 38	155	Ball	310	15	UL/CUL	52	10" ¹	17.95	15.95	14.49	12.95
1954711	Delta	EFB1348HHE-SV06	48	127 x 127 x 38	185	Ball	360	17.28	UL/CSA/VDE/CE	55.5	26" ¹	17.95	15.95	14.95	12.95


¹ 3 leads; speed sensor ² 3 leads; locked rotor protection ³ 4 Leads wired for Dell proprietary PWM circuit control w/ tach (blue), lock rotor (yellow) & fan guard

⁴ 5 leads; locked rotor with 2 separate ground if needed (These functions are optional, if needed) [†] Blower

DC & AC Plug Fan Power Cords

*Web Code: GAE

For Fans w/ Terminal Connection

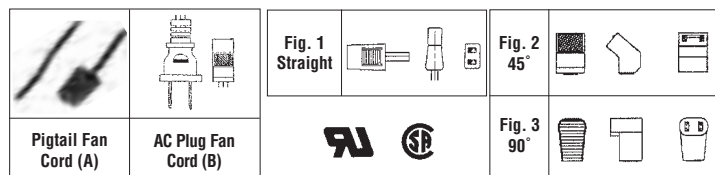

Part No.	Description	Fig.	Length	1	10	100	250
28564	Straight pigtail fan cord	1A	24"	\$1.49	\$1.25	.89	\$.89
2076658	Straight pigtail fan cord	1A	36"	1.49	1.25	.89	.79
1952548	45° pigtail fan cord	2A	24"	1.25	1.19	1.09	.99
104192	90° pigtail fan cord	3A	24"	1.25	1.19	1.09	.99
1952572	Straight AC plug fan cord	1B	72"	2.95	2.69	2.39	2.19
2117245	45° AC plug fan cord	2B	24"	11.95	10.95	9.95	8.95
1952581	45° AC plug fan cord	2B	72"	2.95	2.69	2.39	2.19

* Green cord, thermostatic controlled

Fan Guards & Aluminum Washable Filters

Guards and filters fit all fans. Please match by size dimension.

*Web Code: UAR

Example: P/N 300557 fan (80mm) matches P/N 31924 metal guard (80mm).

Part No.	mm	Description	Fig.	1	10	50	100
123502	40	Metal (chrome) guard	1	\$.59	\$.55	\$.49	\$.45
120038	60	Metal (chrome) guard	1	.65	.59	.55	.49
687666	60	Metal (black anodized) guard	2	.85	.79	.75	.69
31924	80	Metal (chrome) guard	1	.69	.65	.59	.55
1928433	80	Metal (black anodized) guard	2	.79	.69	.65	.59
123511	92	Metal (chrome) guard	1	.75	.69	.65	.59
25735	120	Metal (chrome) guard	1	.79	.75	.69	.65
695068	120	Metal (black anodized) guard	2	1.09	.99	.89	.79
695076	127	Metal (chrome) guard	1	1.25	1.09	.99	.89
1811198	172	Metal (chrome) guard	1	1.25	1.09	.99	.89
1952644	40	Plastic guard only	3	.55	.49	.45	.39
1952652	60	Plastic guard only	3	.65	.59	.55	.49
1952290	80	Plastic guard only	3	.69	.59	.55	.49

Part No.	mm	Description	Fig.	1	10	50	100
1952661	92	Plastic guard only	3	\$.89	\$.85	\$.75	\$.69
1952679	120	Plastic guard only	3	.99	.89	.79	.75
1952687	150	Plastic guard only	3	1.29	1.19	1.09	.99
1952695	40	Plastic guard w/ mesh	4	1.29	1.19	1.09	.99
1952708	60	Plastic guard w/ mesh	4	1.95	1.79	1.59	1.39
138562	80	Plastic guard w/ mesh	4	1.65	1.49	1.39	1.29
229665	92	Plastic guard w/ mesh	4	1.95	1.75	1.49	1.35
196817	120	Plastic guard w/ mesh	4	2.19	2.09	1.95	1.79
1952716	172	Plastic guard w/ mesh	4	2.79	2.49	2.29	2.19
1952724	60	Alum. washable filter	5	1.95	1.75	1.59	1.45
138580	80	Alum. washable filter	5	2.09	1.95	1.75	1.59
1952732	92	Alum. washable filter	5	2.25	1.95	1.75	1.59
130105	120	Alum. washable filter	5	2.95	2.75	2.49	2.25

Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com



212600



206309

115 & 220VAC Tubeaxial Fans



* Web Code: ABJ



275793



209365

mm to Inches Conversion Chart

mm	6.8	10	15	20	25	28	30	32	35	38	40	45	51	60	76	80	92	95	97	120	127	150	172
Inches	0.27	0.40	0.60	0.80	1.00	1.10	1.18	1.26	1.40	1.50	1.60	1.80	2.00	2.36	2.99	3.15	3.63	3.74	3.82	4.69	5.00	5.90	6.77

Part No.	Manufacturer	Mfr. Part No.	Voltage (VAC)	Size mm (W x H x D)	Air Flow (CFM)	Bearing	Current (mA)	Power (Watts)	Agency Approvals	Noise (dBA)	Connection	Pricing			
												1	10	50	100
213867	Fulltech	UF60D11BWH	115	60 x 60 x 30	10.2	Ball	35	4	UL/CUL/VDE/CE	28	12' leads	\$17.95	\$15.95	\$14.49	\$12.95
2100267	Pelonis	PM8025HA1S	115	80 x 80 x 25	18.8	Sleeve	110	13.2	UL/CUL/CE	26.7	Terminals	12.95	11.49	9.95	8.95
146078	Common Wealth	FP108AX-S1-B (115)	115	80 x 80 x 25	23	Ball	180	14	UL/CE	29	12' leads	15.95	14.49	12.95	11.49
300557	Fulltech	UF80B11SWH	115	80 x 80 x 25	24	Sleeve	140	14	UL/CUL/TUV/CE	35	12' leads	12.95	11.49	9.95	8.95
300258	Fulltech	UF80B11BTH	115	80 x 80 x 25	24	Ball	140	14	UL/CUL/TUV/CE	35	Terminals	13.95	12.49	10.95	9.95
212645	Elina	EP083815-LBL	115	80 x 80 x 38	24	Ball	110	9	UL/CSA/TUV/CE	32	12' leads	13.95	12.49	10.95	9.95
300582	Fulltech	UF80A11SWL	115	80 x 80 x 38	25	Sleeve	110	12	UL/CUL/TUV/CE	32	12' leads	13.95	12.49	10.95	9.95
300303	Fulltech	UF80A11BWL	115	80 x 80 x 38	25	Ball	110	11	UL/CUL/TUV/CE	32	12' leads	15.95	14.49	12.95	11.49
300330	Fulltech	UF80A11BTL	115	80 x 80 x 38	25	Ball	110	12	UL/CUL/TUV/CE	32	Terminals	14.95	13.49	11.95	10.95
300600	Fulltech	UF80A11BWH	115	80 x 80 x 38	29	Ball	120	12	UL/CUL/TUV/CE	36	12' leads	15.95	14.49	12.95	11.49
1950155	Sunon	SF11580A-1083HSL-GN	115	80 x 80 x 38	30	Sleeve	150	13	UL/CE/TUV	33	24' leads	13.95	12.49	10.95	9.95
300389	Fulltech	UF80A11BTH	115	80 x 80 x 38	30	Ball	120	12	UL/CUL/TUV/CE	36	Terminals	15.95	14.49	12.95	11.49
75433	Sunon	SF11592A-1092HSL	115	92 x 92 x 25	36	Sleeve	130	12	UL/CSA/TUV/CE	39	12' leads	12.95	11.49	9.95	8.95
303467	Sunon	SF11592A-1092HBL	115	92 x 92 x 25	37	Ball	110	12	UL/CSA/TUV/CE	40	12' leads	14.95	13.49	11.95	10.95
75460	Sunon	SF11592A-1092HBT-R	115	92 x 92 x 25	37	Ball	110	12	UL/CSA/TUV/CE	40	Terminals	16.95	14.95	13.49	11.95
1819376	NMB	4710PS12TB30A00	115	120 x 120 x 25	70.6	Ball	190	11	UL/CSA/VDE/CE	38	Terminals	12.95	11.49	9.95	8.95
1810048	Sunon	SP101AT-1122HBL-GN	115	120 x 120 x 25	78	Ball	180	18	UL/CUL/TUV/CE	46	12' leads	16.95	14.95	13.49	11.95
124063	Sunon	SP101AT-1122HBT	115	120 x 120 x 25	78	Ball	180	18	CSA/TUV/CE	46	Terminals	16.95	14.95	13.49	11.95
303361	Fulltech	UF12A11BTL1	115	120 x 120 x 38	64	Ball	80	15	UL/CUL/TUV/CE	37	Terminals	14.95	13.49	11.95	10.95
1585371	Sunon	SP103A-1123LBL	115	120 x 120 x 38	78	Ball	130	11	UL/CSA/TUV	39	6' w/ conn.	11.95	10.95	9.95	8.95
1918796	Jamicon	KA1238L1B0A0-T	115	120 x 120 x 38	78	Dual Ball	200	12	UL/CUL/CE	38	Terminals	14.95	13.49	11.95	10.95
300792	Fulltech	UF12A11STL	115	120 x 120 x 38	81	Sleeve	150	15	UL/CUL/TUV/CE	38	Terminals	14.95	13.49	11.95	10.95
303483	Fulltech	UF12A11SWL	115	120 x 120 x 38	82	Sleeve	150	12	UL/CUL/TUV/CE	38	12' leads	12.95	11.49	10.49	9.49
2100427	Adda	AA1281HS-ATLF	115	120 x 120 x 38	83	Sleeve	250	16.3	UL/CSA/TUV/CE	42.2	Terminals	13.95	12.49	10.95	9.95
106586	Common Wealth	FP108-1-S1/T	115	120 x 120 x 38	105	Sleeve	180	12	UL/CSA/CE	47	Terminals	13.95	12.49	10.95	9.95
303415	Common Wealth	FP108-1-S1-B/W	115	120 x 120 x 38	105	Ball	200	17	UL/CSA/TUV/CE	47	12' leads	15.95	14.49	12.95	11.49
16935	Common Wealth	FP108-1-S1-B/T	115	120 x 120 x 38	105	Ball	200	17	UL/CSA/TUV/CE	47	Terminals	15.95	14.49	12.95	11.49
212600	Fulltech	UF12A11BWH	115	120 x 120 x 38	106	Ball	190	15	UL/CUL/TUV/CE	46	12' leads	15.95	14.49	12.95	11.49
1707163	Sunon	SP101A-1123HBL-GN	115	120 x 120 x 38	107	Ball	180	18	UL/CSA/TUV	50	12' leads	15.95	14.49	12.95	11.49
206309	Adda	AA1281UB-AT	115	120 x 120 x 38	107	Ball	230	24	UL/CUL/CE	48	Terminals	15.95	14.49	12.95	11.49
275793	Sunon	SP101A-1123HBT	115	120 x 120 x 38	107	Ball	180	18	UL/CUL/CE	50	Terminals	16.95	14.95	13.49	11.95
303408	Sunon	SP100A-1123XBL	115	120 x 120 x 38	117	Ball	240	20	UL/CSA/TUV/CE	47	12' leads	17.95	15.95	14.49	12.95
102884	Sunon	SP100A-1123XBT	115	120 x 120 x 38	117	Ball	240	20	UL/CUL/TUV/CE	50	Terminals	17.95	15.95	14.49	12.95
108725	Fulltech	UF15AC11BTH	115	172 x 150 x 38	211	Ball	230	28	UL/CUL/TUV/CE	58	Terminals	29.95	27.95	25.95	23.95
2099454	Adda	AA1751MB-AW	115	172 x 150 x 51	186	Ball	350	29.8	UL/CUL/TUV/CE	50.5	12' leads	29.95	26.95	23.95	21.49
189684	Fulltech	UF15PC12BTH	115	172 x 150 x 51	226	Ball	250	30	CSA	58	Terminals	34.95	32.95	29.95	26.95
212582	Fulltech	UF15PC11BWH	115	172 x 150 x 51	226	Ball	250	30	UL/CUL/TUV/CE	58	12' leads	36.95	34.95	32.95	29.95
1950956	Arctic	KEST-481BW	115	172 x 150 x 51	260	Ball	620	46	UL/CE/TUV	61	12' leads	34.95	32.95	29.95	26.95
1810128	Common Wealth	FP-108AX-S1-B (220)	220	80 x 80 x 25	21	Ball	120	13	UL/CSA/TUV/CE	29	13' leads	16.95	14.95	13.49	11.95
2099471	Adda	AA8382MX-AT	220	80 x 80 x 38	24	Hypro	50	6.8	UL/CUL/TUV/CE	25.3	Terminals	14.95	13.49	11.95	10.95
100918	Sunon	SF23080A/2083HSL	220	80 x 80 x 38	30	Sleeve	60	13.5	UL/CSA/TUV/CE	35	12' leads	16.95	14.95	13.49	11.95
355630	Fulltech	UF-80A23-BTH-R	220	80 x 80 x 38	30	Ball	60	12	UL/CSA/VDE/CE	36	Terminals	16.95	14.95	13.49	11.95
209365	Bi-Sonic	4C-230LB	220	120 x 120 x 38	63	Ball	60	9	TUV/CE	34	10' leads	12.95	11.49	9.95	8.95
302244	Comair Rotron	28023	220	120 x 120 x 38	88	Ball	130	28.6	UL/CSA	50.7	Terminals	12.95	11.49	9.95	8.95
1918753	Jamicon	KA1238H2B01	220	120 x 120 x 38	89	Dual Ball	200	23	UL/CUL/TUV/CE	42	Terminals	10.95	9.95	8.95	7.95
1918761	Jamicon	KA1238H2B12	220	120 x 120 x 38	110	Ball	200	24	UL/CUL/TUV/CE	45	Terminals	12.95	11.49	9.95	8.95
1585346	Sunon	A2123-HBL	220	120 x 120 x 38	117	Ball	120	20	UL/CUL/TUV	50	17' leads	14.95	13.49	11.95	10.95
303459	Sunon	DP200A-2123XBL	220	120 x 120 x 38	117	Ball	120	21	UL/CSA/TUV/CE	50	12' leads	15.95	14.49	12.95	11.49
1585338	Sunon	A2123-HBT	220	120 x 120 x 38	117	Ball	120	20	UL/CUL/TUV	50	Terminals	14.95	13.49	11.95	10.95
102892	Sunon	DP200A-2123XBT	220	120 x 120 x 38	117	Ball	120	21	UL/CSA/TUV/CE	50	Terminals	17.95	15.95	14.49	12.95
1809872	Sunon	A2175-HBT	220	172 x 150 x 51	239	Ball	110	25	UL/TUV/CE	51	Terminals	29.95	26.95	23.95	19.95
1950964	Arctic	KEST-482BW	220	172 x 150 x 51	256	Ball	400	58	UL/TUV/CE	58	12' leads	32.95	29.95	26.95	23.95

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

AC-to-AC & AC-to-DC Regulated Switching Wall Adapters



AC-to-AC Wall Adapters

Input: 120VAC @ 60Hz

* Web Code: ABQ



We specialize in Wall Adapters – Call for additional OEM PRICING.

We are happy to change any listed DC wall adapter power plug to a connector of your choice (see pg 130) for just \$2.50 each. A 100 pc. minimum order applies.



Part No.	Manufacturer	Product No.	Output Rating		Output Connector ID x OD mm Female/Male	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing			
			Voltage (VAC)	Current (mA)							1	10	50	100
2082521	Atlinks	5-2634	5	400	2.1mm x 5.5mm right angle F	2.0 x 1.4 x 1.3	White	6'	0.4	UL/CSA	\$3.95	\$3.59	\$3.25	\$2.95
2082530	Atlinks	5-2633	5	400	2.1mm x 5.5mm right angle F	2.0 x 1.4 x 1.3	Black	6'	0.4	UL/CSA	4.95	4.49	3.95	3.59
249017	ReliaPro	ACU070150	7	1500	2.5mm x 5.5mm F	2.5 x 2.0 x 1.7	Black	6'	0.5	UL/CSA	9.95	8.95	7.95	7.29
100061	ReliaPro	ACU090050	9	500	2.1mm x 5.5mm F	2.7 x 1.9 x 1.7	Black	6'	0.6	UL/CUL	7.95	7.29	6.59	5.95
1950921	ITI	AM-9700ALF	9	700	Screw terminals	2.8 x 2.0 x 1.7	White	—	0.6	UL	4.95	4.49	3.95	3.59
236814	ReliaPro	ACU090080	9	800	3.5mm M	2.5 x 2.0 x 1.7	Black	6'	0.5	UL/CUL	7.95	6.95	6.25	5.59
1581281	OEM	AA-091A	9	1000	2.1mm x 5.5mm F	2.2 x 2.1 x 1.6	Black	6'	0.6	UL/CSA	6.95	6.25	5.59	4.95
102234	ReliaPro	ACU090100Z8182	9	1000	2.1mm x 5.5mm F	3.2 x 2.2 x 1.9	Black	6'	0.6	UL/CSA	8.95	7.95	7.29	6.49
1586154	Arndt	AA091A	9	1000	2.1mm x 5.5mm F	2.2 x 2.1 x 1.6	Black	6'	0.6	UL/CSA	7.95	6.95	6.25	5.59
157041	ReliaPro	ACU090100E8942	9	1000	2.5mm x 5.5mm F	2.1 x 2.1 x 1.6	Black	6'	0.6	UL/CSA	8.95	7.95	7.29	6.49
112336	ReliaPro	ACU090150	9	1500	2.5mm x 5.5mm F	2.5 x 2.2 x 2.0	Black	6'	0.9	UL	10.95	9.95	8.95	7.95
688634	Arndt	PP-1012-A	10	1200	2.5mm x 5.5mm F	3.5 x 2.5 x 1.9	Black	6'	1.3	UL	7.95	6.95	6.25	5.59
2076543	Radio Shack	15-1963	12	400	2.1mm x 5.5mm F	2.6 x 1.7 x 1.6	Black	6'	0.6	UL/CSA	5.95	5.35	4.79	4.29
101258	ReliaPro	ACU120050	12	500	2.1mm x 5.5mm F	2.5 x 2.0 x 1.7	Black	6'	0.6	UL/CSA	6.95	6.25	5.59	4.95
2076666	CIC	48A12-500Q	12	500	2.5mm x 5.5mm right angle F	3.3 x 2.6 x 2.0	Black	6'	1.0	CSA	4.95	4.49	3.95	3.59
10081	ReliaPro	ACU120100J0920	12	1000	2.1mm x 5.5mm F	2.6 x 2.4 x 2.0	Black	6'	0.7	UL/CSA	9.95	8.95	7.95	7.29
100167	ReliaPro	A41120100U	12	1000	2.5mm x 5.5mm F	3.2 x 2.4 x 2.0	Black	6'	0.7	UL/CSA	9.95	8.95	7.95	7.29
10428	ReliaPro	ACU120100Z9121	12	1000	3.5mm M	2.6 x 2.4 x 2.0	Black	6'	0.6	UL/CUL	9.95	8.95	7.95	7.29
167151	ReliaPro	ADU120150	12	1500	2.1mm x 5.5mm F	3.4 x 2.7 x 2.2	Black	6'	1.5	UL/CUL	10.95	9.95	8.95	7.95
307838	ReliaPro	ADU120160H4120	12	1600	2.5mm x 5.5mm F	2.9 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	11.95	10.95	9.95	8.95
153761	ReliaPro	ADU120160C2521	12	1600	3.5mm M	2.5 x 2.2 x 1.9	Black	6'	0.9	UL	10.95	9.95	8.95	7.95
206404	Arndt	MGT1220	12	1670	Screw terminals with green LED	3.2 x 2.2 x 1.9	White	—	0.9	UL/CSA	9.95	8.95	7.95	7.29
2082564	ReliaPro	GPU1355000	13.5	5000	2.1mm x 5.5mm F (Table-Top style)	4.7 x 3.2 x 2.5	Black	6'	2.4	—	22.95	20.49	18.95	16.95
171408	ReliaPro	ACU140050	14	500	2.1mm x 5.5mm F	2.8 x 2.0 x 1.6	Black	6'	0.6	UL/CSA	9.95	8.95	7.95	6.95
318684	Horizon	ACU140085	14	850	2.5mm x 5.5mm right angle F	2.5 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	12.95	11.49	9.95	8.95
100108	ReliaPro	ADU160100	16	1000	2.1mm x 5.5mm F	3.2 x 2.2 x 1.9	Black	6'	0.9	UL/CSA	10.95	9.95	8.95	7.95
163053	ReliaPro	ADU160110	16	1100	2.5mm x 5.5mm F	3.2 x 2.3 x 1.8	Black	6'	1.1	UL/CSA	10.95	9.95	8.95	7.95
176604	ReliaPro	BHU160400	16	4000	2.1mm x 5.5mm F (Table-Top style)	4.4 x 3.1 x 2.5	Black	6'/6"	2.8	—	19.95	17.95	15.95	13.95
2082142	Ault	308-2018	18	900	Screw terminals	1.88 x 2.18 x 1.95	Beige	—	0.7	UL	8.95	7.95	6.95	5.95
121216	ReliaPro	ADU180100	18	1000	2.1mm x 5.5mm F	3.1 x 2.7 x 1.9	Black	6'	1.1	UL/CUL	10.95	9.95	8.95	7.95
185439	ReliaPro	AFU180185	18	1850	2.1mm x 5.5mm right angle F	3.3 x 2.7 x 2.2	Black	6'	1.7	—	11.95	10.95	9.95	8.95
2076631	Ault	T57-182200	18	2200	2.1mm x 5.5mm F	3.2 x 2.6 x 2.2	Black	5'6"	1.2	UL/CSA	11.95	10.95	9.95	8.95
87581	ReliaPro	ADU240050	24	500	2.1mm x 5.5mm F	2.5 x 2.2 x 1.9	Black	6'	0.9	UL/CSA	8.95	7.95	7.29	6.49
206439	Arndt	MGT2420	24	830	Screw terminals with green LED	3.2 x 2.2 x 1.9	White	—	0.9	UL/CSA	10.95	9.95	8.95	7.95
140599	ReliaPro	ADU240100D5531	24	1000	2.1mm x 5.5mm F	3.0 x 2.2 x 1.9	Black	6'	1.2	UL/CSA	10.95	9.95	8.95	7.95
10102	ReliaPro	ADU240100E0461	24	1000	3.5mm M	3.0 x 2.2 x 1.9	Black	6'	1.2	UL/CSA	10.95	9.95	8.95	7.95
2100195	ReliaPro	GPU572401500WA00	24	1500	2.1mm x 5.5mm F	3.3 x 2.6 x 2.3	Black	6'	1.7	UL/CUL	14.95	13.49	11.95	10.95



AC-to-DC "Slim Line" Regulated Switching Wall Adapters

Output connector: 2.1mm x 5.5mm F2 (center positive)

Compact in size and lightweight, they are the perfect power solution in all those applications where space is critical. And their high efficiency satisfies requirements for minimizing power losses. You no longer have to deal with traditional wall adapters that block unused outlets in wall plates and power strips/surge protectors.

- 2-wire AC input
- Output cord length: 6'
- Input voltage: 100 – 240VAC @ 47-63Hz
- Color: black
- One-year warranty



* Web Code: CBQ



We'll Brand the Adapters
With Your Company Name
Call 1-800-831-4242 for Details



CEC Equivalents Available Below

Choose from 2 Models!		Output Rating		Size (H"xW"xD")	Wt. (lbs.)	Pricing			
Non-CEC P/N	CEC Part No.	Volt (VDC)	Curr. (mA)			1	10	50	100
—	251565	3.3	1500	2.5x1.1x1.7	0.2	\$11.95	\$10.95	\$9.49	\$8.49
—	251600	3.3	2500	2.9x1.1x1.7	0.3	12.95	11.49	9.95	8.95
252701	—	5	500	2.9x1.1x1.7	0.3	10.95	9.95	8.95	7.95
—	252720	5	1000	2.5x1.1x1.7	0.2	12.95	11.49	9.95	8.95
252727	252728	5	1500	2.5x1.1x1.7	0.2	13.95	12.49	10.95	9.95
—	252736	5	2500	2.9x1.3x2.2	0.3	14.95	13.49	11.95	10.49
2082222	—	5	3000	2.9x1.3x2.2	0.3	14.95	12.95	10.95	8.95
—	252753	9	500	2.5x1.1x1.7	0.2	11.95	10.95	9.95	8.95
—	1950841	9	1000	2.5x1.1x1.7	0.2	13.95	12.49	10.95	9.95
—	252779	9	1200	2.9x1.3x2.2	0.3	13.95	12.49	10.95	9.95
252786	—	9	1500	2.9x1.3x2.2	0.3	15.95	14.49	12.95	11.49

✓ CEC equivalent available

Choose from 2 Models!		Output Rating		Size (H"xW"xD")	Wt. (lbs.)	Pricing			
Non-CEC P/N	CEC Part No.	Volt (VDC)	Curr. (mA)			1	10	50	100
252794	252795	12	250	2.5x1.1x1.7	0.2	\$8.95	\$7.95	\$6.95	\$6.25
—	252808	12	500	2.5x1.1x1.7	0.2	10.95	9.95	8.95	7.95
—	252816	12	600	2.5x1.1x1.7	0.2	9.95	8.95	7.95	6.95
—	252824	12	1000	2.9x1.3x2.2	0.3	12.95	11.49	9.95	8.95
—	252833	12	1250	2.9x1.3x2.2	0.3	13.95	12.49	10.95	9.95
254757	—	15	800	2.9x1.3x2.2	0.2	12.95	11.49	10.49	9.49
—	252904	15	1000	2.9x1.3x2.2	0.3	13.95	12.49	10.95	9.95
252858	—	24	250	2.5x1.1x1.7	0.2	9.95	8.95	7.95	6.95
252866	—	24	500	2.9x1.3x2.2	0.3	11.95	10.95	9.95	8.95
—	2076341	24	630	2.9x1.3x2.2	0.3	12.95	11.49	10.49	9.49

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

AC-to-DC Regulated Switching Wall Adapters

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRRUN	DOLLAR SALE

Jameco carries the full line of Mean Well products. For additional Mean Well products visit www.Jameco.com/meanwellproducts



AC-to-DC Regulated Switching Wall Adapters

★ Web Code: CDZ

We specialize in Wall Adapters – Call for additional OEM PRICING.

We are happy to change any listed DC wall adapter power plug to a connector of your choice (see pg 130) for just \$2.50 each. A 100 pc. minimum order applies.



Female Straight




Female Right Angle



Screw Terminals



1954199



Part No.	Manufacturer	Product No.	Output Rating		Output Connector ID x OD mm Female/Male; Polarity ◆	Input VAC @ Hz	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing			
			Volts (VDC)	Current (mA)								1	10	50	100
1809805	Globtek	WR9HA1000C9P-F(R) *	5	1000	2.1mm x 5.5mm F 2	100-240@50-60	2.1 x 1.2 x 1.6	Black	6'	0.2	UL/CUL/CE	\$8.95	\$7.95	\$6.95	\$6.49
1940660	Mean Well	GS06U1P1J *	5	1000	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.3 x 1.9	Black	6'	0.2	UL/CUL/CEC	11.95	10.95	9.95	8.95
1950981	Philips	AY3192/17	5	2000	1.7mm x 4.0mm F 2	100-240@50-60	3.1 x 1.4 x 1.3	Black	6'	0.3	UL/CUL	10.95	9.95	8.95	7.95
157340	D-Link	AF1205B	5	2000	2.1mm x 5.5mm right angle F 2	100-120@50-60	2.4 x 1.4 x 1.1	Black	6'	0.3	UL/CUL/TUV	8.95	7.95	6.95	6.25
210894	ReliaPro	SYS1193-1005 *	5	2000	2.1mm x 5.5mm F 2	100-240@47-63	2.9 x 1.4 x 2.2	Black	6'	0.2	UL/CUL	12.95	11.49	10.49	9.49
1940740	Mean Well	GS12U05P1I	5	2000	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.9 x 1.0	Black	4'	0.3	UL/CUL/CEC	12.95	11.49	10.49	9.49
189190	Interex	EPA101MU-05B	5	2000	2.5mm x 5.5mm F 1	100-240@50-60	3.2 x 2.8 x 1.3	Black	6'	0.4	UL/CUL	12.95	11.49	10.49	9.49
1954199	Mean Well	GS15U-1P1J *	5	2400	2.1mm x 5.5mm F 2	90-264@47-63	2.8 x 1.3 x 2.0	Black	6'	0.4	UL/CUL/CEC	14.95	13.49	11.95	10.95
689864	ReliaPro	DSA-0151A-05	5	2400	2.5mm x 5.5mm right angle F 2	100-240@50-60	3.2 x 2.1 x 1.4	Black	6'	0.5	UL/CUL	14.95	13.95	12.95	11.95
1952863	Mean Well	GS18U05-P1J	5	3000	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	4'	0.5	UL/CUL/CEC	15.95	14.95	13.95	12.95
379622	Mean Well	ES25U05-P1J	5	4000	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CE	14.95	13.49	11.95	10.95
379623	Mean Well	GS25U05-P1J	5	4000	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	15.95	14.95	13.95	12.95
2082011	Friwo	MPA3U	6	400	2.1mm x 5.5mm right angle F 2	100-240@50-60	2.8 x 2.0 x 0.7	Black	6'	0.3	UL/CUL	5.95	5.49	4.95	3.95
2095429	Phihong	PSMIIR-060	6	1660	2.1mm x 5.5mm F 2	100-240@50-60	2.8 x 1.8 x 1.2	Black	6'	0.3	UL/CUL/CE	14.95	13.49	11.95	10.95
1918702	Globtek	GT-41052-1506†	6	2500	2.5mm x 5.5mm right angle F 2	100-240@50-60	2.9 x 1.7 x 1.5	Black	6'	0.5	UL/CUL/CE	22.95	19.95	17.95	15.95
1940678	Mean Well	GS06U-11P1J *	7.5	800	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.3 x 1.9	Black	6'	0.2	UL/CUL/CEC	11.95	10.95	9.95	8.95
1940758	Mean Well	GS12U07P1I	7.5	1600	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.9 x 1.0	Black	6'	0.3	UL/CUL/CEC	12.95	11.49	10.49	9.49
380008	Mean Well	ES25U07-P1J	7.5	2930	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CE	14.95	13.49	11.95	10.95
380332	Mean Well	ES25U07-P1M	7.5	2930	2.5mm x 5.5mm F 2	100-240@50-60	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CE	15.95	14.49	12.95	11.95
1940686	Mean Well	GS06U-2P1J *	9	660	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.3 x 1.9	Black	6'	0.2	UL/CUL/CEC	11.95	10.95	9.95	8.95
2099850	Ault	HES12-090130	9	1300	2.1mm x 5.5mm F 2	100-240@50-60	2.4 x 1.8 x 1.3	Black	6'	0.3	UL/CUL/CE	11.95	10.95	9.95	8.95
1940766	Mean Well	GS12U09-P1I	9	1330	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.9 x 1.0	Black	6'	0.3	UL/CUL	12.95	11.49	10.49	9.49
1952847	Mean Well	GS18U09-P1J	9	2000	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	15.95	14.95	13.95	12.95
380140	Mean Well	GS25U09-P1J	9	2780	2.5mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	17.95	15.95	14.49	12.95
2121578	ReliaPro	ST-12500	12	500	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	—	0.3	UL/CUL/CEC	9.95	8.95	7.95	6.95
1940694	Mean Well	GS06U-3P1J *	12	500	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.3 x 1.9	Black	6'	0.2	UL/CUL/CE	11.95	10.95	9.95	8.95
1955036	Arndt	26092‡	12	700	2.1mm x 5.5mm F 2	95-240@47-63	4.0 x 2.3 x 1.1	Black	5.5'	0.4	UL/CUL	10.95	9.95	8.95	6.95
2121586	ReliaPro	ST-121A	12	1000	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	—	0.3	UL/CUL/CEC	11.95	10.95	9.95	8.95
1940774	Mean Well	GS12U12-P1I	12	1000	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.9 x 1.0	Black	6'	0.3	UL/CUL/CEC	12.95	11.49	10.49	9.49
195354	Group West	TRC-12-1200	12	1200	2.1mm x 5.5mm F 2	100-240@50-60	3.0 x 1.9 x 1.0	Black	6'	0.2	UL/CUL/CE	10.95	9.95	8.95	7.95
1954623	Dee Van	DSA-0151A-12	12	1250	2.1mm x 5.5mm F 2	100-120@50-60	3.1 x 2.1 x 1.4	Black	6'	0.5	UL/CUL	11.95	10.95	9.95	8.95
1954201	Mean Well	GS15U-3P1J *	12	1250	2.1mm x 5.5mm F 2	90-264@47-63	2.8 x 1.3 x 2.0	Black	6'	0.4	UL/CUL/CE	15.95	14.49	12.95	11.49
2082062	Ktec	KSAD1200	12	1500	2.1mm x 5.5mm F 2	100-240@50-60	3.2 x 1.7 x 1.3	Black	4'	0.3	UL/CUL	12.95	11.49	9.95	8.95
2082054	APD	WA-18G12U	12	1500	2.1mm x 5.5mm F 2	100-240@50-60	3.0 x 1.9 x 1.5	Black	6'	0.4	UL/CUL/TUV	12.95	11.49	9.95	8.95
1952855	Mean Well	GS18U12-P1J	12	1500	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.2	UL/CUL/CE/CEC	15.95	14.95	13.95	12.95
2082134	ReliaPro	ST-122A	12	2000	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	—	0.4	UL/CUL/CEC	14.95	13.49	11.95	10.95
1950497	ReliaPro	SYS1308-2412 *	12	2000	2.1mm x 5.5mm F 2	100-240@50-60	2.9 x 1.3 x 1.7	Black	6'	0.4	UL/CUL/CE	15.95	14.49	12.95	11.49
380156	Mean Well	GS25U12-P1J	12	2080	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CE/CEC	16.49	14.95	13.49	12.49
1940707	Mean Well	GS06U-4P1J *	15	400	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.3 x 1.9	Black	6'	0.2	UL/CUL/CEC	11.95	10.95	9.95	8.95
1707112	Mean Well	SW12U15-P1I	15	800	2.1mm x 5.5mm F 2	100-240@50-60	2.6 x 2.0 x 1.0	Black	6'	0.5	UL/CUL/CE	11.95	10.49	9.49	8.49
1940782	Mean Well	GS12U15-P1I	15	800	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.9 x 1.0	Black	6'	0.3	UL/CUL/CEC	12.95	11.49	10.49	9.49
1952871	Mean Well	GS18U15-P1J	15	1200	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 2.1 x 1.4	Black	6'	0.4	UL/CUL/CE/CEC	15.95	14.95	13.95	12.95
380173	Mean Well	GS25U15-P1J	15	1670	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CE	16.49	14.95	13.49	12.49
1940715	Mean Well	GS06U-5P1J *	18	330	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.3 x 1.9	Black	6'	0.2	UL/CUL/CEC	11.95	10.95	9.95	8.95
1940791	Mean Well	GS12U18-P1I	18	670	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.9 x 1.0	Black	6'	0.3	UL/CUL/CEC	12.95	11.49	10.49	9.49
380191	Mean Well	GS25U18-P1J	18	1380	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 1.2 x 1.3	Black	6'	0.5	UL/CUL/CEC	16.49	14.95	13.49	12.49
1940803	Mean Well	GS12U24-P1I	24	500	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.9 x 1.0	Black	6'	0.3	UL/CUL/CEC	12.95	11.49	10.49	9.49
1952898	Mean Well	GS18U24-P1J	24	750	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	15.95	14.95	13.95	12.95
2121594	ReliaPro	ST-241A	24	1000	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	—	0.3	UL/CUL/CEC	14.95	13.49	11.95	10.95
380202	Mean Well	GS25U24-P1J	24	1040	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	16.49	14.95	13.49	12.49
380220	Mean Well	GS25U28-P1J	28	890	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 2.1 x 1.3	Black	6'	0.6	UL/CUL/CEC	16.49	14.95	13.49	12.49
380412	Mean Well	ES25U36-P1M	36	690	2.5mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CE	16.49	14.95	13.49	12.49
380244	Mean Well	GS25U48-P1J	48	520	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	16.49	14.95	13.49	12.49

* Slimline package † Includes 4 each interchangeable plug kit ‡ With light indicator ✓ CEC equivalent available CEC

JAMECO ReliaPro

3-Prong Wall Adapter Enclosure

- 3-prong power plug and cable strain relief
- Material: noryl
- Color: black

Part No.	Style	Size (H x W x D)	1	10	100
115052	Non-vented	3.4" x 2.7" x 2.3"	\$2.25	\$1.95	\$1.75

Looking for a Different Output Connector?

We are happy to change any listed DC wall adapter power plug to a connector of your choice (see pg 130) for just \$2.50 each. A 100 pc. minimum order applies.

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

Energy Star Worldwide Interchangeable AC-to-DC Regulated Switching Wall Adapters

Meets US and European Energy Star compliance. Approved for European high-efficiency power applications.

- Field changeable AC Plug Clips (**sold separately, see below**)
- Input voltage: 90-264VAC @ 47-63Hz
- Output connector: 2.1mm x 5.5mm female center positive; except P/N 1918702: 2.5mm x 5.5mm female right angle center positive
- Load regulation: ±5%
- Applications: wireless communications, portable equipment, digital camera, peripherals and networking

- Regulated output
- Double insulated



*Web Code: NBH



Phihong & Mean Well AC Plug Clips (below)



Shown w/o AC Plug Clip
AC Plug Clips Not Included

Wall Adapters (AC Plug Clip required, not included)

Part No.	Manufacturer	Mfr. Part No.	Output Volt. (VDC)	Current (A)	Power (W)	Ripple (mVp-p)	Line Regulation	Efficiency (%)	Dimensions (L" x W" x H")	Pricing			
										1	10	50	100
1950761	Phihong	PSA05R-050PA	5	1.0	5	50	±1%	60 - 75	2.8 x 1.8 x 1.2	\$5.95	\$5.49	\$4.95	\$4.49
2082302	Mean Well	GE12105-P1J	5	2.0	10	50	±5%	70	2.8 x 1.6 x 1.5	14.95	13.49	11.95	10.95
2095429	Phihong	PSM1IR-060	6	1.66	10	100	±5%	73	2.8 x 1.8 x 1.2	14.95	13.49	11.95	10.95
1918702	Globtek	GT-41052-1506	6	2.5	15	100	±1%	76	2.9 x 1.7 x 1.5	22.95	19.95	17.95	15.95
2082311	Mean Well	GE18109-P1J	9	2.0	18	100	±5%	75	3.2 x 1.7 x 1.6	16.95	15.49	13.95	12.95
228770	Phihong	PSA05R-120	12	0.42	5	120	±5%	60	2.8 x 1.8 x 1.2	12.95	11.49	10.49	9.49
2108656	Phihong	PSC12R-120	12	1.0	12	240	±5%	78	2.8 x 1.8 x 1.2	14.95	13.49	11.95	10.95
2100179	Phihong	PSAA20R-120R	12	1.67	20	120	±5%	81	2.8 x 2.0 x 1.3	19.95	18.95	16.95	15.95
2082329	Phihong	PSC30R-120	12	2.5	30	180	±1%	80	3.8 x 2.1 x 1.2	23.95	21.49	18.95	16.95
2114423	APS	PA1040-120-1	12	3.33	40	120	±1%	75	4.3 x 2.1 x 1.3	24.95	22.49	20.49	17.95
2114458	APS	PA1050-120-1	12	4.16	50	120	±1%	75	4.3 x 2.1 x 1.3	24.95	22.49	20.49	17.95
2082337	Mean Well	GE12115-P1J	15	0.8	12	150	±3%	76	2.8 x 1.6 x 1.5	13.95	12.49	10.95	9.95
2082345	Mean Well	GE12124-P1J	24	0.63	15	240	±3%	80	2.8 x 1.6 x 1.5	13.95	12.49	10.95	9.95
2114431	APS	PA1040-240-1	24	1.67	40	240	±1%	75	4.3 x 2.1 x 1.3	25.95	23.49	20.95	17.95
2114466	APS	PA1050-240-1	24	2.08	50	240	±1%	75	4.3 x 2.1 x 1.3	25.95	23.49	20.95	17.95
2114440	APS	PA1040-480-1	48	0.83	40	480	±1%	75	4.3 x 2.1 x 1.3	25.95	23.49	20.95	17.95

† Comes with USA AC plug clip (RPA) * 2.5mm x 5.5mm female right angle center positive plug * Kit includes US, UK, EU, AUS plugs

Phihong AC Plug Clips (sold separately, required for above adapters)

Part No.	Mfr. P/N	Description (see above for photos)	1	10	50	100
229155	RPA	USA AC plug only	\$.69	\$.65	\$.59	\$.55
229163	RPE	European AC plug only	.69	.65	.59	.55
229171	RPK	United Kingdom AC plug only	1.05	.99	.95	.89
2081422	RPS	Australia AC plug only	1.75	1.69	1.65	1.59
229181	RPKIT	Kit includes RPA/RPE/RPK/RPS clips (4)	3.49	3.29	3.19	2.95

Mean Well AC Plug Clips (sold separately, required for above adapters)

Part No.	Mfr. P/N	Description (see above for photos)	1	10	50	100
2082353	AC-Plug-US	USA AC plug only	\$.69	\$.65	\$.62	\$.59
2082361	AC-Plug-EU	European AC plug only	.89	.85	.79	.75
2082370	AC-Plug-UK	United Kingdom AC plug only	1.09	1.05	.99	.95
2082388	AC-Plug-AU	Australia AC plug only	.95	.89	.85	.79
2082396	AC-Plug-MIX	Kit includes US, EU, UK & AU clips (4)	3.49	3.29	3.19	2.95



AC-to-DC Regulated Linear Wall Adapters

We specialize in Wall Adapters – Call for additional OEM PRICING.

*Web Code: WAZ

♦ Polarity figures & photos on next page

Part No.	Manufacturer	Product No.	Output Rating		Output Connector ID x OD mm Female/Male; Polarity ♦	Input VAC @ Hz	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing			
			Voltage (VDC)	Current (mA)								1	10	50	100
164101	ReliaPro	GPU410500	5	500	2.1mm x 5.5mm F 2	120@60	2.8 x 2.0 x 1.6	Black	6'	0.6	UL/CUL	\$9.95	\$8.95	\$7.95	\$6.95
220935	ReliaPro	DDU050060	5	600	2.1mm x 5.5mm F 1	120@60	2.7 x 2.2 x 1.9	Black	6'	0.8	UL/CUL	10.95	9.95	8.95	7.95
319986	DVE	DV-580R	5	800	2.5mm x 5.5mm F 2	120@60	3.2 x 2.2 x 2.0	Black	6'	1.0	UL/CUL	10.95	9.95	8.95	7.95
2081609	Condor	RWP480505	5	1000	2.1mm x 5.5mm F 2	120@60	3.2 x 2.2 x 1.9	Black	6'	1.2	UL/CSA	10.95	9.95	8.95	7.95
1953612	ReliaPro	DBU0501000	5	1000	2.1mm x 5.5mm F 2	120@60	3.3 x 2.2 x 1.9	Black	6'	1.2	UL/CSA	12.95	11.49	9.95	8.95
168605	ReliaPro	DBU0501000	5	1000	2.5mm x 5.5mm F 2	120@60	3.3 x 2.2 x 1.9	Black	6'	1.2	UL/CSA	12.95	11.49	9.95	8.95
681571	ITE	RWP480505-2	5	1000	2.5mm x 5.5mm right angle F 2	120@60	3.3 x 2.2 x 1.9	Black	6'	1.0	UL/CUL	12.95	11.49	9.95	8.95
1919220	Frivo	FE4823	5	1200	2.5mm x 5.5mm F 2	120@60	3.5 x 2.4 x 1.9	Black	6'	1.2	UL/CUL	14.95	13.49	11.95	10.95
190512	ReliaPro	DBU60020-H3570	6	200	2.1mm x 5.5mm F 2	120@60	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	9.95	8.95	7.95	6.95
283573	ReliaPro	ADR-6V500MA-2.1	6	500	2.1mm x 5.5mm F 2	120@60	3.1 x 2.0 x 1.7	Black	6'	0.6	UL/CSA	10.95	9.95	8.95	7.95
1953701	ReliaPro	ADR-6V500MA-2.5	6	500	2.5mm x 5.5mm F 2	120@60	3.1 x 2.0 x 1.7	Black	6'	0.6	UL/CSA	9.95	8.95	7.95	6.95
1953719	ReliaPro	DBU0601000	6	1000	2.1mm x 5.5mm F 2	120@60	3.2 x 2.3 x 2.0	Black	6'	1.3	UL/CSA	12.95	11.49	9.95	8.95
190529	ReliaPro	AD9123	9	250	2.5mm x 5.5mm right angle F 2	120@60	2.5 x 2.0 x 1.6	Black	6'	0.5	UL/CSA	9.95	8.95	7.95	6.95
1953639	ReliaPro	DCU09050	9	500	2.1mm x 5.5mm F 2	120@60	3.3 x 2.2 x 1.9	Black	6'	0.9	UL/CSA	10.95	9.95	8.95	7.95
1953647	ReliaPro	DCU09050	9	500	2.5mm x 5.5mm F 2	120@60	3.3 x 2.2 x 1.9	Black	6'	0.9	UL/CSA	10.95	9.95	8.95	7.95
220898	ReliaPro	DCU120020	12	200	2.1mm x 5.5mm F 1	120@60	2.5 x 2.0 x 1.7	Black	6'	0.5	UL/CUL	9.95	8.95	7.95	6.95
1953655	ReliaPro	DDU120050H	12	500	2.1mm x 5.5mm F 1	120@60	2.9 x 2.2 x 1.9	Black	6'	1.3	UL/CSA	10.95	9.95	8.95	7.95
162996	ReliaPro	DDU120050	12	500	2.1mm x 5.5mm F 2	120@60	3.2 x 2.2 x 1.9	Black	6'	0.9	UL/CUL	10.95	9.95	8.95	7.95
170245	ReliaPro	RDU120100	12	1000	2.1mm x 5.5mm F 2	120@60	3.2 x 2.3 x 2.0	Black	6'	1.2	UL/CUL	14.95	13.49	11.95	10.95
1953663	ReliaPro	DCU1201000	12	1000	2.5mm x 5.5mm F 2	120@60	3.3 x 2.3 x 2.0	Black	6'	1.2	UL/CSA	14.95	13.49	11.95	10.95
174861	ReliaPro	DFU240050	24	500	2.1mm x 5.5mm F 2	120@60	3.4 x 2.7 x 2.2	Black	6'	1.3	UL/CUL	12.95	11.49	9.95	8.95
1953680	ReliaPro	DFU240500W	24	500	2.5mm x 5.5mm F 1	120@60	3.1 x 2.2 x 2.0	Black	6'	1.2	UL/CUL	11.95	10.95	9.95	8.95
174879	ReliaPro	DCU090025	24	500	2.5mm x 5.5mm F 2	120@60	3.4 x 2.7 x 2.2	Black	6'	1.3	UL/CUL	12.95	11.49	9.95	8.95
1953698	ReliaPro	DFU2401000	24	1000	2.1mm x 5.5mm F 2	120@60	3.4 x 2.7 x 2.2	Black	6'	1.3	UL/CSA	16.95	14.95	13.49	11.95
1953671	ReliaPro	MPC-2400107	24	1000	2.5mm x 5.5mm F 2	120@60	3.4 x 2.7 x 2.2	Black	6'	1.3	UL/CSA	16.95	14.49	11.95	10.95

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

AC-to-DC Unregulated Linear Wall Adapters

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE





AC-to-DC Unregulated Linear Wall Adapters

120VAC @ 60Hz

We specialize in Wall Adapters - Call for additional OEM PRICING.

*Web Code: UAP

We are happy to change any listed DC wall adapter power plug to a connector of your choice (see pg 130) for just \$2.50 each. A 100 pc. minimum order applies.



Part No.	Manufacturer	Product No.	Output Rating		Output Connector ID x OD mm Female/Male; Polarity ◆	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing			
			Voltage (VDC)	Curr. (mA)							1	10	50	100
112070	ReliaPro	DBU050022Z5480	5	225	2.5mm x 5.5mm F 2	1.9 x 2.2 x 2.0	Black	7'	0.3	UL/CSA	\$4.95	\$4.49	\$3.95	\$3.59
2125536	CUI Inc	DPD050025	5	250	2.1mm x 5.5mm F 2	2.2 x 1.5 x 1.4	Black	6'	0.3	UL/CUL	4.95	4.49	3.95	3.59
155601	ReliaPro	DCU050100B3582	5	1000	2.1mm x 5.5mm F 2	2.6 x 2.0 x 1.7	Black	6'	0.7	UL/CSA	9.95	8.95	7.95	6.95
1918657	ReliaPro	DDU050100	5	1000	2.5mm x 5.5mm F 2	3.2 x 2.2 x 1.9	Black	6'	0.7	UL/CUL	9.95	8.95	7.95	6.95
237251	Freeplay	DPX350817	6	100	2.1mm x 5.5mm F 2	2.4 x 1.7 x 1.4	Black	6'	0.4	UL/CSA	3.95	3.59	3.19	2.89
302439	Dynage	LF06300D-08	6	300	2.1mm x 5.5mm F 2	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CSA	4.95	4.49	3.95	3.59
2099551	Fuhua	UE-3560300D	6	300	2.5mm x 5.5mm F 2	2.2 x 1.7 x 1.7	Black	6'	0.4	UL/CUL	4.95	4.49	3.95	3.59
119255	ReliaPro	DBU060050Z2251	6	500	2.1mm x 5.5mm F 1	2.3 x 1.8 x 1.8	Black	6'	0.6	UL/CUL	6.95	6.25	5.59	4.95
101266	ReliaPro	DBU060050E3860	6	500	2.1mm x 5.5mm F 2	2.4 x 1.9 x 1.6	Black	6'	0.4	UL/CSA	6.95	6.25	5.59	4.95
15544	ReliaPro	DBU060050Z8371	6	500	3.5mm M 2	2.4 x 1.9 x 1.6	Black	6'	0.4	UL/CSA	6.95	6.25	5.59	4.95
2081431	PEI	DV-0670-B14	6	700	2.1mm x 5.5mm F 2	2.4 x 2.0 x 1.6	Black	6'	0.5	UL/CUL	5.95	5.39	4.79	4.29
147707	ReliaPro	DBU060080C6962	6	800	2.1mm x 5.5mm F 2	2.3 x 2.0 x 1.6	Black	6'	0.6	UL/CSA	7.95	6.95	5.95	4.95
220943	ReliaPro	DCU060120G2401	6	1200	2.1mm x 5.5mm F 1	2.5 x 2.0 x 1.7	Black	6'	0.7	UL/CUL	8.95	7.95	6.95	5.95
2095154	Thomson	5-2760	7.5	500	2.1mm x 5.5mm right angle F 2	2.5 x .96 x 1.4	Black	6'	0.4	UL/CUL	3.95	3.49	2.95	2.59
220951	ReliaPro	DCU075100G2291	7.5	1000	2.1mm x 5.5mm F 1	2.5 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	5.95
248751	Uniq	AD-071A	7.5	1000	2.5mm x 5.5mm F 2	2.3 x 2.3 x 1.9	Black	6'	0.9	UL/CSA	4.95	4.49	3.95	3.59
280250	ReliaPro	DDU075110G9521	7.5	1100	2.1mm x 5.5mm F 2	2.9 x 2.3 x 1.9	Black	6'	0.9	UL/CUL	8.95	7.95	6.95	5.95
127511	ReliaPro	DDU080100E2281	8	1000	2.1mm x 5.5mm F 2	3.1 x 2.5 x 2.1	Black	6'	1.3	UL	9.95	8.95	7.95	6.95
355936	ReliaPro	DBU090020	9	200	1.3mm x 3.5mm F 2	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	5.95	5.35	4.79	4.39
134025	ReliaPro	DBU090020Z6100	9	200	2.1mm x 5.5mm F 1	2.1 x 1.7 x 1.6	Black	6'	0.4	UL/CSA	5.95	5.35	4.79	4.39
2100152	ReliaPro	AP2911	9	200	2.1mm x 5.5mm F 2	2.6 x 1.8 x 1.5	Black	6'	0.4	UL/CUL	4.95	4.49	3.95	3.59
100845	ReliaPro	DBU090020E0850	9	200	2.1mm x 5.5mm F 2	2.1 x 1.7 x 1.5	Black	6'	0.4	UL/CSA	5.95	5.35	4.79	4.39
2082556	Thomson	5-2616	9	200	2.1mm x 5.5mm right angle F 2	2.2 x 1.4 x 1.4	Black	6'	0.5	UL/CUL	3.95	3.49	2.95	2.59
2082548	Atlinks	5-2617	9	200	2.1mm x 5.5mm right angle F 2	2.2 x 1.4 x 1.4	Gray	6'	0.5	UL/CUL	4.95	4.49	3.95	3.59
100837	ReliaPro	DBU090020Z5490	9	200	3.5mm M 2	2.6 x 1.8 x 1.6	Black	6'	0.4	UL/CSA	5.95	5.35	4.79	4.39
2082572	Atlinks	5-2677	9	210	2.1mm x 5.5mm right angle F 2	2.2 x 1.4 x 1.4	Black	6'	0.5	UL/CUL	4.95	4.49	3.95	3.59
133891	ReliaPro	DBU090030C112	9	300	2.1mm x 5.5mm F 2	2.0 x 1.5 x 1.5	Black	6'	0.4	UL/CSA	5.95	5.35	4.79	4.39
318676	ReliaPro	DBU090030H5790	9	300	2.5mm x 5.5mm F 1	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	5.95	5.39	4.79	4.39
1949120	Various	AD35-0900300DU	9	300	2.5mm x 5.5mm F 2	2.2 x 1.7 x 1.5	Black	6'	0.4	UL	4.95	4.49	3.95	3.59
189238	ReliaPro	DBU090030H4540	9	300	2.5mm x 5.5mm F 2	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	5.95	5.35	4.79	4.39
1954615	Mei Int.	MADA-2131	9	350	2.5 mm M 1	2.2 x 1.7 x 1.5	Black	6'	0.3	UL/CUL	4.95	4.49	3.95	2.95
140636	ReliaPro	DCU090040C6351	9	400	2.5mm x 5.5mm F 2	2.6 x 2.0 x 2.0	Black	6'	0.6	UL/CSA	5.95	5.35	4.79	4.25
163628	ReliaPro	DCU090050Z7484	9	500	2.1mm x 5.5mm F 1	2.5 x 1.9 x 1.7	Black	6'	0.6	UL/CSA	6.95	6.25	5.59	4.95
100853	ReliaPro	DCU090050E2961	9	500	2.1mm x 5.5mm F 2	2.5 x 1.9 x 1.7	Black	6'	0.6	UL/CSA	6.95	6.25	5.59	4.95
147732	ReliaPro	OH-41036DT	9	500	2.1mm x 5.5mm F 2	2.6 x 2.0 x 1.7	Beige	6'	0.6	UL/CSA	6.95	6.25	5.59	4.95
236937	ReliaPro	DCU090050G6440	9	500	2.5mm x 5.5mm right angle F 2	2.5 x 2.0 x 1.7	Black	6'	0.4	UL/CSA	6.95	6.25	5.59	4.95
15561	ReliaPro	DCU090050A2011	9	500	3.5mm M 2	2.5 x 2.0 x 1.6	Black	6'	0.5	UL/CSA	6.95	6.25	5.59	4.95
202180	ReliaPro	DCU090060F2091	9	600	2.1mm x 5.5mm F 2	3.3 x 2.9 x 2.3	Black	6'	0.6	UL/CUL	6.95	6.25	5.59	4.95
100175	ReliaPro	DCU090060Z6652	9	600	2.5mm x 5.5mm F 2	2.7 x 2.0 x 1.7	Black	6'	0.6	UL/CSA	6.95	6.25	5.59	4.95
202198	ReliaPro	DCU090080F2221	9	800	2.1mm x 5.5mm F 2	3.3 x 2.9 x 2.3	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	5.95
421577	Powerline	0900-12	9	850	2.5mm x 5.5mm F 2	2.7 x 2.1 x 1.7	Black	6'	0.8	UL/CSA	6.95	6.25	5.59	3.95
164929	ReliaPro	DDU090100C2550	9	900	2.1mm x 5.5mm F 1	2.7 x 2.3 x 1.8	Black	6'	0.9	UL/CUL	6.95	6.25	5.59	4.95
421690	Fisher Price	SA48-29A	9	1000	2.1mm x 5.5mm F 2	3.1 x 2.2 x 1.8	Black	6'	1.1	UL/CSA	6.95	5.95	4.95	3.95
364576	ReliaPro	DDU090100J0490	9	1000	2.1mm x 5.5mm F 2	2.9 x 2.3 x 1.9	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	6.95
227774	GTE	ADP2108GT	9	1000	2.1mm x 5.5mm right angle F 2	2.5 x 2.2 x 1.9	Black	6'	0.9	UL/CUL	7.95	6.95	5.95	4.95
2099905	Golden Regent	W48D-H1000	9	1000	2.5mm x 5.5mm F 1 (US plug)	3.2 x 2.3 x 1.9	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	6.95
2099913	ENG *	T48-9-1000D3	9	1000	2.5mm x 5.5mm F 1 (Euro plug)	3.2 x 2.3 x 1.9	Black	6'	0.9	CE/TUV	8.95	7.95	6.95	6.25
2099921	ENG *	T48-9-1000D4	9	1000	2.5mm x 5.5mm F 1 (UK plug)	3.2 x 2.3 x 1.9	Black	6'	0.9	CE/TUV	8.95	7.95	6.95	6.25
127505	ReliaPro	DDU090100	9	1000	2.5mm x 5.5mm F 2	2.6 x 2.4 x 2.0	Black	6'	0.9	UL/CSA	9.95	8.95	7.95	6.95
1586082	GTE	ADP2108GT (2.5)	9	1000	2.5mm M 2	2.6 x 2.2 x 1.9	Black	6'	0.9	UL/CSA	7.95	6.95	5.95	4.95
15587	ReliaPro	DDU090100Z9081	9	1000	3.5mm M 2	2.6 x 2.4 x 2.0	Black	6'	0.9	UL/CSA	9.95	8.95	7.95	6.95
130526	ReliaPro	DDE090120F3621	9	1200	2.1mm x 5.5mm F 1	2.4 x 2.0 x 1.8	Black	6'	1.0	UL/CSA	10.95	9.95	8.95	7.95
143693	ReliaPro	DFU0901500A3040	9	1500	2.1mm x 5.5mm F 2	3.3 x 2.5 x 2.3	Black	6'	1.3	UL/CSA	12.95	11.95	10.95	9.95
2082193	Philips	SPA-3545-81	12	100	2.1mm x 5.5mm F 2	2.5 x 1.8 x 1.5	Black	6'	0.5	UL/CSA	5.49	4.95	4.75	4.29
163993	ReliaPro	DBU120020E2291	12	200	2.1mm x 5.5mm right angle F 1	2.4 x 1.7 x 1.6	Black	6'	0.4	UL/CSA	5.49	4.95	4.75	4.29
100095	ReliaPro	DBU120020G0610	12	200	2.1mm x 5.5mm F 2	2.1 x 1.8 x 1.5	Black	6'	0.4	UL/CSA	5.49	4.95	4.75	4.29
158043	ReliaPro	DBU120020E2261	12	200	2.1mm x 5.5mm right angle F 2	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CSA	5.95	5.39	4.59	3.95
127976	ReliaPro	DCU120030D7161	12	300	2.1mm x 5.5mm F 2	2.6 x 1.8 x 1.6	Black	6'	0.7	UL/CSA	6.95	6.25	5.59	4.95
2082046	Videx	U/090/9	12	300	2.1mm x 5.5mm right angle F 2	2.5 x 1.9 x 1.7	Black	6'6"	0.6	UL/CSA	6.95	6.25	5.59	4.95

* 240VAC 50Hz

More AC-to-DC Wall Adapters listed on pages 121-123 & 125

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

AC-to-DC Unregulated Linear Wall Adapters

JAMECO ReliaPro

AC-to-DC Unregulated Linear Wall Adapters (Continued)

★ Web Code: UAP

120VAC @ 60Hz


We specialize in Wall Adapters – Call for additional OEM PRICING.



We are happy to change any listed DC wall adapter power plug to a connector of your choice (see pg 130) for just \$2.50 each. A 100 pc. minimum order applies.



123158



Part No.	Manufacturer	Product No.	Output Voltage (VDC)	Curr. (mA)	Output Connector ID x OD mm Female/Male; Polarity ◆	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing			
											1	10	50	100
190503	ReliaPro	ADA-410	12	400	2.1mm x 5.5mm right angle F 2	2.6 x 2.1 x 1.9	Black	6'	0.5	UL/CUL	\$7.49	\$6.95	\$5.65	\$4.95
213575	Ault	5312-000-418	12	400	2.5mm x 5.5mm right angle F 1	2.9 x 2.6 x 1.9	Black	12'	0.7	UL/CSA	7.95	7.29	6.59	5.95
114825	ReliaPro	DCU120050D4740	12	500	Stripped & tinned	2.5 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	6.29	4.95	4.39	4.19
15368	ReliaPro	DCU120050Z8698	12	500	2.1mm x 5.5mm F 1	2.5 x 1.9 x 1.6	Black	6'	0.6	UL/CSA	6.49	5.95	5.39	4.95
102496	ReliaPro	DCU120050E8601	12	500	2.1mm x 5.5mm F 2	2.5 x 1.9 x 1.6	Black	6'	0.6	UL/CSA	7.95	7.29	6.59	5.95
131300	ReliaPro	DCU120050E0251	12	500	2.1mm x 5.5mm right angle F 2	2.6 x 1.9 x 1.7	Beige	6'	0.6	UL/CSA	7.95	7.29	6.59	5.95
102277	ReliaPro	DCU120050UE2631	12	500	2.5mm x 5.5mm F 2	2.5 x 2.1 x 1.7	Black	6'	0.6	UL/CSA	7.95	7.29	6.59	5.95
17267	ReliaPro	DCU120050Z5391	12	500	3.5mm M 2	2.5 x 1.9 x 1.6	Black	6'	0.6	UL/CSA	7.95	7.29	6.59	5.59
202201	ReliaPro	DCU120060F2131	12	600	2.1mm x 5.5mm F 2	3.3 x 2.9 x 2.3	Black	6'	0.6	UL/CUL	7.95	7.29	6.59	5.95
202219	ReliaPro	DCU120070F2142	12	700	2.1mm x 5.5mm F 2	3.3 x 2.9 x 2.3	Black	6'	0.6	UL/CUL	8.95	7.95	7.29	6.49
117479	ReliaPro	DDU120080E6451	12	800	2.1mm x 5.5mm F 2	3.0 x 2.3 x 2.0	Black	6'	0.9	UL/CSA	8.95	7.95	7.29	6.49
129331	ReliaPro	DDU120080F2412	12	800	2.5mm x 5.5mm F 2	3.0 x 2.3 x 2.0	Black	6'	0.9	UL/CSA	8.95	7.95	7.29	6.49
121232	ReliaPro	DDU120080F2271	12	800	3.5mm M 2	2.6 x 2.4 x 2.0	Black	6'	0.9	UL/CSA	7.95	7.25	5.95	5.45
100870	ReliaPro	DDU120100Z7974	12	1000	2.1mm x 5.5mm F 2	2.6 x 2.4 x 1.9	Black	6'	0.9	UL/CSA	9.95	8.95	7.95	7.29
105478	ReliaPro	DDU120100Z2993	12	1000	2.5mm x 5.5mm F 2	3.1 x 2.4 x 2.0	Black	6'	1.0	UL/CSA	9.95	8.95	7.95	7.29
15392	ReliaPro	DDU120100E7302	12	1000	3.5mm M 2	3.3 x 2.4 x 2.0	Black	6'	1.0	UL/CSA	9.95	8.95	7.95	7.29
196779	ReliaPro	DDU120120G0031	12	1200	2.5mm x 5.5mm F 2	3.0 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	10.95	9.95	8.95	7.95
203036	ReliaPro	DDU120150H4530	12	1500	2.1mm x 5.5mm F 1	3.3 x 2.2 x 1.9	Black	6'	1.5	UL/CUL	14.95	13.49	11.95	10.95
136881	ReliaPro	DDU120150K1960	12	1500	2.1mm x 5.5mm F 2	3.4 x 2.7 x 2.2	Black	6'	1.5	UL	14.95	13.49	11.95	10.95
1928151	Leader	481215003CT	12	1500	2.5mm x 5.5mm F 2	3.4 x 2.3 x 2.1	Black	6'	1.5	UL/CUL	12.95	11.49	9.95	8.95
101291	ReliaPro	DDU120150	12	1500	2.5mm x 5.5mm F 2	3.4 x 2.7 x 2.2	Black	6'	1.5	UL/CUL	14.95	13.49	11.95	10.95
2077626	Qualcomm	TXACA036	13	1000	2.5mm x 5.5mm F 2 (Switching)	2.7 x 2.4 x 1.6	Black	6'6"	0.6	UL/CE	6.95	6.25	5.59	4.95
308099	ReliaPro	DDU135100H3210	13.5	1000	2.1mm x 5.5mm F 2	2.9 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	10.95	9.95	8.95	7.95
212812	ReliaPro	DBU140020F6022	14	200	2.1mm x 5.5mm F 2	2.2 x 1.7 x 1.5	Black	6'	0.8	UL/CUL	6.95	6.25	5.59	4.95
212821	ReliaPro	DBU140030F6042	14	300	2.1mm x 5.5mm F 2	2.2 x 1.7 x 1.5	Black	6'	0.8	UL/CUL	7.95	7.29	6.59	5.95
129314	Various	DV-1250	14	360	2.5mm x 5.5mm right angle F 2	2.3 x 2.0 x 1.6	Black	6'	0.6	UL/CSA	6.95	5.95	4.95	3.95
123932	ReliaPro	DDU140070Z7470	14	700	2.1mm x 5.5mm F 2	2.6 x 2.4 x 2.0	Black	6'	1.0	UL/CSA	8.95	7.95	6.95	6.25
202260	ReliaPro	DDU140100F3270	14	1000	2.1mm x 5.5mm F 2	3.9 x 2.9 x 2.4	Black	6'	0.9	UL/CUL	8.95	7.95	6.95	5.95
190001	ReliaPro	DCU150050E3021	15	500	2.1mm x 5.5mm F 2	2.3 x 2.4 x 1.9	Black	6'	0.8	UL/CSA	7.95	7.29	6.59	5.95
189982	ReliaPro	DCU150050E3031	15	500	2.5mm x 5.5mm F 2	2.3 x 2.4 x 1.9	Black	6'	0.8	UL/CSA	7.95	7.29	6.59	5.95
155803	ReliaPro	DDU150060E5822	15	600	2.1mm x 5.5mm F 1	2.9 x 2.3 x 1.9	Black	6'	1.0	UL/CSA	8.95	7.95	7.29	6.49
203502	ReliaPro	DDU150090F4480	15	900	2.5mm x 5.5mm F 2	2.6 x 2.2 x 1.9	Black	6'	1.0	UL/CSA	9.95	8.95	7.95	7.29
151992	ReliaPro	DDU150100E8181	15	1000	2.1mm x 5.5mm F 1	3.1 x 2.0 x 1.9	Beige	6'	1.5	UL/CSA	8.95	7.95	6.95	5.95
191652	ReliaPro	DDU150100D7051	15	1000	2.1mm x 5.5mm F 2	3.3 x 2.2 x 1.9	Black	6'	1.0	UL/CSA	10.95	9.95	8.95	7.95
681563	Ault	P48151000A020G	15	1000	2.5mm x 5.5mm F 2	3.3 x 2.3 x 1.9	Black	6'	1.2	UL/CSA	7.95	6.95	5.95	4.95
162317	ReliaPro	DDU165050J19910	16	500	2.1mm x 5.5mm F 2	2.5 x 2.0 x 1.7	Black	6'	0.8	UL/CSA	9.95	8.95	7.95	7.29
217541	NiteRider	FE4116168C030	16.8	300	2.5mm x 5.5mm F 2	3.1 x 2.1 x 1.6	Black	6'	0.6	UL/CUL	5.95	5.25	4.59	3.95
2081713	DVE	DV-1790	17	900	2.5mm x 5.5mm F 2	3.2 x 2.2 x 2.0	Black	6'	1.2	UL/CSA	5.95	5.25	4.59	3.95
181729	ReliaPro	DCU180025F8680	18	250	2.1mm x 5.5mm F 2	2.6 x 2.0 x 1.6	Black	6'	0.6	UL	6.95	6.25	5.59	4.95
217568	NiteRider	FE4126180P040	18	400	2.5mm x 5.5mm F 2 (w/ LED indicator)	3.5 x 2.1 x 1.6	Black	6'	0.8	UL/CUL	6.95	6.25	5.59	4.95
163272	ReliaPro	DDU180050C1031	18	500	2.1mm x 5.5mm F 2	2.6 x 2.3 x 1.9	Black	6'	0.8	UL/CUL	8.95	7.95	7.29	6.49
206958	ReliaPro	DDU180100H4551	18	1000	2.5mm x 5.5mm F 2	3.3 x 2.2 x 1.9	Black	6'	1.4	UL/CUL	9.95	8.95	7.95	7.29
102285	ReliaPro	DDU240040Z7860	24	400	2.1mm x 5.5mm F 2	3.0 x 2.3 x 2.0	Black	6'	0.9	UL/CUL	8.95	7.95	7.29	6.49
163635	ReliaPro	DDU240050C1981	24	500	2.1mm x 5.5mm F 1	3.1 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	9.95	8.95	7.95	7.29
191556	ReliaPro	DDU240050E5852	24	500	2.5mm x 5.5mm F 2	3.1 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	9.95	8.95	7.95	7.29
139088	ReliaPro	DDU240050E9160	24	500	3.5mm M 2	3.1 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	9.95	8.95	7.95	7.29
1918930	ReliaPro	DDU240060L260	24	600	2.1mm x 5.5mm F 2	2.9 x 2.2 x 1.9	Black	6'	0.4	UL/CUL	10.95	9.95	8.95	7.95
168495	ReliaPro	DFU240080J3180	24	800	2.1mm x 5.5mm F 2	2.9 x 1.9 x 1.6	Black	6'	0.4	UL/CUL/TUV	11.95	10.95	9.95	8.95
220960	ReliaPro	DFU240100G2300	24	1000	2.1mm x 5.5mm F 1	3.4 x 2.7 x 2.2	Black	6'	1.6	UL/CUL	14.95	13.49	11.95	9.95
249121	ReliaPro	DFU240120/G8520	24	1150	2.1mm x 5.5mm F 2	3.4 x 2.7 x 2.2	Black	6'	1.7	UL/CUL	16.95	14.95	13.49	11.95
249113	ReliaPro	DFU240120/G8510	24	1150	2.5mm x 5.5mm F 2	3.4 x 2.7 x 2.2	Black	6'	1.7	UL/CUL	16.95	14.95	13.49	11.95
199523	ReliaPro	DDU300050E9340	30	500	2.5mm x 5.5mm F 2	2.9 x 2.3 x 1.9	Black	6'	1.1	UL/CUL	9.95	8.95	7.95	7.29
215095	ReliaPro	MW48-4800250	48	250	2.5mm x 5.5mm F 2	2.9 x 2.3 x 1.9	Black	6'	1.1	UL/CUL	8.95	7.95	7.29	6.49
230640	ReliaPro	MW57-4800500-2.1	48	500	2.1mm x 5.5mm F 2	3.3 x 2.7 x 2.2	Black	6'	1.1	—	10.95	9.95	8.95	7.95
215109	ReliaPro	MW57-4800500	48	500	2.5mm x 5.5mm F 2	3.3 x 2.7 x 2.2	Black	6'	1.1	—	9.95	8.95	7.95	6.95
15309	ReliaPro	900-051	3, 4.5, 6, 7.5, 9, 12	500 120VAC	1.3 x 3.5, 2.1 x 5.0, 2.5 x 5.5 Female 2.5, 3.5 Male, 9V battery snap (LED ind.)	3.0 x 2.2 x 2.1	Black	6'	0.7	UL/CSA	9.95	8.95	7.95	6.95
123158	ReliaPro	900-100	1.5, 3, 4.5, 6, 7.5, 9, 12	1000 120VAC	1.3 x 3.5, 2.1 x 5.0, 2.5 x 5.5 Female 2.5, 3.5 Male, 9V battery snap (LED ind.)	3.7 x 2.2 x 2.5	Black	6'	0.9	—	10.95	9.95	8.95	7.95

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above


AC-to-DC Table-Top Power Supplies

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE


























Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

AC-to-DC Regulated & Unregulated Linear & Switching Table-Top Power Supplies

We are happy to change the power plug on any listed table-top power supply to a connector of your choice (see pg 130) for just \$2.50 each. A 100 pc. minimum order applies.



See page 134 for International Power Cords

Part No.	Manufacturer	Product No.	Output Volts (VDC)/ Current (A)	Output Connector ID x OD/F = female; M = male; Polarity 	Input VAC@Hz	Output Power (W)	LED Ind.	Size (L" x W" x H")	Cords* (DC/AC)	Wt. (lbs.)	Agency Approvals	Pricing			
												1	10	50	100
2-Wire AC Input – Unregulated Linear Table-Top												* Web Code: TBE			
190051	APS	APS48EA114	+7/1.5	2.5mm x 5.5mm F 2	120@60	10	No	3.4 x 2.3 x 1.9	6/6'	1.9	UL/CUL	\$6.95	\$6.25	\$4.95	\$3.95
243109	Regal	JK-91001-N	+9/1.0	Stripped & Tinned	120@60	9	No	3.3 x 2.2 x 1.9	6/6'	1.2	UL/CSA	6.95	6.25	4.95	3.95
2081941	Toshiba	AD-121ADT	+12/1.0	2.1mm x 5.5mm F 2	120@60	12	No	3.2 x 2.2 x 1.9	6/6'	1.3	UL/CUL	7.95	6.95	6.25	5.59
140880	ReliaPro	DC1215ST	+12/1.5	Stripped & Tinned	120@60	18	No	3.1 x 2.1 x 1.9	6/6'	1.5	UL	11.95	10.95	9.95	8.95
143714	Horizon	DC1220F1	+12/2.0	2.1mm x 5.5mm F 2	120@60	24	No	3.8 x 2.8 x 2.3	6/6'	2.2	UL/CUL	13.95	12.49	10.95	9.95
143715	ReliaPro 	DC1220F1	+12/2.0	2.1mm x 5.5mm F 2	120@60	24	No	3.8 x 2.8 x 2.3	6/6'	2.2	UL/CUL	14.95	13.49	11.95	10.95
143722	ReliaPro	DC1220F5	+12/2.0	2.5mm x 5.5mm F 2	120@60	24	No	3.8 x 2.8 x 2.3	6/6'	2.2	UL/CUL	14.95	13.49	11.95	10.95
143731	ReliaPro	DC1220M3	+12/2.0	3.5mm M 2	120@60	24	No	3.8 x 2.8 x 2.3	6/6'	1.9	UL/CUL	14.95	13.49	11.95	10.95
2099569	JEC	57-1607-U4D	+16/0.7	2.5mm x 5.5mm F 2	120@60	19	No	3.6 x 2.7 x 3.6	6/6'	1.3	UL	8.95	7.95	6.95	6.25
139096	ReliaPro	DC2412F1	+24/1.2	2.1mm x 5.5mm F 2	120@60	29	No	4.4 x 3.1 x 2.6	6/6'	2.5	—	14.95	13.49	11.95	10.95
1953815	SR Components	DC24-1.2	+24/1.2	2.1mm x 5.5mm F 2	120@60	29	No	4.5 x 3.4 x 2.6	5/6'	0.7	UL	10.95	9.95	8.95	7.95
173665	Skynet	DND-3005	+30/0.5	2.5mm x 5.5mm F 2	120@60	15	No	3.0 x 2.5 x 2.2	5'9/3'2"	1.4	UL/CUL	5.95	5.25	4.95	3.95
2-Wire AC Input – Regulated Linear Table-Top												* Web Code: CEM			
664261	Intermec	062035	+5/0.75	4-pin DIN M	120@60	3.75	No	4.4 x 2.5 x 2.0	6/6'	1.6	UL/CSA	\$8.95	\$7.95	\$6.95	\$6.25
174845	ReliaPro 	DCR2410F12	+24/1	2.1mm x 5.5mm F 2	120@60	24	No	4.4 x 3.0 x 2.5	6/6'	2.6	UL	17.95	15.95	14.49	12.95
2-Wire AC Input – Regulated Switching Table-Top – Single Output												* Web Code: DDZ			
1586242	Phihong 	PSAA15W-050-R	+5/3.0	2.1mm x 5.5mm F 2	100-240@50-60	15	No	3.2 x 2.0 x 1.2	6/1'	—	UL/CUL/TUV/CE	\$15.95	\$14.49	\$12.95	\$11.49
1940299	Mean Well 	GS18B05-P1J	+5/3.0	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.1 x 2.1 x 1.3	4/1'	0.5	UL/CSA/TUV/CEC	15.95	14.49	13.49	12.49
1940483	Mean Well 	GS25B05-PIJ	+5/4.0	2.1mm x 5.5mm F 2	100-240@50-60	20	Yes	3.1 x 2.1 x 1.3	4/1'	0.5	UL/CSA/TUV/CEC	16.49	14.95	13.95	12.95
377925	Mean Well 	P30B-1P2JU	+5/4.0	2.1mm x 5.5mm F 2	90-264@47-63	20	Yes	4.3 x 2.6 x 1.4	6/6'	0.7	UL/CSA/TUV/CE	21.95	19.95	18.95	17.95
380621	Mean Well 	ES25B05-P1MU	+5/4.0	2.5mm x 5.5mm F 2	90-264@47-63	20	Yes	3.1 x 2.1 x 1.3	6/6'	0.5	UL/CSA/TUV/CE	18.95	16.95	15.49	14.49
1940301	Mean Well 	GS18B07-P1J	+7.5/2.0	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.1 x 2.1 x 1.3	6/1'	0.5	UL/CSA/TUV/CEC	15.95	14.49	13.49	12.49
1707067	Mean Well 	ES25B07-P1J	+7.5/2.93	2.1mm x 5.5mm F 2	100-240@50-60	22	Yes	3.1 x 2.1 x 1.3	6/1'	0.4	UL/CUL/TUV/CE	10.95	9.49	8.49	7.49
195806	ReliaPro	DCR920F12	+9/2.0	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	4.2 x 2.6 x 1.4	6/6'	0.9	UL/CUL/TUV/CE	21.95	19.95	18.95	17.95
1940310	Mean Well 	GS18809-P1J	+9/2.0	2.1mm x 5.5mm F 2	90-264@47-63	18	Yes	3.1 x 2.1 x 1.3	6/1'	0.5	UL/CUL/TUV/CE	15.95	14.49	13.49	12.49
195768	ReliaPro	DCR920F52	+9/2.0	2.5mm x 5.5mm F 2	100-240@50-60	18	Yes	4.3 x 2.6 x 1.4	6/6'	0.9	UL/CUL/TUV/CE	21.95	19.95	18.95	17.95
380681	Mean Well 	ES25B09-P1MU	+9/2.78	2.5mm x 5.5mm F 2	90-264@47-63	25	Yes	3.1 x 2.1 x 1.3	6/6'	0.5	UL/CSA/TUV/CE	18.95	16.95	15.49	14.49
379787	Mean Well 	P30B-2P2MU	+9/2.89	2.5mm x 5.5mm F 2	90-264@47-63	26	Yes	4.3 x 2.6 x 1.4	6/6'	0.7	UL/CSA/TUV/CE	19.95	18.95	17.95	16.95
1940213	EDAC, Inc. 	EA10302	+9/3.3	2.1mm x 5.5mm F 2	100-240@50-60	30	Yes	3.9 x 1.8 x 1.2	4/1'	0.5	UL/CUL/TUV/CE	14.95	13.49	11.95	10.95
1950905	APS	AD715U-1121	+12/1.2	2.5mm x 5.5mm F 2	100-240@50-60	15	No	3.7 x 2.1 x 1.3	6/1'	0.5	UL/CUL/TUV/CE	11.95	10.95	9.95	8.95
191353	Delta	ADP-15FB	+12/1.25	2.1mm x 5.5mm F 2	100-240@50-60	15	No	3.5 x 2.3 x 1.2	6/1'	0.5	UL/CE	11.95	10.95	9.95	8.95
1943043	Fairway	VE15B-120	+12/1.5	2.1mm x 5.5mm F 2	100-240@50-60	18	No	3.1 x 2.1 x 1.1	6/1'	0.5	UL/TUV/CE	14.95	12.95	11.49	9.95
1940328	Mean Well 	GS18B12-P1J	+12/1.5	2.1mm x 5.5mm F 2	100-240@50-60	18	No	3.1 x 2.1 x 1.3	6/6'	0.5	UL/CSA/CE/CEC	15.95	14.49	13.49	12.49
2099868	DVE	DSA-0421S	+12/2.0	2.1mm x 5.5mm F 2	100-240@50-60	24	Yes	3.7 x 2.2 x 1.3	6/6'	0.4	UL/CUL/TUV/CE	19.95	17.95	15.95	13.95
1537555	APD	DA-24B12	+12/2.0	2.5mm x 5.5mm F 2	100-240@47-63	24	No	3.6 x 2.2 x 1.3	6/1'	0.4	UL/CUL/TUV/CE	19.95	17.95	15.95	13.95
1942155	Jentec	JTA0210P	+12/3.0	2.1mm x 5.5mm F 2	100-240@50-60	36	Yes	4.3 x 2.0 x 1.2	4/1'	0.6	UL/CUL/TUV/CE	15.95	13.95	11.95	10.95
401042	ReliaPro 	ADPV16	+12/3.0	2.1mm x 5.5mm F 2	100-240@50-60	36	No	3.9 x 1.8 x 1.2	4/1'	0.5	UL/CUL/TUV/CE	22.95	20.49	18.95	16.95
220442	ReliaPro 	SL120300RT	+12/3.0	2.5mm x 5.5mm F 2 	100-240@50-60	36	Yes	4.3 x 2.0 x 1.2	6/1'	0.6	UL/CUL/TUV/CE	24.95	22.49	19.95	17.95
2099876	Lishin Int.	LSE9802A 1240	+12/3.33	2.1mm x 5.5mm F 2	100-240@50-60	40	Yes	3.7 x 2.2 x 1.3	5/6'	0.4	UL/CSA/TUV/CE	22.95	20.49	18.95	16.95
1940336	Mean Well 	GS18B15-P1JT	+15V/1.2	2.1mm x 5.5mm F 2	100-240@50-60	18	No	3.1 x 2.1 x 1.3	6/6'	0.5	UL/CSA/CEC	15.95	14.49	13.49	12.49
1940521	Mean Well 	GS25B15-P1JT	+15/1.66	2.1mm x 5.5mm F 2	100-240@50-60	25	No	3.1 x 2.1 x 1.3	6/6'	0.5	UL/CSA/CEC	18.95	16.95	14.95	13.49
1940539	Mean Well 	GS25B18-P1J	+18/1.38	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.1 x 2.1 x 1.3	6/1'	0.5	UL/CSA/TUV/CEC	18.95	16.95	14.95	13.49
1940352	Mean Well 	GS18B24-P1J	+24/0.75	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.1 x 2.1 x 1.3	6/1'	0.5	UL/CSA/TUV/CEC	15.95	14.49	13.49	12.49
1940547	Mean Well 	GS25B24-P1JT	+24/1.04	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.1 x 2.1 x 1.3	6/1'	0.5	UL/CSA/TUV/CEC	16.49	14.95	13.49	12.49
221613	Mean Well 	P30B-6P2JT	+24/1.12	2.1mm x 5.5mm F 2	100-240@50-60	27	Yes	4.3 x 2.6 x 1.4	6/6'	0.8	UL/CUL/TUV/CE	26.95	24.95	22.95	20.49
1940230	EDAC, Inc.	EA1030D2	+24/1.25	2.1mm x 5.5mm F 2	100-240@50-60	30	Yes	3.9 x 1.8 x 1.2	4/1'	0.5	UL/CUL/TUV/CE	19.95	17.95	15.95	13.95
229843	Phihong 	PSAA60W-240	+24/2.5	2.1mm x 5.5mm F 2	100-240@47-63	60	No	5.1 x 2.4 x 1.3	4/1'	0.5	UL/CSA/CEC	36.95	33.95	31.95	28.95

* See accessory table-top power cord chart on page 129 when AC cord needed; refer to 1, 2 or 3 in "Cord (DC/AC)" column above for correct power cord

† Right Angle

✓ CEC Equivalent available. Add a "C" before part number for CEC version.

✓ CEC

3-Wire Regulated Table-Top Power Supplies on Next Page

RoHS compliant product

+ This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version.

Details on page 199.


AC-to-DC Table-Top Power Supplies

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE


























Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

AC-to-DC Regulated & Unregulated Linear & Switching Table-Top Power Supplies

We are happy to change the power plug on any listed table-top power supply to a connector of your choice (see pg 130) for just \$2.50 each. A 100 pc. minimum order applies.



See page 134 for International Power Cords

Part No.	Manufacturer	Product No.	Output Volts (VDC)/ Current (A)	Output Connector ID x OD/F = female; M = male; Polarity 	Input VAC@Hz	Output Power (W)	LED Ind.	Size (L" x W" x H")	Cords* (DC/AC)	Wt. (lbs.)	Agency Approvals	Pricing			
												1	10	50	100
2-Wire AC Input – Unregulated Linear Table-Top												* Web Code: TBE			
190051	APS	APS48EA114	+7/1.5	2.5mm x 5.5mm F 2	120@60	10	No	3.4 x 2.3 x 1.9	6/6'	1.9	UL/CUL	\$6.95	\$6.25	\$4.95	\$3.95
243109	Regal	JK-91001-N	+9/1.0	Stripped & Tinned	120@60	9	No	3.3 x 2.2 x 1.9	6/6'	1.2	UL/CSA	6.95	6.25	4.95	3.95
2081941	Toshiba	AD-121ADT	+12/1.0	2.1mm x 5.5mm F 2	120@60	12	No	3.2 x 2.2 x 1.9	6/6'	1.3	UL/CUL	7.95	6.95	6.25	5.59
140880	ReliaPro	DC1215ST	+12/1.5	Stripped & Tinned	120@60	18	No	3.1 x 2.1 x 1.9	6/6'	1.5	UL	11.95	10.95	9.95	8.95
143714	Horizon	DC1220F1	+12/2.0	2.1mm x 5.5mm F 2	120@60	24	No	3.8 x 2.8 x 2.3	6/6'	2.2	UL/CUL	13.95	12.49	10.95	9.95
143715	ReliaPro 	DC1220F1	+12/2.0	2.1mm x 5.5mm F 2	120@60	24	No	3.8 x 2.8 x 2.3	6/6'	2.2	UL/CUL	14.95	13.49	11.95	10.95
143722	ReliaPro	DC1220F5	+12/2.0	2.5mm x 5.5mm F 2	120@60	24	No	3.8 x 2.8 x 2.3	6/6'	2.2	UL/CUL	14.95	13.49	11.95	10.95
143731	ReliaPro	DC1220M3	+12/2.0	3.5mm M 2	120@60	24	No	3.8 x 2.8 x 2.3	6/6'	1.9	UL/CUL	14.95	13.49	11.95	10.95
2099569	JEC	57-1607-U4D	+16/0.7	2.5mm x 5.5mm F 2	120@60	19	No	3.6 x 2.7 x 3.6	6/6'	1.3	UL	8.95	7.95	6.95	6.25
139096	ReliaPro	DC2412F1	+24/1.2	2.1mm x 5.5mm F 2	120@60	29	No	4.4 x 3.1 x 2.6	6/6'	2.5	—	14.95	13.49	11.95	10.95
1953815	SR Components	DC24-1.2	+24/1.2	2.1mm x 5.5mm F 2	120@60	29	No	4.5 x 3.4 x 2.6	5/6'	0.7	UL	10.95	9.95	8.95	7.95
173665	Skynet	DND-3005	+30/0.5	2.5mm x 5.5mm F 2	120@60	15	No	3.0 x 2.5 x 2.2	5'9/3'2"	1.4	UL/CUL	5.95	5.25	4.95	3.95
2-Wire AC Input – Regulated Linear Table-Top												* Web Code: CEM			
664261	Intermec	062035	+5/0.75	4-pin DIN M	120@60	3.75	No	4.4 x 2.5 x 2.0	6/6'	1.6	UL/CSA	\$8.95	\$7.95	\$6.95	\$6.25
174845	ReliaPro 	DCR2410F12	+24/1	2.1mm x 5.5mm F 2	120@60	24	No	4.4 x 3.0 x 2.5	6/6'	2.6	UL	17.95	15.95	14.49	12.95
2-Wire AC Input – Regulated Switching Table-Top – Single Output												* Web Code: DDZ			
1586242	Phihong 	PSAA15W-050-R	+5/3.0	2.1mm x 5.5mm F 2	100-240@50-60	15	No	3.2 x 2.0 x 1.2	6/1'	—	UL/CUL/TUV/CE	\$15.95	\$14.49	\$12.95	\$11.49
1940299	Mean Well 	GS18B05-P1J	+5/3.0	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.1 x 2.1 x 1.3	4/1'	0.5	UL/CSA/TUV/CEC	15.95	14.49	13.49	12.49
1940483	Mean Well 	GS25B05-PIJ	+5/4.0	2.1mm x 5.5mm F 2	100-240@50-60	20	Yes	3.1 x 2.1 x 1.3	4/1'	0.5	UL/CSA/TUV/CEC	16.49	14.95	13.95	12.95
377925	Mean Well 	P30B-1P2JU	+5/4.0	2.1mm x 5.5mm F 2	90-264@47-63	20	Yes	4.3 x 2.6 x 1.4	6/6'	0.7	UL/CSA/TUV/CE	21.95	19.95	18.95	17.95
380621	Mean Well 	ES25B05-P1MU	+5/4.0	2.5mm x 5.5mm F 2	90-264@47-63	20	Yes	3.1 x 2.1 x 1.3	6/6'	0.5	UL/CSA/TUV/CE	18.95	16.95	15.49	14.49
1940301	Mean Well 	GS18B07-P1J	+7.5/2.0	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.1 x 2.1 x 1.3	6/1'	0.5	UL/CSA/TUV/CEC	15.95	14.49	13.49	12.49
1707067	Mean Well 	ES25B07-P1J	+7.5/2.93	2.1mm x 5.5mm F 2	100-240@50-60	22	Yes	3.1 x 2.1 x 1.3	6/1'	0.4	UL/CUL/TUV/CE	10.95	9.49	8.49	7.49
195806	ReliaPro	DCR920F12	+9/2.0	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	4.2 x 2.6 x 1.4	6/6'	0.9	UL/CUL/TUV/CE	21.95	19.95	18.95	17.95
1940310	Mean Well 	GS18809-P1J	+9/2.0	2.1mm x 5.5mm F 2	90-264@47-63	18	Yes	3.1 x 2.1 x 1.3	6/1'	0.5	UL/CUL/TUV/CE	15.95	14.49	13.49	12.49
195768	ReliaPro	DCR920F52	+9/2.0	2.5mm x 5.5mm F 2	100-240@50-60	18	Yes	4.3 x 2.6 x 1.4	6/6'	0.9	UL/CUL/TUV/CE	21.95	19.95	18.95	17.95
380681	Mean Well 	ES25B09-P1MU	+9/2.78	2.5mm x 5.5mm F 2	90-264@47-63	25	Yes	3.1 x 2.1 x 1.3	6/6'	0.5	UL/CSA/TUV/CE	18.95	16.95	15.49	14.49
379787	Mean Well 	P30B-2P2MU	+9/2.89	2.5mm x 5.5mm F 2	90-264@47-63	26	Yes	4.3 x 2.6 x 1.4	6/6'	0.7	UL/CSA/TUV/CE	19.95	18.95	17.95	16.95
1940213	EDAC, Inc. 	EA10302	+9/3.3	2.1mm x 5.5mm F 2	100-240@50-60	30	Yes	3.9 x 1.8 x 1.2	4/1'	0.5	UL/CUL/TUV/CE	14.95	13.49	11.95	10.95
1950905	APS	AD715U-1121	+12/1.2	2.5mm x 5.5mm F 2	100-240@50-60	15	No	3.7 x 2.1 x 1.3	6/1'	0.5	UL/CUL/TUV/CE	11.95	10.95	9.95	8.95
191353	Delta	ADP-15FB	+12/1.25	2.1mm x 5.5mm F 2	100-240@50-60	15	No	3.5 x 2.3 x 1.2	6/1'	0.5	UL/CE	11.95	10.95	9.95	8.95
1943043	Fairway	VE15B-120	+12/1.5	2.1mm x 5.5mm F 2	100-240@50-60	18	No	3.1 x 2.1 x 1.1	6/1'	0.5	UL/TUV/CE	14.95	12.95	11.49	9.95
1940328	Mean Well 	GS18B12-P1J	+12/1.5	2.1mm x 5.5mm F 2	100-240@50-60	18	No	3.1 x 2.1 x 1.3	6/6'	0.5	UL/CSA/CE/CEC	15.95	14.49	13.49	12.49
2099868	DVE	DSA-0421S	+12/2.0	2.1mm x 5.5mm F 2	100-240@50-60	24	Yes	3.7 x 2.2 x 1.3	6/6'	0.4	UL/CUL/TUV/CE	19.95	17.95	15.95	13.95
1537555	APD	DA-24B12	+12/2.0	2.5mm x 5.5mm F 2	100-240@47-63	24	No	3.6 x 2.2 x 1.3	6/1'	0.4	UL/CUL/TUV/CE	19.95	17.95	15.95	13.95
1942155	Jentec	JTA0210P	+12/3.0	2.1mm x 5.5mm F 2	100-240@50-60	36	Yes	4.3 x 2.0 x 1.2	4/1'	0.6	UL/CUL/TUV/CE	15.95	13.95	11.95	10.95
401042	ReliaPro 	ADPV16	+12/3.0	2.1mm x 5.5mm F 2	100-240@50-60	36	No	3.9 x 1.8 x 1.2	4/1'	0.5	UL/CUL/TUV/CE	22.95	20.49	18.95	16.95
220442	ReliaPro 	SL120300RT	+12/3.0	2.5mm x 5.5mm F 2 	100-240@50-60	36	Yes	4.3 x 2.0 x 1.2	6/1'	0.6	UL/CUL/TUV/CE	24.95	22.49	19.95	17.95
2099876	Lishin Int.	LSE9802A 1240	+12/3.33	2.1mm x 5.5mm F 2	100-240@50-60	40	Yes	3.7 x 2.2 x 1.3	5/6'	0.4	UL/CSA/TUV/CE	22.95	20.49	18.95	16.95
1940336	Mean Well 	GS18B15-P1JT	+15V/1.2	2.1mm x 5.5mm F 2	100-240@50-60	18	No	3.1 x 2.1 x 1.3	6/6'	0.5	UL/CSA/CEC	15.95	14.49	13.49	12.49
1940521	Mean Well 	GS25B15-P1JT	+15/1.66	2.1mm x 5.5mm F 2	100-240@50-60	25	No	3.1 x 2.1 x 1.3	6/6'	0.5	UL/CSA/CEC	18.95	16.95	14.95	13.49
1940539	Mean Well 	GS25B18-P1J	+18/1.38	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.1 x 2.1 x 1.3	6/1'	0.5	UL/CSA/TUV/CEC	18.95	16.95	14.95	13.49
1940352	Mean Well 	GS18B24-P1J	+24/0.75	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.1 x 2.1 x 1.3	6/1'	0.5	UL/CSA/TUV/CEC	15.95	14.49	13.49	12.49
1940547	Mean Well 	GS25B24-P1JT	+24/1.04	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.1 x 2.1 x 1.3	6/1'	0.5	UL/CSA/TUV/CEC	16.49	14.95	13.49	12.49
221613	Mean Well 	P30B-6P2JT	+24/1.12	2.1mm x 5.5mm F 2	100-240@50-60	27	Yes	4.3 x 2.6 x 1.4	6/6'	0.8	UL/CUL/TUV/CE	26.95	24.95	22.95	20.49
1940230	EDAC, Inc.	EA1030D2	+24/1.25	2.1mm x 5.5mm F 2	100-240@50-60	30	Yes	3.9 x 1.8 x 1.2	4/1'	0.5	UL/CUL/TUV/CE	19.95	17.95	15.95	13.95
229843	Phihong 	PSAA60W-240	+24/2.5	2.1mm x 5.5mm F 2	100-240@47-63	60	No	5.1 x 2.4 x 1.3	4/1'	0.5	UL/CSA/CEC	36.95	33.95	31.95	28.95

* See accessory table-top power cord chart on page 129 when AC cord needed; refer to 1, 2 or 3 in "Cord (DC/AC)" column above for correct power cord

† Right Angle

✓ CEC Equivalent available. Add a "C" before part number for CEC version.

✓ CEC

3-Wire Regulated Table-Top Power Supplies on Next Page

RoHS compliant product

+ This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version.

Details on page 199.

AC-to-DC Regulated Switching Table-Top Power Supplies

AC-to-DC Regulated Linear & Switching Table-Top Power Supplies

We are happy to change the power plug on any listed table-top power supply to a connector of your choice (see pg 130) for just \$2.50 each. A 100 pc. minimum order applies.

See page 134 for International Power Cords

689661



309876




221488



1950884



1708625



Female (F)



Male (M)



DIN (M)



Part No.	Manufacturer	Manufacturer Part No.	Output	Output Connector	Input	Output	LED	Size	Cords*	Wt.	Agency	Pricing			
			Volts (VDC)/ Current (A)	ID x OD mm Female/Male; Polarity		VAC@Hz						Power (W)	Ind.	(L" x W" x H")	(DC/AC)
2-Wire AC Input – Regulated Switching Table-Top – Single Output (Continued)												* Web Code: DDZ			
1707075	Mean Well	ES18B28-P1J	+28/0.64	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.1 x 2.1 x 1.3	6'/1	0.5	UL/CUL/TUV/CE	\$7.95	\$6.95	\$5.95	\$4.95
1940379	Mean Well	GS18B48-P1JT	+48/0.37	2.1mm x 5.5mm F 2	100-240@50-60	18	No	3.1 x 2.1 x 1.3	6'/6'	0.5	UL/CSA/CEC	15.95	14.49	13.49	12.49
1707139	Mean Well	ES25B48-P1J	+48/0.52	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.1 x 2.1 x 1.3	6'/1	0.4	UL/CUL/TUV/CE	19.95	17.95	15.95	14.49
2-Wire AC Input – Regulated Switching Table-Top – Triple Output												* Web Code: DDZ			
196138	DVE	DSA-0283A	+5/1, +12/1.49 -5/0.43	5-pin DIN M	100-240@47-63	23	No	4.9 x 2.7 x 1.5	6'/1	0.8	UL/CSA/TUV	\$7.95	\$6.95	\$5.95	\$4.95
3-Wire AC Input – Regulated Linear Table-Top – Double & Quad Output												* Web Code: CEM			
689661	Regal	R1JG-5500	+5/1; -5/0.5	5-pin DIN M	120@60	30	No	5.1 x 3.6 x 2.8	6'/6'	2.7	UL	\$9.95	\$8.95	\$7.95	\$6.95
689653	Regal	RJM-551228	+5/0.9; -5/0.2; +12/62; -28/16	6-pin DIN M	120@60	55	No	5.1 x 3.6 x 2.8	6'/6'	1.3	CUL	11.95	10.49	9.49	8.49
3-Wire AC Input – Regulated Switching Table-Top – Single Output												* Web Code: DDZ			
1928863	DVE	DSA0210D-03	+3.3/4.0	2.5mm x 5.5mm F 2	100-240@50-60	13	No	3.9 x 2.0 x 1.4	4'/2	0.5	UL/CUL/TUV/CE	\$12.95	\$10.95	\$9.49	\$8.49
2115549	Sino-American	217-03814	+5/0.5	2.1mm x 5.5mm F 2	100-240@50-60	2.5	No	3.1 x 2.0 x 1.2	6'/2	0.4	UL/CSA	8.95	7.95	6.95	5.95
308700	Be-Well	ZD0001F	+5/1.0	2.1mm x 5.5mm F 2	100-240@50-60	5	No	4.2 x 2.0 x 1.6	6'/2	0.4	UL/CUL/TUV/CE	9.95	8.95	7.95	6.95
1918737	Magtech	SPU15A-102	+5/1.0	2.5mm x 5.5mm F 2	100-240@47-63	5	Yes	3.6 x 1.5 x 1.4	6'/2	0.4	UL/CUL/TUV/CE	9.95	8.95	7.95	6.95
309876	Go Forward	GI12-US0520	+5/2.0	2.1mm x 5.5mm F 2	100-240@50-60	10	No	2.6 x 1.9 x 1.3	6'/2	0.4	UL/CUL/TUV/CE	9.95	8.95	7.95	6.95
196218	GlobTek	GT-21089-1305T3	+5/2.0	2.1mm x 5.5mm F 2	120-240@50-60	10	No	3.4 x 1.9 x 1.3	6'/2	0.4	UL/CUL/TUV/CE	15.95	14.49	12.95	11.95
1955642	Delta	ADP-105B	+5/2.0	2.1mm x 5.5mm F 2	100-240@50-60	10	No	3.3 x 1.9 x 1.2	6'/2	0.3	UL/CUL/CE	9.95	8.95	7.95	6.95
1954236	Mean Well	GS15A-1P1J	+5/2.4	2.1mm x 5.5mm F 2	90-264@47-63	12	No	3.9 x 2.3 x 1.3	6'/2	0.4	UL/CUL/TUV/CEC	17.95	15.95	14.49	13.49
695244	DVE	DSA-0151D-05	+5/2.4	2.5mm x 5.5mm F 2	100-240@47-63	10	No	3.9 x 2.0 x 1.4	6'/2	0.5	UL/CUL/TUV/CE	14.95	13.49	11.95	9.95
2115506	OEM	SYS1089-1305-T3	+5/2.6	2.1mm x 5.5mm F 2	100-240@50-60	13	No	3.4 x 1.8 x 1.3	6'/2	0.3	UL/CUL/CE	12.95	11.49	9.95	8.95
1940387	Mean Well	GS18A05-P1J	+5/3.0	2.1mm x 5.5mm F 2	100-240@50-60	15	Yes	3.7 x 2.1 x 1.4	4'/2	0.5	UL/CUL/TUV/CE/CEC	18.49	16.49	14.49	12.95
1940571	Mean Well	GS25A05-P1J	+5/4.0	2.1mm x 5.5mm F 2	100-240@50-60	20	Yes	3.7 x 2.1 x 1.4	4'/2	0.5	UL/CUL/TUV/CEC	19.95	18.95	16.49	14.95
1952337	Mean Well	GS40A05-P1JU	+5/5.0	2.1mm x 5.5mm F 2	90-264@47-63	25	Yes	4.9 x 2.0 x 1.2	4'/2	0.7	UL/CSA/TUV/CEC	34.95	31.49	27.95	24.95
320081	GlobTek	TR9CA6000LCP-Y	+5/6.0	2.5mm x 5.5mm F 2	100-240@50-60	30	Yes	4.7 x 2.4 x 1.3	6'/2	0.7	UL/CUL/TUV/CE	39.95	35.95	31.95	28.95
221488	Mean Well	SPU50-1U	+5/10.0	5-pin DIN M	100-240@50-60	50	Yes	5.7 x 3.0 x 1.7	6'/6'	2.0	UL/CUL/TUV/CE	54.95	49.95	46.95	43.95
206529	Mean Well	GS40A07-P1J	+7.5/5.34	2.1mm x 5.5mm F 2	100-240@50-60	40	Yes	4.9 x 2.0 x 1.3	6'/6'	1.5	UL/CUL/TUV/CE	27.95	25.95	24.49	22.95
1940408	Mean Well	GS18A09-P1JU	+9/2.0	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.7 x 2.1 x 1.4	6'/6'	0.6	UL/CUL/TUV/CEC	18.49	16.49	14.49	12.95
1952361	Mean Well	GS60A09-P1J	+9/6.0	2.1mm x 5.5mm F 2	90-264@47-63	54	Yes	4.9 x 2.0 x 1.3	4'/2	0.7	UL/CUL/TUV/CEC	28.95	26.95	24.95	22.95
1955651	ELPAC	W0812	+12/0.67	2.5mm x 5.5mm F 2	100-240@47-63	8	No	3.3 x 1.9 x 1.2	6'/6'	0.8	UL/CUL/TUV/CE	10.95	9.95	8.95	7.95
1928417	Mean Well	GI12-US1210	+12/1.0	2.1mm x 5.5mm F 2	100-240@50-60	12	No	2.9 x 1.9 x 1.3	6'/2	0.3	UL/CSA/TUV/CE	14.95	13.49	11.95	10.95
1954244	Mean Well	GS15A-3P1J	+12/1.25	2.1mm x 5.5mm F 2	90-264@47-63	15	No	3.9 x 2.3 x 1.3	6'/2	0.4	UL/CUL/TUV/CEC	17.95	15.95	14.49	12.95
1940416	Mean Well	GS18A12-P1JU	+12/1.5	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.7 x 2.1 x 1.4	6'/6'	0.5	UL/CUL/TUV/CEC	18.49	16.49	14.49	12.95
616216	Sinotech	MPC1200150	+12/1.5	2.5mm x 5.5mm F 1	100-240@50-60	18	No	3.4 x 2.2 x 1.3	6'/2	0.5	UL/CUL/CE/CEC	15.95	13.95	12.49	10.95
1928425	ITE	NL20-120160-11	+12/1.6	2.1mm x 5.5mm F 2	100-240@50-60	19	Yes	4.3 x 1.8 x 1.2	6'/2	0.2	UL/CSA/TUV/CE	13.95	12.49	10.95	9.95
1940601	Mean Well	GS25A12-P1JU	+12/2.08	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.7 x 2.1 x 1.4	4'/6'	0.5	UL/CUL/TUV/CEC	18.95	16.95	14.95	13.49
1950884	APS	AD725U-1120A	+12/2.1	2.1mm x 5.5mm F 2	100-240@50-60	25	No	3.8 x 2.1 x 1.3	6'/2	0.5	UL/CUL/TUV/CE	14.95	13.49	11.95	10.95
1918690	First Vision	SA06H12-A	+12/2.5	2.5mm x 5.5mm F 2	100-240@50-60	30	Yes	3.7 x 2.0 x 1.4	4'/2	0.6	UL/CUL/TUV/CE	10.95	9.95	8.95	7.95
1942147	Jentec	SA06H1217-A	+12/2.5	2.5mm x 5.5mm F 2	100-240@50-60	30	Yes	3.7 x 2.0 x 1.4	6'/2	0.6	UL/CUL/TUV/CE	12.95	10.95	9.95	8.95
155214	Mean Well	P40A-3P2JU	+12/3.33	2.1mm x 5.5mm F 2	100-240@50-60	40	Yes	4.3 x 2.6 x 1.4	6'/6'	0.7	UL/CUL/TUV	39.95	35.95	32.95	29.95
1708625	HiPro	HP02040043	+12/3.33	2.5mm x 5.5mm F 2	100-240@50-60	40	Yes	4.3 x 2.4 x 1.2	5'/2	0.7	UL/CUL/TUV/CE/CEC	17.95	15.95	13.95	12.49
297693	Mean Well	P40A-3P2MU-R	+12/3.33	2.5mm x 5.5mm F 2	100-240@50-60	40	Yes	4.3 x 2.6 x 1.4	6'/6'	0.7	UL/CUL/TUV/CE	31.95	29.95	27.95	25.95
1952345	Mean Well	GS40A12-P1J	+12/3.4	2.1mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.3	4'/2	0.7	UL/CUL/TUV/CEC	22.95	20.95	18.95	17.49
1940264	EDAC, Inc.	EA1050E	+12/3.5	2.1mm x 5.5mm F 2	100-240@50-60	42	Yes	4.7 x 2.4 x 1.4	4'/2	0.6	UL/CUL/TUV/CE	22.95	20.95	18.95	17.49
1940272	EDAC, Inc.	EA1050C	+12/4.16	2.1mm x 5.5mm F 2	100-240@50-60	50	Yes	4.7 x 2.4 x 1.4	4'/2	0.6	UL/CUL/TUV/CE	26.95	24.95	22.95	20.95
2100216	BESTEC	BPA-501-12	+12/4.2	2.5mm x 5.5mm F 2	100-240@50-60	50	Yes	6.5 x 2.8 x 1.8	5'/2	0.7	UL/CSA/TUV	34.95	31.49	27.95	24.95
1586314	Phihong	PSC60M-120-R	+12/5.0	2.1mm x 5.5mm F 2	100-240@50-60	60	No	5.1 x 2.4 x 1.3	4'/6'	0.7	UL/CUL/TUV/CE	34.95	31.49	29.95	28.95

* See accessory table-top power cord chart on page 129 when AC cord needed; refer to 1, 2 or 3 in "Cord (DC/AC)" column above for correct power cord † Right angle

✓ CEC Equivalent available

3-Wire Regulated Table-Top Power Supplies continued on next page

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

AC-to-DC Regulated Switching Table-Top Power Supplies



4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

AC-to-DC Regulated Switching Table-Top Power Supplies (Continued)

We are happy to change the power plug on any listed table-top power supply to a connector of your choice (see pg 130) for just \$2.50 each. A 100 pc. minimum order applies.

See page 134 for International Power Cords

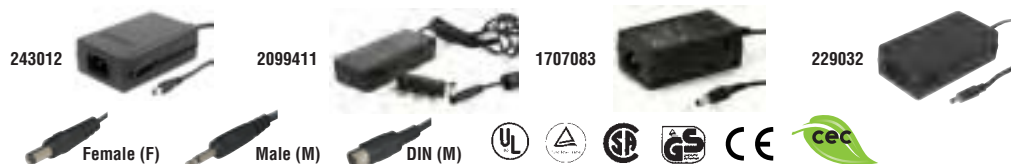

Part No.	Manufacturer	Manufacturer Part No.	Output	Output Connector	Input VAC@Hz	Output Power (W)	LED Ind.	Size (L" x W" x H")	Cords* (DC/AC)	Wt. (lbs.)	Agency Approvals	Pricing			
			Volts (VDC)/ Current (A)	ID x OD mm Female/Male; Polarity								1	10	50	100
3-Wire AC Input – Regulated Switching Table-Top – (Single Output) (Continued)												* Web Code: DDZ			
1952370	Mean Well	GS60A12-P1J	+12/5.0	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 1.9 x 1.2	4' 2	0.7	UL/CUL/TUV/CEC	\$28.95	\$26.95	\$24.95	\$22.95
155231	Mean Well	SPU50-3U	+12/5.0	2.1mm x 5.5mm F 2	100-240@47-63	60	Yes	5.7 x 3.0 x 1.7	6' 6'	1.3	UL/CSA/TUV	49.95	44.95	39.95	35.95
2099420	Sparkle Power	FSP060-DBAB1	+12/5.0	2.5mm x 5.5mm F 2	100-240@50-60	60	Yes	4.3 x 2.4 x 1.2	5' 2	0.5	UL/CUL/TUV/CEC	32.95	29.95	26.95	23.95
2078291	Mean Well	GS90A12-P1M	+12/6.67	2.5mm x 5.5mm F 2	100-240@50-60	80	Yes	5.7 x 2.3 x 1.3	4' 2	0.9	UL/CUL/TUV/CEC	44.49	41.49	38.95	36.49
221429	Mean Well	U6S510S-P2JU	+12/6.7	2.1mm x 5.5mm F 2	100-240@50-60	80	Yes	6.6 x 3.1 x 1.8	6' 6'	2.0	UL/CUL/TUV/CE	64.95	59.95	54.95	49.95
1940846	Mean Well	AS-120P-12	+12/8.4	4-pin DIN M	100-240@50-60	100	No	6.6 x 2.6 x 1.4	4' 2	1.2	UL/CUL/TUV/CE	58.95	54.95	51.95	48.95
2099294	Mean Well	GS220A12-R7B	+12/15	4-pin DIN M	90-264@127-370@47-63	180	Yes	8.3 x 3.4 x 1.8	3.3' 2	2.4	UL/CUL/TUV/CE/PPC	129.95	116.95	104.95	94.95
1954261	Mean Well	GS15A-4P1J	+15/1.0	2.1mm x 5.5mm F 2	100-240@50-60	15	No	3.1 x 2.3 x 1.3	6' 2	0.5	UL/CUL/TUV/CEC	18.49	16.49	14.49	12.95
1940432	Mean Well	GS18A15-P1JU	+15/1.2	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.7 x 2.1 x 1.4	6' 6'	0.5	UL/CUL/TUV/CEC	18.49	16.49	14.49	12.95
1940619	Mean Well	GS25A15-P1J	+15/1.66	2.1mm x 5.5mm F 2	100-240@50-60	25	No	3.7 x 2.1 x 1.4	6' 2	0.5	UL/CUL/TUV/CEC	16.49	14.95	13.49	12.49
243012	Mean Well	P30A-4P2JU	+15/1.8	2.1mm x 5.5mm F 2	100-240@50-60	27	Yes	4.2 x 2.6 x 1.4	6' 6'	0.8	UL/CUL/TUV/CE	24.95	22.49	19.95	18.49
221577	Mean Well	GS40A15-P1J	+15/2.67	2.1mm x 5.5mm F 2	90-264@50-60	40	Yes	4.9 x 2.0 x 1.3	6' 2	0.8	UL/CUL/TUV/CE/CEC	25.95	24.49	22.95	21.49
1954295	Mean Well	GS60A15-P1J	+15/4.0	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 2.0 x 1.2	4' 2	0.7	UL/CUL/TUV/CE	28.95	26.95	24.95	22.95
2078320	Mean Well	GS90A15-P1M	+15/6.0	2.5mm x 5.5mm F 2	100-240@50-60	90	Yes	5.7 x 2.3 x 1.3	39' 2	0.8	UL/CUL/TUV/CEC	44.49	41.49	38.95	36.49
1940854	Mean Well	AS-120P-15	+15/6.7	4-pin DIN M	100-240@50-60	100	No	6.6 x 2.6 x 1.4	4' 2	1.2	UL/CUL/TUV/CE	58.95	54.95	51.95	48.95
243046	Mean Well	P66A-5P2JU	+18/3.66	2.1mm x 5.5mm F 2	100-240@50-60	66	Yes	5.8 x 3.0 x 1.7	6' 6'	1.2	UL/CUL/TUV/CE	44.95	40.95	36.95	32.95
148267	AcBel	AP13AD02	+19/3.42	2.5mm x 5.5mm F 2†	100-240@50-60	65	No	4.2 x 1.8 x 1.1	6' 6'	0.8	UL/CUL/TUV/CE	36.95	32.95	29.95	26.95
2099411	Sparkle Power	FSP090-DMCBI	+19/4.74	7ea. R/A plugs F 2††	100-240@50-60	90	No	5.3 x 2.3 x 1.3	6' 5'	0.7	UL/CUL/TUV/CEC	59.95	53.95	47.95	42.95
2099761	Hi-Capacity	AC-C10K	+19/8.0	2.5mm x 5.5mm F 2	100-240@50-60	120	Yes	6.6 x 2.4 x 1.5	4' 6'	1.0	UL/CUL/TUV/CE	49.95	44.95	39.95	35.95
1954279	Mean Well	GS15A-6P1J	+24/0.62	2.1mm x 5.5mm F 2	90-264@47-63	12	No	3.9 x 2.3 x 1.3	6' 2	0.4	UL/CUL/TUV/CEC	18.49	16.49	14.49	12.95
1940459	Mean Well	GS18A24-P1J	+24/0.75	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.7 x 2.1 x 1.4	6' 2	0.5	UL/CUL/TUV/CEC	15.95	14.49	13.49	12.49
1940635	Mean Well	GS25A24-P1JU	+24/1.04	2.1mm x 5.5mm F 2	100-240@50-60	25	No	3.7 x 2.1 x 1.4	6' 6'	0.5	UL/CUL/TUV/CEC	18.95	16.95	14.95	13.49
380577	Mean Well	ES25A24-P1MU	+24/1.04	2.5mm x 5.5mm F 2	100-240@50-60	25	Yes	3.7 x 2.1 x 1.4	6' 6'	0.6	UL/CSA/TUV/CE	19.95	17.95	15.95	13.95
229026	Phihong	PSC30U-240-R	+24/1.25	2.1mm x 5.5mm F 2	100-240@50-60	30	No	4.5 x 2.4 x 1.4	6' 2	0.5	UL/CUL/TUV/CE	26.95	24.95	22.95	21.49
1952353	Mean Well	GS40A24-P1J	+24/1.67	2.1mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.2	6' 2	0.7	UL/CUL/TUV/CEC	24.95	22.49	19.95	17.95
1537256	ReliaPro	OH1048A2401700U-U	+24/1.7	2.5mm x 5.5mm F 2	90-264@47-63	40	Yes	4.5 x 2.0 x 1.3	6' 2	0.5	UL/CUL/CE	24.95	22.49	19.95	17.95
1940281	EDAC, Inc.	EA1050D	+24/2.08	2.1mm x 5.5mm F 2	100-240@50-60	50	Yes	4.7 x 2.4 x 1.4	4' 2	0.6	UL/CUL/TUV/CEC	24.95	22.49	19.95	17.95
1942788	EDAC, Inc.	EA1050B240	+24/2.5	2.1mm x 5.5mm F 2	100-240@50-60	60	Yes	4.8 x 2.4 x 1.4	6' 2	1.8	UL/CUL/TUV/CE/CEC	24.95	22.49	19.95	17.95
1952214	Mean Well	GS60A24-P1J	+24/2.5	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 2.0 x 1.3	6' 2	0.7	UL/CUL/TUV/CEC	28.95	26.95	24.95	22.95
1950913	EDAC, Inc.	EA1050B-240-1	+24/2.5	2.5mm x 5.5mm F 2	100-240@50-60	60	Yes	4.8 x 2.4 x 1.4	6' 2	1.8	UL/CUL/TUV/CE	29.95	26.95	24.95	22.95
355056	ReliaPro	JR-TT-66-24	+24/2.75	2.1mm x 5.5mm F 2	100-240@50-60	66	Yes	5.8 x 3.0 x 1.7	6' 2	1.2	UL/CUL/TUV	44.95	40.95	36.95	32.95
2078338	Mean Well	GS90A24-P1M	+24/3.75	2.5mm x 5.5mm F 2	100-240@50-60	90	No	5.9 x 2.3 x 1.2	4' 2	0.9	UL/CUL/TUV/CEC	44.49	41.49	38.95	36.49
1940871	Mean Well	AS-120P-24	+24/5.0	2.5mm x 5.5mm F 2	100-240@50-60	120	No	6.6 x 2.6 x 1.4	4' 2	1.2	UL/CUL/TUV/CE	58.95	54.95	51.95	48.95
2099286	Mean Well	GS220A24-R7B	+24/9.2	4-pin DIN M	90-264@127-370@47-63	220	Yes	8.3 x 3.4 x 1.8	3.3' 2	2.4	UL/CUL/TUV/CE/PPC	129.95	116.95	104.95	94.95
1707083	Mean Well	ES18A28-P1J	+28/0.64	2.1mm x 5.5mm F 2	100-264@47-63	18	Yes	3.7 x 2.1 x 1.4	6' 2	0.5	UL/CUL/TUV/CE/CE	12.95	10.95	9.49	8.49
1940643	Mean Well	GS25A28-P1JU	+28/0.89	2.1mm x 5.5mm F 2	100-240@50-60	25	No	3.7 x 2.1 x 1.4	6' 6'	0.7	UL/CUL/TUV/CEC	18.95	16.95	14.95	13.49
1940475	Mean Well	GS18A48-P1J	+48/0.37	2.1mm x 5.5mm F 2	100-240@50-60	18	No	3.6 x 2.1 x 1.4	6' 6'	0.5	UL/CUL/TUV/CEC	18.49	16.49	14.49	12.95
1940651	Mean Well	GS25A48-P1J	+48/0.52	2.1mm x 5.5mm F 2	100-240@50-60	25	No	3.7 x 2.1 x 1.4	6' 2	0.5	UL/CUL/TUV/CEC	16.49	14.95	13.49	12.49
229032	Phihong	PSA31U-480	+48/0.63	2.1mm x 5.5mm F 2	90-264@47-63	30	No	4.5 x 2.4 x 1.6	6' 2	0.5	UL/CUL/TUV/CE	19.95	18.95	17.95	16.95
221585	Mean Well	GS40A48-P1J	+48/0.84	2.1mm x 5.5mm F 2	100-240@50-60	40	Yes	4.9 x 2.0 x 1.3	6' 6'	0.8	UL/CUL/TUV/CE	27.95	25.95	23.95	21.95
172065	Mean Well	SPU50-9U	+48/1.25	2.1mm x 5.5mm F 2	100-240@50-60	60	Yes	5.6 x 2.9 x 1.7	6' 6'	1.3	UL/CSA/TUV	27.95	25.95	23.95	21.95
1952396	Mean Well	GS60A48-P1JU	+48/1.25	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 2.0 x 1.2	6' 6'	0.7	UL/CUL/TUV/CE/CEC	28.95	26.95	24.95	22.95
376615	Mean Well	P66A-8P2JU	+48/1.37	2.1mm x 5.5mm F 2	100-240@50-60	66	Yes	5.8 x 3.0 x 1.7	6' 6'	1.2	UL/CSA/TUV/CE	39.95	36.95	33.95	31.49
379681	Mean Well	P66A-8P2MU	+48/1.37	2.5mm x 5.5mm F 2	90-264@47-63	66	Yes	5.8 x 3.0 x 1.7	6' 6'	1.2	UL/CSA/TUV/CE	44.95	41.95	38.95	35.95
3-Wire AC Input – Regulated Switching Table-Top – Double & Triple Output												* Web Code: TDO			
196270	Horizon	PSU25A13	+5/2.5, +12/1.0	4-pin mini DIN M	100-240@47-63	25	No	4.2 x 2.6 x 1.4	6' 4'	1.2	UL/CUL/TUV/CE	\$34.95	\$31.49	\$28.95	\$25.95
221720	Mean Well	P25A14E-R1BU	+5/2.5, +15/0.3 -15/0.3	5-pin DIN M	100-240@50-60	25	Yes	4.3 x 2.6 x 1.4	6' 2	0.8	UL/CUL/TUV/CE	34.95	31.49	28.95	25.95
2125501	Entone	SPU45E-201	+5/5.0, +12/2.0	4-pin mini DIN M	100-240@47-63	49	Yes	5.7 x 3.0 x 1.7	4' 6'	1.2	UL/CUL/TUV/CE	39.95	35.95	32.95	29.95

* See accessory table-top power cord chart on page 129 when AC cord needed; refer to 1, 2 or 3 in "Cord (DC/AC)" column above for correct power cord † Right Angle

†† Includes 7ea. DC right angle plugs (1.7 x 4.75, 1.7 x 5.5, 2.1 x 5.5, 2.5 x 5.5, 3.0 x 6.3, 4.3 x 6.5, 5.8mm x 6.5mm) for various notebook compatibility

✓ CEC Equivalent available. Add a "C" before part number for CEC version. CEC

3-Wire Regulated Table-Top Power Supplies continued on next page


RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

AC-to-DC Regulated Switching Table-Top Power Supplies (Continued)

We are happy to change the power plug on any listed table-top power supply to a connector of your choice (see below) for just \$2.50 each. A 100 pc. minimum order applies.

Part No.	Manufacturer	Manufacturer Part No.	Output Volts (VDC)/ Current (A)	Output Connector ID x OD mm Female/Male; Polarity	Input VAC@Hz	Output Power (W)	LED Ind.	Size (L" x W" x H")	Cords (DC/AC)	Wt. (lbs.)	Agency Approvals	Pricing			
												1	10	50	100
3-Wire AC Input – Regulated Switching Table-Top – Triple Output (Continued)												* Web Code: TTO			
190960	Mean Well	P25A13D-R1B	+5/2.5, +12/0.8, -12/0.3	5-pin DIN M	100-240@50-60	26	Yes	4.1 x 2.6 x 1.4	6' ²	1.1	CUL/TUV/CE	\$39.95	\$35.95	\$32.95	\$29.95
221702	Mean Well	P50A13D-R1BU	+5/4.0, +12/2.0, -12/0.5	5-pin DIN M	100-240@50-60	50	Yes	5.7 x 3.0 x 1.7	4'6"	1.5	UL/CUL/TUV/CE	49.95	44.95	39.95	35.95
237367	Mean Well	P50A14E-R1B	+5/3.5; +15/1.2, -15/0.3	5-pin DIN M	100-240@47-63	42	Yes	5.8 x 3.0 x 1.7	4' ²	1.2	UL/CUL/TUV/CE	49.95	44.95	39.95	35.95

* See accessory table-top power cord chart below when AC cord needed; refer to ¹, ² or ³ in "Cord (DC/AC)" column above for correct power cord



189587



38050

Accessory Power Input Cords for Table-Top Power Supplies



1951123

* Web Code: RBE

Part No.	Ref. No. *	Description	Color	AWG	Certification	Cord Length	Wt. (lbs.)	Cord Type	1	10	50	100
189587	1	2-conductor power cord (Figure 8 style)	Black	18/2	UL/CSA	6'	0.3	SPT	\$2.69	\$2.39	\$2.19	\$1.95
38050	2	3-conductor power cord	Black	18/3	UL/CSA	6'	0.4	SVT	3.95	3.59	3.25	2.95
1953559	3	3-conductor flat power cord (Mickey Mouse style)	Black	18/3	UL/CSA	6'	0.4	SPT-2	2.95	2.65	2.39	1.95
1951123	3	3-conductor round power cord (Mickey Mouse style)	Black	18/3	UL/CSA	6'	0.4	SVT	3.95	3.49	2.95	2.49

* These reference numbers for "AC cord needed" for Table-Top Power Supplies on pages 126-129

More Power Cords on page 133

24-Watt Switching Table-Top Power Supply

Interchangeable AC & DC Plugs with Selected DC Outputs

- Input voltage: 100-240VAC @ 50-60Hz
- Output current: 2A
- Output connectors: 2.5mm & 3.5mm male, 1mm x 3mm, 2.1mm x 5mm, 2.5mm x 5mm, 1.35mm x 3.5mm x & 1.7mm x 4mm
- Interchangeable AC input plugs for USA/UK/Europe/Taiwan/China (included)
- Selectable outputs: 3VDC, 4.5VDC, 6VDC, 7.5VDC, 9VDC, 12VDC



Part No.	Mfr. Part No.	Size (L x W x H)	1	10	25
1537491	PSSMV3	4.7" x 3.3" x 2.5"	\$39.95	\$35.95	\$32.95

36-Watt Switching Table-Top Power Supply

- Output voltage: 5VDC to 24VDC in 1V increments
- Output connectors: 2.5mm & 3.5mm male, 1mm x 3mm, 1.35mm x 3.5mm, 1.5mm x 5mm, 1.7mm x 4mm, 2.1mm x 5mm and 2.5mm x 5mm
- Stabilized outputs, low ripple & interference
- High efficiency, low energy consumption
- Input voltage: 100-240VAC @ 50/60Hz
- Short-circuit, overload protection • LED power indicator



Includes: AC power cord

Part No.	Mfr. Part No.	Output Current	Size (L x W x H)	1	10	25
1537521	PSSMV7U	1.5A to 4A	3.5" x 1.8" x 1.2"	\$49.95	\$44.95	\$39.95

GlobTek® AC-to-DC Medical Table-Top Regulated Switching Power Supplies

- 2.5mm x 5.5mm female center positive
- Input voltage: 90-264VAC @ 47-63Hz
- Leakage current: 0.1mA max.
- Regulation (line & load): ±5%
- Isolation voltage: 4,000VAC • 3-wire AC input
- Ripple & noise: 1% or 100mV, whichever is smaller
- Cord lengths: DC: 6'; AC: not included use P/N 115078, pg 133
- Size: 2.9"L x 2.0"W x 1.6"H

* Web Code: WBM



Part No.	Mfr. Part No.	Power (W)	Output VDC/Amps	Pricing			
				1	10	25	100
230683	TR9CE1250CP	15.6	+12/1.3	\$35.95	\$24.95	\$21.49	\$19.95
230763	TR9CE4000LCP	49.2	+12/4.1	54.95	49.95	44.95	39.95
230691	TR9CG1200CP	18.0	+15/1.2	44.95	39.95	35.95	32.95
230772	TR9CG3333LCP	49.5	+15/3.3	49.95	44.95	39.95	35.95
230798	TR9CI2100LCP	50.4	+24/2.1	59.95	53.95	47.95	42.95

5VDC@0.5A Interchangeable Wall Plug Adapter

With USB Socket Type A

* Web Code: NBH

- Voltage output: 5VDC @ 0.5A
- Voltage input: 90-264VAC @ 47-63Hz • Efficiency: 55% (typical)
- Leakage current: 0.20µA max. • UL/CUL/TUV/CE approved
- Size: 2.97"L x 1.81"W x 1.25"H • Wall plug clips not included



Part No.	Product No.	1	10	50	100
662805	PSC30R-050	\$10.95	\$9.95	\$8.95	\$7.95

USB-A Power Cable with Interchangeable Tips

- 4' cable • 26 AWG
- USB-A male connector • UL/CSA approved
- Tips: 1.3mm x 5.5mm female, 1.5mm x 4.8mm female, 1.7mm x 4.8mm female, 2.1mm x 5.5mm female, 2.5mm x 5.5mm female, 2.9mm x 6.3mm female, 1.3mm x 3.3mm female, and 1.3mm x 4.3mm female,
- For use with P/N 662805 wall adapter (see above)



Part No.	Product No.	1	10	50	100
2081625	USBAC8	\$8.95	\$7.95	\$6.95	\$5.95

Cigarette Lighter Car Power Adapter

- Switch selectable 1.5V, 3V, 4.5V, 5V, 6V, 9V and 12V
- DC power plugs: 2.5mm x 5mm, 2.1mm x 5mm, 1.5mm x 5mm, 1.7mm x 4mm, 1.3mm x 3.5mm and 0.7mm x 2.35mm
- Powers portable electronic devices such as MP3 players, cell phones, etc.
- Switching power supply provides 1000mA from cigarette lighter plug
- Reversible plug for center positive or negative polarity



Part No.	Mfr. Part No.	1	10	50	100
155230	JCD22A	\$14.95	\$12.95	\$9.95	\$8.95

Auto/Air Cigarette DC/DC Power Adapter

- Input voltage: 11VDC to 16VDC @ 10A max.
- Input connector: cigarette plug, fused (15A @ 250V)
- Output connector: interchangeable tips of 2.1mm F, 2.5mm F, 3.5mm M
- Input/Output cord length: 42"/48"
- Color: black with LED power indicator
- Size: 4.7"L x 2.0"W x 1.0"H



Part No.	Product No.	1	10	50	100
2099770	AA-5001G	\$19.95	\$17.95	\$15.95	\$14.49

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Power Plugs, Adapters & Jacks

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE



DC Power Plugs & Adapters



★ Web Code: MFP

Part No.	Mfr.	Product No.	Fig.	Description (Barrel) Plug ID x OD x L (mm)	Strain Relief ID x L (mm)	1	10	100
71192	ValuePro	PP137	1	F plug, 1.3 x 3.5 x 9.5	4.1 x 12 (black)	\$.79	\$.69	\$.65
1537395	ValuePro	PL-005	2	F plug, 1.3 x 3.5 x 9.4 (rt. angle)	2.8 x 11	.95	.85	.75
2098013	ValuePro	DCP-111	1	F plug, 1.7 x 5.5 x 9.8	4.6 x 12 (black)	.95	.85	.75
191484	ValuePro	PP049W	1	F plug, 2.1 x 5.5 x 9.0	4.6 x 12.5 (white)	.69	.59	.55
2004890	ValuePro	PP049S	1	F plug, 2.1 x 5.5 x 9.5	4.5 x 12.5 (black)	.79	.69	.65
297617	Switchcraft	S760	3	F plug, 2.1 x 5.5 x 9.5	5.5 x 25 (black)	3.95	3.49	2.95
28760	ValuePro	PP049	1	F plug, 2.1 x 5.5 x 10 (P205)	4.1 x 12 (black)	.79	.69	.55
138587	ValuePro	PJ021R	2	F plug, 2.1 x 5.5 x 12 (rt. angle)	2.8 x 11 (black)	.89	.79	.65
147329	ValuePro	PP049L	1	F plug, 2.1 x 5.5 x 14 (P205L)	4.3 x 12 (black)	.89	.79	.65
190538	ValuePro	PJ109S	1	F plug, 2.5 x 5.5 x 9.5	4.7 x 13 (black)	.59	.55	.49
281877	Switchcraft	760	3	F plug, 2.5 x 5.5 x 9.5	5.5 x 25 (black)	3.49	3.15	2.49
28768	ValuePro	PP109	1	F plug, 2.5 x 5.5 x 10 (P206)	4.7 x 13 (black)	.79	.69	.59
147336	ValuePro	PP109L	1	F plug, 2.5 x 5.5 x 14 (P206L)	4.2 x 12 (black)	.79	.69	.59
168242	ValuePro	PP109N	3	F plug, 2.5 x 5.5 x 14	3.9 x 22 (black)	.69	.59	.55
2099163	ValuePro	PL-008	2	F plug, 2.5 x 5.5 x 9.5 (rt. angle)	2.8 x 11	.95	.85	.75
101135	ValuePro	PJ1025	4	M plug, — x 2.5 x 11 (P201)	4.3 x 13 (black)	.79	.69	.55
231176	ValuePro	AP-340	4	M plug, — x 3.5 x 14 (stereo)	4.3 x 13.5 (black)	.79	.69	.55
231167	ValuePro	AP-343	5	M plug, — x 3.5 x 14 (stereo)	4.4 x 13 (metal)	1.49	1.25	.99
231160	ValuePro	PJ1035	5	M plug, — x 3.5 x 14 (mono)	4.8 x 13.5 (metal)	1.49	1.25	.99
101152	ValuePro	PJ1035	4	M plug, — x 3.5 x 14.5 (P202)	4.0 x 13 (black)	.69	.59	.49
2113703	ValuePro	JR1826	6	Adapter, 1.7mm M to 2.1mm F (1.7"L)	—	1.49	1.25	.99
2112989	ValuePro	JR1828C	6	Adapter, 2.1mm M to 1.3mm F (1.3"L)	—	1.49	1.25	.99
1953591	ValuePro	DCJ2.1-DCP2.5	6	Adapter, 2.1mm M to 2.5mm F (1.4"L)	—	1.49	1.25	.99
2113009	ValuePro	JP1829	6	Adapter, 2.5mm M to 1.3mm F (1.3"L)	—	1.49	1.25	.99
2113711	ValuePro	Jr1827	6	Adapter, 2.5mm M to 1.7mm F (1.7"L)	—	1.49	1.25	.99
1953604	ValuePro	DCJ2.5-DCP2.1	6	Adapter, 2.5mm M to 2.1mm F (1.4"L)	—	1.49	1.25	.99

DC Cords with Pigtail – 6' length

Part No.	Mfr.	Cross Ref. No.	Fig.	Description (Barrel) ID x OD x L (mm)	AWG	1	10	100
2113674	ValuePro	DCCORD1.3	7	Plug, 1.3 x 3.5 x 12	24 (black)	1.59	1.39	1.15
2114693	ValuePro	DCCORD1.7	8	Jack, 1.7 x 2.5 x 12	24 (black)	1.59	1.39	1.15
2114706	ValuePro	6FT#245.5X1.7	7	Plug, 1.7 x 2.5 x 12	24 (black)	1.59	1.39	1.15
2096763	ValuePro	DCCORD2.1	7	Plug, 2.1 x 5.5 x 12	24 (black)	1.59	1.39	1.15
2114600	ValuePro	6FT#245.5X2.1	8	Jack, 2.1 x 5.5 x 12	24 (black)	1.59	1.39	1.15
2096771	ValuePro	DCCORD2.5	7	Plug, 2.5 x 5.5 x 12	24 (black)	1.59	1.39	1.15
2114597	ValuePro	6FT#245.5X2.5	8	Jack, 2.5 x 5.5 x 12	24 (black)	1.59	1.39	1.15

DC Extension Power Cables

Part No.	Mfr.	Description	Length	1	10	100
2099147	ValuePro	DCEXTCORD2.1- 3FT	3'	1.75	1.49	1.25
2099121	ValuePro	DCEXTCORD2.1- 6FT	6'	1.95	1.75	1.49
2099155	ValuePro	DCEXTCORD2.5- 3FT	3'	1.75	1.49	1.25
2099139	ValuePro	DCEXTCORD2.5- 6FT	6'	1.95	1.75	1.49

Male & Female Power Jacks

Part No.	Mfr.	Product No.	Description	Dimensions H x W x D (mm)	Type/ Mount	Circuit/ Terminal	Mating Plug (see right)	Terminals		
								Solder eyelet	PC board	Code
								1	10	100
101194	Various	PP024	1.3mm male	6.0 x 6.0 x 9.0	1/D	1/B	1.3 mm F	\$.59	\$.55	\$.45
101178	Various	PP014	2.1mm male	10.9 x 9.0 x 14.5	2/D	1/A	2.1 mm F	.39	.35	.29
101179	ValuePro	PP014	2.1mm male	10.9 x 9.0 x 14.5	2/D	1/A	2.1 mm F	.45	.39	.35
137673	Various	PP013	2.1mm male	10.9 x 9.0 x 14.5	3/D	4/A	2.1 mm F	.45	.39	.35
151590	Various	DPJ-021A	2.1mm male	18.0 x 12.6 Dia.	4/C†	1/A	2.1 mm F	.89	.79	.69
151555	ValuePro	DPJ-026	2.1mm male	21.0 x 8.0 Dia.	5/E	1/A	2.1 mm F	1.49	1.35	1.19
159611	Various	PJ1014A	2.1mm male	57.5 x 12.6 Dia.	6/F	3/A	2.1 mm F	1.75	1.59	1.39
281851	Switchcraft	722A	2.1mm male	15.1 x 7.5 Dia.	7/C	1/A	2.1 mm F	2.75	2.49	2.25
207714	Various	HEC0470	2.5 mm male	11.0 x 9.0 x 14.5	2/D	1/B	2.5 mm F	.55	.49	.39
101186	Various	PP014A	2.5 mm male	11.0 x 9.0 x 14.5	2/D	1/A	2.5 mm F	.49	.45	.29
101187	ValuePro	PP014A	2.5 mm male	11.0 x 9.0 x 14.5	2/D	1/A	2.5 mm F	.55	.49	.45
151563	Various	DPJ-026A	2.5 mm male	15.1 x 8.0 Dia.	5/E	1/A	2.5 mm F	1.49	1.35	1.19
159506	Various	PJ1015A	2.5 mm male	57.5 x 12.6 Dia.	6/F	3/A	2.5 mm F	1.49	1.35	1.19
202358	Various	HD2388	2.5 mm male	12.4 x 7.7 Dia.	8/C*	3/A	2.5 mm F	1.19	.99	.89
2100355	Switchcraft	HE2388M	2.5 mm male	17.1 x 10.9 Dia.	8/C**	4/A	2.5 mm F	1.49	1.35	1.19
281842	Switchcraft	712A	2.5 mm male	15.8 x 7.5 Dia.	7/C	1/A	2.5 mm F	3.95	3.39	2.95
297553	Switchcraft	PC712A	2.5 mm male	23.3 x 11.0 Dia.	9/D	1/A	2.5 mm F	3.95	3.39	2.95
297529	Switchcraft	L712A	2.5 mm male	23.3 x 11.0 Dia.	10/C	1/A	2.5 mm F	3.95	3.39	2.95
101143	ValuePro	PJ0352	3.5 mm female	10.0 x 10.0 x 18.5	11/E	2/A	3.5 mm M	.39	.35	.29
109496	ValuePro	PJ035PM	3.5 mm female	10.5 x 9.0 x 20.0	12/C	2/A	3.5 mm M	.49	.45	.39
165730	ValuePro	PJ035A	3.5 mm female	15.5 x 5.9 Dia.	13/C	3/A	3.5 mm M	.79	.69	.59

† Center offset *Plastic **Metal

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



Wagan Cell Phone/ PDA Travel Adapter

Provides Both DC & USB Power

Converts any car charger into a wall adapter by simply plugging the adapter into the wall and car charger into the DC port. It's universal for all cell phone brands when used with your car charger. It's also suitable for any PDA or MP3 player by utilizing the USB port.

- DC: 12V @ 500mA • USB: 5V @ 500mA
- Fuse protected • Space saving folding design

Part No.	Description	1	10
2096051	AC to DC power adapter	\$14.95	\$13.49



Automobile Fused Power Plugs with Cords

- Accepts .25" x 1.25" fuse
- 115002: Screw assembly w/ strain relief (no cord)
- 124760: 3' cord w/ pigtail
- 105064: 12' cord w/ pigtail

Part No.	Mfr.	Fuse	1	10	100
115002	ValuePro	5A/250VAC	\$2.25	\$1.99	\$1.79
124760	ValuePro	3A/250VAC	2.49	2.25	1.99
105064	Various	2A/250VAC	1.95	1.75	1.39

Mounting	Code
Panel	C
PCB	D
Panel & PCB	E
Cable	F


★ Web Code: BAM



International Step-Up & Step-Down Transformers

★ Web Code: RAL



Part No.	Product No. *	Fig.	Type	Volt Step	Primary Voltage	Secondary Voltage	Power (VA)	Dimensions			Wt. (lbs.)	Pricing		
								H"	W"	D"		1	10	25
85008	AC220V300	2/A	Auto	Up	110VAC	220VAC	300	3.50	3.05	3.95	4.8	\$39.95	\$35.95	\$31.95
221331	GIS-500	2/A	Isolation	—	110VAC	110VAC	500	4.69	3.75	6.00	16.0	59.95	53.95	48.95
221217	P8689	2/A	Auto	Up	110VAC	220VAC	1000	4.63	3.75	6.13	17.0	79.95	71.95	64.95
99573	AC110V50	1/B	Auto	Down	220VAC	110VAC	50	2.50	1.63	1.33	0.7	9.95	8.95	7.95
85016	AC110V300	2/B	Auto	Down	220VAC	110VAC	300	3.50	3.05	3.95	4.8	39.95	35.95	31.95
111851	AC110V500	2/B	Auto	Down	220VAC	110VAC	500	3.99	3.60	4.84	8.5	69.95	62.95	56.95
222092	GISD-1000	2/A	Auto	Down	220VAC	110VAC	1000	5.38	4.38	8.13	31.0	79.95	71.95	64.95
142906	AC110V1500	2/B	Auto	Down	220VAC	110VAC	1500	5.25	4.50	5.75	15.2	99.95	89.95	79.95

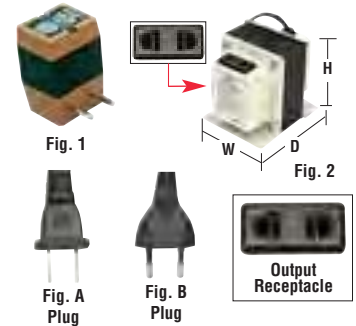

Quick-Connect Power Transformers

★ Web Code: BAN

- Input voltage: 115/230VAC, 50-60Hz
- Terminals: quick-connect, solder



Part No.	Product No.	Triad Cross *	Input Voltage	Output Voltage	VA	Size of Connect	Dimensions			Wt. (lbs.)	Pricing		
							L"	W"	H"		1	10	25
104387	XFR1225Q	FD612	115/230VAC	12.6VCT @ 2.5A	31.5	0.187"	1.75	2.33	2.00	1.3	\$11.95	\$10.95	\$9.95
104409	XFR1635Q	FD716†	115/230VAC	16VCT @ 3.5A	56.0	0.141"	2.25	2.68	2.33	1.8	15.95	14.49	12.95
101864	XFR2424Q	FD724	115/230VAC	24VCT @ 2.4A	57.6	0.141"	2.10	2.70	2.29	1.7	11.95	10.95	8.95
104417	XFR3615Q	FD736	115/230VAC	36VCT @ 1.5A	54.0	0.141"	2.30	2.70	2.30	1.8	15.95	14.49	12.95

† Terminal solder lugs are on same side

* Triad cross is for reference only



Split-Bobbin Power Transformers (2.5 to 19.2VA)

★ Web Code: LBK

Non-concentrically wound with primaries and secondaries side-by-side providing low capacitive coupling.

- Primary: 115/230VAC, 50-60Hz
- PC terminal pin spacing for accurate placement

* Triad cross is for reference only







Part No.	Product No.	Triad Cross *	Input Voltage	VA	Individual Output	Parallel Output	Series Output	Dimensions			Wt. (lbs.)	Pricing		
								L"	W"	H"		1	10	100
221292	DSW-312	FS12200	115/230	2.5	6.3V @ .20A	6.3V @ .40A	12.6VCT @ .20A	1.38	1.13	1.19	0.3	\$6.95	\$6.25	\$5.59
102534	XFR1205SB	FS12500	115/230	6.3	6.3V @ .50A	6.3V @ 1.0A	12.6VCT @ .50A	1.32	1.64	1.38	0.4	7.95	6.95	6.25
102518	XFR1602SB	FS16150	115/230	2.4	8V @ .15A	8V @ .30A	16VCT @ .15A	1.17	1.40	1.20	0.3	4.95	4.49	3.95
116089	14A-2.5R-2Y	Signal	118/230	2.5	12V @ .20A	12V @ .40A	24VCT @ .10A	1.62	1.31	1.12	0.25	5.95	5.35	4.79
102593	XFR2405SB	FS24500	115/230	12.0	12V @ .50A	12V @ 1.0A	24VCT @ .50A	1.58	1.90	1.46	0.7	7.95	6.95	5.95
209015	ST-6-48	—	115	19.2	24V @ .40A	24V @ .80A	48VCT @ .40A	1.88	2.25	1.40	0.8	5.95	5.35	4.79

Power Transformers (7.6 to 288VA)

★ Web Code: JAM

Power transformers have both single and dual-voltage input and center-tapped outputs. This makes them the perfect choice for power supply design or for use in transformer, rectifier and filter circuits.

- Primary: 115VAC or 115/230VAC, 50-60Hz



Part No.	Product No.	Triad Cross [#]	Primary Color Code			VA	Secondary			Lead Type	Fig.	Dimensions			Wt. (lbs.)	Pricing			
							Voltage		Color Code			L"	W"	H"		1	10	100	
102163	XFR6102 ^R	F314X	Black	Yellow [*]	Red	7.6	6.3VCT @ 1.2A	White	Black [*]	White	Wire	1	1.84	2.40	1.67	0.8	\$6.95	\$6.25	\$4.95
105524	XR082-91-R ^R	—	Black	White [*]	Red	9.0	9VCT @ 1A	Blue	Black [*]	Blue	Wire	1	1.82	2.43	1.67	0.7	7.95	7.15	6.49
221400	P-8657 ^R	F218X	Black	—	Black	24.0	12VAC @ 2A	White	—	White	Wire	2	1.89	2.75	1.99	1.3	9.95	8.95	7.95
221356	P-8658	F219X	Black	—	Black	48.0	12VAC @ 4A	White	—	White	Wire	2	2.25	4.00	2.63	2.3	12.95	11.49	8.95
29226	XFR122 ^R	F44X	Yellow	—	Yellow	25.2	12.6VCT @ 2A	Blue	Red [*]	Black	Wire	3	2.41	2.79	1.99	1.5	13.95	12.49	9.95
102155	XFR1220 ^R	F344X	Black	Yellow [*]	Red	25.2	12.6VCT @ 2A	White	Black [*]	White	Wire	1	2.35	2.32	1.97	1.5	13.95	12.49	9.95
149771	XFR1240 ^R	F3181U	Black	Red [*]	Yellow	50.4	12.6VCT @ 4A	White	Black [*]	White	Wire	1	2.45	3.20	2.25	2.2	14.95	13.49	10.95
102121	XFR124 ^R	F181U	Black	—	Black	50.4	12.6VCT @ 4A	White	Black [*]	White	Wire	3	2.45	3.21	2.26	2.7	14.95	13.49	10.95
105532	XFR1810	—	Blue	Red [*]	Black	18.0	18VCT @ 1A	Yellow	Black [*]	Yellow	Wire	1	2.20	2.81	1.99	1.2	9.95	8.95	6.95
149957	XFR1820 ^R	—	Black	Red [*]	Yellow	36.0	18VCT @ 2A	White	Black [*]	White	Wire	1	2.25	3.15	2.71	1.8	11.95	10.95	8.95
221382	P8396 ^R	—	Black	—	Black	9.6	24VCT @ 0.4A	White	Black [*]	White	Wire	3	1.63	2.80	1.97	0.6	7.95	6.95	5.95
102112	XFR2410 ^R	F346X	Black	Yellow [*]	Red	24.0	24VCT @ 1A	White	Black [*]	White	Wire	1	2.41	2.80	1.99	1.5	10.95	9.95	7.95
221373	P-8662 ^R	F192X	Black	—	Black	48.0	24VCT @ 2A	White	Black [*]	White	Wire	3	2.44	3.60	2.23	2.3	13.95	12.49	9.95
112513	XFR242N ^R	F229X	Black	—	Black	48.0	24VAC @ 2A	White	—	White	Wire	2	2.33	3.16	2.28	1.8	13.95	12.49	9.95
221365	P-8663 ^R ↑	F193U	—	—	—	96.0	24VCT @ 4A	—	—	—	Lug	3	2.81	2.94	4.00	4.0	19.95	17.95	15.95
221411	P-8666 ^R ↑	F226U	—	—	—	288.0	24VCT @ 12A	—	—	—	Lug	3	4.63	3.75	4.63	11.2	54.95	49.95	44.95
99654	XFR242 ^R	—	Red	—	Red	49.2	24.6VCT @ 2A	Blue	Yellow [*]	Blue	Wire	3	2.44	3.22	2.30	2.5	13.95	12.49	9.95
102104	XFR2520 ^R	F341X	Black	White [*]	Red	50.4	25.2VCT @ 2A	Orange	Black [*]	Orange	Wire	1	2.45	3.22	2.26	2.8	13.95	12.49	9.95
149797	XFR2820 ^R	F3185U	Black	Red [*]	Yellow	56.0	28VCT @ 2A	White	Black [*]	White	Wire	1	2.45	3.22	2.26	2.3	13.95	12.49	9.95

† Solder terminals

* Center tap

Triad cross is for reference only

★ For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

PC Mount Modem Coupling Transformers

125357: • Core type: EI-14

- Insulation resistance: 100MΩ
- ±20% impedance matching and DC resistance matching
- Hipot tested: 1000VAC • Vacuum wax impregnated

117760:

- Dielectric strength: 1250VAC • Insertion loss: 2.50dB @ 1kHz

Part No.	Product No.	Impedance (Ω)		Resistance (Ω)		Pricing		
		Primary	Secondary	Primary	Secondary	1	10	100
125357	XFR6006A14-R	600CT	600CT	65	55	\$2.25	\$1.95	\$1.75
117760	671-8014	600	600	108	120	2.95	2.75	2.49

TRIAD Low Frequency Current Sensing Transformer

May be used to monitor current 0.1-30A @ frequencies 50-400Hz.

- Turns ratio: 1:500 • Typical output: 110mV/amp
- Hi-pot: 500V • Burden resistor: 60Ω

Part No.	Mfr. Part No.	Sen DCR	Primary DCR	1	10	100
627591	CSE187L	21Ω max.	250μΩ max.	\$3.95	\$3.49	\$2.95

TRIAD Current Sensing Transformer

- Frequency range: 20-200kHz • Min. inductance: 3.5mH
- Primary is inserted thru hole in casing
- Arrow side of primary conductor has same polarity as pin #1

Part No.	Mfr. Part No.	DCR	Primary Arms	1	10	100
627621	CST306-1A	0.34Ω max.	35	\$3.95	\$3.59	\$3.25

500 to 2000VA Variable Transformers

- Input: 110VAC or 220VAC
- Power: 500, 1000 or 2000VA
- Output: 0-240VAC
- Banana/screw input terminals
- Universal US/European output plugs
- Lighted on/off power switch

Part No.	Fuse	Size (W" x D" x H")	Wt. (lbs.)
121276	3A/250V (P/N 69439)	5.3 x 7.3 x 7.0	10.4
129008	5A/250V	9.4 x 6.5 x 7.7	14.8
152582	10A/250V (P/N 69462)	9.0 x 7.0 x 7.7	19.8

Part No.	Description	1	5	25
121276	500VA trans. R	\$109.95	\$99.95	\$89.95
129008	1000VA trans. R	139.95	124.95	114.95
152582	2000VA trans. R	219.95	199.95	179.95

320VA Variable AC Transformer

- Input voltage: 110VAC @ 50-60Hz
- Matching input/output terminals: P/N 103668 & 109112 (disconnect .25" solderless terminals), pg 91
- Maximum current: 2.5A
- Shaft length: 0.5"
- Size: 2.8"Dia. x 2.1"H
- Weight: 2.5 lbs.
- Panel mount
- One-year warranty

Includes: 3 disconnect .25" solderless terminals

Part No.	Product No.	1	5	25
149324	PSV-203-R-R	\$59.95	\$53.95	\$47.95

*Variable Transformers Online — Enter Web Code MAR

6kV-7.4kV High Voltage Power Supply

- Input voltage range: 113VAC to 132VAC
- Input lead wires: 22 AWG UL1015, 7.5"L; AC hot (black), AC COM (white), HV RTN (green)
- Output voltage: 6.0kV to 7.4kV A@ 120VAC
- Output lead wires: 22 AWG UL3239, 10" (pink)
- UL94V-0 rated encapsulant filled epoxy • Size: 3.0"L x 1.2"W x 1.0"H

Part No.	Product No.	Description	1	10	50	100
2100136	CS2080A3	High voltage power supply	\$12.95	\$11.95	\$10.95	\$9.95

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

TRIAD PC Mount Data/Voice Dual Transformer

- Frequency range: data voice: 300 – 3500Hz; data: 800 to 3500Hz
- Trans-hybrid loss: 50dB
- Dielectric strength FCC68.304: 1500V • Power level: -45dBm to +7dBm
- Meets FCC part 68.310: 60dB min., 200-1000Hz; 45dB min., 1000-4000Hz

Part No.	Mfr. Part No.	Impedance (Ω)		DC Current (mA) max.	Typical Loss dB		Pricing		
		Primary	Secondary		Insertion	Return	1	10	50
630475	TY-300P	600 (4W)	600/600	0	0.8	30	\$5.95	\$5.35	\$4.79

TRIAD PC Mount Audio Transformer

- Impedance matching: 10% over frequency range
- 6-pin PC mount • Output: 100mW
- Impedance (Ω): 600CT/600CT
- Primary DC Unbalance: 15mA

Part No.	Mfr. Part No.	Dimensions (W x D x H)	1	10	100
630459	TY-145P-R	13/16" x 9/32" x 5/8"	\$3.95	\$3.49	\$2.95

Current Sensing Transformer

- Frequency range: 10-50 kHz
- Inductance: 5mH
- Sensitivity current (I_{in}): 1A
- Terminating resistor: 50Ω
- Turns: 60
- Sensitivity voltage (V_{out}): 1V
- Max. current: 300mA

Part No.	Product No.	Dimensions (W x D x H)	1	10	100
164718	MTC30101	0.7" x 0.46" x 0.8"	\$2.49	\$2.25	\$1.95

*Audio Transformers Online — Enter Web Code SAJ

Class 1 Current Transformer

- Maximum voltage: 660VAC
- Frequency: 50-60Hz
- Ratio: 200A/5A; 5VA
- Size: 2.95"W x 1.70"D x 3.36"H
- Weight: 1.1 lbs. • Power: 5VA

Part No.	Product No.	1	10	100
174887	MSQ30	\$7.95	\$6.95	\$6.25

300VA Isolation Transformer 120VAC to 120VAC

- Input connector: 5.5' cord with 2-prong plug
- Input voltage: 120VAC @ 60Hz
- Output voltage: 120VAC @ 2.5A (isolated)
- Size: 3.2"W x 4.6"D x 4.2"H • Weight: 7.0 lbs.

Part No.	Product No.	1	5	25
181315	ITR300	\$39.95	\$35.95	\$31.95

550VA Variable AC Transformer

- Input voltage: 110VAC @ 60Hz
- Output voltage: 0-140VAC
- Rated current: 5A • Panel mount
- Input/output terminals: binding post with 0.188" diameter post
- Size: 4.3"Dia. x 4.0"H
- Weight: 6.8 lbs.
- One-year warranty

Part No.	Product No.	1	5	25
152937	PSV-264-R-R	\$109.95	\$99.95	\$89.95

EMI Suppression Cores with Case

Reduce Electromagnetic Interference (EMI) with a snap of these suppression cores around a power cord or data cord. Easy to install and an affordable way to reduce EMI without redesigning your product.

- Impedance at 100MHz between 75-225Ω min.
- Color: black (except P/N 2095402: white)

Round

Part No.	InDia.	OutDia.	Length	1	10	100
218174 R	.20"	.64"	1.15"	\$1.25	\$0.99	\$0.75
2095402	.30"	.78"	0.77"	1.19	.99	.79
217842 R	.34"	.78"	1.40"	1.49	1.25	.99
2081810 R	.38"	1.0"	0.65"	1.19	.99	.79
2094979 R	.51"	.89"	1.42"	1.75	1.59	1.25











Square

Part No.	InDia.	Width	Height	Length	1	10	100
2094987 R	.20"	.55"	.59"	1.40"	\$1.49	\$1.25	\$1.09
1952901	.25"	.70"	.77"	1.30"	1.75	1.49	1.19
1536958 R	.40"	.87"	.87"	1.27"	1.75	1.59	1.25



International Step-Up/Step-Down Autotransformer

- Input voltage: 110/200/220/240V
- Output voltage: 110/220V
- Wattage: 80 watts continuous/100 watts intermittent
- On/off switch
- Fuse protected
- Two free spare fuses • CE certification
- European to US adapter on power cable
- Universal European/US output receptacles
- Dimension: 5.2"L x 3.7"W x 3.5"H

Part No.	Product No.	1	10	25
2082599	VC-100	\$12.95	\$11.95	\$10.95



Plug Detail – Industry Standard Designs



JAMECO ValuePro

2 & 3-Conductor Fan, Pigtail, Detachable & Hospital Grade Power Cords

- Molded connectors
- Excellent resistance to jacket abrasion
- Voltage rating: 300 volts
- Temperature: -20°C to +60°C



★ Web Code: UBF

AWG	Volts	Amps	VA
18	125	10	1250
16	125	12	1500
14	125	15	1875

2-Conductor Line Cords with Pigtail

Part No.	Product No.	*Mfr.	Wt.	Fig.	Length	Color	AWG / Cond	Cord Type	1	10	50	100
2120188	444010-4	JVP	.15	1A	4'	Black	18/2	SPT-2	\$1.95	\$1.75	\$1.49	\$1.25
152187	171068G	JVP	.20	1	6'	Beige	18/2	SPT-2	2.25	1.99	1.85	1.69
124434	ST008	JVP	.16	1	6'	Black	18/2	SPT-2	2.25	1.99	1.85	1.69
42042	SY-001-R	JVP	.18	1A	6'	Black	18/2	SPT-2	2.49	2.25	1.95	1.79

2-Conductor "8" Style Power Cords for Laptops and Power Supplies

355944	VW-1G	+	.30	2A	6'	Gray	18/2	SPT-2	\$1.75	\$1.59	\$1.39	\$1.25
189587	VW-1	JVP	.30	2A	6'	Black	18/2	SPT-2	2.69	2.39	2.19	1.95

2-Conductor "D" Style Power Cord for Laptops and Power Supplies

200791	LL114039	+	.30	2B	6'	Black	18/2	SPT-2	\$1.95	\$1.79	\$1.59	\$1.39
--------	----------	---	-----	----	----	-------	------	-------	--------	--------	--------	--------

2-Conductor AC Plug Fan Power Cords

1952572	FACS3	+	.40	3A	6'	Black	18/2	SPT-2	\$2.95	\$2.69	\$2.39	\$2.19
1952581	FAC45	+	.40	3B	6'	Black	18/2	SPT-2	2.95	2.69	2.39	2.19

3-Conductor Power Cords with Pigtail (Unshielded) 290 Plug

38009	17237	JVP	.31	4	6'	Gray	18/3	SVT	\$3.79	\$3.39	\$2.95	\$2.79
37997	17236	JVP	.30	4	6'	Black	18/3	SVT	3.79	3.39	2.95	2.79
173810	17405	JVP	.14	4	6'	Gray	18/3	SJT	3.95	3.55	3.19	2.89
159410	17405B	JVP	.37	4	6'	Black	18/3	SJT	3.95	3.55	3.19	2.89
1585514	CPB-FL-08	+	.56	4	8'	Black	18/3	SVT	4.29	3.85	3.49	3.19
38025	17238	JVP	.42	4	8'	Black	18/3	SVT	4.49	3.95	3.55	2.95
339688	17407	JVP	.60	4	8'	Black	18/3	SJT	4.79	4.39	3.79	3.39
102007	17535B	+	.49	4	10'	Black	18/3	SVT	4.95	4.49	3.95	3.49
196286	LL40378	JVP	.80	4	10'	Black	16/3	SJT	6.95	6.25	5.59	4.95
166925	17516	JVP	.41	4	6'7"	Black	14/3	SJT	7.95	7.19	6.49	5.79
100272	17629B	JVP	.88	4	9'	Black	14/3	SJT	8.95	7.95	7.19	6.49

† With crimped terminals (3) †† European standard insulation color code

3-Conductor Power Cord with Pigtail (Shielded) 910 Plug

339995	72WV866SSD	JVP	.49	7A	6'7"	Black	18/3	SVT	\$3.95	\$3.49	\$2.95	\$2.65
--------	------------	-----	-----	----	------	-------	------	-----	--------	--------	--------	--------

3-Conductor Detachable Power Cords (Unshielded) 290B/386A Plugs

2081801	17002A	JVP	.36	5	1'	Black	18/3	SVT	\$2.95	\$2.65	\$2.39	\$1.95
2082425	17000A	JVP	.35	5	3'	Black	18/3	SVT	3.25	2.95	2.59	2.29
38041	17249	JVP	.37	5	6'	Beige	18/3	SVT	3.95	3.59	3.19	2.49
103747	17248	JVP	.34	5	6'	Gray	18/3	SVT	3.95	3.59	3.19	2.49
38050	17250	+	.36	5	6'	Black	18/3	SVT	3.95	3.59	3.25	2.95
132118	17500	JVP	.44	5	6'	Black	18/3	SJT	4.95	4.49	3.95	3.25
117584	17502	JVP	.37	5	7'7"	Gray	18/3	SVT	3.95	3.59	3.25	2.95
2100275	17251B	JVP	.37	5	7'7"	Black	18/3	SVT	3.95	3.49	3.19	2.79
1585637	171096	+	.60	5	8'	Black	18/3	SVT	3.95	3.49	3.19	2.79
171096	17758	+	.60	5	8'	Black	18/3	SJT	4.95	4.49	3.95	3.49
102024	17501V	JVP	.55	5	10'	Black	18/3	SVT	5.95	5.69	5.39	4.95
163361	6952299	JVP	.33	5	14'	Black	18/3	SJT	6.95	6.25	5.59	4.95
340291	17001A	JVP	.31	5	3'	Black	16/3	SJT	3.95	3.59	3.19	2.79
159361	17602	JVP	.52	5	6'	Black	16/3	SJT	6.95	5.95	5.35	4.79
1537230	LL34877	JVP	.72	5	8'	Black	16/3	SJT	7.95	6.95	6.25	5.59
125541	17504	JVP	.72	5	6'7"	Black	14/3	SJT	7.95	7.19	6.49	5.79

3-Conductor Detachable Power Cords (Shielded) 290B/386A Plugs

2082433	77450	JVP	.40	5	6'	Gray	18/3	SVT	\$3.49	\$2.95	\$2.65	\$2.25
213874	176608G	JVP	.40	5	6'	Beige	18/3	SVT	4.25	3.79	3.49	2.95
161761	17742	SLA	.40	5	6'	Black	18/3	SVT	4.49	3.95	3.59	2.95
1537459	LL6415	+	.40	5	9'10"	Beige	18/3	SJT	4.95	4.49	3.75	2.75

3-Conductor Computer Power Supply Extension Cords (150/386A/910 Plugs)

2125317	LL90989	+	.15	6B	1'6"	Black	18/3	SVT	\$2.49	\$2.25	\$1.95	\$1.75
206172	PEC-3	JVP	.22	6A	3'	Black	18/3	SJT	2.95	2.65	2.39	2.19
319804	LR94903	+	.82	6A	6'	Gray	18/3	SVT	2.95	2.75	2.49	2.25
28468	PEC	JVP	.36	6A	6'	Black	18/3	SVT	3.95	3.55	3.19	2.79
420224	10W1-02212	JVP	.53	6A	12'	Black	18/3	SVT	5.95	5.39	4.79	4.25
2125827	LS-14	+	.15	6B	6'	Black	18/3	SVT	1.95	1.75	1.59	1.35

3-Conductor Power Cords with Pigtail (Unshielded) 910 or 386 Plug

340056	17537	JVP	.37	7A	9'10"	Black	18/3	SJT	\$3.95	\$3.49	\$2.95	\$2.75
340099	17539	JVP	.80	7A	9'10"	Black	16/3	SJT	4.95	4.49	3.95	3.49
340072	17521	JVP	.80	7B	9'10"	Black	16/3	SJT	3.95	3.49	2.95	2.75

3-Conductor Right Angle Detachable Power Cords (Unshielded) 290B/910 Plugs

2099999	E88265	JVP	.82	8A	8'	Black	18/3	SVT	\$4.49	\$3.95	\$3.49	\$2.95
117357	8120-6177	JVP	.41	8B	6'	Gray	18/3	SVT	3.95	3.55	3.19	2.79
38077	17250R	JVP	.54	8B	6'	Black	18/3	SVT	3.95	3.55	3.19	2.79
2121519	17569R	JVP	.30	8B	10'	Black	18/3	SJT	4.95	4.49	3.95	3.59
177384	17507	JVP	.28	8B	10'	Black	18/3	SVT	4.95	4.49	3.95	3.49
222958	17510	+	.88	8B	6'7"	Black	14/3	SJT	5.95	5.39	4.79	4.25

3-Conductor Right Angle Detachable Power Cord (Shielded) 290B/910 Plugs

173252	17745	JVP	.16	8B	6'7"	Black	18/3	SVT	\$5.95	\$5.39	\$4.79	\$4.25
--------	-------	-----	-----	----	------	-------	------	-----	--------	--------	--------	--------

3-Conductor Hospital Grade Power Cords (green dot)

2115434	LL39965	+	.75	10	10'	Gray	18/3	SJT	\$9.95	\$8.95	\$7.95	\$6.95
132011	17006G	JVP	.82	10	10'	Gray	16/3	SJT	9.95	8.95	7.95	6.95
115078	17006	JVP	.84	10	10'	Blk	16/3	SJT	10.95	9.95	8.95	7.95
1537563	17510HG	+	.82	9	10'	Gray	14/3	SJT	5.95	5.49	4.95	4.49

3-Conductor Computer Monitor Power Adapter Cord (150/386 Plugs)

177448	MPC1	JVP	.16	11	1'	Black	18/3	SVT	\$2.95	\$2.69	\$2.39	\$2.19
--------	------	-----	-----	----	----	-------	------	-----	--------	--------	--------	--------

3-Conductor Detachable Power Cords (Power Strip Saver) 290B/386 Plugs

208339	P55-BR	JVP	.16	12	1'	Beige	18/3	SVT	\$2.49	\$2.25	\$1.95	\$1.75
199778	PSS-1	JVP	.16	12	1'	Black	18/3	SVT	2.95	2.69	2.39	2.15

3-Conductor Power Cord ("Y" Type Power Strip Saver II) 290B/386 (2) Plugs

208347	GPR-2006	+	.38	13	22'	Black	18/3	SVT	\$6.95	\$6.25	\$5.59	\$4.95
--------	----------	---	-----	----	-----	-------	------	-----	--------	--------	--------	--------

3-Conductor Power Cord ("Y" Twin End) 150/386 (2) Plugs

340566	17268A	JVP	.32	14	4'	Black	18/3	SJT	\$6.95	\$6.25	\$5.59	\$4.95
--------	--------	-----	-----	----	----	-------	------	-----	--------	--------	--------	--------

3-Conductor "Mickey Mouse" Style Power Supply Cords

1953559	MMFLAT	MWL	.40	15	6'	Black	18/3	SPT-2	\$2.95	\$2.65	\$2.39	\$1.95
1951123	MMPC	MWL	.40	15	6'	Black	18/3	SVT	3.95	3.49	2.95	2.49

* Thermoplastic Cord Jacket Type: SPT-2 (Flat): Junior duty; SVT (Round): Light service; SJT (Round): Junior service

* JVP = Jameco ValuePro | MWL = Mean Well | SLA = Sola | + Manufacturer Varies

★ For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

NAME BRANDS	4 LEVELS OF SAVINGS
HOUSE BRANDS	FACTORY OVERRUN
DOLLAR SALE	

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

Power Cords, AC Receptacles, Power Entry & Line Filters

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

JAMECO ValuePro

- 3-conductor detachable power cords
- Excellent resistance to jacket abrasion
- Cord color: black; except 1950702/172195: grey

International Power Cords

- BSI: British Standard Institution
- Cord type: H05VVf
- Voltage rating: 300V

Part No.	Cross Ref. No.	Country	Agency Approvals	Cord Length	Plug Fig.	Conductors	Pricing		
							1	10	100
117911	PCVDE-6B	Europe	All	6 ft.	1/A	3/0.75mm	\$4.95	\$4.49	\$3.95
2081916	GTA3ARA	Europe	All	6 ft.	2/A	3/0.75mm	4.95	4.49	3.95
1950702	BSI1363A	UK	ATSA	6 ft.	3/A	3/1.0mm	4.95	4.49	3.95
174633	21071H5182	UK/Ireland	BSI	8 ft.	3/A	3/1.0mm	6.95	6.25	5.59
172195	8120-6979	Italy	All	6 ft.	4	3/1.0mm	4.95	4.49	3.95



Fig. 1 (Straight)



Fig. 2




Fig. A



Fig. 3 (Right Angle, Fused)



Fig. 4


European Agency Approvals

Germany	VDE	CEC	France	LCIE
Austria	DVE	CVE	Netherlands	KEMA
Belgium	CEBEC	CEC	Norway	NEMKO
Denmark	DEMKO	D	Sweden	SEMKO
Finland	FIMKO	F	Switzerland	SEV

*Web Code: XAQ



EMI Power Entry Filters (IEC Connector), Line Filters & AC Receptacles (IEC 320)

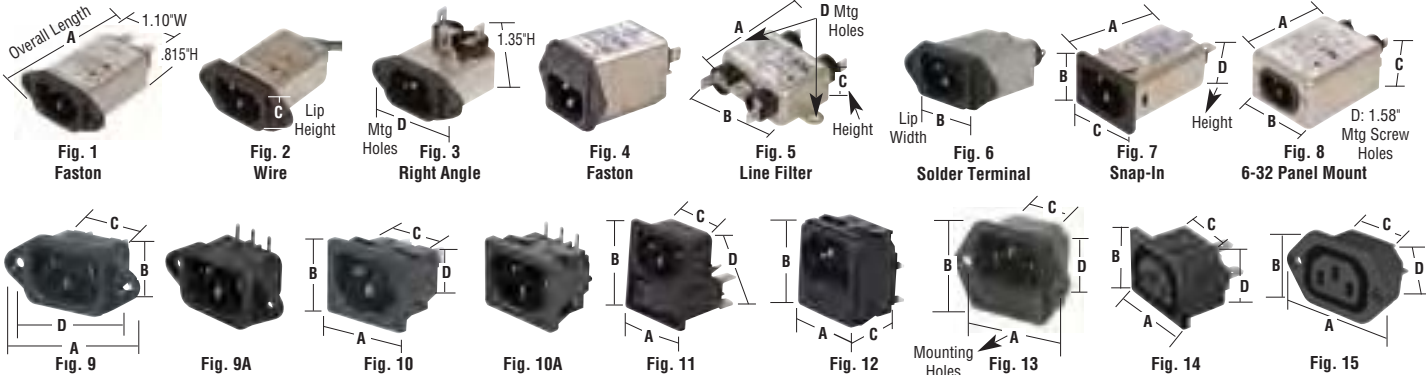

- Rated voltage: 115/250VAC
- Operating frequency: 50/60Hz
- Hipot rating (one minute) line to ground: 2250VDC; line to line: 1450VDC

EMI Power Entry Filter: Maximum leakage current each line to ground: @ 115VAC 60Hz: 0.20mA @ 250VAC 50Hz: 0.40mA

EMI Line Filter: Maximum leakage current each line to ground: @ 115VAC 60Hz: 0.25mA; 1.0mA (10000pF) @ 250VAC 50Hz: 0.45mA; 2.0mA (10000pF)

*Web Code: ACR

Part No.	Mfr.	Product No.	Description	Fig.	Current (A)	Hipot (VDC)	Terminals	Terminal Size	Agency Approvals	Dimension (in.)				Pricing		
										A	B	C	D	1	10	100
1951511	Delta†	01GEEG3E (1ED1)	Power entry filter, straight (screw flanged)	1	1	2250	Faston	0.25"	UL/CSA/VDE	2.20	1.19	0.87	1.58	\$3.49	\$2.95	\$2.49
210913	Delta†	01GEEW3E (1ED8)	Power entry filter, straight (screw flanged)	2	1	2250	4" Wires	Wire	UL/CSA/VDE	1.89	1.19	0.86	1.58	2.95	2.49	1.95
1951529	Delta	01DEEG3V	Power entry filter, rt. angle (screw flanged)	3	1	2250	Faston	0.25"	UL/CSA/VDE	1.64	1.19	0.87	1.58	2.95	2.49	1.95
1172613	Tyco	1EGG1-2R	Pwr entry filter, straight, fused (screw flanged)	4	1	2250	Faston	0.25"	UL/CSA/VDE	1.62	1.29	1.44	1.27	3.95	3.59	3.39
1951545	Delta	01DKAG5	Line filter	5	1	2250	Faston	0.25"	UL/CSA/VDE	2.92	1.98	0.87	2.39	2.95	2.49	1.95
395647	Corcom	2VK1	Line filter	5	2	2250	Faston	0.25"	UL/CSA/VDE	3.00	1.74	0.89	2.39	3.95	3.49	2.95
107326	Delta	03DEEG3B (3EF1F)	Power entry filter, straight (screw flanged)	1	3	2250	Faston	0.25"	UL/CSA/VDE	2.20	1.19	0.87	1.58	3.95	3.49	2.95
667438	ValuePro	YB03A1 (3EF1F)	Power entry filter, straight (screw flanged)	1	3	2250	Faston	0.25"	UL/CSA/VDE	2.23	1.19	0.89	1.58	4.95	4.49	3.95
150616	ValuePro	03AC1R	Power entry filter, straight (screw flanged)	6	3	2250	Solder	0.16"	UL/CSA/VDE	2.05	1.19	0.89	1.58	4.95	4.49	3.95
1951537	Delta†	03GEEW3E-R (3ED8)	Power entry filter, wire (screw flanged)	2	3	2250	4" Wire	Wire	UL/CSA/VDE	1.90	1.19	0.87	1.58	4.95	4.49	3.95
1951553	Delta†	03GENG3E-R	Power entry filter (snap-in flanged)	7	3	2250	Faston	0.25"	UL/CSA/VDE	2.20	0.95	1.22	0.82	3.95	3.59	3.39
1951561	Delta	03DBG5 (3EB1)	Line filter	5	3	2250	Faston	0.25"	UL/CSA/VDE	2.48	1.73	0.76	2.13	3.95	3.59	3.39
1954720	Delta	04BEEG3S	Power entry filter, straight, fused (screw flanged)	1	4	2250	Faston	0.25"	UL/CSA/VDE	2.26	1.19	1.26	1.40	3.95	3.59	3.39
1951570	Delta†	05DRDG3S (5ER7)	Power entry filter, 6-32 threaded panel mount	8	5	2250	Faston	0.25"	UL/CSA/VDE	3.15	1.97	1.28	1.58	4.95	4.49	3.95
667462	ValuePro	YB06T1	Power entry filter, straight (screw flanged)	1	6	2250	Solder	0.25"	UL/CSA/VDE	2.10	1.19	0.89	1.58	4.49	3.95	3.49
1951633	ValuePro†	YB06AIRR	Power entry filter, straight (screw flanged)	1	6	2250	Faston	0.25"	UL/CSA/VDE	2.20	1.19	0.89	1.58	4.95	4.49	3.95
1951588	Delta	YB06DEEG3V	Power entry filter, right angle (screw flanged)	3	6	2250	Faston	0.25"	UL/CSA/VDE	1.64	1.19	0.87	1.58	4.95	4.49	3.95
1951596	Delta†	10GEEG3C	Power entry filter, straight (screw flanged)	1	10	2250	Faston	0.25"	UL/CSA/VDE	2.20	1.19	0.87	1.58	4.95	4.49	3.95
1951609	Delta	10ME3(S)	Power entry filter, right angle (PC mount)	3	10	2250	Solder	0.16"	UL/CSA/VDE	1.64	1.19	0.87	1.58	4.95	4.49	3.95
1951617	Delta	15DEEG3HA(D)	Power entry filter, straight (screw flanged)	1	15	2250	Faston	0.25"	UL/CSA/VDE	2.42	1.19	0.87	1.58	5.95	5.35	4.79
165016	OKAYA††	SUP-J15G-E2	Power entry filter, straight (screw flanged)	6	15	††	Solder	0.16"	UL/CSA/VDE	2.20	1.21	0.89	1.58	5.95	5.35	4.79
147901	ValuePro	701R	AC power inlet, male (screw flanged)	9	15	250	Faston	0.187"	UL/CSA/VDE	1.97	0.76	1.06	1.58	.99	.79	.65
16652	ValuePro	JR101R	AC power inlet, male (screw flanged)	9	15	250	Faston	0.25"	UL/CSA/VDE	1.97	0.76	1.06	1.58	1.09	.89	.69
2114010	Adam Tech	IEC-A-4R	AC pwr inlet, M RA (screw flanged, PC mount)	9A	15	250	Solder	0.071"	UL/CSA/VDE	1.97	0.89	1.06	0.76	.59	.49	.39
147109	Various	42R02	AC power inlet, male (snap-in)	10	15	250	Faston	0.25"	UL/CSA/VDE	1.23	0.95	1.04	0.77	.99	.79	.65
2114028	Adam Tech	IEC-J-4R	AC pwr inlet, M RA (snap-in, PC mount)	10A	15	250	Solder	0.071"	UL/CSA/VDE	1.22	0.95	1.04	0.79	.65	.55	.45
2095525	ValuePro	IEC-GS-1-100	AC pwr inlet, male w/ sw. & fuse folder (snap-in)	11	15	250	Faston	0.187"	UL/CSA/VDE	1.20	1.97	0.77	1.83	2.49	2.25	1.95
117445	ValuePro#	0717R	AC power inlet, male w/ fuse chamber (snap-in)	12	10	250	Faston	0.187"	UL/CSA/VDE	1.18	1.30	1.05	1.20	1.95	1.79	1.59
265528	ValuePro#	WS-044R	AC power inlet, male w/ fuse chamber (screw)	13	10	250	Faston	0.185"	UL/CSA/VDE	1.40	1.28	1.06	1.21	1.49	1.35	1.19
1954640	Various	K2415	AC power inlet, female (snap-in)	14	15	250	Faston	0.187"	UL/CSA/VDE	1.38	0.98	1.26	1.10	1.25	.99	.79
1954658	Various	K2414	AC power inlet, female (screw flanged)	15	15	250	Faston	0.187"	UL/CSA/VDE	1.97	1.14	1.26	0.95	1.75	1.49	1.25

† High Performance; †† Increased filtering; ††† Added bleed resistor; ††† More safety agencies †† Hipot: 2000Vrms # Includes spare fuse holder – fuse type 5mm x 20mm (250V)

Continued on next page

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

EMI Power Entry Filters (IEC Connector), Line Filters & AC Receptacles (IEC 320) Continued




Fig. 16




Fig. 17




Fig. 18




Fig. 19




Fig. 20




Fig. 21




Fig. 22



Fig. 23

* Web Code: ACR

Part No.	Mfr.	Mfr. Part No.	Description	Fig.	Current (A)	Hipot (VDC)	Terminals	Terminal Size	Agency Approvals	Dimension (in.)				Pricing		
										A	B	C	D	1	10	100
2114052	Adam Tech	IEC-NA-4-	AC pwr inlet, mini, M RA (snap-in, PC mount)	16	15	250	Solder	0.098"	UL/CSA/VDE	1.102	0.63	1.748	0.492	\$.55	\$.45	\$.39
2114061	Adam Tech	IEC-ND-4-	AC pwr inlet, mini, M RA (scrw flngd, panel mnt)	17	15	250	Solder	0.098"	UL/CSA/VDE	1.378	0.571	0.811	0.401	2.49	2.29	1.95
2114079	Adam Tech	IEC-NH-4-	AC pwr inlet, mini, M RA (snap-in, PC mount)	18	15	250	Solder	0.059"	UL/CSA/VDE	0.886	0.689	0.787	0.61	.65	.55	.49
2114087	Adam Tech	IEC-NA-A-4-	AC pwr inlet, mini, M RA (scrw flngd, panel mnt)	19	15	250	Solder	0.071"	UL/CSA/VDE	1.543	0.717	0.787	0.61	.69	.59	.55
2114095	Adam Tech	NEMA-5-2-	AC pwr outlet, NEMA receptacles (snap-in)	20	15	250	Fork	—	UL/CSA/VDE	1.063	1.063	0.70	0.866	.75	.65	.55
2114124	Adam Tech	PLF-6DZ2KR-	Pwr entry filter, strght, fuse & sw. (scrw flngd)	21	15	250	Faston	0.250"	UL/CSA/VDE	1.968	2.559	2.394	1.154	9.95	8.95	7.95
2114108	Adam Tech	PLF-3PC4-	Line filter, plastic case (PC mount)	22	15	250	Solder	0.039"	UL/CSA/VDE	1.93	1.38	1.06	—	6.95	5.95	5.25
2114116	Adam Tech	PLF-3PC-	Line filter, metal case (PC mount)	23	15	250	Solder	0.039"	UL/CSA/VDE	0.984	0.984	0.787	—	5.95	5.49	4.95

For 14-16 AWG wires

Open-Frame Linear AC-to-DC Power Supplies

- Load regulation: $\pm 0.5\%$
- Line regulation: $\pm 0.5\%$
- UL/CE/TUV certified

* Web Code: MSP



2077503

Part No.	Manufacturer	Mfr. Part No.	Output		Input (VAC @ Hz) *	Rip & Noise (mV p-p)	Size (L" x W" x H")	Pricing		
			Voltage @ Current (min-max)	Power				1	5	25
2077503	Astec	ACV12N5	+12V @ 5.1A	61W	100-240 @ 47-63Hz	3.0	7.0 x 4.87 x 2.75	\$24.95	\$22.49	\$19.95
2077511	Astec	ACV15N4.5	+15V @ 4.5A	67.5W	100-240 @ 47-63Hz	3.0	7.0 x 4.87 x 2.75	24.95	22.49	19.95
2080454	Power One	HBB15-1.5A	+12V to 15V @ 1.7A/1.5A -12V to 15V @ 1.7A/1.5A	192W	100 or 240VAC @ 47-63Hz	5.0	7.0 x 4.88 x 2.50	59.95	53.95	47.95

* Jumperable between 100VAC to 240VAC

Open-Frame Medical Switching AC-to-DC Power Supplies



MPS-65

- Universal AC input/full range
- Soft-start circuit, limiting AC surge current
- Short-circuit, overload and overvoltage protection
- Load regulation: $\pm 2.0\%$
- Volt. adjustment: 10%
- 100% full-load burn-in test
- Leakage current: 0.3mA @ 240V
- Isolation volt.: 4000VAC
- Working temp.: -10°C to +60°C
- Mating connector: P/N 104732, pg 77
- 2.9 watts/in³ max.



Performance at Value Prices

* Web Code: JBK

Part No.	Manufacturer	Mfr. Part No.	Output		Input (VAC @ Hz)	Ripple & Noise (mV p-p) *	Certification	Pricing		
			Voltage @ Current (min-max)	Power				1	5	25
221058	Mean Well	MPS-45-7.5	+7.5V @ 0-5.4A	40.5W	90-264 @ 47-440	100	UL/CUL/TUV/CE	\$23.95	\$21.95	\$19.95
221146	Mean Well	MPS-65-7.5	+7.5V @ 0-8A	60.0W	90-264 @ 47-440	100	UL/CUL/TUV/CE	24.95	23.49	21.95
221066	Mean Well	MPS-45-12	+12V @ 0-3.7A	44.4W	90-264 @ 47-440	100	UL/CUL/TUV/CE	21.95	19.95	17.95
221154	Mean Well	MPS-65-12	+12V @ 0-5.2A	62.4W	90-264 @ 47-440	100	UL/CUL/TUV/CE	26.49	24.49	22.49
221162	Mean Well	MPS-65-13.5	+13.5V @ 0-4.7A	63.5W	90-264 @ 47-440	100	UL/CUL/TUV/CE	23.95	21.95	19.95
221189	Mean Well	MPS-65-24	+24V @ 0-2.7A	64.8W	90-264 @ 47-440	100	UL/CUL/TUV/CE	26.49	24.49	22.49
2081721	EOS	LFMVL780-4000	+5V @ 10A, +12V @ 2A, -5V @ .8A, -12V @ .8A	80.0W	90-240 @ 47-63	80	UL/CE	44.95	39.95	35.95

* Primary Output

Open-Frame Ultraminiature Switching AC-to-DC Power Supplies



OFM-0203

- 100% full-load burn-in test
- No load consumption
- Ultraminiature size and lightweight
- Short-circuit, overload, overvoltage, overtemperature protection
- Three-year warranty; except P/Ns 300433/300530: Two-year warranty
- Universal AC input/full range
- UL/CUL/TUV/CE



Performance at Value Prices

* Web Code: CCQ



NFM-05

Part No.	Manufacturer	Mfr. Part No.	Output		Size (L" x W" x H")	Load Regulation	Line Regulation	Ripple & Noise (mV p-p) *	Pricing		
			Voltage @ Current (min-max)	Power					1	10	50
694971	Mean Well	NFM-05-5	+5V @ 0-1A	5W	2.3 x 1.8 x 0.8	$\pm 1.5\%$	$\pm 1.0\%$	80	\$19.95	\$17.95	\$15.95
300281	Mean Well	OFM-5001	+5V @ 0-1A	5W	2.3 x 1.8 x 0.8	$\pm 2.0\%$	$\pm 0.5\%$	50	16.95	14.95	13.95
300433	Astrodyne	OFM-0101	+5V @ 0-2A	10W	2.6 x 1.8 x 0.8	$\pm 1.0\%$	$\pm 1.0\%$	80	17.95	15.95	13.95
695199	Mean Well	NFM-20-5	+5V @ 0-4.4A	22W	3.0 x 2.0 x 0.8	$\pm 1.0\%$	$\pm 1.5\%$	80	24.95	22.95	20.95
694989	Mean Well	NFM-05-12	+12V @ 0-0.42A	5.04W	2.3 x 1.8 x 0.8	$\pm 0.5\%$	$\pm 0.5\%$	150	19.95	17.95	15.95
695156	Mean Well	NFM-15-12	+12V @ 0-1.25A	15W	2.8 x 1.9 x 0.9	$\pm 0.5\%$	$\pm 0.5\%$	150	24.95	22.49	19.95
300484	Mean Well	OFM-1502	+12V @ 0-1.25A	15W	2.8 x 1.9 x 0.8	$\pm 1.0\%$	$\pm 0.3\%$	150	23.95	21.95	19.95
300417	Mean Well	OFM-5003	+15V @ 0-0.33A	5W	2.3 x 1.8 x 0.8	$\pm 1.0\%$	$\pm 0.3\%$	150	14.95	12.95	11.95
300530	Mean Well	OFM-0203	+15V @ 0-1.4A	20W	3.5 x 2.0 x 0.8	$\pm 1.0\%$	$\pm 0.3\%$	150	21.95	19.95	18.49

* Primary Output

Open-Frame Switching Power Supplies continued on pages 136 & 137

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Open-Frame Switching AC-to-DC Power Supplies

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

Open-Frame Switching AC-to-DC Power Supplies

*Web Code: OSP

- Universal AC input/full range
- Short-circuit, overload and overvoltage protection
- Two-year warranty

PFC Model Additional Features:

- Built-in active Power Factor Protection function, power factor >0.93
- Three-year warranty

For complete specifications visit www.Jameco.com



PPS-125



USP-225

Part No.	Manufacturer	Mfr. Part No.	Output		Input (VAC @ Hz)	Size (L"xW"xH")	Mounting Holes (L"xW"xDia.")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	PFC	Certification	Pricing		
			Voltage @ Current (min-max)	Power									1	5	25
Single Output															
218991	Artesyn	NLP150L-96S3	+3.3V @ 1-22A	72.6W	90-264 @ 47-63	6.8x3.8x1.3	6.5x3.5x0.2	50	2.0	2.0	—	UL/CSA/VDE/CE	\$69.95	\$64.95	\$59.95
694452	Mean Well	USP-225-3.3	+3.3V @ 0-40A	132W	90-264 @ 47-63	8.0x4.0x1.5	see datasheet†	100	1.0	0.5	✓	UL/CUL/TUV/CE/CB	74.95	69.95	64.95
229042	Phihong	PSA15LN3-050	+5V @ 0-3A	15W	90-264 @ 47-63	4.3x1.6x0.9	4.0x1.3x0.2	50	2.0	1.0	—	UL/CUL/TUV/CE	22.95	20.95	18.95
2081836	CUI Inc.	VOF-25-5	+5V @ 4.4A	25W	85-264 @ 47-63	3.5x2.0x0.9	3.2x1.7x0.2	50	5.0	5.0	—	UL/CUL/TUV/CE/FCC	11.95	10.49	9.49
212354	Mean Well	PS-25-5	+5V @ 0-5A	25W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	80	2.0	0.5	—	UL/CUL/TUV/CE	13.95	12.49	10.95
210841	Power-One	MAP42-100S	+5V @ 0-8A	40W	120-240 @ 50-60	5.0x3.0x1.3	4.6x2.6x0.2	50	1.0	0.2	—	UL/CSA/TUV/CE	12.95	11.49	9.95
217332	Mean Well	PS-45-5	+5V @ 0-8A	40W	90-264 @ 47-440	5.0x3.0x1.1	4.6x2.6x0.2	100	3.0	1.0	—	UL/CUL/TUV/CE	15.49	13.95	12.49
201938	Mean Well	PS-65-5	+5V @ 0-12A	60W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	100	1.0	4.0	—	UL/CUL/TUV/CE	16.95	14.95	13.49
1586331	Phihong	PSA120-050-R	+5V @ 0-15A	75W	40-264 @ 47-63	5.0x3.0x1.2	4.5x2.5x0.2	100	20.0	1.0	—	UL/CUL/TUV/CE	39.95	36.95	33.95
218915	Artesyn	NLP110-960S	+5V @ 0.5-15A	75W	90-264 @ 47-63	6.5x3.0x1.3	6.1x2.6x0.2	50	2.0	2.0	—	UL/CUL/CSA/VDE	42.95	39.95	36.95
1954439	Mean Well	USP-500-5	+5V @ 0-80A	400W	90-264 @ 47-63	10.0x5.0x1.6	see datasheet†	80	2.0	0.5	✓	UL/CUL/TUV/CE	199.95	189.95	179.95
219011	Artesyn	NLP150L-96S5	+5.1V @ 1-22A	112.2W	90-264 @ 47-63	6.8x3.8x1.3	6.5x3.5x0.2	50	2.0	2.0	—	UL/CSA/VDE/CE	49.95	44.95	39.95
392826	Mean Well	PS-25-7.5	+7.5V @ 0-3.3A	24.8W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	80	2.0	0.5	—	UL/CUL/TUV/CE	13.95	12.49	10.95
2105666	Mean Well	PS-15-12	+12V @ 0-1.25A	15W	85-264 @ 47-63	3.7x1.9x1.0	3.4x1.9x0.14	150	0.5	0.5	—	CE/CB	10.95	9.95	8.95
229060	Phihong	PSA15LN3-120	+12V @ 0-1.25A	15W	90-264 @ 47-63	4.3x1.6x0.9	4.0x1.3x0.2	120	2.0	1.0	—	UL/CUL/TUV/CE	22.95	20.95	18.95
148604	Mean Well	PS-25-12	+12V @ 0-2.1A	25.2W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	100	2.0	0.3	—	UL/CUL/TUV/CE	13.95	12.49	10.95
213728	Mean Well	PS-45-12	+12V @ 0-3.7A	44.4W	90-264 @ 47-440	5.0x3.0x1.1	4.6x2.6x0.2	100	2.0	1.0	—	UL/CUL/TUV/CE	15.49	13.95	12.49
148639	Mean Well	PS-65-12	+12V @ 0-5.2A	62.4W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.15	100	2.0	1.0	—	UL/CUL/TUV/CE	16.95	14.95	13.49
2099981	ITE	SBU60-105	+12V @ 5.25A	63W	90-264 @ 47-63	5.0x3.0x1.1	4.6x2.6x0.15	120	3.0	0.5	—	UL/CUL/CE	13.95	11.95	9.95
173472	Mean Well	LPS-100-12	+12V @ 0-8.4A	100.8W	88-264 @ 47-63	8.7x2.4x1.3	8.4x2.1x0.14	100	1.5	0.5	✓	UL/CUL/TUV/CE	41.95	38.95	35.95
237024	Lite-On	PA-1101-1	+12V @ 2-8.5A	102W	85-264 @ 47-63	6.0x4.0x1.3	—	1200	10.0	1.0	—	UL/CUL/TUV/CE	34.95	31.95	28.95
2079373	PowerLD	PD-125-12	+12V @ 0-10.5A	126W	90-264 @ 47-63	5.0x3.0x1.2	4.6x2.6x0.14	100	2.0	0.5	—	UL/CUL/CE	49.95	44.95	39.95
374089	Mean Well	PPS-125-12	+12V @ 0-10.5A	126W	90-264 @ 47-63	5.0x3.0x1.4	4.6x2.6x0.14	100	1.0	0.5	✓	UL/CUL/TUV/CE	56.95	52.95	49.95
213681	Mean Well	LPP-150-12	+12V @ 0-12.5A	150W	85-264 @ 47-63	8.7x2.4x1.6	8.3x2.6x0.15	100	1.0	0.5	✓	UL/CUL/TUV/CE	46.95	42.95	38.95
668713	Mean Well	PPS-200-12	+12V @ 0-16.6A	199.2W	90-264 @ 47-63	5.0x3.0x1.4	4.6x2.6x0.14	100	1.0	0.5	✓	UL/CUL/TUV/CE	79.95	71.95	63.95
374380	Mean Well	PS-65-13.5	+13.5V @ 0-5.4A	63.5W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.15	100	2.0	1.0	—	UL/CUL/TUV/CE	16.95	14.95	13.49
216769	Mean Well	PS-25-15	+15V @ 0-1.7A	25.5W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	100	2.0	0.3	—	UL/CUL/TUV/CE	13.95	12.49	10.95
1919019	Mean Well	PS-35-15	+15V @ 0-2.4A	36W	90-264 @ 47-440	4.0x2.0x0.9	3.8x1.8x0.1	150	0.5	0.5	—	UL/CUL/TUV/CE/CB	15.25	13.75	12.25
374353	Mean Well	PS-45-15	+15V @ 0-3.5A	45W	90-264 @ 47-440	5.0x3.0x1.1	4.6x2.6x0.2	100	3.0	1.0	—	UL/CUL/TUV/CE	15.49	13.95	12.49
216751	Mean Well	PS-65-15	+15V @ 0-4.2A	63W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	100	2.0	1.0	—	UL/CUL/TUV/CE	16.95	14.95	13.49
374097	Mean Well	PPS-125-15	+15V @ 0-8.4A	126W	90-264 @ 47-63	5.0x2.4x1.4	4.6x2.6x0.14	100	1.0	0.5	✓	UL/CUL/TUV/CE	56.95	52.95	49.95
668721	Mean Well	PPS-200-15	+15V @ 0-13.3A	199.5W	90-264 @ 47-63	5.0x3.0x1.4	4.6x2.6x0.14	100	1.0	0.5	✓	UL/CUL/TUV/CE	79.95	71.95	63.95
212346	Mean Well	PS-25-24	+24V @ 0-1A	24W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	240	2.0	0.2	—	UL/CUL/TUV/CE	13.95	12.49	10.95
1919035	Mean Well	PS-35-24	+24V @ 0-1.5A	36W	90-264 @ 47-440	4.0x2.0x0.9	3.8x1.8x0.1	200	0.5	0.5	—	UL/CUL/TUV/CE/CB	15.25	13.75	12.25
213720	Mean Well	PS-45-24	+24V @ 0-1.9A	45.6W	90-264 @ 47-440	5.0x3.0x1.1	4.6x2.6x0.2	100	2.0	1.0	—	UL/CUL/TUV/CE	15.49	13.95	12.49
148647	Mean Well	PS-65-24	+24V @ 0-2.7A	64.8W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	100	2.0	1.0	—	UL/CUL/TUV/CE	16.95	14.95	13.49
244727	Mean Well	LPS-75-24	+24V @ 0-3.5A	76.8W	90-264 @ 47-63	8.7x2.2x1.2	8.4x1.8x0.2	120	1.0	1.0	✓	UL/CUL/TUV/CE	24.95	22.95	20.95
173463	Mean Well	LPS-100-24	+24V @ 0-4.2A	100.8W	88-264 @ 47-63	8.7x2.4x1.3	8.4x2.1x0.1	150	0.5	0.5	✓	UL/CUL/TUV/CE	41.95	38.95	35.95
301429	Mean Well	PPS-125-24	+24V @ 0-5.2A	124.8W	90-264 @ 47-63	5.0x3.0x1.4	4.6x2.6x0.1	150	1.0	0.5	✓	UL/CUL/TUV/CE	56.95	52.95	49.95
213672	Mean Well	LPP-150-24	+24V @ 0-6.3A	150W	85-264 @ 47-63	8.7x2.4x1.6	8.3x2.6x0.2	150	0.5	0.5	✓	UL/CUL/TUV/CE	46.95	42.95	38.95
668730	Mean Well	PPS-200-24	+24V @ 0-8.3A	199.2W	90-264 @ 47-63	5.0x3.0x1.4	3.7x7.8x0.14	150	1.0	0.5	✓	UL/CUL/TUV/CE	79.95	71.95	63.95
694495	Mean Well	USP-225-24	+24V @ 0-9.4A	225.6W	90-264 @ 47-63	8.0x4.0x1.5	see datasheet†	150	1.0	0.5	✓	UL/CUL/TUV/CE/CB	74.95	69.95	64.95
201946	Mean Well	PS-65-27	+27V @ 0-2.4A	64.8W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	100	2.0	1.0	—	UL/CUL/TUV/CE	16.95	14.95	13.49
236882	Mean Well	LPP-100-27	+27V @ 0-3.8A	102.6W	88-264 @ 47-63	8.7x2.4x1.3	8.4x2.1x0.1	150	0.5	0.5	✓	UL/CUL/TUV/CE	39.95	36.95	33.95
201954	Mean Well	PS-65-48	+48V @ 0-1.35A	64.8W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	100	2.0	1.0	—	UL/CUL/TUV/CE	16.95	14.95	13.49
216710	Mean Well	LPS-100-48	+48V @ 0-2.1A	100.8W	88-264 @ 47-63	8.7x2.4x1.3	8.4x2.1x0.1	200	0.5	0.5	✓	UL/CUL/TUV/CE	38.95	35.95	32.95
2120348	Cosel	LDA150W-48	+48V @ 3.0A	144W	85-264 @ 47-440	8.7x2.9x1.3	8.3x2.5x0.1	400	0.5	0.04	—	UL/CSA/TUV/CE	19.95	17.95	15.95
216646	Mean Well	LPP-150-48	+48V @ 0-3.2A	153.6W	85-264 @ 47-63	8.7x2.4x1.6	8.3x2.6x0.2	250	0.5	0.5	✓	UL/CUL/TUV/CE	46.95	42.95	38.95
694508	Mean Well	USP-225-48	+48V @ 0-4.7A	225.6W	90-264 @ 47-63	8.0x4.0x1.5	see datasheet†	250	1.0	0.5	✓	UL/CUL/TUV/CE/CB	74.95	69.95	64.95
1954463	Mean Well	USP-500-48	+48V @ 10.5A	504W	90-264 @ 47-63	10.0x5.0x1.6	see datasheet†	150	1.0	0.5	✓	UL/CUL/TUV/CE	199.95	189.95	179.95

* Primary Output † Multiple sets of mounting holes, see datasheet for dimensions

More Open-Frame Switching Power Supplies on pages 135 & 137

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

Open-Frame & Enclosed Switching AC-to-DC Power Supplies

Open-Frame Switching AC-to-DC Power Supplies (Continued)

* Web Code: OSP

- Universal AC input/full range
- Short-circuit, overload and overvoltage protection
- Two-year warranty

For complete specifications visit www.Jameco.com



PT-65

Part No.	Manufacturer	Mfr. Part No.	Output		Input (VAC @ Hz)	Size (L"xW"xH")	Mounting Holes (L"xW"xDia.")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	PFC	Certification	Pricing		
			Voltage @ Current (min-max)	Power									1	5	25
Double Output															
171731	Delta	DPS-60MPB	+3.3V @ 0.8-8A; +5V @ 1-9A	65W	90-270 @ 47-63	5.8x3.3x1.4	5.1x3.74x0.1	50	2.0	2.0	—	UL/CUL/TUV	\$8.95	\$7.95	\$6.95
212312	Mean Well	PD-2505	+5V @ 0.1-3A; -5V @ 0.1-2.5A	25W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.08x0.1	50	4.0	1.0	—	UL/CUL/TUV/CE	19.95	18.49	16.95
212338	Mean Well	PD-25A	+5V @ 0.2-2.5A; +12V @ 0.1-1.5A	25W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.08x0.1	50	1.0	0.5	—	UL/CUL/TUV/CE	16.95	15.95	14.95
212330	Mean Well	PD-25B	+5V @ 0.2-2A; +24V @ 0.1-1A	25.2W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	50	1.0	0.5	—	UL/CUL/TUV/CE	16.95	15.95	14.95
194862	Mean Well	PD-45A	+5V @ 0.4-3.2A; +12V @ 0.2-2	40W	90-264 @ 47-440	5.0x3.0x1.1	4.6x2.6x0.2	50	3.0	1.0	—	UL/CUL/TUV/CE	17.95	16.95	15.95
194871	Mean Well	PD-45B	+5V @ 0.4-3.2A; +24V @ 0.2-1.2A	44.8W	90-264 @ 47-440	5.0x3.0x1.1	4.6x2.6x0.2	50	3.0	1.0	—	UL/CUL/TUV/CE	17.95	16.95	15.95
194889	Mean Well	PD-65A	+5V @ 0.4-7A; +12V @ 0.2-3.2A	61.1W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	50	3.0	1.0	—	UL/CUL/TUV/CE	19.95	18.95	17.95
692377	Autec	UPS65-1002	+5V @ 0.5-3.5A; +12V @ 0.1-4A	65W	90-260 @ 47-63	6.0x3.5x1.5	4.8x3.2x0.2	50	2.0	0.5	—	UL/CSA/TUV	19.95	17.95	15.95
194897	Mean Well	PD-65B	+5V @ 0.4-3.5A; +24V @ 0.2-2A	65.5W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	50	3.0	1.0	—	UL/CUL/TUV/CE	19.95	18.95	17.95
375056	Mean Well	PD-110B	+5V @ 0.5-5A; +24V @ 0.5-3.5A	109W	100-264 @ 47-63	7.0X4.3X1.8	6.5X3.8X0.1	100	1.0	1.0	—	UL/CUL/TUV/CE	43.95	39.95	36.95
148690	Mean Well	PD-2512	+12V @ 0.1-1.2A; -12V @ 0.1-1A	24W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	50	3.0	0.5	—	UL/CUL/TUV/CE	15.95	14.95	13.95
2100857	Mean Well	PD-25-15	+15V @ 1A, -5V @ 1A	25W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	50	3.0	0.5	—	EN/TUV/UL	19.95	17.95	16.49
Triple Output															
230536	Phihong	PSA25L-301	+5V @ 0.2-2A; +12V @ 0.1-1A; -12V @ 0-0.3A	25W	90-264 @ 47-63	4.3x1.6x0.9	3.7x2.1x0.1	50	2.0	1.0	—	UL/CUL/TUV/CE	\$26.95	\$24.95	\$22.95
2081617	Artesyn	NFN40-7607	+5V @ 3A; +12V @ 2A; -5V @ 0.35A	40W	85-264 @ 47-440	5.0x3.0x1.2	4.6x2.6x0.15	50	2.0	1.0	—	UL/CSA/TUV	21.95	19.95	17.95
229122	Phihong	PSA4531	+5V @ 0-4A; +12V @ 0-1.5A; -12V @ 0-0.5A	44W	90-264 @ 47-63	5.0x3.0x1.2	4.6x2.6x0.2	50	2.0	1.0	—	UL/CSA/TUV/CE	36.95	33.95	30.49
88402	Mean Well	PT-45B	+5V @ 0.4-3A; +12V @ 0.2-2A; -12V @ 0-0.3A	45W	90-264 @ 47-440	5.0x3.0x1.1	4.6x2.6x0.2	50	3.0	1.0	—	UL/CUL/TUV/CE	19.95	18.49	16.95
229140	Phihong	PSA4534	+5V @ 0-4A; +15V @ 0-1.2A; -15V @ 0-0.5A	45.5W	90-264 @ 47-63	5.0x3.0x1.2	4.6x2.6x0.16	50	2.0	2.0	—	UL/CSA/TUV/CE	34.95	31.95	28.95
216734	Mean Well	PT-65B	+5V @ 0.4-5.5A; +12V @ 0.2-2.5A; -12V @ 0-0.5A	63.5W	90-264 @ 47-440	5.0x3.0x1.7	4.6x2.6x0.2	50	3.0	1.0	—	UL/CUL/TUV/CE	22.95	20.95	19.49
216726	Mean Well	PT-65C	+5V @ 0.4-5.5A; +15V @ 0.2-2A; -15V @ 0-0.5A	65W	90-264 @ 47-440	5.0x3.0x1.7	4.6x2.6x0.2	50	3.0	1.0	—	UL/CUL/TUV/CE	22.95	20.95	19.49
215707	Mean Well	PT-65D	+5V @ 0.5-4A; +12V @ 0.2-2A; +24V @ 0.2-1A	65W	90-264 @ 47-440	5.0x3.0x1.7	4.6x2.6x0.2	50	2.0	1.0	—	UL/CUL/TUV/CE	22.95	20.95	19.49
301487	Mean Well	PPT-125B	+5V @ 1-14.4A; +12V @ 0.3-3.8A; -12V @ 0.05-0.63A	99.5W	90-264 @ 47-63	5.0x3.0x1.4	4.6x2.6x0.1	100	3.0	0.5	✓	UL/CUL/TUV/CE	56.95	53.95	51.95
301495	Mean Well	PPT-125C	+5V @ 1-13.8A; +15V @ 0.25-3.1A; -15V @ 0.05-0.63A	125.1W	90-264 @ 47-63	5.0x3.0x1.4	4.6x2.6x0.2	100	3.0	0.5	✓	UL/CUL/TUV/CE	56.95	53.95	51.95
Quad Output															
673934	Martek Power	PVI-50-46BUB	+5V @ 6.5A; +3.3V @ 2.5A; +12V @ 0.8A; -12V @ 0.5A	57W	100-240 @ 50-60	8.1x3.2x1.5	7.6x2.6x0.15	50	2.0	2.0	—	UL/CUL/CSA/TUV/CE	\$34.95	\$31.95	\$28.95
2081721	EOS**	LFMVL80-4000	+5V @ 10A; +12V @ 2A; -5V @ 0.8A; -12V @ 0.8A	80W	90-240 @ 47-63	3.0x5.0x1.0	4.55x2.55	80	1.0	1.0	—	UL/CE	44.95	39.95	35.95
217277	Mean Well	PPQ-100B	+5V @ 2-10A; +12V @ 0.3-3.4A; -5V @ 0-0.6A; -12V @ 0-0.6A	101W	90-264 @ 47-63	7.0x4.3x1.6	6.5x3.8X0.2	100	2.0	1.0	✓	UL/CUL/TUV/CE	26.95	24.95	22.95
645298	Mean Well	PQ-100DTR	+5V @ 5A; +12V @ 2A; -12V @ 2A; +24V @ 2A	103W	100-264 @ 47-63	7.0x4.3x1.8	6.5x3.8x0.2	80	1.0	1.0	—	—	36.95	32.95	28.95

* Primary Output

** Medical rated

Enclosed Switching AC-to-DC Power Supplies

Specs & images on next page

* Web Code: EPS

Part No.	Manufacturer	Mfr. Part No.	Output		Size (L"xW"xH")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	Additional Info pg 138 ↑	Certification	Pricing		
			Voltage @ Current (min-max)	Power							1	5	25
Single Output													
693193	Mean Well🔗	RS-25-3.3	+3.3V @ 0-6A	19.8W	3.0x2.0x1.1	80	2.0	0.5	1	UL/CUL/TUV/CE/CB	\$18.49	\$16.95	\$15.95
693329	Mean Well🔗	RS-150-3.3	+3.3V @ 0-30A	99W	7.8x3.9x1.5	80	2.0	0.5	1	UL/CUL/TUV/CE/CB	37.95	34.95	31.95
201903	Mean Well🔗	SP-150-3.3-R	+3.3V @ 0-30A	99W	7.0x3.9x2.0	100	1.0	0.5	3	UL/CUL/TUV/CE/CB/PFC	56.95	49.95	44.95
693636	Mean Well🔗	SP-480-3.3	+3.3V @ 0-85A	280.5W	10.9x5.0x1.7	80	1.0	0.5	3	UL/CUL/TUV/CE/CB	144.95	134.95	124.95
692422	Volgen	SX15U-05S	+5V @ 0-3A	15W	3.3x2.7x1.3	100	0.8	0.8	—	UL/CSA	14.95	13.49	11.95
689848	Metapo	1M150C05-1M	+5V @ 0-3A	15W	3.9x3.8x1.4	100	0.5	1.0	—	UL/CUL/TUV/CE	13.95	11.95	10.49
1919043	Mean Well🔗	RS-15-5	+5V @ 0-3A	15W	2.5x2.0x1.1	80	1.5	0.5	1	UL/CUL/TUV/CE/CB	14.95	13.95	12.95
323282	Mean Well🔗	RS-25-5	+5V @ 0-5A	25W	3.1x2.0x1.1	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	17.49	15.49	13.49
123247	Mean Well🔗	S-25-5	+5V @ 0-5A	25W	3.9x3.8x1.4	50	1.0	0.5	2	UL/TUV/CE	18.49	17.49	16.49
323329	Mean Well🔗	RS-35-5	+5V @ 0-7A	35W	3.9x3.2x1.4	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	18.95	16.95	14.95
689805	Metapo	1M041C05-1M	+5V @ 0-8A	40W	4.8x3.8x1.5	75	—	—	—	UL/CUL/TUV/CE	16.95	14.95	12.95
123290	Mean Well🔗	S-40-5	+5V @ 0-8A	40W	5.1x3.9x1.5	75	1.0	0.5	2	UL/CUL/TUV/CE/CB	21.49	19.95	18.95

* Primary Output

↑ Additional info on next page

More Enclosed Switching Power Supplies continued on pages 138-142

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Enclosed Switching AC-to-DC Power Supplies



4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

Enclosed Switching AC-to-DC Power Supplies (Continued)

* Web Code: EPS

- 100% full-load burn-in test For complete specifications visit www.Jameco.com
- † Additional Info:
- 1 G3 Series:** Miniature size, high reliability, suitable for critical applications • 88-264VAC @47-63Hz • 5G vibration
- 70°C operation • Withstand 300VAC surge input for 5 sec. • Short-circuit/overload/overvoltage protection • Three-year warranty
- 2 G2 Series:** Without CE certification for models more than 200W (except for S-240) • 85-264VAC @47-63Hz
- Universal AC input (25-60W), Switch selectable AC input (100-150W), AC input range auto-sensing (240W) • Two-year warranty
- 3 PFC Series:** Built-in active Power Factor Correction function • Power factor >0.93 • 88-264VAC @47-63Hz
- Universal AC input • Three-year warranty
- 4 Parallel Series:** Built-in remote sense, remote On/Off control & Parallel functions • 115V & 220V versions @ 47-63Hz
- Short-circuit/overvoltage/overload/overtemperature protection
- 5 Parallel Series with PFC:** Same as parallel series with Power Factor Correction
- 6 G5 Series:** Built-in active PFC function • 1U low profile 38mm
- High efficiency up to 89% • Withstand 300VAC surge input for 5 sec. • 85-264VAC @ 47-63Hz
- Five-year warranty



			Output			Ripple & Noise	Load Reg.	Line Reg.	Additional Info		Pricing		
Part No.	Manufacturer	Mfr. Part No.	Voltage @ Current (min-max)	Power	Size (L"xW"xH")	(mV p-p)*	(±%)*	(±%)*	(above)†	Certification	1	5	25
Single Output (Continued)													
689784	Metapo	1M051C05-0M	+5V @ 0-10A	50W	6.0x3.7x1.5	100	—	—	—	UL/CUL	\$17.95	\$15.95	\$14.49
323388	Mean Well	RS-50-5	+5V @ 0-10A	50W	3.9x3.8x1.4	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	23.95	21.95	19.95
2079390	PowerLD	PD-60-5	+5V @ 0-10A	50W	5.1x3.9x1.5	50	2.0	0.5	—	UL/CUL/CE	29.95	26.95	23.95
689768	Potrans	FS-06005-0M	+5V @ 0-12A	60W	5.1x3.9x1.5	120	—	—	—	UL/CUL/CE	18.95	16.95	14.95
123327	Mean Well	S-60-5	+5V @ 0-12A	60W	6.3x3.8x1.5	120	1.0	0.5	2	UL/CUL/TUV/CE/CB	23.49	21.95	20.95
194830	Mean Well	SP-75-5	+5V @ 0-15A	75W	7.0x3.9x1.3	80	1.0	0.5	3	UL/CUL/TUV/CE/CB	42.95	37.49	32.95
323708	Mean Well	RS-100-5	+5V @ 0-16A	80W	6.3x3.8x1.5	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	36.95	32.95	28.95
201962	Mean Well	S-100F-5	+5V @ 0-20A	100W	7.8x3.9x1.5	100	1.0	0.5	2	UL/CUL/TUV/CE/CB	28.95	26.95	24.95
194791	Mean Well	SP-100-5	+5V @ 0-20A	100W	7.0x3.9x1.8	100	1.0	0.5	3	UL/CUL/TUV/CE/CB/PFC	49.95	46.95	43.95
323821	Mean Well	RS-150-5	+5V @ 0-26A	130W	7.8x3.9x1.5	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	39.95	36.95	33.95
123394	Mean Well	S-150-5	+5V @ 0-30A	150W	7.0x4.3x2.0	150	0.5	0.5	2	UL/CUL/TUV/CE/CB	34.95	32.49	29.95
201912	Mean Well	SP-150-5	+5V @ 0-30A	150W	7.0x3.9x2.0	100	1.0	0.5	3	UL/CUL/TUV/CE/CB/PFC	56.95	49.95	44.95
202042	Mean Well	SP-200-5	+5V @ 0-40A	200W	7.0x3.9x2.0	100	1.0	0.5	3	UL/CUL/TUV/CE/CB/PFC	62.95	58.95	54.95
2102490	Mean Well	SP-240-5	+5V @ 0-45A	225W	7.5x3.7x2.0	150	1.0	0.5	3	UL/CUL/TUV/CE/CB/PFC	64.95	59.95	55.95
216776	Mean Well	S-320-5	+5V @ 0-50A	250W	8.5x4.5x2.0	150	1.0	0.5	2	UL/CUL	69.95	64.95	59.95
244735	Mean Well	SP-320-5	+5V @ 0-55A at 230VAC; 0-44A at 115VAC	275W	8.5x4.5x2.0	150	1.0	0.5	3	UL/CUL/TUV/CE/CB/PFC	74.95	69.95	64.95
2076295	Mean Well	PSP-600-5	+5V @ 0-80A	400W	6.7x4.7x3.7	180	0.5	0.5	5	UL/CUL/TUV/CE/CB/PFC	134.95	124.95	114.95
693644	Mean Well	SP-480-5	+5V @ 0-85A	425W	10.9x5.0x1.7	80	1.0	0.5	3	UL/CUL/TUV/CE/CB/PFC	154.95	144.95	134.95
374002	Mean Well	SE-600-05	+5V @ 0-100A	500W	9.7x5.0x2.5	150	2.0	0.5	2	UL/CUL	114.95	106.95	99.95
220249	Mean Well	SCN-600-05	+5V @ 0-100A	500W	11.5x5.2x2.7	100	2.0	0.5	4	UL/CUL/CB	224.95	209.95	199.95
693661	Mean Well	SP-750-5	+5V @ 0-120A	600W	10.9x5.0x2.5	120	2.0	0.5	3	UL/CUL/TUV/CE/CB	229.95	214.95	199.95
231669	Mean Well	PSP-1500-5	+5V @ 0-217.5A	1087.5W	10.9x5.1x7.5	100	2.0	0.5	5	UL/CUL/TUV/CE/CB	324.95	299.95	279.95
123415	Mean Well	S-150-7.5	+7.5V @ 0-20A	150W	7.0x4.3x2.0	150	0.5	0.5	2	UL/CUL/TUV/CE/CB	34.95	32.49	29.95
693556	Mean Well	S-240-7.5	+7.5V @ 0-30A	225W	7.5x3.7x2.6	200	1.0	0.5	2	UL/CUL/TUV/CE/CB/PFC	74.95	69.95	66.95
207212	Mean Well	S-320-7.5	+7.5V @ 0-36A	270W	8.5x4.5x2.0	150	0.5	0.5	2	UL/CUL	69.95	64.95	59.95
394215	Mean Well	SP-320-7.5	+7.5V @ 0-40A	300W	8.5x4.5x2.0	150	1.0	0.5	3	UL/CUL/TUV/CE/CB/PFC	74.95	69.95	64.95
1919051	Mean Well	RS-15-12	+12V @ 0-1.3A	15.6W	2.5x2.0x1.1	120	0.5	0.5	1	UL/CUL/TUV/CE/CB	14.95	13.95	12.95
2120356	Potrans	FS-02512-1M-02	+12V @ 2.1A	25.2W	3.9x3.8x1.3	120	0.05	0.05	—	UL/CUL/CE	15.95	14.95	13.49
323300	Mean Well	RS-25-12	+12V @ 0-2.1A	25.2W	3.0x2.0x1.1	120	0.5	0.5	1	UL/CUL/TUV/CE/CB	18.49	16.95	15.95
123255	Mean Well	S-25-12	+12V @ 0-2.1A	25.2W	3.9x3.8x1.4	100	0.5	0.5	2	UL/TUV/CE	18.49	17.49	16.49
323337	Mean Well	RS-35-12	+12V @ 0-3A	36W	3.9x3.2x1.4	120	0.5	0.5	1	UL/CUL/TUV/CE/CB	19.95	18.95	17.95
689830	Metapo	1M041C12-1M	+12V @ 0-3.5A	42W	3.9x3.8x1.4	100	—	—	—	UL/CUL/TUV/CE	19.95	18.95	17.95
123298	Mean Well	S-40-12	+12V @ 0-3.5A	42W	5.1x3.9x1.5	100	0.5	0.5	2	UL/CUL/TUV/CE/CB	21.49	19.95	18.95
689821	Metapo	1M051C12-1M	+12V @ 0-4.2A	50W	6.0x3.7x1.5	100	—	—	—	UL/CUL/TUV/CE	19.95	18.95	17.95
323396	Mean Well	RS-50-12	+12V @ 0-4.2A	50.4W	3.9x3.8x1.4	120	0.5	0.5	1	UL/CUL/TUV/CE/CB	23.95	21.95	19.95
689813	Potrans	1M061C05-1M	+12V @ 0-5A	60W	3.9x3.8x1.4	120	—	—	—	UL/TUV/CE	21.95	19.95	18.49
123335	Mean Well	S-60-12	+12V @ 0-5A	60W	6.3x3.8x1.5	120	0.5	0.5	2	UL/CUL/TUV/CE/CB	23.49	21.95	20.95
323599	Mean Well	RS-75-12	+12V @ 0-6A	72W	5.1x3.9x1.5	120	0.5	0.5	1	UL/CUL/TUV/CE/CB	26.95	24.95	22.95
194838	Mean Well	SP-75-12	+12V @ 0-6.3A	75.6W	7.0x3.9x1.3	80	0.5	0.5	3	UL/CUL/TUV/CE/CB	42.95	37.49	32.95
123386	Mean Well	S-100F-12	+12V @ 0-8.5A	102W	7.8x3.9x1.5	125	0.5	0.5	2	UL/TUV/CE/CB	28.95	26.95	24.95
323716	Mean Well	RS-100-12	+12V @ 0-8.5A	102W	6.3x3.8x1.5	120	0.5	0.5	1	UL/CUL/TUV/CE/CB	36.95	32.95	28.95
194803	Mean Well	SP-100-12	+12V @ 0-8.5A	102W	7.0x3.9x1.8	100	0.5	0.5	1	UL/CUL/TUV/CE/CB/PFC	49.95	46.95	43.95
123423	Mean Well	S-150-12	+12V @ 0-12.5A	150W	7.0x4.3x2.0	180	0.3	0.3	2	UL/CUL/TUV/CE/CB	34.95	32.49	29.95
323839	Mean Well	RS-150-12	+12V @ 0-12.5A	150W	7.8x3.9x1.5	120	0.5	0.5	1	UL/CUL/TUV/CE/CB	41.95	38.95	35.95
173421	Mean Well	SP-150-12	+12V @ 0-12.5A	150W	7.0x3.9x2.0	100	0.5	0.5	3	UL/CUL/TUV/CE/CB/PFC	56.95	49.95	44.95
2094848	Mean Well	HRPG-150-12	+12V @ 0-13A	156W	6.3x3.8x1.5	120	0.5	0.3	6	UL/CUL/TUV/CE/CB/PFC	84.95	79.95	74.95
2102123	Mean Well	HLG-240-12A	+12V @ 16A	240W	9.6x2.7x1.5	150	2.0	0.5	—	CNS/EN/FCC/GB/TUV/UC	109.95	99.95	94.95
194774	Mean Well	SP-200-12	+12V @ 0-16.7A	200.4W	7.0x3.9x2.0	100	0.5	0.5	3	UL/CUL/TUV/CE/CB/PFC	62.95	58.95	54.95
137649	Mean Well	S-240-12	+12V @ 0-18A	216W	7.5x3.7x2.6	150	0.5	0.5	2	UL/CUL/TUV/CE/CB/PFC	74.95	69.95	66.95
2101497	Mean Well	SP-240-12	+12V @ 0-20A	240W	7.5x3.7x2.0	150	0.5	0.3	3	UL/CUL/TUV/CE/CB/PFC	64.95	59.95	55.95


* Primary Output

More Enclosed Switching Power Supplies on pages 137 & 139-142

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



Enclosed Switching AC-to-DC Power Supplies (Continued)



SP-500

* Web Code: EPS

Part No.	Manufacturer	Mfr. Part No.	Output		Size (L"xW"xH")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	Additional Info Pg. 138†	Certification	Pricing		
			Voltage @ Current(min-max)	Power							1	5	25
Single Output (Continued)													
207204	Mean Well	S-320-12	+12V @ 0-25A	300W	8.5x4.5x2.0	150	0.5	0.5	2	UL/CUL	\$69.95	\$64.95	\$59.95
244743	Mean Well	SP-320-12	+12V @ 0-25A at 230VAC; 0-20A @ 115VAC	300W	8.5x4.5x2.0	150	0.5	0.3	3	UL/CUL/TUV/CE/CB/PFC	74.95	69.95	64.95
2102203	Mean Well	HRP-300-12	+12V @ 0-27A	324W	7.8x4.1x1.6	120	0.5	0.3	3	UL/CUL/TUV/CE/CB/PFC	114.95	104.95	94.95
2094872	Mean Well	HRPG-300-12	+12V @ 0-27A	324W	7.8x4.1x1.6	120	0.5	0.3	6	UL/CUL/TUV/CE/CB/PFC	119.95	114.95	109.95
2094928	Mean Well	SE450-12	+12V @ 0-37.5A	450W	8.9x4.9x2.0	200	1.0	0.5	2	UL/CUL/TUV/CE/CB/PFC	99.95	92.95	86.95
301373	Mean Well	SP-480-12	+12V @ 0-40A at 230VAC; 0-36A @ 115VAC	480W	10.9x5.0x1.7	120	0.5	0.3	3	UL/CUL/TUV/CE/CB/PFC	154.95	144.95	134.95
190693	Mean Well	SP-500-12	+12V @ 0-40A at 230VAC; 0-34A @ 115VAC	480W	6.7x4.7x3.7	240	0.5	0.5	3	UL/CUL/TUV/CE/CB/PFC	149.95	139.95	129.95
374011	Mean Well	SE-600-12	+12V @ 0-50A	600W	9.7x5.0x2.5	150	0.5	0.5	2	UL/CUL	114.95	106.95	99.95
374214	Mean Well	PSP-600-12	+12V @ 0-50A	600W	6.7x4.7x3.7	240	0.5	0.5	5	UL/CUL/TUV/CE/CB/PFC	149.95	139.95	129.95
220257	Mean Well	SCN-600-12	+12V @ 0-50A	600W	11.5x5.2x2.7	120	1.0	0.5	4	UL/CUL/CB	224.95	209.95	194.95
388631	Mean Well	SCP-600-12	+12V @ 0-50A	600W	11.4x4.7x2.7	120	0.5	0.5	5	UL/CUL/TUV/CE/CB	199.95	189.95	179.95
2094961	Mean Well	HRPG-600-12	+12V @ 0-53A	636W	8.6x4.1x2.5	120	0.5	0.3	6	UL/CUL/TUV/CE/CB/PFC	189.95	174.95	164.95
319944	Mean Well	SP-750-12	+12V @ 0-62A	750W	10.9x5.0x2.5	120	0.5	0.3	3	UL/CUL/TUV/CE/CB	229.95	214.95	199.95
217366	Mean Well	PSP-1000-12	+12V @ 0-75A at 230VAC; 0-63.8A @ 115VAC	900W	10.9x5.1x5.0	150	0.5	0.3	5	UL/CUL/TUV/CE/CB/PFC	399.95	369.95	349.95
373261	Mean Well	PSP-1500-12	+12V @ 0-112.5A	1350W	10.9x5.1x7.5	150	0.5	0.3	5	UL/CUL/TUV/CE/CB/PFC	499.95	474.95	449.95
202025	Mean Well	S-150-13.5	+13.5V @ 0-11.2A	151.2W	7.0x4.3x2.0	180	0.3	0.3	2	UL/CUL/TUV/CE/CB	34.95	32.49	29.95
394193	Mean Well	SP-150-13.5	+13.5V @ 0-11.2A	151.2W	7.0x3.9x2.0	100	0.5	0.5	3	UL/CUL/TUV/CE/CB/PFC	56.95	49.95	44.95
212410	Mean Well	SP-200-13.5	+13.5V @ 0-14.9A	201.1W	7.0x3.9x2.0	100	0.5	0.5	3	UL/CUL/TUV/CE/CB/PFC	62.95	58.95	54.95
693572	Mean Well	S-320-13.5	+13.5V @ 0-22A	297W	8.5x4.5x2.0	150	0.5	0.5	2	UL/CUL	69.95	64.95	59.95
693599	Mean Well	SP-320-13.5	+13.5V @ 0-22A	297W	8.5x4.5x2.0	150	0.5	0.3	3	UL/CUL/TUV/CE/CB/PFC	74.95	69.95	64.95
212389	Mean Well	SP-500-13.5	+13.5V @ 0-36A at 230VAC; 0-30.6A @ 115VAC	486W	6.7x4.7x3.7	240	0.5	0.5	3	UL/CUL/TUV/CE/CB	149.95	139.95	129.95
1919060	Mean Well	RS-15-15	+15V @ 0-1A	15W	2.5x2.0x1.1	120	0.5	0.5	1	UL/CUL/TUV/CE/CB	14.95	13.95	12.95
123263	Mean Well	S-25-15	+15V @ 0-1.7A	25.5W	3.9x3.8x1.4	100	0.5	0.5	2	UL/TUV/CE	18.49	17.49	16.49
323302	Mean Well	RS-25-15	+15V @ 0-1.7A	25.5W	3.0x2.0x1.1	120	0.5	0.5	1	UL/CUL/TUV/CE/CB	18.49	16.95	15.95
323345	Mean Well	RS-35-15	+15V @ 0-2.4A	36W	3.9x3.2x1.4	120	0.5	0.5	1	UL/CUL/TUV/CE/CB	19.95	18.95	17.95
155053	Skyenet	SNP-9548-M1	+15V @ 2.6A	39W	5.0x3.0x1.2	100	1.0	1.0	—	UL/CUL/CSA	19.95	17.95	15.95
202140	Mean Well	S-40-15	+15V @ 0-2.8A	42W	5.1x3.9x1.5	100	0.5	0.5	2	UL/CUL/TUV/CE/CB	21.49	19.95	18.95
323409	Mean Well	RS-50-15	+15V @ 0-3.4A	51W	3.9x3.8x1.4	120	0.5	0.5	1	UL/CUL/TUV/CE/CB	23.95	21.95	19.95
123343	Mean Well	S-60-15	+15V @ 0-4A	60W	6.3x3.8x1.5	150	0.5	0.5	2	UL/CUL/TUV/CE/CB	23.49	21.95	20.95
323602	Mean Well	RS-75-15	+15V @ 0-5A	75W	5.1x3.9x1.5	120	0.5	0.5	1	UL/CUL/TUV/CE/CB	26.95	24.95	22.95
212450	Mean Well	S-100F-15	+15V @ 0-6.7A	100.5W	7.8x3.9x1.5	125	0.5	0.5	2	UL/CUL/TUV/CE/CB	28.95	26.95	24.95
212433	Mean Well	SP-100-15	+15V @ 0-6.7A	100.5W	7.0x3.9x1.8	100	0.5	0.5	3	UL/CUL/TUV/CE/CB/PFC	49.95	46.95	43.95
323724	Mean Well	RS-100-15	+15V @ 0-7A	105W	6.3x3.8x1.5	120	0.5	0.5	1	UL/CUL/TUV/CE/CB	36.95	32.95	28.95
123432	Mean Well	S-150-15	+15V @ 0-10A	150W	7.0x4.3x2.0	180	0.3	0.3	2	UL/CUL/TUV/CE/CB	34.95	32.49	29.95
323847	Mean Well	RS-150-15	+15V @ 0-10A	150W	7.8x3.9x1.5	120	0.5	0.5	1	UL/CUL/TUV/CE/CB	41.95	38.95	35.95
173412	Mean Well	SP-150-15	+15V @ 0-10A	150W	7.0x3.9x2.0	100	0.5	0.5	3	UL/CUL/TUV/CE/CB/PFC	56.95	49.95	44.95
2094856	Mean Well	HRPG-150-15	+15V @ 0-10A	150W	6.3x3.8x1.5	150	0.5	0.3	6	UL/CUL/TUV/CE/CB/PFC	84.95	79.95	74.95
202060	Mean Well	SP-200-15	+15V @ 0-13.4A	201W	7.0x3.9x2.0	100	0.5	0.5	3	UL/CUL/TUV/CE/CB/PFC	62.95	58.95	54.95
202076	Mean Well	S-240-15	+15V @ 0-15A	225W	7.5x3.7x2.6	150	0.5	0.5	2	UL/CUL/TUV/CE/CB/PFC	74.95	69.95	66.95
2101500	Mean Well	SP-240-15	+15V @ 0-16A	240W	7.5x3.7x2.0	150	0.5	0.3	3	UL/CUL/TUV/CE/CB/PFC	64.95	59.95	55.95
374993	Mean Well	S-320-15	+15V @ 0-20A	300W	8.5x4.5x2.0	150	0.5	0.5	2	UL/CUL	74.95	69.95	64.95
693610	Mean Well	SP-320-15	+15V @ 0-20A	300W	8.5x4.5x2.0	150	0.5	0.3	3	UL/CUL/TUV/CE/CB/PFC	74.95	69.95	64.95
693652	Mean Well	SP-480-15	+15V @ 0-35A	480W	10.9x5.0x1.7	150	0.5	0.3	3	UL/CUL/TUV/CE/CB/PFC	154.95	144.95	134.95
291522	Mean Well	SE-600-15	+15V @ 0-40A	600W	9.7x5.0x2.5	150	0.5	0.5	2	UL/CUL	114.95	106.95	99.95
374222	Mean Well	PSP-600-15	+15V @ 0-40A	600W	6.7x4.7x3.7	240	0.5	0.5	5	UL/CUL/TUV/CE/CB/PFC	144.95	134.95	124.95
374045	Mean Well	SCN-600-15	+15V @ 0-40A	600W	11.5x5.2x2.7	150	0.5	0.5	4	UL/CUL/CB	199.95	189.95	179.95
2094901	Mean Well	HRPG-600-15	+15V @ 0-43A	645W	8.6x4.1x2.5	150	0.5	0.3	6	UL/CUL/TUV/CE/CB/PFC	189.95	174.95	164.95
694920	Mean Well	RSP-1500-15	+15V @ 0-100A	1500W	10.9x5.0x3.3	150	0.5	0.5	5	UL/CUL/TUV/CE/CB/PFC	424.95	389.95	359.95
1919078	Mean Well	RS-15-24	+24V @ 0-0.625A	15W	2.5x2.0x1.1	200	0.5	0.5	1	UL/CUL/TUV/CE/CB	14.95	13.95	12.95
123272	Mean Well	S-25-24	+24V @ 0-1.1A	26.4W	3.9x3.8x1.4	100	0.5	0.5	2	UL/TUV/CE	18.49	17.49	16.49
323311	Mean Well	RS-25-24	+24V @ 0-1.1A	26.4W	3.0x2.0x1.1	120	0.5	0.5	1	UL/CUL/TUV/CE/CB	18.49	16.95	15.95
323353	Mean Well	RS-35-24	+24V @ 0-1.5A	36W	3.9x3.2x1.4	120	0.5	0.5	1	UL/CUL/TUV/CE/CB	19.95	18.95	17.95
689792	Metapo	1M041C24-1M	+24V @ 0-1.8A	43W	4.8x3.8x1.5	100	—	—	—	UL/CUL/TUV/CE	19.95	17.95	15.95
123319	Mean Well	S-40-24	+24V @ 0-1.8A	43W	5.1x3.9x1.5	100	0.5	0.5	2	UL/CUL/TUV/CE/CB	21.49	19.95	18.95
2104225	Mean Well	NES-50-24	+24V @ 0-2.2A	52.8W	5.1x3.9x1.5	200	0.5	0.5	—	UL/CUL/CE/CB	23.95	21.95	19.95
323417	Mean Well	RS-50-24	+24V @ 0-2.2A	52.8W	3.9x3.8x1.4	120	0.5	0.5	1	UL/CUL/TUV/CE/CB	23.95	21.95	19.95
123352	Mean Well	S-60-24	+24V @ 0-2.5A	60W	6.3x3.8x1.5	150	0.5	0.5	2	UL/CUL/TUV/CE/CB	23.49	21.95	20.95
323620	Mean Well	RS-75-24	+24V @ 0-3.2A	76.8W	5.1x3.9x1.5	120	0.5	0.5	1	UL/CUL/TUV/CE/CB	26.95	24.95	22.95
2104250	Mean Well	NES-75-24	+24V @ 0-3.2A	76.8W	6.3x3.8x1.5	200	0.5	0.5	—	UL/CUL/CE/CB	26.95	24.49	21.95
194854	Mean Well	SP-75-24	+24V @ 0-3.2A	76.8W	7.0x3.9x1.3	100	0.5	0.5	3	UL/CUL/TUV/CE/CB	42.95	37.49	32.95
194812	Mean Well	SP-100-24	+24V @ 0-4.2A	100.8W	7.0x3.9x1.8	150	0.5	0.5	3	UL/CUL/TUV/CE/CB/PFC	49.95	46.95	43.95

* Primary Output

More Enclosed Switching Power Supplies on pages 137-138 & 140-142

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Enclosed Switching AC-to-DC Power Supplies

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts



Enclosed Switching AC-to-DC Power Supplies (Continued)



PSP-500

★ Web Code: EPS

			Output		Size	Ripple & Noise	Load Reg.	Line Reg.	Additional Info		Pricing		
Part No.	Manufacturer	Mfr. Part No.	Voltage @ Current (min-max)	Power	(L"xW"xH")	(mV p-p)*	(±%)*	(±%)*	Pg. 138†	Certification	1	5	25
Single Output (Continued)													
201971	Mean Well	S-100F-24	+24V @ 0-4.5A	108W	7.8x3.9x1.5	150	0.5	0.5	2	UL/TUV/CE/CB	\$28.95	\$26.95	\$24.95
323732	Mean Well	RS-100-24	+24V @ 0-4.5A	108W	6.3x3.8x1.5	120	0.5	0.5	1	UL/CUL/TUV/CE/CB	36.95	32.95	28.95
155651	Power One	MAP110-1024CM	+24V @ 5A or +28V @ 4.3A	110W	7.0x4.3x1.8	240	0.5	1.0	—	UL/CSA/TUV	34.95	29.95	26.95
1945920	APS	RP1150-24C	+24V @ 0-6.25A	150W	7.5x4.2x2.0	100	1.0	1.0	—	UL/CE	34.95	29.95	26.95
173404	Mean Well	SP-150-24	+24V @ 0-6.25A	150W	7.0x3.9x2.0	150	0.5	0.5	3	UL/CUL/TUV/CE/CB/PFC	56.95	49.95	44.95
371012	Potrans	GL150W-24-NC	+24V @ 6.5A	156W	7.8x3.7x2.5	180	2.0	2.0	—	UL/CUL/TUV/CE	26.95	23.95	21.49
123450	Mean Well	S-150-24	+24V @ 0-6.5A	156W	7.0x4.3x2.0	240	0.2	0.2	2	UL/CUL/TUV/CE/CB	34.95	32.49	29.95
2079429	PowerLD	PD-150-24	+24V @ 0-6.5A	156W	7.8x3.9x1.5	120	1.0	0.5	—	UL/CUL/CE	39.95	36.95	33.95
323855	Mean Well	RS-150-24	+24V @ 0-6.5A	156W	7.8x3.9x1.5	120	0.5	0.5	1	UL/CUL/TUV/CE/CB	41.95	38.95	35.95
2094864	Mean Well	HRPG-150-24	+24V @ 0-6.5A	156W	6.3x3.8x1.5	150	0.5	0.3	6	UL/CUL/TUV/CE/CB/PFC	84.95	79.95	74.95
194782	Mean Well	SP-200-24	+24V @ 0-8.4A	201.6W	7.0x3.9x2.0	150	0.5	0.5	3	UL/CUL/TUV/CE/CB/PFC	62.95	58.95	54.95
137657	Mean Well	S-240-24	+24V @ 0-10A	240W	7.5x3.7x2.6	180	0.5	0.5	2	UL/CUL/TUV/CE/CB/PFC	74.95	69.95	66.95
2101518	Mean Well	SP-240-24	+24V @ 0-10A	240W	7.5x3.7x2.0	150	0.5	0.2	3	UL/CUL/TUV/CE/CB/PFC	64.95	59.95	55.95
196657	Mean Well	S-320-24	+24V @ 0-12.5A	300W	8.5x4.5x2.0	150	0.5	0.5	2	UL/CUL	69.95	64.95	59.95
244752	Mean Well	SP-320-24	+24V @ 0-13.0A at 230VAC; 0-10.4A @ 115VAC	312W	8.5x4.5x2.0	150	0.5	0.2	3	UL/CUL/TUV/CE/CB/PFC	74.95	69.95	64.95
2102220	Mean Well	HRP-300-24	+24V @ 0-14A	336W	7.7x4.1x1.6	150	0.5	0.2	3	UL/CUL/TUV/CE/CB/PFC	114.95	104.95	94.95
2094881	Mean Well	HRPG-300-24	+24V @ 0-14A	336W	7.8x4.1x1.6	150	0.5	0.3	6	UL/CUL/TUV/CE/CB/PFC	119.95	114.95	109.95
2101606	Mean Well	SE-450-24	+24V @ 0-18.8A	451.2W	8.9x4.9x2.0	200	0.5	0.2	—	UL/CUL	99.95	92.95	86.95
301322	Mean Well	SP-480-24	+24V @ 0-20.0A at 230VAC; 0-18A @ 115VAC	480W	10.9x5.0x1.7	150	0.5	0.2	3	UL/CUL/TUV/CE/CB/PFC	154.95	144.95	134.95
147054	Mean Well	SP-500-24	+24V @ 0-20.0A at 230VAC; 0-17A @ 115VAC	480W	6.7x4.7x3.7	240	0.5	0.5	3	UL/CUL/TUV/CE/CB/PFC	149.95	139.95	129.95
190722	Mean Well	PSP-500-24	+24V @ 0-20.8A at 230VAC; 0-16.6A @ 115VAC	499.2W	10.9x5.1x7.5	150	0.5	0.2	5	UL/CUL/TUV/CE/CB/PFC	219.95	209.95	199.95
295902	Mean Well	SE-600-24	+24V @ 0-25A	600W	9.7x5.0x2.5	150	0.5	0.5	2	UL/CUL	114.95	106.95	99.95
374231	Mean Well	PSP-600-24	+24V @ 0-25A	600W	6.7x4.7x3.7	240	0.5	0.5	5	UL/CUL/TUV/CE/CB/PFC	144.95	134.95	124.95
220265	Mean Well	SCN-600-24	+24V @ 0-25A	600W	11.5x5.2x2.7	240	1.0	0.5	4	UL/CUL/CB	224.95	209.95	194.95
320048	Mean Well	SP-750-24	+24V @ 0-31.3A	750W	10.9x5.0x2.5	120	0.5	0.2	3	UL/CUL/TUV/CE/CB	219.95	199.95	184.95
374310	Mean Well	SCP-800-24	+24V @ 0-33A	792W	11.4x4.7x2.7	240	0.5	0.5	5	UL/CUL/TUV/CE/CB	269.95	249.95	229.95
217358	Mean Well	PSP-1000-24	+24V @ 0-37.6A at 230VAC; 0-32A @ 115VAC	902.4W	10.9x5.1x5.0	150	0.5	0.2	5	UL/CUL/TUV/CE/CB/PFC	359.95	329.95	299.95
1585717	Mean Well	RSP-1000-24	+24V @ 0-40A	960W	11.6x5.0x1.6	150	0.5	0.5	5	UL/CUL/TUV/CE/CB/PFC	319.95	299.95	279.95
373923	Mean Well	PSP-1500-24	+24V @ 0-56.4A	1353.6W	10.9x5.1x7.5	150	0.5	0.2	5	UL/CUL/TUV/CE/CB/PFC	499.95	474.95	449.95
2103353	Mean Well	SE-1500-24	+24V @ 0-62.5A	1500W	10.9x6.9x2.5	150	0.5	0.5	—	UL/CUL	369.95	332.95	299.95
694938	Mean Well	RSP-1500-24	+24V @ 0-63A	1512W	10.9x5.0x3.3	150	0.5	0.5	5	UL/CUL/TUV/CE/CB/PFC	424.95	389.95	359.95
693409	Mean Well	SP-75-27	+27V @ 0-2.8A	75.6W	7.0x3.9x1.3	100	0.5	0.5	3	UL/CUL/TUV/CE/CB	42.95	37.49	32.95
202033	Mean Well	S-150-27	+27V @ 0-5.6A	151.2W	7.0x4.3x2.0	240	0.2	0.2	2	UL/CUL/TUV/CE/CB	34.95	32.49	29.95
693513	Mean Well	SP-150-27	+27V @ 0-5.6A	151.2W	7.8x3.9x2.0	150	0.5	0.5	—	UL/CUL/TUV/CE/CB/PFC	56.95	49.95	44.95
693548	Mean Well	SP-200-27	+27V @ 0-7.5A	202.5W	7.0x3.9x2.0	150	0.5	0.5	3	UL/CUL/TUV/CE/CB/PFC	62.95	58.95	54.95
693581	Mean Well	S-320-27	+27V @ 0-11.0A	297W	8.5x4.5x2.0	200	0.5	0.5	2	UL/CUL	69.95	64.95	59.95
693628	Mean Well	SP-320-27	+27V @ 0-11.7A	315.9W	8.5x4.5x2.0	200	0.5	0.2	3	UL/CUL/TUV/CE/CB/PFC	74.95	69.95	64.95
190706	Mean Well	SP-500-27	+27V @ 0-18A at 230VAC; 0-15.3A @ 115VAC	486W	6.7x4.7x3.7	200	0.5	0.5	3	UL/CUL/TUV/CE/CB/PFC	149.95	139.95	129.95
190731	Mean Well	PSP-500-27	+27V @ 0-18.5A at 230VAC; 0-14.8A @ 115VAC	499.5W	10.9x5.1x7.5	150	0.5	0.2	5	UL/CUL/TUV/CE/CB/PFC	219.95	209.95	199.95
295911	Mean Well	SE-600-27	+27V @ 0-22.2A	599.4W	9.7x5.0x2.5	150	0.5	0.5	2	UL/CUL	114.95	106.95	99.95
374257	Mean Well	PSP-600-27	+27V @ 0-22.2A	600W	6.7x4.7x3.7	240	0.5	0.5	5	UL/CUL/TUV/CE/CB/PFC	149.95	139.95	129.95
374038	Mean Well	SP-750-27	+27V @ 0-27.8A	750W	10.9x5.0x2.5	120	0.5	0.2	3	UL/CUL/TUV/CE/CB	219.95	199.95	184.95
231652	Mean Well	PSP-1000-27	+27V @ 0-33.6A at 230VAC; 0-28.6A at 115VAC	907.2W	10.9x5.1x5.0	150	0.5	0.2	5	UL/CUL/TUV/CE/CB/PFC	419.95	374.95	344.95
1585709	Mean Well	RSP-1000-27	+27V @ 0-37.0A	999W	11.6x5.0x1.6	150	0.5	0.5	5	UL/CUL/TUV/CE/CB/PFC	319.95	299.95	279.95
231714	Mean Well	PSP-1500-27	+27V @ 0-50.4A	1360.8W	10.9x5.1x7.5	150	0.5	0.2	5	UL/CUL/TUV/CE/CB/PFC	499.95	474.95	449.95
694946	Mean Well	RSP-1500-27	+27V @ 0-56.0A	1512W	10.9x5.0x3.3	150	0.5	0.5	5	UL/CUL/TUV/CE/CB/PFC	424.95	389.95	359.95
392834	Mean Well	S-240-30	+30V @ 0-8A	240W	7.5x3.7x2.6	180	0.5	0.5	2	UL/CUL/TUV/CE/CB/PFC	74.95	69.95	66.95
2102473	Mean Well	SP-240-30	+30V @ 0-8A	240W	7.5x3.7x2.0	150	0.5	0.2	3	UL/CUL/TUV/CE/CB/PFC	64.95	59.95	55.95
2101753	Mean Well	HRPG-600-36	+36V @ 0-17.5A	630W	8.6x4.1x2.5	200	0.5	0.2	3	UL/CUL/TUV/CE/CB/PFC	189.95	174.95	164.95
693249	Mean Well	RS-50-48	+48V @ 0-1.1A	52.8W	3.9x3.8x1.4	100	0.5	0.5	1	UL/CUL/TUV/CE/CB	23.95	21.95	19.95
216805	Mean Well	SP-75-48	+48V @ 0-1.6A	76.8W	7.0x3.9x1.3	100	0.5	0.5	3	UL/CUL/TUV/CE/CB/PFC	42.95	37.49	32.95
216793	Mean Well	S-100F-48	+48V @ 0-2.2A	105.6W	7.8x3.9x1.5	150	0.5	0.5	2	UL/TUV/CE/CB	28.95	26.95	24.95
167346	Mean Well	S-150-48	+48V @ 0-3.2A	153.6W	7.0x4.3x2.0	240	0.2	0.2	2	UL/CUL/TUV/CE/CB	34.95	32.49	29.95
201930	Mean Well	SP-150-48	+48V @ 0-3.2A	153.6W	7.0x3.9x2.0	250	0.5	0.5	3	UL/CUL/TUV/CE/CB/PFC	56.95	49.95	44.95
323863	Mean Well	RS-150-48	+48V @ 0-3.3A	158.4W	7.8x3.9x1.5	200	0.5	0.5	1	UL/CUL/TUV/CE/CB	41.95	38.95	35.95
202068	Mean Well	SP-200-48	+48V @ 0-4.2A	201.6W	7.0x3.9x2.0	250	0.5	0.5	3	UL/CUL/TUV/CE/CB/PFC	62.95	58.95	54.95
167338	Mean Well	S-240-48	+48V @ 0-5.0A	240W	7.5x3.7x2.6	240	1.0	1.0	2	UL/CUL/TUV/CE/CB/PFC	74.95	69.95	66.95
2102481	Mean Well	SP-240-48	+48V @ 0-5A	240W	7.5x3.7x2.0	150	0.5	0.2	3	UL/CUL/TUV/CE/CB/PFC	64.95	59.95	55.95
689776	Metapo	1M321C48-0M	+48V @ 0-6.5A	312W	7.5x4.5x2.0	240	0.5	0.5	—	UL/CUL	64.95	59.95	54.95
207191	Mean Well	S-320-48	+48V @ 0-6.5A	312W	8.5x4.5x2.0	240	0.5	0.5	2	UL/CUL	69.95	64.95	59.95
244770	Mean Well	SP-320-48	+48V @ 0-6.7A at 230VAC; 0-5.4A @ 115VAC	321.6W	8.5x4.5x2.0	240	0.5	0.2	3	UL/CUL/TUV/CE/CB/PFC	74.95	69.95	64.95
2105164	Mean Well	SE-450-48	+48V @ 0-9.4A	451.2W	8.9x4.9x2.0	200	0.5	0.2	—	UL/CUL	99.95	92.95	86.95


*Primary Output

More Enclosed Switching Power Supplies on pages 137-139 & 141-142

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



Enclosed Switching AC-to-DC Power Supplies (Continued)



RQ-65

*Web Code: EPS

			Output		Size	Ripple & Noise	Load Reg.	Line Reg.	Additional Info		Pricing		
Part No.	Manufacturer	Mfr. Part No.	Voltage @ Current (min-max)	Power	(L"xW"xH")	(mV p-p) *	(±%)*	(±%)*	Pg. 138†	Certification	1	5	25
Single Output (Continued)													
301402	Mean Well	SP-480-48	+48V @ 0-10.0A at 230VAC; 0-9A @ 115VAC	480W	10.9x5.0x1.7	240	0.5	0.2	3	UL/CUL/TUV/CE/CB/PFC	\$154.95	\$144.95	\$134.95
161796	Mean Well	SP-500-48	+48V @ 0-10.0A at 230VAC; 0-8.5A @ 115VAC	480W	6.7x4.7x3.7	300	0.5	0.5	3	UL/CUL/TUV/CE/CB/PFC	149.95	139.95	129.95
190749	Mean Well	PSP-500-48	+48V @ 0-10.5A at 230VAC; 0-8.4A @ 115VAC	504W	10.9x5.1x7.5	200	0.5	0.2	5	UL/CUL/TUV/CE/CB/PFC	219.95	209.95	199.95
374062	Mean Well	SCN-600-48	+48V @ 0-12.0A	576W	11.5x5.2x2.7	480	0.5	0.5	4	UL/CUL/CB	224.95	209.95	194.95
295929	Mean Well	SE-600-48	+48V @ 0-12.5A	600W	9.7x5.0x2.5	200	0.5	0.5	2	UL/CUL	114.95	106.95	99.95
374249	Mean Well	PSP-600-48	+48V @ 0-12.5A	600W	6.7x4.7x3.7	240	0.5	0.5	5	UL/CUL/TUV/CE/CB/PFC	149.95	139.95	129.95
217350	Mean Well	PSP-1000-48	+48V @ 0-19.0A at 230VAC; 0-16.2A @ 115VAC	912W	10.9x5.1x5.0	200	0.5	0.2	5	UL/CUL/TUV/CE/CB/PFC	449.95	419.95	394.95
1585725	Mean Well	RSP-1000-48	+48V @ 0-21.0A	1008W	11.6x5.0x1.6	150	0.5	0.5	5	UL/CUL/TUV/CE/CB	319.95	299.95	279.95
231722	Mean Well	PSP-1500-48	+48V @ 0-28.5A	1368W	10.9x5.1x7.5	200	0.5	0.2	5	UL/CUL/TUV/CE/CB/PFC	529.95	489.95	449.95
694954	Mean Well	RSP-1500-48	+48V @ 0-32.0A	1536W	10.9x5.0x3.3	200	0.5	0.5	5	UL/CUL/TUV/CE/CB/PFC	424.95	389.95	359.95
Double Output													
323362	Mean Well	RD-35A	+5V @ 0.3-4A; +12V @ 0.2-1A	32W	3.9x3.2x1.4	80	0.5	0.5	1	UL/CUL/TUV/CE/CB	\$28.95	\$26.95	\$24.95
323380	Mean Well	RD-35B	+5V @ 0.3-4A; +24V @ 0.2-1.3A	51.2W	3.9x3.2x1.4	80	0.5	0.5	1	UL/CUL/TUV/CE/CB	28.95	26.95	24.95
323425	Mean Well	RD-50A	+5V @ 0.3-6A; +12V @ 0.3-3A	54W	3.9x3.8x1.4	80	0.5	0.5	1	UL/CUL/TUV/CE/CB	32.95	29.95	27.49
323433	Mean Well	RD-50B	+5V @ 0.3-6A; +24V @ 0.2-2A	53.6W	3.9x3.8x1.4	80	0.5	0.5	1	UL/CUL/TUV/CE/CB	32.95	29.95	27.49
123458	Mean Well	D-60A	+5V @ 0.3-4A; +12V @ 0.2-3A	56W	6.3x3.8x1.5	75	0.5	0.5	2	UL/CUL/TUV/CE/CB	29.95	27.95	25.95
123466	Mean Well	D-60B	+5V @ 0.3-3A; +24V @ 0.2-1.8A	58W	6.3x3.8x1.5	75	0.5	0.5	2	UL/CUL/TUV/CE/CB	29.95	27.95	25.95
323505	Mean Well	RD-65A	+5V @ 0.3-8A; +12V @ 0.2-4A	66W	5.1x3.9x1.5	80	0.5	0.5	1	UL/CUL/TUV/CE/CB	35.95	32.95	29.95
323513	Mean Well	RD-65B	+5V @ 0.3-8A; +24V @ 0.2-3A	68W	5.1x3.9x1.5	80	0.5	0.5	1	UL/CUL/TUV/CE/CB	35.95	32.95	29.95
323628	Mean Well	RD-85A	+5V @ 2.0-10A; +12V @ 0.3-5A	88W	6.3x3.8x1.5	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	51.95	48.95	45.95
132410	Mean Well	D-120A	+5V @ 2.0-12A; +12V @ 0.5-5A	120W	7.0x3.9x2.0	60	0.5	0.5	2	UL/CUL/TUV/CE/CB	49.95	46.95	43.95
132397	Mean Well	D-120B	+5V @ 2.0-6A; +24V @ 0.4-4A	126W	7.0x3.9x2.0	60	0.5	0.5	2	UL/CUL/TUV/CE/CB	49.95	46.95	43.95
323741	Mean Well	RD-125A	+5V @ 2.0-15A; +12V @ 0.5-10A	130.9W	7.8x3.9x1.5	80	3.0	1.0	1	UL/CUL/TUV/CE/CB	53.95	49.95	46.95
323759	Mean Well	RD-125B	+5V @ 2.0-10A; +24V @ 0.4-5A	133.4W	7.8x3.9x1.5	80	3.0	1.0	1	UL/CUL/TUV/CE/CB	53.95	49.95	46.95
2106124	Mean Well	RD-125-1224	+12V @ 1.0-3.7A; +24V @ 0.4-3.7A	133.2W	7.8x3.9x1.5	120	1.0	0.5	1	UL/CUL/TUV/CE/CB	53.95	49.95	46.95
Triple Output													
201989	Mean Well	T-40A	+5V @ 0.6-3A; +12V @ 0.2-2A; -5V @ 0.1-0.5A	41.5W	5.1x3.9x1.5	100	0.5	0.5	2	CSA/CE	\$29.95	\$27.95	\$25.95
201997	Mean Well	T-40B	+5V @ 0.6-3A; +12V @ 0.2-2A; -12V @ 0.1-0.5A	45W	5.1x3.9x1.5	100	0.5	0.5	2	CSA/CE	29.95	27.95	25.95
202009	Mean Well	T-40C	+5V @ 0.6-3A; +15V @ 0.2-1.5A; -15V @ 0.1-0.5A	45W	5.1x3.9x1.5	100	0.5	0.5	2	CSA/CE	29.95	27.95	25.95
323442	Mean Well	RT-50A	+5V @ 0.5-5A; +12V @ 0.2-2.5A; -5V @ 0.5-5A	46.5W	3.9x3.8x1.4	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	29.95	27.49	24.95
323460	Mean Well	RT-50B	+5V @ 0.5-5A; +12V @ 0.2-2.5A; -12V @ 0.1-1A	50W	3.9x3.8x1.4	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	33.95	31.95	29.95
323468	Mean Well	RT-50C	+5V @ 0-5A; +15V @ 0.2-2A; -15V @ 0.1-1A	50W	3.9x3.8x1.4	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	33.95	31.95	29.95
323476	Mean Well	RT-50D	+5V @ 0.5-5A; +12V @ 0.1-1A; +24V @ 0.2-1.5A	51W	3.9x3.8x1.4	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	33.95	31.95	29.95
123482	Mean Well	T-60B	+5V @ 0.5-5A; +12V @ 0.2-2.5A; -12V @ 0-0.5A	61W	6.3x3.8x1.5	100	1.0	0.5	2	UL/CUL/TUV/CE/CB	33.95	31.95	29.95
123491	Mean Well	T-60C	+5V @ 0.5-5A; +15V @ 0.2-2A; -15V @ 0-0.5A	62.5W	6.3x3.8x1.5	100	1.0	0.5	2	UL/CUL/TUV/CE/CB	33.95	31.95	29.95
323540	Mean Well	RT-65B	+5V @ 0.5-8A; +12V @ 0.2-3.5A; -12V @ 0-1A	64.6W	5.1x3.9x1.5	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	38.95	35.95	33.95
323548	Mean Well	RT-65C	+5V @ 0.5-8A; +15V @ 0.2-3A; -15V @ 0-1A	65.5W	5.1x3.9x1.5	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	38.95	35.95	33.95
323555	Mean Well	RT-65D	+5V @ 0.5-8A; +12V @ 0.1-1A; +24V @ 0.2-2A	68W	5.1x3.9x1.5	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	38.95	35.95	33.95
323644	Mean Well	RT-85A	+5V @ 2-10A; +12V @ 0.3-4A; -5V @ 0-1A	84.5W	6.3x3.8x1.5	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	33.95	31.95	29.95
323661	Mean Well	RT-85C	+5V @ 2-10A; +15V @ 0.3-4A; -15V @ 0-1A	87.5W	6.3x3.8x1.5	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	33.95	31.95	29.95
323678	Mean Well	RT-85D	+5V @ 2-10A; +12V @ 0.1-1A; +24V @ 0.3-2.5A	90W	6.3x3.8x1.5	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	29.95	26.95	23.95
213794	Mean Well	TP-100A	+5V @ 3-10A; +12V @ 0.4-4A; -5V @ 0-0.6A	100W	7.8x3.9x2.0	100	3.0	1.0	3	UL/CUL/TUV/CE/CB/PFC	69.95	62.95	56.95
301509	Mean Well	T-120B	+5V @ 2-12A; +12V @ 0.5-5A; -12V @ 0.2-1A	121W	7.0x3.9x2.0	80	0.5	0.5	2	UL/CUL/TUV/CE/CB	52.95	48.95	44.95
323767	Mean Well	RT-125A	+5V @ 2-15A; +12V @ 0.5-6A; -5V @ 0.1-1A	131W	7.8x3.9x1.5	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	44.95	39.95	35.95
323775	Mean Well	RT-125B	+5V @ 2-15A; +12V @ 0.5-6A; -12V @ 0.1-1A	132W	7.8x3.9x1.5	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	54.95	49.95	46.95
323783	Mean Well	RT-125C	+5V @ 2-15A; +15V @ 0.5-6A; -15V @ 0.1-1A	132.5W	7.8x3.9x1.5	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	54.95	49.95	46.95
323792	Mean Well	RT-125D	+5V @ 2-15A; +12V @ 0.1-2A; +24V @ 0.4-4A	136W	7.8x3.9x1.5	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	54.95	49.95	46.95
213832	Mean Well	TP-150C	+5V @ 2-15A; +15V @ 0.4-4.5A; -15V @ 0-0.6A	151.5W	7.8x3.9x2.0	100	3.0	1.0	3	UL/CUL/TUV/CE/CB/PFC	59.95	54.95	49.95
Quad Output													
323484	Mean Well	RQ-50B	+5V @ 0.5-6A; +12V @ 0.2-1.5A; -5V @ 0-1A; -12V @ 0-1A	45.5W	3.9x3.8x1.4	80	0.5	0.5	1	UL/CUL/TUV/CE/CB	\$35.95	\$33.95	\$31.95
323492	Mean Well	RQ-50D	+5V @ 0.5-6A; +12V @ 0.2-1.5A; +24V @ 0.1-1A; -12V @ 0-1A	53.4W	3.9x3.8x1.4	80	0.5	0.5	1	UL/CUL/TUV/CE/CB	32.95	29.95	27.95
147046	Mean Well	Q-60B	+5V @ 0.5-5.5A; +12V @ 0.1-2A; -5V @ 0-0.5A; -12V @ 0-0.5A	60W	6.3x3.8x1.5	100	0.5	0.5	2	UL/CUL/CE/CB	39.95	35.95	32.95
323564	Mean Well	RQ-65B	+5V @ 0.5-8A; +12V @ 0.2-3A; -5V @ 0-1A; -12V @ 0-1A	62.5W	5.1x3.9x1.5	80	0.5	0.5	1	UL/CUL/TUV/CE/CB	39.95	36.95	34.95
323572	Mean Well	RQ-65D	+5V @ 0.5-8A; +12V @ 0.2-3A; +24V @ 0.1-1.5A; -12V @ 0-1A	68W	5.1x3.9x1.5	80	0.5	0.5	1	UL/CUL/TUV/CE/CB	39.95	36.95	34.95
323695	Mean Well	RQ-85D	+5V @ 2-10A; +12V @ 0.3-4A; +24V @ 0.1-1.5A; -12V @ 0-1A	84W	6.3x3.8x1.5	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	54.95	51.95	48.95
132389	Mean Well	Q-120B	+5V @ 2-11A; +12V @ 0.5-4A; -5V @ 0.2-1A; -12V @ 0.2-1A	120W	7.0x3.9x2.0	80	0.5	0.5	2	UL/CUL/TUV/CE/CB	54.95	51.95	48.95

*Primary Output

More Enclosed Switching Power Supplies on pages 137-140 & 142

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts



Enclosed Switching AC-to-DC Power Supplies (Continued)



RQ-125

★ Web Code: EPS

Part No.	Manufacturer	Mfr. Part No.	Output		Size (L"xW"xH")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	Additional Info Pg. 138↑	Certification	Pricing		
			Voltage @ Current (min-max)	Power							1	5	25
Quad Output (Continued)													
323803	Mean Well	RQ-125B	+5V @ 2-12A; +12V @ 0.5-4.5A; -5V @ 0.1-1A; -12V @ 0.1-1A	120W	7.8x3.9x1.5	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	\$56.95	\$49.95	\$46.95
132371	Mean Well	Q-120D	+5V @ 2-8A; +12V @ 0.2-2A; +24V @ 0.2-2A; -12V @ 0.2-1A	124W	7.0x3.9x2.0	80	0.5	0.5	2	UL/CUL/TUV/CE/CB	54.95	51.95	48.95
323812	Mean Well	RQ-125D	+5V @ 2-12A; +12V @ 0.5-4A; +24V @ 0.1-2.5A; -12V @ 0-1A	124W	7.8x3.9x1.5	80	1.0	0.5	1	UL/CUL/TUV/CE/CB	58.95	54.95	51.95
213648	Mean Well	QP-150F	+5V @ 3-10A; +15V @ 0-3A; +24V @ 0.4-2A; -15V @ 0-0.6A	152W	7.8x3.9x1.5	120	2.0	1.0	3	UL/CUL/TUV/CE/CB/PFC	104.95	94.95	84.95
213752	Mean Well	QP-200D	+5V @ 3-15A; +12V @ 0-4A +24V @ 0.4-3A; -12V @ 0-0.7A	204.9W	7.8x3.9x2.0	100	2.0	1.0	3	UL/CUL/TUV/CE/CB/PFC	124.95	114.95	104.95

* Primary Output

Mounting Brackets & Accessories for Mean Well Enclosed Switching AC-to-DC Power Supplies

All brackets use metric screws: 2-F3 x 6, 2-F4 x 6, 2-T3 x 6, 2-T4 x 6 and 8-T4 x 6 (not included)

★ Web Code: MBM

Part No.	Product No.	For Models	1	10
222122	DRL-01	S-25/40, RS-25/35	\$1.25	\$1.09
222131	DRL-02	S-60/100F/150, D-60/120, SD-100/150, SP-75/100/150/200	1.75	1.49
222148	DRL-03	S-240/320, SP-320	2.25	1.95
222157	DRP-01	All Models	2.49	2.25
222165	DRP-02	S-25, SP-75/100/150/200	1.95	1.75
222173	DRP-03	All Models	1.95	1.75
222182	MHS012	S-320/350, SP-100/150/200/320	.75	.65
1952636	MHS013	PSP-500, SP-750, SE-600	.85	.75
222199	MHS025	SP-500, PSP-600	.95	.85
248736	2094.0	DR, DRH, DRP, DRT, MDR	6.95	6.29



222122 4.35"L x 1.73"W x 2.52"H



222131 7.50"L x 1.73"W x 2.52"H

222148 7.875"L x 2.48"W x 1.80"H



222165 5.13"L x 4.09"W x .078"H



248736 (DIN Mounting Rail)
Length: 1 meter



222173 1.75"L x 1.97"W x .345"H



222182 .767"L x .60"W x .625"H



1952636 1.62"L x .67"W x .60"H



222199 5.51"L x 7.89"W x .068"H

Mating Connector

103588 \$1.20/10
Spade Solderless Terminal

Crimp Tool



72996 \$22.49
Solderless Terminal Crimp Tool

Pricing & specs on page 91



LED Enclosed Power Supplies with Power Factor Correction

For Indoor and Outdoor Applications

- Suitable for LED lighting & moving sign application
- Short-circuit/overload/overvoltage/overtemperature protection

PLN Series • Plastic case • Constant voltage and current
• Working temperature: -30°C to 50°C

CLG Series • Metal case • Adjustable voltage and current
• Working temperature: -30°C to 70°C

ELN Series • Plastic case • Built-in constant current limiting circuit

HLG Series • Metal case • Adjustable voltage and constant current

- 100% full-load burn-in test
- Universal AC input/full range
- Inrush current: 40A/230VAC
- Two-year warranty
- Inrush current: 40A/230VAC
- Three-year warranty

- Cooling by free air convection
- UL1310 class 2 power unit
- Input voltage: 90-295VAC
- Input voltage: 90-295VAC

★ Web Code: LPP



PLN Series



- Two-year warranty
- Three-year warranty

Part No.	Manufacturer	Mfr. Part No.	Output		Size (L" x W" x H")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	Certification	Pricing		
			Voltage @ Current (min-max)	Power (W)						1	5	25
2120233	Advance	LED120A0012V10F #	+12V @ 1A	12	5.2 x 1.3 x 1.0	2000	5.0	1.0	UL/CUL/CSA	\$19.95	\$17.95	\$15.95
1954404	Mean Well	PLN-30-12	+12V @ 0-2.5A	30	5.7 x 1.9 x 1.2	2000	10.0	3.0	UL/CUL/TUV/CE	33.95	31.95	29.95
1918913	Mean Well	PLN-60-12	+12V @ 0-5A	60	7.1 x 2.4 x 1.4	2000	5.0	3.0	UL/CUL/TUV/CE/PFC	49.95	46.95	44.95
1918833	Mean Well	PLN-100-12	+12V @ 0-5A	60	7.9 x 2.8 x 1.4	150	2.0	1.0	UL/CUL/TUV/CE/PFC	59.95	56.95	54.95
2105308	Mean Well	ELN-60-12	+12V @ 5A	60	7.1 x 2.4 x 1.4	120	2.0	1.0	CUL/CE	31.95	29.95	27.95
1954877	Mean Well	CLG-150-12A	+12V @ 0-11A	132	8.7 x 2.7 x 1.5	150	1.0	0.5	UL/TUV/CE	84.95	79.95	74.95
1918964	Mean Well	PLN-60-15	+15V @ 0-4A	60	7.1 x 2.4 x 1.4	2400	10.0	4.0	UL/CUL/TUV/CE	49.95	46.95	44.95
1919001	Mean Well	CLG-60-15 †	+15V @ 0-4A	60	6.8 x 2.4 x 1.5	2400	10.0	4.0	UL/CUL/TUV/CE	59.95	56.95	54.95
1585856	Mean Well	CLG-100-15 †	+15V @ 0-5A	75	8.7 x 2.7 x 1.5	150	2.0	1.0	UL/CUL/TUV/CE/PFC	64.95	59.95	56.95
1585864	Mean Well	CLG-100-20 †	+20V @ 0-4.8A	96	8.7 x 2.7 x 1.5	150	2.0	1.0	UL/CUL/TUV/CE/PFC	64.95	59.95	56.95
1954412	Mean Well	PLN-30-24	+24V @ 0-1.25A	30	5.7 x 1.9 x 1.2	2600	10.0	3.0	UL/CUL/TUV/CE	33.95	31.95	29.95
1585872	Mean Well	CLG-100-24 †	+24V @ 0-4A	96	8.7 x 2.7 x 1.5	150	2.0	1.0	UL/CUL/TUV/CE/PFC	69.95	64.95	59.95
1954885	Mean Well	CLG-150-24A	+24V @ 0-6.3A	150	8.7 x 2.7 x 1.5	150	1.0	0.5	UL/TUV/CE	84.95	79.95	74.95
2102140	Mean Well	HLG-240-24A ††	+24V @ 10A	240	9.6 x 2.7 x 1.5	150	0.5	0.5	UL/CUL/TUV/CE/PFC	118.95	106.95	99.95
2100574	Mean Well	PLN-60-27	+27V @ 0-2.3A	62.1	7.1 x 2.4 x 1.4	2700	5.0	3.0	UL/CE	49.95	46.95	44.95
1585733	Mean Well	CLG-100-27 †	+27V @ 0-3.55A	96	8.7 x 2.7 x 1.5	150	2.0	1.0	UL/CUL/TUV/CE/PFC	64.95	59.95	56.95
2105279	Mean Well	ELN-60-48 ††	+48V @ 0-1.3A	62.5	7.1 x 2.4 x 1.4	250	2.0	1.0	UL/CUL/TUV/CE/PFC	31.95	29.95	27.95
1585768	Mean Well	CLG-100-48 †	+48V @ 0-2A	96	8.7 x 2.7 x 1.5	150	2.0	1.0	UL/CUL/TUV/CE/PFC	64.95	59.95	56.95

* Primary Output # IP66 Rated, 120VAC † IP67 Rated †† Input voltage: 90-264VAC

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

DIN-Rail Switching Power Supplies



DIN-Rail Switching Power Supplies

- Short-circuit, overload, overvoltage protection
- Low cost, high reliability
- 100% full-load burn-in test

See page 205 for **NEW Analog DIN-Rail Timers**.

UL-508

- For DIN-Rail terminal blocks see pg 90
- Universal AC input range
- Soft-start circuit, limiting AC surge current

★ Web Code: **RBV**



373182 (Fig. 1)



1943300
(Fig. 2)

Rail not included



192699 (Fig. 3)



Part No.	Mfr. Part No.	Fig.	Output Volts @ Curr.	Pwr (W)	Input Voltage (VAC @ Hz/VDC)	Input Current @ Max Load	Size (L" x W" x H")	Wt. (lbs.)	1	5	25
2101243	DR-15-5	1	5VDC @ 2.4A	12	85-264 @ 47-63/120-370	0.88A(115V)/0.48A(230V)	1.0 x 3.7 x 2.2	0.2	\$21.49	\$19.95	\$18.95
373174	DR-30-5	1	5VDC @ 3A	15	85-264 @ 47-63/120-370	1.1A(115V)/0.6A(230V)	1.1 x 3.7 x 2.2	0.6	24.95	22.95	21.49
1943300	MDR-20-5	2	5VDC @ 3A	15	85-264 @ 47-63/120-370	0.55A (115V)/0.35A (230V)	3.9 x 0.9 x 3.5	0.4	25.95	24.49	22.95
212303	DR-450-5	3	5VDC @ 5A	25	85-264 @ 47-63/120-370	1.5A(115V)/0.75A(230V)	3.0 x 2.6 x 3.6	0.9	27.95	25.95	23.95
1943393	MDR-40-5	4	5VDC @ 6A	30	85-264 @ 47-63/120-370	1.1A (115V)/0.7A (230V)	3.9 x 1.6 x 3.5	0.6	32.95	31.49	29.95
373212	DR-60-5	1	5VDC @ 6.5A	32.5	85-264 @ 47-63/124-370	1.8A(115V)/1.0A(230V)	3.1 x 3.7 x 2.2	0.7	34.95	32.49	29.95
1943449	MDR-60-5	5	5VDC @ 10A	50	85-264 @ 47-63/120-370	1.8A (115V)/1.0A (230V)	3.9 x 1.6 x 3.5	0.7	36.95	34.95	32.95
1952978	MDR-10-12	2	12VDC @ 0.84A	10	85-264 @ 47-63/120-370	0.33A(155V)/0.21A(230V)	3.9 x 0.9 x 3.5	0.4	21.95	20.49	19.49
2094952	DR-15-12	1	12VDC @ 1.25A	15	85-264 @ 47-63/120-370	0.88A(115V)/0.48A(230V)	3.7 x 1.0 x 2.2	0.2	21.49	19.95	18.95
1943334	MDR-20-12	2	12VDC @ 1.67A	20	85-264 @ 47-63/120-370	0.55A (115V)/0.35A (230V)	3.9 x 0.9 x 3.5	0.4	25.95	24.49	22.95
373182	DR-30-12	1	12VDC @ 2A	24	85-264 @ 47-63/120-370	1.1A(115V)/0.6A(230V)	3.1 x 3.7 x 2.2	0.6	24.95	22.95	21.49
1943406	MDR-40-12	4	12VDC @ 3.33A	40	85-264 @ 47-63/120-370	1.1A (115V)/0.7A (230V)	3.9 x 1.6 x 3.5	0.6	32.95	31.49	29.95
192699	DR-4512	3	12VDC @ 3.5A	42	85-264 @ 47-63/120-370	1.5A(115V)/0.75A(230V)	3.0 x 2.6 x 3.6	0.7	27.95	25.95	23.95
373230	DR-60-12	1	12VDC @ 4.5A	54	85-264 @ 47-63/124-370	1.8A(115V)/1.0A(230V)	3.1 x 3.7 x 2.2	0.7	34.95	32.49	29.95
1943457	MDR-60-12	5	12VDC @ 5A	60	85-264 @ 47-63/120-370	1.8A (115V)/1.0A (230V)	3.9 x 1.6 x 3.5	0.7	36.95	34.95	32.95
212291	DR-75-12	6	12VDC @ 6.3A	75	85-264 @ 47-63/120-370	2.0A(115V)/1.2A(230V)	3.9 x 2.1 x 4.9	1.2	44.95	42.49	39.95
1943511	DR-100-12	1	12VDC @ 7.5A	90	85-264 @ 47-63/124-370	3.0A(115V)/1.6A(230V)	3.9 x 3.7 x 2.2	0.8	49.95	46.95	44.95
1943481	MDR-100-12	5	12VDC @ 7.5A	90	85-264 @ 47-63/120-370	1.3A(155V)/0.8A(230V)	3.9 x 2.2 x 3.5	0.9	64.95	61.95	58.95
212274	DR-120-12	7	12VDC @ 10A	120	88-132/176-264* @ 47-63	2.8A(115V)/1.7A(230V)	2.6 x 3.9 x 4.9	1.4	54.95	51.95	48.95
2099366	SDR-120-12	8	12VDC @ 10A	120	88-264/124-370* @ 47-63	1.4A(115V)/1.0.7A(230V)	4.5 x 1.6 x 4.9	1.5	74.95	69.95	64.95
2101391	DR-15-15	9	15VDC @ 1A	15	85-264 @ 47-63	0.88A(115V)/0.48A(230V)	3.7 x 1.0 x 2.2	0.2	21.49	19.95	18.95
1943342	MDR-20-15	2	15VDC @ 1.24A	20	85-264 @ 47-63/120-370	0.55A(115V)/0.35A(230V)	3.9 x 0.9 x 3.5	0.4	39.95	35.95	31.95
373191	DR-30-15	1	15VDC @ 2A	30	85-264 @ 47-63/120-370	1.1A(115V)/0.6A(230V)	3.1 x 3.7 x 2.2	0.6	24.95	22.95	21.49
373238	DR-60-15	1	15VDC @ 4A	60	85-264 @ 47-63/124-370	1.8A(115V)/1.0A(230V)	3.1 x 3.7 x 2.2	0.7	34.95	32.49	29.95
1952986	MDR-10-24	2	24VDC @ 0.42A	10	85-264 @ 47-63/120-370	0.33A(155V)/0.21A(230V)	3.9 x 0.9 x 3.5	0.4	21.95	20.49	19.49
1943385	MDR-20-24	2	24VDC @ 1A	24	85-264 @ 47-63/120-370	0.55A (115V)/0.35A (230V)	3.9 x 0.9 x 3.5	0.4	25.95	24.49	22.95
373203	DR-30-24	1	24VDC @ 1.5A	36	85-264 @ 47-63/120-370	1.1A(115V)/0.6A(230V)	3.1 x 3.7 x 2.2	0.6	24.95	22.95	21.49
1943422	MDR-40-24	4	24VDC @ 1.7A	40.8	85-264 @ 47-63/120-370	1.1A (115V)/0.7A (230V)	3.9 x 1.6 x 3.5	0.6	32.95	31.49	29.95
192681	DR-4524	3	24VDC @ 2A	48	85-264 @ 47-63/120-370	1.5A(115V)/0.75A(230V)	3.0 x 2.6 x 3.6	0.7	27.95	25.95	23.95
373246	DR-60-24	1	24VDC @ 2.5A	60	85-264 @ 47-63/124-370	1.8A(115V)/1.0A(230V)	3.1 x 3.7 x 2.2	0.7	34.95	32.49	29.95
1943465	MDR-60-24	5	24VDC @ 2.5A	60	85-264 @ 47-63/120-370	1.8A (115V)/1.0A (230V)	3.9 x 1.6 x 3.5	0.7	36.95	34.95	32.95
212282	DR-75-24	6	24VDC @ 3.2A	75	85-264 @ 47-63/120-370	2.0A(115V)/1.2A(230V)	3.9 x 2.1 x 4.9	1.2	44.95	42.49	39.95
1943490	MDR-100-24	5	24VDC @ 4A	90	85-264 @ 47-63/120-370	1.3A(155V)/0.8A(230V)	3.9 x 2.2 x 3.5	0.9	64.95	61.95	58.95
1943537	DR-100-24	1	24VDC @ 4.2A	100	88-264 @ 47-63/124-370	3.0A(115V)/1.6A(230V)	2.2 x 3.9 x 3.7	0.8	49.95	46.95	44.95
212266	DR-120-24	7	24VDC @ 5A	120	88-132/176-264* @ 47-63	2.8A(115V)/1.7A(230V)	2.6 x 3.9 x 4.9	1.4	54.95	51.95	48.95
1953727	DRH-120-24	7	24VDC @ 5A	120	340-550 @ 47-63/480-780	0.65A(400V)/0.6A(500V)	3.9 x 2.6 x 4.9	1.7	74.95	69.95	64.95
2099374	SDR-120-24	8	24VDC @ 5A	120	88-264/124-370* @ 47-63	1.4A(115V)/1.0.7A(230V)	4.5 x 1.6 x 4.9	1.5	74.95	69.95	64.95
221892	DRP-240-24	10	24VDC @ 10A	240	85-264 @ 47-63/120-370	3.5A(115V)/1.8A(230V)	3.9 x 4.9 x 4.9	2.4	89.95	84.95	79.95
373123	DRT-240-24	10	24VDC @ 10A	240	3-phase 340-550 @ 47-63/480-780	0.95A(400V)/0.75A(500V)	3.9 x 4.9 x 4.9	2.9	94.95	89.95	84.95
2081086	SDR-240-24	8	24VDC @ 10A	240	88-264 @ 47-63/124-370	2.6A(115V)/1.3A(230V)	2.5 x 4.9 x 4.5	2.5	134.95	124.95	114.95
252663	DRP-480-24	11	24VDC @ 20A	480	180-264 @ 47-63/25-370	4.0A(230V)	8.9 x 3.9 x 4.9	4.6	139.95	129.95	119.95
295938	DRP-480S-24	11	24VDC @ 20A	480	90-132/180-264* @ 47-63/254-370	11.0A(115V)/4.0A(230V)	8.9 x 3.9 x 4.9	4.6	144.95	134.95	124.95
2094944	SDR-480-24	12	24VDC @ 20A	480	88-264 @ 47-63/124-370	2.6A(115V)/1.3A(230V)	4.9 x 3.4 x 5.0	4.9	209.95	194.95	184.95
1943431	MDR-40-48	4	48VDC @ 0.83A	39.8	85-264 @ 47-63/120-370	1.1A (115V)/0.7A (230V)	3.9 x 1.6 x 3.5	0.6	32.95	31.49	29.95
1943473	MDR-60-48	5	48VDC @ 1.25A	60	85-264 @ 47-63/120-370	1.8A (115V)/1.0A (230V)	3.9 x 1.6 x 3.5	0.7	36.95	34.95	32.95
221904	DR-120-48	7	48VDC @ 2.5A	120	88-132/176-264* @ 47-63	2.8A(115V)/1.7A(230V)	2.6 x 3.9 x 4.9	1.4	54.95	51.95	48.95
1953735	DRH-120-48	7	48VDC @ 2.5A	120	340-550 @ 47-63/480-780	0.65A(400V)/0.6A(500V)	3.9 x 2.6 x 4.9	1.7	69.95	64.95	59.95
221883	DRP-240-48	10	48VDC @ 5A	240	85-264 @ 47-63/120-370	3.5A(115V)/1.8A(230V)	3.9 x 4.9 x 4.9	2.4	89.95	84.95	79.95
2094936	SDR-240-48	8	48VDC @ 5A	240	88-264 @ 47-63/120-370	2.6A(115V)/1.3A(350V)	2.5 x 4.9 x 4.5	2.5	134.95	124.95	114.95
252655	DRP-480-48	11	48VDC @ 10A	480	180-264 @ 47-63/25-370	4.0A(230V)	8.9 x 3.9 x 4.9	4.6	139.95	129.95	119.95
301306	DRP-480S-48	11	48VDC @ 10A	480	90-132/180-264* @ 47-63/254-370	11.0A(115V)/4.0A(230V)	8.9 x 3.9 x 4.9	4.6	144.95	134.95	124.95
373106	DRT-480-48	11	48VDC @ 10A	480	3-phase 340-550 @ 47-63/480-750	1.7A(400V)/1.3A(500V)	8.9 x 3.9 x 4.9	5.5	79.95	74.95	69.95

* Switch selectable † With Power Factor Correction



DIN Mounting Rail



Part No.	Mfr. Part No.	Description	Material	Type	Length	1	10	100
248736	2094.0	Prepunched DIN mounting rail	Zinc bichromate plate steel	TS35 x 7.5	1 meter (39")	\$6.95	\$6.29	\$5.49

★ For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

NAME BRANDS	4 LEVELS OF SAVINGS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE
-------------	---------------------	--------------	-----------------	-------------

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

Encapsulated Switching Power Supplies

*Web Code: E5P

PM-05/PM-10/PM-15/PM-20 Series:

- Universal AC input (85-264VAC @ 47Hz)
- Short-circuit, overload, overvoltage protection
- Ultra-miniature size
- UL/CUL/TUV/CE/CB
- Cooling by free air convection
- 100% full-load burn-in test
- Three-year warranty



Part No.	Manufacturer	Mfr. P/N	Output		Pins	Ripple & Noise (mVp-p)	Load Reg. (±%)	Line Reg. (±%)	Size (L" x W" x H")	Pricing		
			Volt. @ Curr. (min-max)	Pwr (W)						1	10	50
1954527	Mean Well	PM-05-12	+12V @ 0-0.42A	5.04	4	150	1.0	0.5	2.5 x 2.0 x 0.8	\$15.49	\$14.49	\$13.49
1954551	Mean Well	PM-10-12	+12V @ 0-0.85A	10.2	4	150	1.0	0.5	2.8 x 2.0 x 0.9	17.49	16.49	15.49
1954586	Mean Well	PM-15-12	+12V @ 0-1.25A	15	4	150	1.0	0.5	3.0 x 2.1 x 0.9	20.95	19.95	18.95
1954367	Mean Well	PM-20-12	+12V @ 0-1.80A	21.6	6	150	1.0	0.5	3.7 x 2.2 x 0.9	22.95	21.49	19.95
1954535	Mean Well	PM-05-24	+24V @ 0-0.23A	5.52	4	240	0.5	0.5	2.5 x 2.0 x 0.8	15.49	14.49	13.49
1954560	Mean Well	PM-10-24	+24V @ 0-0.42A	10.1	4	240	0.5	0.5	2.8 x 2.0 x 0.9	17.49	16.49	15.49
1954594	Mean Well	PM-15-24	+24V @ 0-0.63A	15.1	4	240	0.5	0.5	3.0 x 2.1 x 0.9	20.95	19.95	18.95
1954383	Mean Well	PM-20-24	+24V @ 0-0.92A	22.1	6	240	0.5	0.5	3.7 x 2.2 x 0.9	22.95	21.49	19.95

600-Watt Rackmount Power Supply

*Web Code: MCJ

- AC Input active surge current limiting
- Forced air cooling by built-in DC fan
- Built-in remote sense function
- Short-circuit, overload, overvoltage, overtemperature protection
- Input voltage: 90-132VAC/180-264VAC switch selectable
- Output: 48VDC @ 12.5A • Ripple & noise: 150mVp-p max.

Part No.	Mfr. Part No.	Size (W" x D" x H")	1	5	25
673408	SE-600-48RM	19.5 x 5.0 x 3.5	\$249.95	\$229.95	\$214.95

Dual Adj. Regulated Power Supply Kit

- Adjustable positive/negative supplies ±5 to ±15VDC, 175mA-750mA per supply
- LED on indicator • 120VAC input • 48-piece kit
- PC board construction • Difficulty level: intermediate




Part No.	Cross Ref. No.	Size (L" x W" x H")	Wt. (lbs.)	1	10
20626	JE215	5.1 x 3.5 x 2.0	2.1	\$24.95	\$22.49

We also carry AT & ATX Computer Power Supplies See page 180

15 to 500-Watt Enclosed Converters

Performance at Value Prices

- 2:1 wide input range • 100% burn-in test • Working temp.: -10°C to +60°C • Protection: short-circuit, overload and overvoltage
- SD-15 Series • Built-in EMI filter, low ripple noise • One-year warranty
- SD-25/SD-50/SD-100/SD-150 Series • Isolation voltage: 1500VDC • Built-in EMI filter, low ripple noise • One-year warranty
- SD-200/350 Series • Isolation volt.: 1500VDC • Cooling by free air convection • Fixed switching freq @ 83kHz • SD-200: One-year warranty; SD-350: Two-year warranty
- SD-500 Series • Isolation voltage: 2000VAC • DC input active surge current limiting
- Wide 4:1 ~ 2:1 SC input range • Forced air cooling by built-in DC fan w/ fan speed control function • Three-year warranty



Part No.	Mfr. Part No.	Input Range	Output		Size (L" x W" x H")	Pins	Line Reg. (±%)	Load Reg. (±%)	Ripple & Noise (mV p-p)	Pricing			
			Voltage @ Current	Power (W)						1	5	25	100
1953778	SD-15A-5R	9.2-18V	+5V @ 3.0A	15	3.1 x 2.0 x 1.1	5	0.5	0.5	100	\$19.95	\$18.49	\$16.95	\$15.95
175662	SD-25A-5R	9-18V	+5V @ 5.0A	25	3.9 x 3.8 x 1.4	5	0.5	0.5	100	24.95	22.95	21.49	19.95
212549	SD-50A-5R	9-18V	+5V @ 10A	50	6.3 x 3.8 x 1.5	5	0.5	0.5	100	32.49	29.95	27.95	26.49
1953882	SD-200B-5R	19-36V	+5V @ 34A	170	8.5 x 4.5 x 2.0	9	0.5	1.0	100	99.95	94.95	89.95	84.95
1953891	SD-350B-5R	19-36V	+5V @ 57A	285	8.5 x 4.5 x 2.0	9	0.5	1.0	100	109.95	104.95	99.95	94.95
1953823	SD-15B-12R	18-36V	+12V @ 1.25A	15	3.1 x 2.0 x 1.1	5	0.3	0.3	120	19.95	18.49	16.95	15.95
1953840	SD-15C-12R	36-72V	+12V @ 1.25A	15	3.1 x 2.0 x 1.1	5	0.3	0.3	120	19.95	18.49	16.95	15.95
175805	SD-25A-12R	9-18V	+12V @ 2.1A	25.2	3.9 x 3.8 x 1.4	5	0.3	0.3	120	25.95	23.95	21.95	20.49
1537483	SD-50A-12R	9.2-18V	+12V @ 4.2A	50.1	6.3 x 3.8 x 1.5	5	0.3	0.3	120	32.49	29.95	27.95	26.49
212531	SD-50B-12R	19-36V	+12V @ 4.2A	50.4	6.3 x 3.8 x 1.5	5	0.3	0.3	120	32.49	29.95	27.95	26.49
212506	SD-50C-12R	36-72V	+12V @ 4.2A	50.4	6.3 x 3.8 x 1.5	5	0.3	0.3	120	32.49	29.95	27.95	26.49
212469	SD-100C-12R	36-72V	+12V @ 8.5A	102	7.8 x 3.9 x 1.5	7	0.3	0.3	120	41.95	38.95	36.95	34.95
217270	SD-150B-12R	19-36V	+12V @ 12.5A	150	7.8 x 4.3 x 2.0	7	0.5	0.5	120	54.95	51.95	48.95	46.95
1953903	SD-200B-12R	19-36V	+12V @ 16.7A	200.4	8.5 x 4.5 x 2.0	9	0.5	1.0	100	99.95	94.95	89.95	84.95
1953920	SD-200C-12R	36-72V	+12V @ 16.7A	200.4	8.5 x 4.5 x 2.0	9	0.5	1.0	120	99.95	94.95	89.95	84.95
1953760	SD-200D-12R	72-144V	+12V @ 16.7A	200.4	8.5 x 4.5 x 2.0	9	0.5	1.0	120	99.95	94.95	89.95	84.95
1953962	SD-350B-12R	19-36V	+12V @ 27.5A	330	8.5 x 4.5 x 2.0	9	0.3	1.0	120	109.95	104.95	99.95	94.95
1953997	SD-350C-12R	36-72V	+12V @ 27.5A	330	8.5 x 4.5 x 2.0	9	0.3	1.0	120	109.95	104.95	99.95	94.95
1954033	SD-500L-12R	19-72V	+12V @ 40A	480	8.5 x 4.5 x 2.0	7	0.5	0.5	150	174.95	164.95	154.95	144.95
1954050	SD-500H-12R	72-144V	+12V @ 40A	480	8.5 x 4.5 x 2.0	7	0.5	0.5	150	174.95	164.95	154.95	144.95
175813	SD-25A-24R	9-18V	+24V @ 1.1A	26.4	3.9 x 3.8 x 1.4	5	0.2	0.2	150	25.95	23.95	21.95	20.49
2107186	SD-25C-24R	36-72V	+24V @ 1.1A	26.4	3.9 x 3.8 x 1.4	5	0.2	0.2	150	25.95	23.95	21.95	20.49
2107266	SD-50A-24R	9.2-18V	+24V @ 2.1A	50.4	6.3 x 3.8 x 1.5	5	0.2	0.2	150	32.49	29.95	27.95	26.49
212514	SD-50B-24R	19-36V	+24V @ 2.1A	50.4	6.3 x 3.8 x 1.5	5	0.2	0.2	150	32.49	29.95	27.95	26.49
1953954	SD-200B-24R	19-36V	+24V @ 8.4A	201.6	8.5 x 4.5 x 2.0	9	0.5	1.0	150	99.95	94.95	89.95	84.95
1953743	SD-200C-24R	36-72V	+24V @ 8.4A	201.6	8.5 x 4.5 x 2.0	9	0.5	1.0	150	109.95	99.95	94.95	89.95
1953971	SD-350B-24R	19-36V	+24V @ 14.6A	350.4	8.5 x 4.5 x 2.0	9	0.2	1.0	150	109.95	104.95	99.95	94.95
1954009	SD-350C-24R	36-72V	+24V @ 14.6A	350.4	8.5 x 4.5 x 2.0	9	0.2	1.0	150	109.95	104.95	99.95	94.95
1954025	SD-500L-24R	19-72V	+24V @ 21A	504	8.5 x 4.5 x 2.0	7	0.5	0.5	150	174.95	164.95	154.95	144.95
1953911	SD-200B-48R	19-36V	+48V @ 4.2A	201.6	8.5 x 4.5 x 2.0	9	0.5	1.0	150	99.95	94.95	89.95	84.95
1953946	SD-200D-48R	72-144V	+48V @ 4.2A	201.6	8.5 x 4.5 x 2.0	9	0.5	1.0	120	99.95	94.95	89.95	84.95
1954017	SD-350C-48R	36-72V	+48V @ 7.3A	350.4	8.5 x 4.5 x 2.0	9	0.2	1.0	150	109.95	104.95	99.95	94.95
1953989	SD-350B-48R	19-36V	+48V @ 7.3A	350.4	8.5 x 4.5 x 2.0	9	0.3	1.0	120	109.95	104.95	99.95	94.95

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

Pure-Sine-Wave DC/AC Inverters

- Output waveform: sine wave
 - Thermostatically controlled cooling fan
 - Low battery alarm, low battery shutdown, overtemperature, overload, short-circuit, reverse polarity protection
 - Output wave form THD: < 3%
 - Output connector: 3-prong AC receptacle
 - Two-year warranty
- SAMLEX:** • Operating temperature: 0 ~ 40°C • Output voltage: 120VAC (±3%) @ 60Hz
- Mean Well:** • Working temperature: 0 ~ 60°C • Output voltage: 110VAC @ 60Hz



PST-30S



TS-1000

***Additional Sine-Wave Inverters available Online — Enter Web Code XEL**

Part No.	Manufacturer	Mfr. Part No.	Output Power (W)	Efficiency (%)	Input Voltage Range (VDC)	Input Connector	Size (L" x W" x H")	Wt. (lbs.)	Pricing	
									1	5
672624	Samlex	PST-30S-12A	300	85	10.5 – 16.5	Screwdown terminals	8.4 x 5.8 x 2.6	3.3	\$149.95	\$134.95
1952425	Mean Well	TS-1000-112F*	1000	88	10.5 – 15.0	Screwdown terminals	15.5 x 7.2 x 2.8	9.5	399.95	369.95
1943545	Mean Well	TS-1500-112A	1500	87	10.5 – 15.0	Screwdown terminals	16.5 x 8.7 x 3.5	7.5	424.95	389.95


* With built-in GFCI



Unregulated Encapsulated Converters

- Input range: 4.5-5.5V
- Ripple & noise: 100mV p-p
- Input filter: capacitor type
- Line & load regulation: ±1.0%
- No external components needed
- Working temp.: -15°C to +60°C
- 1000VDC isolation
- 100% burn-in test
- Protection: short-circuit
- One-year warranty

***Web Code: SBH**



216831

Part No.	Mfr. Part No.	Output Voltage@Current	Power	Size (L"xW"xH")	Pins	Pricing		
						1	10	50
213226	SRS-0505	+5V @ 100mA	0.5W	.88 x .39 x .33	8	\$9.95	\$8.95	\$7.95
216831	SPR01L-12	+12V @ 84mA	1W	.77 x .28 x .40	4	9.95	8.95	7.95



Encapsulated DC-to-DC Converters

SCW03, SLW05, SCW05, SCW08, SKE10, SKA15 & SKE15 Series

- 1000VDC I/O isolation
- Short-circuit/overload protection
- Cooling by free air convection
- Shield metal case
- 2:1 wide input range
- One-year warranty

FEC15 Series

- 2:1 & 4:1 wide input voltage range (depending on model)
- Short-circuit/overload protection
- Fixed switching frequency
- 1600VDC isolation
- Standard DIP package (24-pin)
- Two-year warranty

SBT01 Series

- 1000VDC I/O isolation
- Short-circuit/overload protection
- Cooling by free air convection
- Internal SMD technology

SCW12 & DCW12 Series

- 2:1 wide input voltage range • 1500VDC I/O isolation
- Short-circuit/overload protection
- Built-in EMI filter
- Built-in remote on/off control
- Five sided shielded metal case
- Two-year warranty

DCW03, DCW05, DCW08, DKE10, DKA15 & DKE15 Series

- 1000VDC I/O isolation
- Short-circuit/overload protection
- Cooling by free air convection
- Shield metal case
- 2:1 wide input range
- One-year warranty

DKA30, TKA30 & TKB20 Series

- 1000VDC I/O isolation
- 2:1 wide input range
- Cooling by free air convection
- Remote on/off control
- Short-circuit/overload protection
- Six sided shielded metal case
- One-year warranty

***Web Code: NAX**



SLW05



FEC15



SBT01



DKA15



DCW12



TKA30

Part No.	Manufacturer	Mfr. Part No.	Input Range	Output		Size (L" x W" xH")	Pins	Line Reg. (±%)	Load Reg. (±%)	Ripple & Noise (mV p-p)	Pricing				
				Voltage @ Current	Pwr (W)						1	5	25	100	
Single Output															
220354	Mean Well [®]	SLW05A-033	9-18V	+3.3V @ 1.5A	5	2.0x1.0x0.44	5	0.2	0.5	100	\$16.95	\$15.49	\$13.95	\$12.95	
220337	Mean Well [®]	SKE10B-033	18-36V	+3.3V @ 2.4A	8	2.0x1.0x0.44	5	0.3	0.5	50	19.95	16.95	15.95	14.95	
1944071	Power Mate [®]	FEC15-24S3P3	18-36V	+3.3V @ 4A	15	2.0x1.0x0.4	6	0.5	0.5	50	32.95	29.95	26.95	24.95	
2106790	Mean Well [®]	SBT01M-05	10.8-13.2V	+5V @ 0.2A	1	0.5x0.3x0.2	8	8.0	1.2	100	4.95	4.49	3.95	3.69	
213269	Mean Well [®]	SCW03A-05	9-18V	+5V @ 0.6A	3	1.25x0.8x0.48	10	1.0	0.5	100	13.95	12.95	11.49	10.49	
1953292	Mean Well [®]	SCW05A-05	9-18V	+5V @ 1A	5	1.25x0.8x0.48	8	0.5	0.5	50	14.95	13.49	11.95	10.95	
216929	Mean Well [®]	SLW05A-05	9-18V	+5V @ 1A	5	2.0x1.0x0.44	5	1.0	0.2	100	22.95	19.95	17.95	15.95	
216937	Mean Well [®]	SLW05B-05	18-36V	+5V @ 1A	5	2.0x1.0x0.44	5	1.0	0.2	100	22.95	19.95	17.95	15.95	
1953313	Mean Well [®]	SCW05B-05	18-36V	+5V @ 1A	5	1.25x0.8x0.48	8	0.5	0.5	50	14.95	13.49	11.95	10.95	
213234	Mean Well [®]	SLW05C-05	36-72V	+5V @ 1A	5	2.0x1.0x0.44	5	1.0	0.2	100	22.95	19.95	17.95	15.95	
216962	Mean Well [®]	SKE10A-05	9-18V	+5V @ 2A	10	2.0x1.0x0.44	5	0.3	1.0	50	28.95	25.95	22.95	19.95	
216953	Mean Well [®]	SKE10B-05	18-36V	+5V @ 2A	10	2.0x1.0x0.44	5	0.3	0.5	50	28.95	25.95	22.95	19.95	

Encapsulated Converters continued on next page

***For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above**

Encapsulated & Open-Frame DC-to-DC Converters

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts



Encapsulated DC-to-DC Converters (Continued)

Photos on previous page

*Web Code: NAX

Part No.	Manufacturer	Mfr. Part No.	Input Range	Output		Size (L" x W" x H")	Pins	Line Reg. (±%)	Load Reg. (±%)	Ripple & Noise (mV p-p)	Pricing				
				Voltage @ Current	Pwr (W)						1	5	25	100	
Single Output (Continued)															
216945	Mean Well	SKE10C-05	36-72V	+5V @ 2A	10	2.0x1.0x0.44	5	0.3	1.0	50	\$24.95	\$21.95	\$19.95	\$17.95	
1953428	Mean Well	SCW12A-05	9-18V	+5V @ 2.4A	12	1.25x0.8x0.48	9	0.5	0.5	50	24.95	21.95	19.95	17.95	
1953461	Mean Well	SCW12C-05	36-72V	+5V @ 2.4A	12	1.25x0.8x0.48	9	0.5	0.5	50	24.95	21.95	19.95	17.95	
155716	Mean Well	SKE15A-05	9-18V	+5V @ 3A	15	2.0x2.0x0.43	5	0.3	0.5	50	24.95	21.95	19.95	17.95	
213277	Mean Well	SKE15B-05	18-36V	+5V @ 3A	15	2.0x2.0x0.43	5	0.3	0.5	50	24.95	21.95	19.95	17.95	
216911	Mean Well	SLW05B-12	18-36V	+12V @ 0.417A	5	2.0x1.0x0.44	5	1.0	0.2	100	16.95	14.95	13.49	12.49	
1953495	Mean Well	SCW08A-12	9-18V	+12V @ 0.67A	8	1.25x0.8x0.48	8	0.5	0.5	60	17.95	16.95	15.95	14.95	
1953516	Mean Well	SCW08B-12	18-36V	+12V @ 0.67A	8	1.25x0.8x0.48	8	0.5	0.5	60	17.95	16.95	15.95	14.95	
217024	Mean Well	SKE10B-12	18-36V	+12V @ 0.84A	10	2.0x1.0x0.44	5	0.3	0.5	60	28.95	25.95	22.95	19.95	
1953452	Mean Well	SCW12B-12	18-36V	+12V @ 1A	12	1.25x0.8x0.48	9	0.5	0.5	60	24.95	21.95	19.95	17.95	
1953479	Mean Well	SCW12C-12	36-72V	+12V @ 1A	12	1.25x0.8x0.48	9	0.5	0.5	60	24.95	21.95	19.95	17.95	
155708	Mean Well	SKE15A-12	9-18V	+12V @ 1.25A	15	2.0x2.0x0.43	5	0.3	0.5	60	24.95	21.95	19.95	17.95	
1953161	Mean Well	SKA15A-12	9-18V	+12V @ 1.25A	15	2.0x1.0x0.44	5	0.2	0.5	60	26.95	23.95	21.95	19.95	
213285	Mean Well	SKE15B-12	18-36V	+12V @ 1.25A	15	2.0x2.0x0.43	5	0.3	0.5	60	24.95	21.95	19.95	17.95	
1953170	Mean Well	SKA15B-12	18-36V	+12V @ 1.25A	15	2.0x1.0x0.44	5	0.2	0.5	60	26.95	23.95	21.95	19.95	
1953196	Mean Well	SKA15C-12	36-72V	+12V @ 1.25A	15	2.0x1.0x0.44	5	0.2	0.5	60	26.95	23.95	21.95	19.95	
216882	Mean Well	SLW05A-15	9-18V	+15V @ 0.333A	5	2.0x1.0x0.44	5	1.0	0.2	100	16.95	14.95	13.49	12.49	
216980	Mean Well	SKE10A-15	9-18V	+15V @ 0.666A	10	2.0x1.0x0.44	5	0.3	1.0	60	24.95	21.95	19.95	17.95	
155695	Mean Well	SKE15A-24	9-18V	+24V @ 0.625A	15	2.0x2.0x0.43	5	0.3	0.5	80	24.95	21.95	19.95	17.95	
Dual Output															
155919	Mean Well	DCW03A-05	9-18V	±5V @ 0.3A	3	1.25x0.8x0.48	10	1.0	0.5	100	\$15.95	\$13.95	\$12.49	\$10.95	
217032	Mean Well	DKE10A-05	9-18V	±5V @ 1A	10	2.0x1.0x0.44	5	0.3	0.5	50	26.95	23.95	21.95	19.95	
1954421	Mean Well	DCW12A-05	9-18V	±5V @ 1.2A	12	1.25x0.8x0.48	9	0.5	0.5	50	26.95	23.95	21.95	19.95	
1954076	Mean Well	DCW12C-05	36-72V	±5V @ 1.2A	12	1.25x0.8x0.48	9	0.5	0.5	50	26.95	23.95	21.95	19.95	
1953081	Mean Well	DKA15B-05	18-36V	+5V @ 3A; -5V @ 1.5A	15	2.0x1.0x0.44	5	0.2	0.5	50	28.95	25.95	22.95	20.95	
1954121	Mean Well	DKA30C-05	36-72V	±5V @ 2.5A	25	2.0x2.0x0.82	8	0.5	0.5	100	32.95	29.95	27.95	25.95	
161702	Mean Well	DCW03A-12	9-18V	±12V @ 0.125A	3	1.25x0.8x0.48	10	1.0	0.5	100	15.95	13.95	12.49	10.95	
1953241	Mean Well	DCW05A-12	9-18V	±12V @ 0.23A	5.5	1.25x0.8x0.48	8	0.5	0.5	60	14.95	13.95	12.95	11.95	
1953356	Mean Well	DCW08A-12	9-18V	±12V @ 0.335A	8	1.25x0.8x0.48	8	0.5	0.5	60	19.95	17.95	15.95	14.49	
1953399	Mean Well	DCW08C-12	36-72V	±12V @ 0.335A	8	1.25x0.8x0.48	8	0.5	0.5	60	19.95	17.95	15.95	14.49	
217092	Mean Well	DKE10A-12	9-18V	±12V @ 0.42A	10	2.0x1.0x0.44	5	0.3	0.5	60	26.95	23.95	21.95	19.95	
1953022	Mean Well	DCW12B-12	18-36V	±12V @ 0.5A	12	1.25x0.8x0.48	9	0.5	0.5	60	26.95	23.95	21.95	19.95	
1953049	Mean Well	DCW12C-12	36-72V	±12V @ 0.5A	12	1.25x0.8x0.48	9	0.5	0.5	60	26.95	23.95	21.95	19.95	
161729	Mean Well	DKE15A-12	9-18V	±12V @ 0.625A	15	2.0x2.0x0.43	5	0.3	0.5	60	26.95	23.95	21.95	19.95	
1953090	Mean Well	DKA15B-12	18-36V	±12V @ 0.625A	15	2.0x1.0x0.44	5	0.2	0.5	60	28.95	25.95	22.95	20.95	
1953102	Mean Well	DKA15C-12	36-72V	±12V @ 0.625A	15	2.0x1.0x0.44	5	0.2	0.5	60	28.95	25.95	22.95	20.95	
1953364	Mean Well	DCW08A-15	9-18V	±15V @ 0.267A	8	1.25x0.8x0.48	8	0.5	0.5	60	19.95	17.95	15.95	14.49	
1953381	Mean Well	DCW08B-15	18-36V	±15V @ 0.267A	8	1.25x0.8x0.48	8	0.5	0.5	60	19.95	17.95	15.95	14.49	
217112	Mean Well	DKE10A-15	9-18V	±15V @ 0.333A	10	2.0x1.0x0.44	5	0.3	0.5	60	26.95	23.95	21.95	19.95	
217075	Mean Well	DKE10B-15	18-36V	±15V @ 0.333A	10	2.0x1.0x0.44	5	0.3	0.5	60	26.95	23.95	21.95	19.95	
1953111	Mean Well	DKA15C-15	36-72V	±15V @ 0.5A	15	2.0x1.0x0.44	5	0.2	0.5	60	28.95	25.95	22.95	20.95	
1954130	Mean Well	DKA30A-15	9-18V	±15V @ 1A	30	2.0x2.0x0.82	8	0.5	0.5	100	32.95	29.95	27.95	25.95	
213293	Mean Well	DKE15A-24	9-18V	±24V @ 0.313A	15	2.0x2.0x0.43	5	0.3	0.5	80	26.95	23.95	21.95	19.95	
Triple Output															
217648	Mean Well	TKB20C-B	36-72V	+5V @ 2.5A; ±12V @ 0.31A	20	1.2x2.0x0.82	8	0.2	0.2	100	\$24.95	\$22.95	\$20.95	\$18.95	
1953217	Mean Well	TKA30B-B	18-36V	+5V @ 0.31A; ±12V @ 0.31A	25	2.0x2.0x0.82	8	5.0	5.0	100	37.95	33.95	31.95	29.95	



Isolated Open-Frame DC-to-DC Converters

- Isolation voltage: 1500VDC
 - 100% burn-in test
 - Industry standard footprint
 - Remote ON/OFF
 - Two-year warranty
- CXA20: 4:1 input voltage range

CXE15/CXA20/EXQ60: No minimum load



Part No.	Mfr. Part No.	Input Range	Output		Size (L" x W" x H")	Pins	Line Reg. (±%)	Load Reg. (±%)	Ripple & Noise (mV p-p)	Pricing		
			Voltage @ Current	Power (W)						1	5	25
219070	CXE15-48S1V8	33-75V	+1.8V @ 6A	10.8	2.0 x 1.0 x 0.35	6	0.3	2.0	40	\$22.95	\$19.95	\$17.95
219088	CXE15-48S2V5	33-75V	+2.5V @ 6A	15	2.0 x 1.0 x 0.35	6	0.3	1.5	40	22.95	19.95	17.95
218894	EXQ60-48D3V3-2V5-R	33-75V	+2.5V @ 16A; +3.3V @ 12A	40	2.3 x 1.5 x 0.50	7	—	—	60	64.95	59.95	54.95
219053	CXE15-48S3V3	33-75V	+3.3V @ 4.5A	15	2.0 x 1.0 x 0.35	6	0.1	0.5	70	22.95	19.95	17.95
219109	CXA20-48S3V3	18-75V	+3.3V @ 6A	19.8	2.0 x 1.6 x 0.41	8	0.1	0.2	75	22.95	19.95	17.95
218907	EXQ60-48D05-3V3-R	33-75V	+3.3V @ 15A; +5V @ 12A	60	2.3 x 1.5 x 0.50	7	—	—	60	64.95	59.95	54.95

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

Save 10% or more on most batteries!

Lithium, NiCd & NiMH Batteries

Applications: personal computers, workstations, test equipment, feature telephones, copiers, fax machines, video scramblers/descramblers and remotes.

NEW
MARKED IN PINK

*Web Code: GCF

Lithium

Part No.	Product No.	Manufacturer	Fig.	Size	Volts	mAh	Terminals/Connection	Dimensions	1	10	25
673627	NB4414/F9D	Panasonic	1	Coin cell	2.0	1.0	4.8mm body w/ tabs (2)	0.18"Dia. x 0.06"Thick	\$.49	\$.45	\$.39
673601	NBL621/F9DE	Panasonic	1	Coin cell	2.0	4.0	Vertical PC mount	0.27"Dia. x 0.10"Thick	.85	.75	.65
2123784	CR1220	Evergreen	2	Coin cell	3	40	Clock/memory/watch	0.49"Dia. x 0.77"Thick	.85	.75	.65
2119865	CR1632	Evergreen	2	Coin cell	3	120	Clock/memory/watch	0.63"Dia. x 0.13"Thick	1.09	.95	.85
11789	CR2325	ReliaPro	2	Coin cell	3	165	Clock/memory/watch	0.91"Dia. x 0.13"Thick	1.79	1.59	1.45
14162	CR2032	Various	2	Coin cell	3	180	Clock/memory/watch	0.79"Dia. x 0.13"Thick	1.25	1.09	.99
1585451	DL2032	Duracell	2	Coin cell	3	180	Clock/memory/watch	0.79"Dia. x 0.13"Thick	1.49	1.35	1.19
2119216	CR2450	Evergreen	2	Coin cell	3	550	Clock/memory/watch	0.95"Dia. x 0.20"Thick	1.49	1.35	1.19
689071	DL2450	Various	2	Coin cell	3	600	Clock/memory/watch	0.95"Dia. x 0.18"Thick	2.25	1.95	1.75
2113691	BR2330	Dantona	2	Coin cell	3	255	Clock/memory/watch	0.90"Dia. x 0.12"Thick	2.45	2.19	1.95
2119873	CR2	Evergreen	3	Cylinder	3	750	Consumer tip/digital camera	1.66"L x 0.61"Dia.	4.95	4.49	4.09
2119881	2CR5	Evergreen	4	Dual cyl.	6	1400	(2) term. on one end	1.76"L x 1.33"Dia.	7.95	7.29	6.95
126754	TL5101S	Tadiron	3	Sub-AA	3.6	850	Macintosh®	0.95"L x 0.56"Dia.	4.75	4.25	3.55
263898	ER14250	ReliaPro	3	Sub-AA	3.6	1000	With axial leads	1.00"L x 0.55"Dia.	4.75	4.25	3.85
240266	ER14250	ReliaPro	3	Sub-AA	3.6	1000	Consumer tip	1.00"L x 0.55"Dia.	4.25	3.95	3.55
673635	CA1/2AA	Various	5	1/2 AA	3	950	Barrel w/ leads (2)	1.0"L x 0.58"Dia.	2.49	2.29	1.95
33371	TL5101P	Tadiron	6	1/2 AA	3.6	850	Barrel w/ leads (clock/mem.)	0.93"L x 0.56"Dia.	6.25	5.65	4.95
33398	TL5104P	Tadiron	7	AA	3.6	1900	Barrel w/ leads (clock/mem.)	1.88"L x 0.56"Dia.	6.95	6.25	5.65
146114	TL5104/S	Tadiron	8	AA	3.6	1900	Barrel pressure (clock/mem.)	1.91"L x 0.56"Dia.	6.95	6.25	5.65
240258	CR123A	ReliaPro	9	A	3	1300	Photo/computer	1.36"L x 0.65"Dia.	2.75	2.49	2.25



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5



Fig. 6



Fig. 7



Fig. 8



Fig. 9



Fig. 10



Fig. 11



Fig. 12

NiCd - Rechargeable

Part No.	Product No.	Manufacturer	Fig.	Size	Volts	mAh	Terminals/Connection	Dimensions	1	10	25
261657	AA-700-CT	ReliaPro	10	AA	1.2	700	Consumer tip	1.90"L x 0.55"Dia.	\$1.69	\$1.49	\$1.35
244515	AA-1000-CT	ReliaPro	10	AA	1.2	1000	Consumer tip	1.90"L x 0.55"Dia.	2.75	2.49	2.25
126720	351FT	Evergreen	11	N/A	3.6	60	2-lead (pin), barrel	0.72"L x 0.61"Dia.	4.49	3.95	3.55
119116	3V60R	Dantona	11	N/A	3.6	60	3-lead (pin), barrel	0.72"L x 0.61"Dia.	3.35	2.95	2.65
101653	NA101-1	Evergreen	12	N/A	3.6	60	2-lead (eyelet), barrel	0.72"L x 0.61"Dia.	3.95	3.55	3.19



Fig. 13



Fig. 14



Fig. 15

NiMH - Rechargeable

Part No.	Product No.	Manufacturer	Fig.	Size	Volts	mAh	Terminals/Connection	Dimensions	1	10	25
231095	AAA-750NM	Dantona	13	AAA	1.2	600	Consumer tip	1.70"L x 0.40"Dia.	\$3.45	\$3.09	\$2.79
244822	AA-1800-CT	ReliaPro	14	AA	1.2	1800	Consumer tip	1.90"L x 0.55"Dia.	3.55	3.19	2.89
231087	AA-1800NM	Dantona	15	AA	1.2	1800	Consumer tip	1.90"L x 0.55"Dia.	3.95	3.55	3.19
244620	9V-200	Tysonic	16	9V	9	200	Snaps	1.94"L x 0.65"Dia.	9.75	8.75	7.95
231108	9V-8.4NM	Dantona	17	9V	9	150	Snaps	1.94"L x 0.61"Dia.	10.95	9.95	8.95
231124	D-900NM	Dantona	18	D	1.2	9000	Consumer tip	2.30"L x 1.30"Dia.	14.95	13.49	11.95



Fig. 16



Fig. 17



Fig. 18

Automatic Lead Acid Battery Chargers

- Multi-stage charging circuit prevents batteries from overcharging
- High frequency MOSFET switching design
- Input voltage: 98 to 132VAC @ 50/60Hz

*Web Code: ABC

673416



Part No.	Mfr. Part No.	Output Volt.	Size (L"xW"xH")	Wt. (lbs.)	1	10
673416	SEC-1215A	13.5VDC @ 15A	8.5 x 8.4 x 3.3	4.8	\$145.95	\$131.95
673432	SEC-2415A	27.0VDC @ 15A	10.8 x 8.4 x 3.3	6.4	\$239.95	\$215.95

DANTONA

Universal NiCd/NiMH Charger

- Recharge batteries individually or as a group
- Fast charging in the specified period with an automatic switch for trickle charge

NEW
MARKED IN PINK

*Web Code: PBF

Part No.	Mfr. Part No.	Compatible Battery	1	10	25
231132	SEC-1215A	AAA, AA, C, D, 9V	\$19.95	\$17.95	\$15.95



Lead Acid Batteries

- Use with UPS Backup Systems, Security Fire Alarms, Wheel Chairs, Scooters
- Sealed • UL approved • Rechargeable
- One-year manufacturer warranty

TYSONIC



264014



Lead Acid Chargers on next page

*Web Code: LBR

264031



318924



264057



264065



264073



Part No.	Mfr. Part No.	Nominal Voltage	Amp-Hrs.	Cross Reference				Terminal Size	Size (L" x W" x H")	Wt. (lbs.)	Pricing	
				Panasonic	YUASA	Eagle Picher	Tempest				1	10
138692	K9120-REVC	6	1.3	Honeywell	—	—	—	Quick connect 0.187"	2.1 x 1.0 x 3.8	0.7	\$3.49	\$2.95
264014	TY-6-4.5	6	4.5	LCR6VP	NP4-6	CF16V4	TR-4-6	Quick connect 0.187"	2.8 x 1.9 x 4.0	1.9	11.95	10.75
317024	LA-TY-6-12	6	12.0	—	—	—	—	Quick connect 0.187"	5.9 x 1.9 x 3.7	4.6	19.95	17.95
318844	LA-TY-12-1.2	12	1.2	—	—	—	—	Quick connect 0.187"	3.8 x 1.7 x 2.1	1.3	14.95	13.45
264031	TY-12-2.3	12	2.3	LCR12V2.2P	NP2.3-12	CF12V1.5	TR2.3-12	Quick connect 0.187"	7.0 x 1.3 x 2.4	2.1	19.95	17.95
318924	LA-TY-12-3.2	12	3.2	—	—	—	—	Quick connect 0.187"	5.3 x 2.7 x 2.4	3.1	22.95	20.65
264057	TY-12-7.5	12	7.5	LCR12V7.2BP	NP712	CFM12V65	TR7.5-12	Quick connect 0.187"	5.9 x 2.9 x 3.7	5.6	22.95	20.65
264065	TY-12-12	12	12.0	PS12120	—	CFM12V12	TR12-12	Quick connect 0.187"	5.9 x 3.9 x 3.9	9.0	39.95	35.95
264073	TY-12-18	12	18.0	LCR12V17BP	NP618-12	CF12V18	TR18-12	Quick connect 0.472"	7.1 x 3.0 x 6.6	13.3	47.95	42.95
318852	LA-TY-12-35	12	35.0	—	—	—	—	Nut & bolt	7.6 x 5.1 x 6.3	27.6	79.95	75.95

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

Battery Holders, Snaps, Packs & Chargers

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

JAMECO ReliaPro

Battery Holders

*Web Code: UAB


Eliminate battery mounting problems in portable DC power applications and products. These holders are made from special materials that maintain retention properties longer than conventional holders. They can come with leads, tabs or snaps.

NEW
MARKED IN PINK

Part No.	Cross Ref. No.	*Mfr.	Fig.	No. of Cells	Connector	Sides	Features	1	10	100	500
216283	BH-421-1A	JRP	1	2-AAA	Wires*	Single		\$.59	\$.55	\$.49	\$.39
216292	SBH-421-AS	JRP	1	2-AAA	Wires	Single	w/ cover & switch	.65	.59	.55	.49
216303	BH-431-1A	JRP	2	3-AAA	Wires	Single		.79	.69	.65	.59
216312	SBH-431-1AS	JRP	2	3-AAA	Wires	Single	w/ cover & switch	.95	.85	.75	.69
216339	SBH-441-AS	JRP	3	4-AAA	Wires	Single	w/ cover & switch	1.45	1.29	1.19	.89
216072	BH-311-2A	JRP	4	1-AA	Wires	Single	Aluminum	1.05	.95	.85	.75
216081	BH-321-2A	JRP	1	2-AA	Wires	Single		.75	.69	.59	.55
216099	BH-321-4A	JRP	1	2-AA	Wires	Single	w/ mounting tabs	.75	.69	.59	.55
216102	SBH-321-2A	JRP	5	2-AA	Wires	Single	w/ cover, no switch	.75	.69	.59	.55
216120	SBH-321-1AS	JRP	5	2-AA	Wires	Single	w/ cover & switch	.89	.79	.72	.65
216136	BH-331-A	JRP	2	3-AA	Wires	Single		.85	.77	.69	.62
216144	SBH-331-AS	JRP	6	3-AA	Wires	Single	w/ cover & switch	.79	.69	.65	.59
216152	BH-341-2A	JRP	7	4-AA	Wires	Single		1.15	1.05	.95	.85
105858	BH-PC	JRP	8	4-AA	Wires	Single	wires w/ connector	.95	.85	.79	.64
216179	BH-343-1A	JRP	9	4-AA	Wires	Dual		.79	.69	.65	.59
216187	SBH-341-1AS	JRP	3	4-AA	Wires	Single	w/ cover & switch	1.05	.95	.85	.75
2095453	SBH-341-1A	JRP	3	4-AA	Wires	Single	w/ cover, no switch	.99	.85	.75	.65
216216	BH-363-A	JRP	11	6-AA	Wires	Dual		.65	.59	.55	.49
216223	BH-364-A	JRP	10	6-AA	Wires	Single		.95	.85	.79	.65
216240	BH-383-A	JRP	11	8-AA	Wires	Dual		1.09	.99	.89	.69
216267	BH-383-B	JRP	11	8-AA	Snaps	Dual		1.19	1.09	.99	.79
216259	BH-382-B	JRP	12	8-AA	Snaps	Dual		1.35	1.19	1.09	.79
216347	BH-211-A	JRP	4	1-C	Wires	Single		.55	.49	.45	.39
216363	BH-242-1A	JRP	13	4-C	Wires	Single		1.09	.99	.89	.69
216371	BH-111-1A	JRP	4	1-D	Wires	Single		.69	.65	.59	.49
216390	BH-121-1A	JRP	1	2-D	Wires	Single		1.19	1.09	.95	.79
216401	BH-142-A	JRP	13	4-D	Wires	Single		1.35	1.19	1.09	.89
216427	BH-9V-A	JRP	14	1-9V	Wires	Single		.75	.69	.59	.55
11280	A104-R	JRP	15	1-9V	Wires	Single	3"L, 26AWG, snaps	.39	.35	.29	.25
105794	GBH-1009-R	JRP	16	1-9V	Wires	Single	Metal holder	.35	.32	.29	.25
1949488	BAT-SNAP-4	JRP	17	1-9V	Wires	Single	4"L, 26AWG, snaps	.29	.26	.23	.19
109154	BC6-R	JRP	17	1-9V	Wires	Single	6"L, 26AWG, snaps	.29	.26	.23	.19
216452	SBS-IR-1-R	JRP	18	1-9V	Wires	Single	6"L, 26AWG, snaps	.35	.32	.29	.25
101470	A102-R	JRP	19	1-9V	Wires	Single	10"L, 26AWG, snaps	.35	.32	.29	.25
236996	103	KEY	19	1-CR2032	PC mount	Coin cell		1.65	1.49	1.35	1.19
355434	17002-00603	JRP	20	1-CR2032	PC mount	Coin cell		.79	.69	.65	.59
38543	2S2325	JRP	19	1-CR2354 or 2-CR2325	PC mount	Coin cell		.79	.69	.65	.59
2123741	BH-27-5	ADM	21	1-CR2032 or 1-DL2032	SMT	Coin cell	Solder tabs	.79	.69	.59	.49
2123750	BH-32-1	ADM	22	1-CR2450 or 1-DL2450	PC mount	Coin cell		.89	.79	.69	.59
2123768	BH-41B-1	ADM	23	1-357/SR44	PC mount	Coin cell		.75	.69	.59	.49
2123776	BH-44-5	ADM	24	1-CR1220	SMT	Coin cell	Solder tabs	.95	.85	.75	.65

* Battery holder used in many personal computers

* Wires are 6" unless noted differently

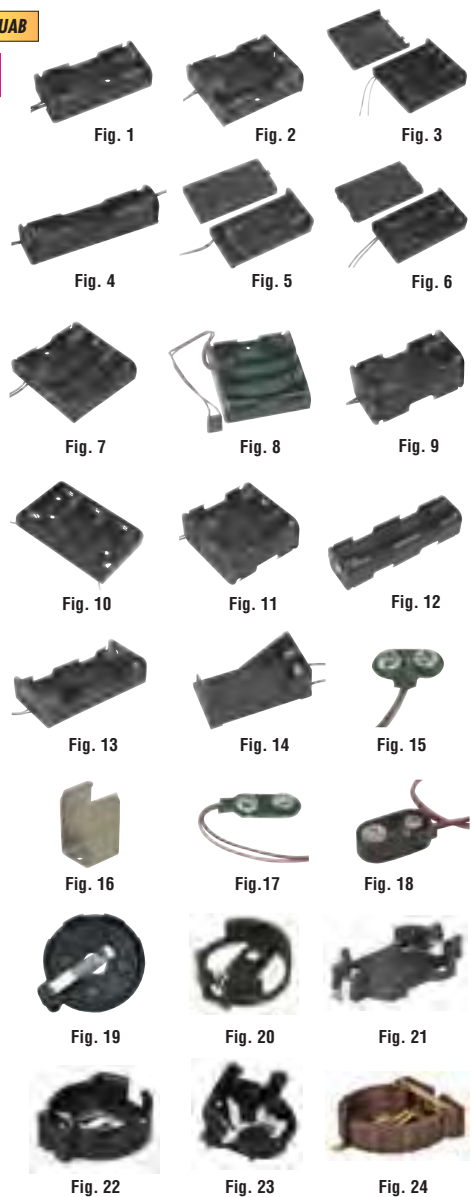


JAMECO ReliaPro

Rechargeable Battery Packs

*Web Code: LAA

Part No.	Fig.	Volt	Cell	Size (L x Dia.)	Type	mAh	Connection	Price	10	25
298652	1	4.8	SC Single	1.72" x 0.9" (43.7mm x 22.9mm)	NiCd	2200	Solder tab	\$15.95	\$14.49	\$12.95
299621	2	4.8	D Single	4.75" x 1.29" (120.7mm x 32.8mm)	NiCd	5000	Lead wire	29.95	26.95	23.95

JAMECO
EXCLUSIVE



360 & 1000-Watt Single Output Lead Acid Battery Chargers

*Web Code: ABC

- Input: 115VAC/230VAC @ 47-64Hz (switch-selectable)
- 1952417/1954332/1954341/1954359:** with built-in passive PFC function
- Overload, short-circuit, reverse polarity, over voltage, over temperature protection
- 1952417/1954308/1954316/1954324:** Fan on/off control (depending on charging current)
 - Charger for lead acid batteries
- 1954316/1954324:** Size: 10.0"L x 5.3"W x 1.9"H, Weight: 3.3 lbs.
- 1952417/1954308:** Size: 9.3"L x 5.3"W x 1.9"H, Weight: 3.3 lbs.
- 1954332/1954341/1954359:** Size: 11.8"L x 7.2"W x 2.8"H, Weight: 7.7 lbs.



Part No.	Mfr. Part No.	Watts	Boost Charge Voltage	Float Charge Voltage	Recommended Battery Capacity (AMP Hours)	Pricing	
						1	5
1952417	PB-360P-12	360	14.4	13.6	80-200	\$94.95	\$84.95
1954308	PB-360N-12	360	14.4	13.6	80-200	94.95	84.95
1954316	PB-360N-24	360	28.8	27.2	40-125	94.95	84.95
1954324	PB-360N-48	360	57.6	54.4	20-65	94.95	84.95
1954332	PB-1000-12	1000	14.4	13.8	200-600	349.95	314.95
1954341	PB-1000-24	1000	28.8	27.6	120-350	349.95	314.95
1954359	PB-1000-48	1000	57.6	55.2	60-175	349.95	314.95

* ADM = Adam Tech | JRP = Jameco ReliaPro | KEY = Keystone

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

Evergreen, Energizer®, Duracell® & Lexcel® Alkaline Batteries



★ Web Code: NBF

**Blowout
Prices**

Part No.	Size	1	10
2120153	9-volt Winco	\$1.79	\$1.59
198731	9-volt Energizer®	2.05	1.85
198791	9-volt Duracell®	2.95	2.65
215845	1.5V D-cell Energizer®	1.15	1.05

Part No.	Size	Min	1	12
2112461	9V, Super Alkaline Vinnic†	2	\$1.05	\$.95
2112452	1.5V, D-cell Evergreen†	2	.95	.89
2112428	1.5V, C-cell Evergreen†	2	.95	.85
2112444	1.5V, AA Evergreen†	4	.25	.20
2112436	1.5V, AAA Lexcel†	4	.25	.20

Part No.	Size	Min	1	40	100
198707	AA Energizer®†	4	\$.79	\$.69	\$.65
198715	AAA Energizer®†	4	.69	.59	.55
115432	AAA Duracell®†	2	.69	.59	.49

† Sold in multiples of 4 †† Sold in multiples of 2

Silver Oxide and Zinc Chloride Batteries

★ Web Code: XAB

Applications: personal computers, workstations, test equipment, feature telephones, copiers, fax machines, video scramblers/descramblers and remotes.

Part No.	Cross Ref.	Description	1	10
140783	357	Silver oxide, button, 175mAh	\$1.49	\$1.39
2119831	S736S	Silver oxide, button, 34mAh	1.19	1.09
2119849	S1131S	Silver oxide, button, 73mAh	1.29	1.19
2119857	S1142S	Silver oxide, button, 116mAh	1.49	1.29
2119890	ER6MSG	Zinc chloride, AA	.59	.55
2119822	ER03MSG	Zinc chloride, AAA	.69	.59
151095	GF6F22	Zinc chloride, 9V	1.29	1.19



151095

The Keith McMillen Batt-O-Meter

This battery tester looks inside your music instruments and 9V devices to measure voltage and remaining hours to use. Features a gold-plated 1/4" power probe that plugs into most instruments and effects pedals to test remaining life of those hard to reach batteries.

- Small and portable
- Works on any guitar pedal
- Self test function
- Identifies pedal and measures
- Externally test alkaline, rechargeable and carbon zinc (9V, AA, AAA...) batteries with selector switch

NEW
MARKED IN PINK



Part No.	Mfr. Part No.	1	5
2125122	Batt-O-Meter	\$34.95	\$31.49

Camera Detector

The easy to use P3 camera detector fits in the palm of your hands. Discreet sweeps of the home, office, or hotel room can be done quickly and efficiently. When a camera is discovered, an LED flickers and an audible alarm sounds

- Auto sensitivity tuner
- Audible LED alarm
- Detects frequencies from 50Hz to 3GHz
- Multi-channel scanning
- Power requirements: 2 CR2032 batteries (included)

Part No.	Mfr. Part No.	Size (L x W x Thick)	1	10
2096157	P7030	3.25" x 0.75" x 0.25"	\$29.95	\$26.95



Electronic Starter Kit

This kit includes everything you need to get started with electronics.

Includes one of each:

- 8 function 20K count DMM (P/N 318764)
- 6.5" x 3.125" breadboard (P/N 20758)
- Wire cutter (P/N 35482)
- Wire stripper (P/N 127862)
- Solder (P/N 170457)
- Hook-up wire (P/N 126085)
- 11-pc. precision screwdriver set (P/N 226094)
- Soldering iron (P/N 129040) and stand (P/N 36329)
- Jumper wire kit (P/N 2096018)
- Electrical tape (P/N 285587)
- Assorted capacitors (P/N 17911) and resistors (P/N 134130)

SAVE \$35



**JAMECO
EXCLUSIVE**

Part No.	Description	1	5
2099171	Electronic Starter Kit	\$99.95	\$89.95

NiZn Rechargeable Batteries

Finally, a rechargeable battery that can exceed the voltage of common single use Alkaline batteries. The PowerGenix battery has up to 33% more energy density over standard rechargeable batteries. Typical rechargeable batteries only produce 1.20 Volts, while these environmental-friendly, Nickel-Zinc batteries produce 1.60 Volts! NiZn technology is perfectly suited for high-tech devices like MP3 players, digital cameras, toys and LED lights.

2115856: 1.50 Hour NiZn Quick Charger

2115821: 3-5 Hour NiZn Fast Charger

- Charges 1-4 AA NiZn rechargeable batteries at a time
- Universal voltage for ease-of-use while traveling (100-240VAC, 50/60Hz)
- Includes: 4 AA NiZn Batteries
- LED lights indicate charging status

2115848: AA NiZn 8-Pack; 2115830: AA NiZn 4-Pack

- Made for high-drain applications
- Can only be charged with a NiZn charger
- 1.60V - equivalent to an Alkaline battery (~1560mAh)
- 30% more voltage than NiMH batteries



★ Web Code: PGX

Part No.	Description	1	10
2115856	NiZn Quick Charger, 1.50 Hours	\$34.95	\$31.95
2115821	NiZn Fast Charger, 3-5 Hours	24.95	22.95
2115848	NiZn AA 8 Battery Pack	24.95	22.95
2115830	NiZn AA 4 Battery Pack	14.95	13.49

USB Data Loggers

- Measures and stores up to 32,000 readings
- High & low alarms, start date/start time
- User programmable alarm thresholds
- Temp. range: -31°F to 176°F
- Data can be graphed, printed and exported to other applications
- Windows® 98/2000/XP/Vista compatible software included

2076367: Temperature, humidity & dew point data logger

- 2½-digit LCD display
- Pushbutton to start
- Relative humidity range: 0 to 100% RH
- Data logger set-ups: logger name, °F/°C, logging rate (10 seconds to 12 hours)

2076412: Standalone data logger

- Immediate, delayed and push-to-start mode
- High contrast LCD shows last, high and low stored readings

2113181: Temperature & relative humidity logger

- Measurement Range: -20 to +70°C; 0 to 100% RH
- User-Programmable Alarm Thresholds for T & RH%

2076404: Carbon monoxide data logger

- CO measurement range: 0 to 1000 ppm
- LED and buzzer alert when warning level is exceeded

Part No.	Mfr. Part No.	1	5
2076367	EL-USB-2-LCD	\$99.95	\$89.95
2076412	EL-USB-TC-LCD	99.95	89.95
2113181	EL-USB-RT	85.95	79.95
2076404	EL-USB-CO	96.95	89.95



2076367



2076412



2113181



2076404

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Clamp, Analog & Digital Multimeters

See www.Jameco.com for complete specifications

4 LEVELS OF SAVINGS
NAME BRANDS | HOUSE BRANDS | FACTORY OVERRUN | DOLLAR SALE

RoHS
RoHS Compliant Product
+ RoHS Also Available
DETAILS ON PAGE 199

Clamp, Analog & Digital Multimeters

38073

P/N 1536843
\$16.95

DT830B

P/N 1928476
\$8.95

MN35

P/N 645618
\$19.95

381676

P/N 1537184
\$39.95

DM7

P/N 214261
\$24.95

M300

P/N 220812
\$10.95

DVM850BL

P/N 355207
\$17.95

BP-1562

P/N 318781
\$10.95

MAS830L

P/N 220759
\$14.95

MAS838

P/N 220741
\$19.95

BP-1415

P/N 318764
\$59.95

EX330

P/N 645626
\$53.95

EX430

P/N 1581177
\$89.95

EX505

P/N 2094127
\$109.95

115

P/N 1537328
\$156.95

117

P/N 1537336
\$199.95

★ Web Code: HBK

★ Web Code: HBK					Basic Measurement Functions												Test Functions				Special Functions				★ Web Code: HBK		
Jameco Part No.	Manufacturer Part No.	Type	No. of Functions	Display Count	Resolution (max DC)	DC Voltage Ranges (V)	AC Voltage Ranges (V)	DC Current Ranges (A)	AC Current Ranges (A)	Resistance Ranges (Ω)	Capacitance Ranges (F)		Frequency Ranges (Hz)	Temperature Range		Diode Test	Battery Test	Continuity Test	Transistor hFE Test	Autorange	Analog Bargraph	RS-232 PC Interface	True RMS	Size (H"xW"xD")	Jameco Part No.	Pricing	
														°C	°F											1	5
1536843	Extech 38073	AMM	6	1	—	2.5V - 300V	10V - 300V	0.5A - 250mA	—	10KΩ - 1MΩ	—		—	—	—		✓							3.5 x 6.1 x 1.9	1536843	\$16.95	\$15.95
1928476	Vastech DT830B	DMM	4	1999	—	200mV - 1000V	200V - 750V	200μA - 10A	—	200Ω - 2MΩ	—		—	—	—	✓			✓					5.0 x 2.7 x 1.0	1928476	8.95	7.95
645618	Extech MN35	DMM	5	2000	100μV	200mV - 600V	200mV - 600mV	200mA - 10A	—	200Ω - 20MΩ	—		—	-20 to 750	-200 to 1400	✓		✓						5.4 x 3.0 x 1.5	645618	19.95	17.95
1537184	Extech 381676	DMM	5	2000	100μV	200mV - 600V	200m - 600V	—	—	200Ω - 20MΩ	—		—	—	—	✓		✓		✓				8.2 x 1.5 x 1.1	1537184	39.95	36.95
214261	Wavetek DM7	DMM	6	1999	1mV	2V - 600V	200V - 600V	200mA	—	2Ω - 2MΩ	—		—	—	—	✓	✓							5.5 x 3.1 x 1.5	214261	24.95	19.95
220812	Mastech M300	DMM	6	2000	1mV	2V - 500V	200V - 500V	200mA	—	2kΩ - 2MΩ	—		—	—	—	✓		✓						4.7 x 2.7 x 0.8	220812	10.95	9.95
355207	Velleman DVM850BL	DMM	6	2000	100μV	200mV - 100V	200V - 600V	200μA - 10A	—	200Ω - 2MΩ	—	↔	—	—	—	✓		✓						5.4 x 2.7 x 1.2	355207	17.95	15.95
318781	BenchPro BP-1562	DMM	6	2000	100μV	200mV - 600V	200V - 750V	200μA - 10A	—	200Ω - 2MΩ	—		—	—	—	✓		✓		✓				5.4 x 2.7 x 1.2	318781	10.95	9.95
220759	Mastech MAS830L	DMM	7	2000	100μV	200mV - 600V	200V - 600V	200μA - 10A	—	200Ω - 2MΩ	—		—	—	—	✓		✓		✓				5.7 x 3.0 x 1.4	220759	14.95	13.95
2113471	Fluke-87-5	DMM	7	6,000	10uV	0 - 1000V	0 - 1000V	0 - 10A	0 - 10A	0 - 50M	0 - 9999μF		0 - 200K	-200 to 1090	-328 to 1994	✓			✓		✓		✓	7.4 x 3.4 x 1.3	2113471	379.95	359.95
220741	Mastech MAS838	DMM	8	2000	100μV	200mV - 600V	200V - 600V	2mA - 10A	—	200Ω - 2MΩ	—		—	-20 to 1000	—	✓		✓						5.7 x 3.0 x 1.4	220741	19.95	17.95
2113480	Fluke-233	DMM	8	10,000	100μV	0.1mV - 1000V	0.1mV - 1000V	1mA - 10A	1mA - 10A	0.1 - 40M	1000nF - 9999μF		0.1 - 50K	-40 to 400	-40 to 752	✓		✓					✓	7.6 x 3.5 x 2.1	2113480	299.95	284.95
318764	BenchPro BP-1415	DMM	8	20,000	10μV	200mV - 1000V	2V - 700V	2mA - 20A	2mA - 20A	200Ω - 200MΩ	2000pF - 20μF		20k	—	—	✓		✓		✓				7.4 x 3.6 x 1.2	318764	59.95	54.95
645626	Extech EX330★	DMM	9	4000	100μV	.1mV - 1000V	.1mV - 750V	.1μA - 10A	.1μA - 10A	.1Ω - 40MΩ	.001nF - 200μF		.001 - 10M	-50 to 1000	-58 to 1832	✓		✓		✓				5.7 x 2.9 x 1.6	645626	53.95	49.95
1581177	Extech EX430	DMM	9	4000	100μV	.1mV - 1000V	.1mV - 750V	.1μA - 20A	.1μA - 20A	.1Ω - 40MΩ	.1nF - 100μF		.001 - 10	-20 to 750	-4 to 1382	✓		✓		✓			✓	7.4 x 3.2 x 2.0	1581177	89.95	79.95
2094127	Extech EX505	DMM	9	4000	10μV	400mV - 1000V	400mV - 1000V	400μA - 10A	400μA - 10A	400 - 40M	40nF - 100μF		5.999 - 9.99M	-20 to 750	-4 to 1382	✓		✓		✓			✓	7.2 x 3.2 x 2.2	2094127	109.95	105.95
1537328	Fluke 115↑	DMM	9	6000	100μV	600mV - 600V	600mV - 600V	6A - 20A	6A - 20A	600Ω - 40MΩ	1000nF - 9999μF		99.99 - 50k	—	—	✓		✓		✓		✓		6.3 x 3.3 x 1.9	1537328	156.95	149.95
1537336	Fluke 117★↑	DMM	9	6000	100μV	600mV - 600V	600mV - 600V	6A - 20A	6A - 20A	600Ω - 40MΩ	1000nF - 9999μF	↔	99.99 - 50k	—	—	✓		✓		✓		✓		6.3 x 3.3 x 1.9	1537336	199.95	189.95
1939651	Extech EX530	DMM	9	40,000	100μV	400mV - 1000V	400mV - 1000V	400mA - 10A	400mA - 10A	400Ω - 40MΩ	40nF - 40μF		40 - 400	-45 to 750	-50 to 1382	✓		✓		✓			✓	7.4 x 3.2 x 2.0	1939651	209.95	199.95
2118459	RSR MS8229	DMM	10	3999	1V	400mV - 1000V	400mV - 750V	400μA - 10A	400μA - 10A	400Ω - 40MΩ	40μF - 100μF		9.999 - 200k	-20 to 1000	-4 to 1832	✓		✓		✓				7.7 x 3.6 x 2.2	2118459	99.95	89.95
692502	Extech DM110	DMM	10	4000	100μV	0 - 500V	0 - 500V	0A - .40	0A - .40A	400Ω - 40MΩ	0 - 200μF		9 - 10M	—	—	✓		✓						4.3 x 2.2 x 0.5	692502	34.95	30.95
220775	Mastech MY64	DMM	11	2000	100μV	200mV - 1000V	200mV - 700V	2mA - 10A	2mA - 10A	200Ω - 200MΩ	2nF - 20μF		2k - 20k	-20 to 1000	—	✓		✓		✓				7.4 x 3.6 x 1.3	220775	39.95	35.95
645571	Velleman DVM890F	DMM	11	2000	100μV	200mV - 1000V	2V - 700V	2mA - 20A	20mA - 20A	200Ω - 200MΩ	2000pF - 20μF		—	—	-58 to 1832	✓		✓		✓				6.7 x 3.5 x 1.5	645571	44.95	39.95
211650	Extech MN26T	DMM	11	4000	100μV	400mV - 600V	400mV - 600V	400μA - 10A	400μA - 10A	400Ω - 40MΩ	4nF - 200μF		10 - 10M	0 to 760	0 to 1400	✓		✓		✓				4.8 x 2.4 x 1.6	211650	39.95	37.95
117373	BenchPro BP-1949	DMM	11	4000	100μV	400mV - 400V	4V - 400V	400μA - 10A	400μA - 10A	400Ω - 4MΩ	50nF - 100μF		5 - 50k	-20 to 1000	-4 to 1532	✓		✓		✓		✓		7.7 x 3.6 x 1.6	117373	79.95	69.95
137462	BenchPro MS8226T	DMM	11	4000	100μV	400mV - 400V	4V - 400V	400μA - 10A	400μA - 10A	400Ω - 4MΩ	50nF - 100μF		5 - 50k	-20 to 1000	—	✓		✓		✓			✓	7.7 x 3.6 x 1.6	137462	99.95	89.95
2113551	Amprobe HD160C	DMM	11	9,999	100μV	1,000mV - 1500V	1,000mV - 1,000 V	100μA - 2A	100μA - 2A	1,000 - 40M	40nF - 400μF		100 - 10M	-20 to 1300	-4 to 2372	✓		✓		✓			✓	7.9 x 4.0 x 2.3	2113551	299.95	284.95
220767	Mastech MY68	DMM	12	3260	100μV	326mV - 1000V	3.26V- 700V	326μA - 10A	326μA - 10A	326Ω - 32.6MΩ	326nF - 32.6μF	↔	32.6k - 150k	—	—	✓		✓		✓		✓		7.4 x 3.6 x 1.3	220767	44.95	39.95
192655	Fluke 175	DMM	12	6000	100μV	600mV - 1000V	600mV - 1000V	60mA - 10A	60mA - 10A	600Ω - 50MΩ	1000nF - 9999μF	↔	99.99 - 99.99k	—	—	✓		✓		✓			✓	7.3 x 3.5 x 1.7	192655	249.95	239.95
2113560	Amprobe 38XR-A	DMM	12	10,000	100μV	1,000mV - 1000V	1,000mV - 750V	100μA - 10A	100μA - 10A	1,000 - 40M	40nF - 400μF		100 - 10M	-20 to 1300	-4 to 2372	✓		✓		✓			✓	7.8 x 3.6 x 2.4	2113560	179.95	169.95
2112532	Extech EX570	DMM	12	40,000	—	0.1mV - 1000V	0.1mV - 1000V	.1μA-20A	.1μA-20A	0.01 - 40M	.001nF - 10,000μF		.0001Hz - 40MHz	-45 to 750	-50 to 1382	✓	✓	✓	-	-			✓	7.25 x 3.25 x 2.25	2112532	249.95	234.95
185535	Fluke 179↑	DMM	13	6000	100μV	600mV - 1000V	600mV - 1000V	60mA - 10A	60mA - 10A	600Ω - 50MΩ	1000nF - 9999μF		99.99 - 99.99k	-40 to 400	-40 to 752	✓		✓		✓		✓		7.3 x 3.5 x 1.7	185535	279.95	269.95
2113578	Amprobe 35XP-A	DMM	17	3,999	100μV	400mV - 1000V	400mV - 750V	400mV - 750V	400μA - 400mA	400 - 40M	4nF - 4mF		4k - 1M	-20 to 1000	-4 to 1832	✓	✓	✓					✓	6.5 x 3.1 x 1.6	2113578	99.95	94.95
2113498	Fluke-335A\$	Clamp	6	6,000	100μV	0 - 600V	0 - 600V	—	0 - 600A	0 - 6000	—		—	-10 to 50	-14 to 122			✓					✓	9.4 x 3.1 x 1.6	2113498	229.95	219.95
2094119	Extech EX613\$	Clamp	9	40,000	10μV	0 - 600V	0 - 600V	400A	400A	.01Ω - 40M	10pF - 40,000μF		40MHz max.	-50 to 1000	-58 to 1832			✓		✓			✓	9.7 x 4.0 x 1.9	2094119	179.95	169.95
374070	Extech MA220	Clamp	10	4000	100μV	400mV - 600V	400mV - 600V	40A - 400A	40A - 400A	400Ω - 40MΩ	40nF - 100mF		5 - 150k	-50 to 1000	-58 to 1830	✓		✓						7.9 x 2.0 x 1.4	374070	99.95	89.95
1585881	Extech EX830\$	Clamp	11	4000	100μV	0.1mV - 600V	0.1mV - 600V	100mA - 1000A	100mA - 1000A	.01Ω - 40MΩ	0.001nF - 40000μF		0.001 - 4k	-50 to 270	-58 to 518	✓		✓					✓	8.5 x 4.3 x 2.0	1585881	209.95	199.95

* With non-contact voltage detector (100-600VAC range)

† With backlight

\$ Soft case included

EX530

P/N 1939651
\$209.95

DM110

P/N 692502
\$34.95

MY64

P/N 220775
\$39.95

DVM890F

P/N 645571
\$44.95

MN26T

P/N 211650
\$39.95

BP-1949

P/N 117373
\$79.95

BP-1737

Environmental Meters & Testers

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE



F of V: Field of View (Distance to target)

★ Web Code: EMT

Part No.	Manufacturer	Mfr. Part No.	Description	1	5
1537299	Extech	IR100	Thermometer, Mini IR, measures temp. (-31 to 446°F) F of V 1:1	\$39.95	\$36.95
219361	Extech	IR-201	Thermometer, Pocket IR w/ Laser Pointer, measures temp. (-58° to 518°F) F of V 6:1	59.95	56.95
2112541	Extech	42510A	Thermometer, wide range mini IR, 12:1 compact thermometer w/ laser pointer (-58 to -1200°F/-50 to -650°C) 12:1 Compact IR	99.95	94.95
214480	Fluke	FLUKE-52-2	Thermometer, measures temp. large backlit dual display, dust splash resistant (-328° to 2501°F)	269.95	249.95
198045	Extech	445703	Thermometer, Digital Hygro/Humidity Meter w/ Indoor Readings, measures temp. (14° to 140°F) & RH (10-99%),	39.95	37.95
1939634	Extech	445713	Thermometer, Digital Hygro/Humidity Meter w/ Indoor & Outdoor Readings & Remote Sensor on 35' cable, temp. (14° to 140°F) & RH (10-99%)	44.95	39.95
218085	Extech	45118	Thermo-Anemometer, Mini, measures temp. (0° to 122°F) & air velocity (1.1 to 62.5mph)	99.95	89.95
1939731	Extech	RPM10	Thermometer, IR & Tachometer, measures temp. (-4° to 600°F) & RPM: photo tach. (10 to 99,999 rpm), contact tach. (.5 to 19,999 rpm) & surface speed (.2 to 6560 feet/min or .05 to 1999.9 miles/min)	289.95	269.95
2112575	Extech	EA11A	Thermometer, Type K, EasyView Series, Dual LCD, Single input with thermocoupler (-58 to 1999°F, -50 to 1300C)	89.95	84.95
2094266	Extech	DA50	AC Current Detector, telescoping 3', non contact, 200-1000A @ 50/60Hz, for shielded and hidden wires	39.95	37.95
1585899	Extech	CB100	AC Circuit Breaker Finder & Receptacle Tester, locates 110 to 125 volt AC circuits & fuses and has push button GFCI test	39.95	36.95
2094282	Extech	RT30	AC Circuit Identifier, wireless remote, confirms correct circuit is open mid-wire, w/o having to connect directly to the wires	129.95	119.95
1581169	Extech	FG100	Combustible Gas Leak Meter, detects: LNG, LPG from 500 to 6500 ppm	59.95	54.95
2094291	Extech	DT100	Distance Meter, ultrasonic, laser pointer IDs targets from 20' to 50', calculates: sum of measurements, area and volume	39.95	36.95
2113463	Fluke	1587	Insulation Meter, True RMS, 1000V, CAT IV	624.95	599.95
2113501	Fluke	411D	Laser Distance Meter, 30m/100 ft, no backlight, 2xAAA batteries	109.95	104.95
131764	Various	LX-102	Light Meter, Digital, ranges: LUX 0 to 50,000, footcandle 0 to 5,000	109.95	89.95
2112612	Extech	HD700	Manometer, differential pressure meter, USB, software, 0-2 PSI, 11 UOM	179.95	169.95
2112567	Extech	380260	Megohmmeter, autoranging, digital, insulation test voltages, 250V, 500V, 1000V, insulation resis. 200MΩ, 2000MΩ, large display	229.95	214.95
1939642	Extech	480836	RF EMF Strength Meter, measures frequency (50MHz to 3.5GHz)	229.95	209.95
645642	Extech	407730	Sound Level Meter, Digital, decibel range (40dB to 130dB)	89.95	79.95
2113594	Fluke	LVD2	Voltage Detector & LED Flashlight, dual sense, 90-600V, CAT IV	31.95	30.95
2113535	Fluke	1AC-A-I	AC Voltage Detector, 90-1000V, flat tip / English / LASPN / CFR	25.95	24.95
2113543	Fluke	1LAC-A-II	Low Voltage Detector, 20-90VAC, round tip, Americas / Pacific	25.95	24.95
2094274	Extech	DV50	Voltage Detector, telescoping 3', non contact, 5-1000VAC @ 50/60Hz, for shielded and hidden wires	29.95	27.95
1928468	Vastech	KT45	Cable Tester for Network & CATV, auto test for continuity, miswires, shorts, open circuits, & reversals	29.95	24.95
145710	BenchPro	145710	Modular Cable Tester, tests 10Base-T, 10Base-2, RJ45/RJ11, 356A, TIA568A/568B, & Token Ring cables, tests: continuity, miswiring, open circuits, shorts, grounding & pin configurations, includes 4 adapters	69.95	62.95
2112604	Extech	480400	Phase Sequence Tester, 40 to 600VAC rated test range for testing phase orientation of three phase power sources, graphical display	79.95	74.95
198002	Extech	40180	Tone Generator & Amplifier Probe, tests: wire trace, continuity, clear/busy/ringing line, & tip/ring ID	79.95	72.95
681504	BK Precision	1253	HDTV Portable Pattern Generator for: Plasma, LCD, TFT, CRT, DLP, GLV, & OLED digital systems	349.95	329.95
14285	BenchPro	RS232	RS232 Line Tester, identifies simple interface problems on lines 2-6, 8, 11, 19, 20	7.95	6.95
26729	BenchPro	31D3	RS232 Mini Line Tester, tests any RS-232 (DB25) interface 7 bi-color LEDs indicate status	7.95	6.95
105196	Various	TRIPOINT	RS232 Signal Adapter/Splitter, metal connectors DB25F/M & DB9M gold plate DC contacts	8.95	7.95

Have A Large Volume Order That Requires Special Pricing? – Call us at 1-800-831-4242

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



Passive Component R/C SMD Tweezer Meter

One hand operation for fast, precise identification and measure of surface mount components.

- 4000 count LCD display
- Over range & low battery indicators
- Measures resistance, capacitance and diode test
- Relative mode for zero or user applied reference
- **Cap. range:** 4nF, 40nF, 400nF, 4µF, 40µF, 200µF
- **Resis. range:** 400Ω, 4kΩ, 400kΩ, 4MΩ, 40MΩ



Part No.	Mfr. Part No.	1	5
1939685	RC100	\$59.95	\$54.95

50mV/50A Current Shunt

- Current range: 0 to 50A
- Accuracy: 0.8% ±0.2mV
- Output ratio: 1mV/1A
- Max. current: 100A



Part No.	Product No.	1	5	25
162309	ST-50	\$25.95	\$23.95	\$21.95



Passive-Component Digital LCR Meter

- 4½-digit backlit LCD display
- Test frequencies of 120Hz and 1kHz
- Selectable parallel or series equivalent circuit
- **Res. ranges:** 20Ω to 10MΩ
- **Cap. ranges:** 2000pF to 10mF
- **Induc. ranges:** 2000µH to 10,000H
- Quality (Q) reading: 0 to 9999
- Set HI/LO limits, absolute or percentage
- Bidirectional RS-232 port with optional software
- Max./Min./Avg. recording with auto power off
- Accuracy of 0.7% for L & C, 0.5% for R
- Dissipation Factor (D) reading: 0 to 0.9999
- Measures L, C & R w/ secondary parameter Q, D or R; both are displayed
- Size: 3.6"W x 2.1"D x 7.6"H
- Weight: 0.8 lbs.



Includes: Test leads, alligator clips, 9V battery & holster

Part No.	Description	1	5
198678	LCR Meter	\$199.95	\$189.95
189238	9VDC adapter for P/N 198678	5.95	5.35

* Thermometers — Enter Web Code CEL

* Cable Testers — Enter Web Code TBF



Kill A Watt™ Energy Consumption Meters

Measures how much energy appliances consume. Simply connect appliances to the Kill A Watt™, and it will assess how efficient they really are. Counts consumption by the Kilowatt-hour, same as your local utility. You can calculate your electrical expenses by the day, week, month, even an entire year. Also check the quality of your power by monitoring voltage, line frequency and power factor.



- Forecast your costs
- Max. power: 1875VA
- Displays volts, amps, watts and Hz
- Max. current: 15A
- Large LCD display
- Operating voltage: 115VAC
- 0.2% accuracy

2075954: Displays usage in dollars

Part No.	Mfr. Part No.	Measures	1	5
2075946	P4400Z	8	\$22.49	\$19.95
2075954	P4460EZ	10	39.95	36.95

Enter web codes online for additional product listings & specifications.
Look for the web code box on the home page.
www.Jameco.com/More

Panel Meters

0.6" High 3½ & 4½-Digit LCD Digital Panel Meters



108388 175951 146835 123140

- Input ranges: 200mV, 20V, 200V, 500V
- Accuracy: ±0.5%
- Supply voltage: 8-12VDC (recommend 9V battery P/N 151095, pg 149)
- Automatic polarity indication
- Input impedance: >100MΩ
- Size: 2.7"W x 1.7"H

* Web Code: WBU

Part No.	Cross Ref. No.	Description	1	10	25
108388	PM-428	3½-digit (no bezel, snap mount)	\$10.95	\$9.95	\$8.95
175951	PM-128	3½-digit (bezel, screw mount)	12.95	11.65	10.49
146835	PM-188BL	3½-digit (with backlight display)	14.95	13.45	11.95
123140	PM-328	4½-digit (bezel, screw mount)	29.95	26.95	24.25

Can not use in common ground applications



Analog Panel Meters

- Includes mounting hardware
- **316507:** Includes current shunt

Part No.	Mfr. P/N	Range	Size (W"xH"xD")	1	10	* Web Code: YBQ
316603	AVM6015	0 - 15VDC	2.4 x 1.8 x 1.3	\$9.95	\$8.95	
316671	AVM7015	0 - 15VDC	2.8 x 2.4 x 1.4	9.95	8.95	
316638	AVM6030	0 - 30VDC	2.4 x 1.8 x 1.3	9.95	8.95	
316654	AVM7030	0 - 30VDC	2.8 x 2.4 x 1.4	9.95	8.95	
316718	AVM60150	0 - 150VAC	2.4 x 1.8 x 1.3	9.95	8.95	
316785	AVM60300	0 - 300VAC	2.4 x 1.8 x 1.3	9.95	8.95	
315301	AIM60005	0 - 50µA	2.4 x 1.8 x 1.3	9.95	8.95	
316523	AIM6050	0 - 50mA	2.4 x 1.8 x 1.3	9.95	8.95	
316486	AIM60100	0 - 100mA	2.4 x 1.8 x 1.3	9.95	8.95	
316558	AIM60500	0 - 500mA	2.4 x 1.8 x 1.3	9.95	8.95	
316566	AIM60500	0 - 5A	2.4 x 1.8 x 1.3	9.95	8.95	
316582	AIM705000	0 - 5A	2.8 x 2.4 x 1.4	9.95	8.95	
316494	AIM6010A	0 - 10A	2.4 x 1.8 x 1.3	9.95	8.95	
316507	AIM6030A	0 - 30A	2.4 x 1.8 x 1.3	12.95	11.65	



Drill Mountable Panel Meters

- Mount by simply drilling a single hole (7/32") and insert the threaded section of the panel meter
- Module size: 1.71"L x 0.84"W

Part No.	Mfr. Part No.	Description	Digit Ht.	Supply Volt.	Measurement Range	1	5	25
2113201	EMV-1125	4-digit, LCD volt/current meter	.50"	7.5-15VDC	200mV-20V/200µA-200mA...	\$32.95	\$29.95	\$26.95
2095040	EMV 1200	3-digit, signal pwrd, LCD voltmeter	.50"	3-50VDC	4-25VDC	33.95	30.95	27.95
2095058	EMT 1900	3½-digit, LCD thermometer	.50"	4-28VDC	14-122°F	33.95	30.95	27.95
2095074	EMC 1500	5-digit, LCD hour meter	.35"	5-27VDC	99999 hours	33.95	30.95	27.95
2095082	EMA 1710	Analog-style LCD panel meter	—	5-12VDC	0-1VDC	33.95	30.95	27.95

Multi-Function Graphics Displays

Customize your 2.4" or 2.8" PanelPilot graphic displays in seconds with the simple click of a mouse. Using Lascar's revolutionary PanelPilot software, select from a wide range of customizable meter styles (digital and analog) including touch screen applications as well as more traditional volt meter apps. Choose colors, text labels, scaling and even display your own logo on power-up. Visit www.panelpilot.com for even more downloadable apps, including touchscreen.

- Operating voltage: 4-30VDC
- Adjustable 0 to 40VDC input
- Screw terminal connections
- Programmable via USB interface
- Free Windows-based configuration software

Part No.	Mfr. Part No.	Description	1	5
2115354	SGD-24-M	2.4", 3½-digit, bargraph & analog style meter	\$94.95	\$86.95
2125149	SGD-28-M	2.8", 3½-digit, bargraph & analog style meter	109.95	99.95



* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Multimeters & Digital Oscilloscopes

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

3-in-1 Multimeter and Cable/Line Tester

- 2000 count LCD display (15mm display size) w/ automatic polarity indication and white backlight
- Continuity and diode test
- **DC voltage ranges:** 0.2 to 1000V
- **AC voltage ranges:** 0.2 to 700V
- **DC current ranges:** 200µA to 10A
- **AC current ranges:** 200µA to 10A
- Size: 3.3"W x 1.1"D x 7.3"H
- Weight: 1.4 lbs.



Includes: 9V battery, test leads, remote box for cable testing, and users manual

Part No.	Mfr. Part No.	1	5
1955984	DVM1000	\$79.95	\$74.95

3-in-1 Lab Center

Digital Multimeter:

- 3½-digit backlit LCD
- Auto. polarity indication
- **DC voltage ranges:** 200mV to 600V
- **AC voltage ranges:** 200V to 600V
- **DC current ranges:** 200µA to 10A
- **Resistance ranges:** 200Ω to 2MΩ
- Diode, transistor and continuity tester

Regulated Power Supply:

- Selectable output volts: 3 to 4.5; 6 to 7.5; 9 to 12VDC
- Output current: 1.5A (2A peak)
- On/off switch

Soldering Station:

- 48W ceramic heating element with temp. sensor
- 24V soldering iron
- Temperature range: 150° to 450°C

Includes: Test leads, user manual, sponge, spare bit for soldering iron and 9V battery for DMM

Part No.	Mfr. Part No.	1	5
695025	LAB1U	\$159.95	\$139.95

*Digital Multimeters — Enter Web Code HBK

2000-Count Multimeters

- Resolution: 100µV max.
- **DC voltage ranges:** 200mV – 1000V
- Size: 7.5"W x 9.6"D x 2.5"H
- Weight: 2.6 lbs.



203801: 3½-Digit – 2A

- **DC/AC current ranges:** 20µA – 2A
- **AC voltage ranges:** 200mV – 700V
- **Resistance ranges:** 200Ω – 20MΩ
- **Conductance ranges:** 2µS – 200nS

160830: 3½-Digit – 10A

- **DC/AC current ranges:** 20µA – 10A
- **AC voltage ranges:** 200mV – 700V
- **Resistance ranges:** 200Ω – 20MΩ
- **Conductance ranges:** 2µS – 200nS

421542: 3½-Digit – 2A

- **DC/AC current ranges:** 200µA – 2A
- **AC voltage ranges:** 200mV – 750V
- **Resistance ranges:** 200Ω – 20MΩ
- **Conductance ranges:** 2mS – 200nS
- **Frequency ranges:** 20Hz – 50kHz

♣ Refurbished = Backed by Jameco

Part No.	Mfr. Part No.	1	5
160830	8010A♣	\$169.95	\$149.95
203801	8012A♣	169.95	149.95
421542	8050A♣	239.95	224.95

Limited Supply - Great Price!

20MHz/30MHz 2-Channel Analog Oscilloscopes

- 6" rectangular screen with internal graticule and scale
- Vertical deflection: 1mV/div to 1V/div (5MHz, 3dB) x 5 (P/N 685311); (10MHz, 3dB) x 5 (P/N 2112823) gain selected
- Horizontal deflection: 0.1µs/div to 2.0s/div in 1-2-5 sequence, 23 steps
- Max. input voltage: 400V (DC + AC peak)
- Input volt.: 115/230VAC with line voltage selector
- ADD function measures sum of 2 signals (P/N 685311)
- Size: 12.8"W x 15.7"D x 5.2"H • Weight: 16.8 lbs.



Includes: 2 (X1/X10) test probes, power cord & manual

Part No.	Mfr. Part No.	1	5
685311	SK0200 (20MHz)	\$429.95	\$399.95
2112823	SK0300 (30MHz)	499.95	459.95

4000-Count True-RMS Benchtop Multimeter with RS-232

- 9 functions, 32 ranges
- 3½-digit backlit LCD display with bargraph
- Auto/manual ranging
- True RMS AC volts and amps
- Resolution: 100µV maximum
- **DC voltage ranges:** 400mV – 1000V (0.3% accuracy)
- **AC voltage ranges:** 4V – 750V
- **DC/AC current ranges:** 4mA – 10A
- **Resistance ranges:** 400Ω – 40MΩ
- **Capacitance ranges:** 4nF – 40µF
- **Frequency ranges:** 100Hz – 600kHz
- Diode and continuity test • Delay hold mode
- Min., max., and relative hold function
- Input voltage: 9V battery or 90-132VAC/198-264VAC @ 50-60Hz • Weight: 3.3 lbs.
- Size: 9.0"W x 9.4"D x 3.3"H • Two-year warranty



Includes: Manual, test leads, power adapter, 9V battery, RS-232 cable & software (98/ME/2000/XP compatible)

Part No.	Mfr. Part No.	1	5
230586	B940	\$179.95	\$169.95

5MHz Handheld Digital Oscilloscope with True-RMS Multimeter

- Record length: 512 single shot, 256 all other functions
- Sample mode: single shot, roll, normal
- Vertical sensitivity: 50mV max.
- Input voltage: 600VDC or AC_{RMS} max.
- Input impedance: 1M
- Resolution: 100µV max.Ω
- USB PC interface and software for transferring waveforms and data
- Sampling time: 25MS/s dual ch.; 50MS/s single ch.
- **DC voltage ranges:** 0.1mV to 1000V
- **AC (TRMS) voltage ranges:** 0.1mV to 750V
- **Resistance ranges:** 0.001kΩ to 5MΩ
- **Frequency ranges:** 0.01Hz to 10MHz
- **RPM ranges:** 240 to 60,000 RPMs
- Size: 3.5"W x 1.8"D x 7.7"H



Includes: Test leads, alligator clips, Ni-MH battery pack, AC adapter/charger, RS-232 cable, holster & carrying case

Part No.	Mfr. Part No.	1	5
2112639	381295A	\$499.95	\$474.95

100MHz Analog Oscilloscope

- 2-channel dual trace
- Auto focusing according to intensity
- Delay line
- Weight: 22.8 lbs.
- Two-year warranty
- Size: 16.9"L x 12.6"W x 5.5"H



Includes: Two (X1/X10) 100MHz probes, power cord, and operations manual

Part No.	Mfr. Part No.	1	5
121179	OS5100	\$999.95	\$965.95

150MHz 2-Channel Digital Oscilloscope

- USB Interface & SD card supported
- Bandwidth (-3dB): 150MHz
- Real-time sample rate: 1GSa/s real-time sample rates maximum, 25GSa/s
- 2-channels with 8-bit vertical resolution
- 2Mega point record length
- Auto set vertical, horizontal, and trigger level
- Vertical sensitivity: 2mV/div ~ 10V/div
- Input voltage: 100-240VAC @ 48-63Hz
- Time base range: 1ns/div ~ 50s/div
- Trigger sensitivity: DC-25MHz: 0.5div or 5mV 25MHz ~ 150MHz: 1.5div or 15mV
- Frequency counter: 6 digits
- Size: 12.2"W x 5.6"H x 5.5"D • Weight: 5.5 lbs.



Includes: BNC cable, power cord & oper. manual

Part No.	Mfr. Part No.	Price
2118491	GDS-1152A	\$1,099.95

25/40MHz 2-Channel Digital Oscilloscopes

- API-0025 (25MHz) & API-0040 (40MHz)
- Display: 5.7" brilliant color TFT display with 64k color
- USB host/device: support USB printer and USB flash drive
- 12 language screen menu
- Math: add, subtract, FFT
- Digital filter function, waveform recorder function, pass/fail function
- Measure system:
 - 32 parameters auto measure
 - Cursor measure: manual, track, and auto mode
- Real time sampling rate:
 - 2126969: 500MSa/s in single channel, 250MSa/s in dual channel
 - 2126951: 1GSa/s in single channel, 500MSa/s in dual channel
- Equivalent sampling rate: 50GSa/s
- Size: 12"L x 5.3"W x 6.0"H • Weight: 5.0 lbs.



Includes: Oscilloscope probes, USB cable, manual, and CD software

Part No.	Mfr. Part No.	1	5
2126969	API-0025	\$499.95	\$479.95
2126951	API-0040	659.00	639.00

*Oscilloscopes Available Online — Enter Web Code RCG

More Information Online
www.Jameco.com

50MHz 2-Channel USB PC Oscilloscope

The PCSU1000 digital storage oscilloscope uses the power of your PC to visualize electrical signals. It has a highly sensitive display resolution, down to 0.15mV, combined with a high bandwidth and a sampling frequency of up to 1GHz.

Oscilloscope:

- Input range: 5mV to 2V/division
- Time base: 20ns to 100ms per division
- Trigger source: CH1, CH2, EXT or free run
- Real time sampling frequency: 1.25kHz to 50MHz

Spectrum Analyzer:

- Frequency range: 1.2kHz to 25MHz
- FFT resolution: 2048 lines
- FFT input channel: CH1 or CH2

Transient Recorder:

- Timescale: 20ms/Div to 2000s/Div
- Max record time: 9.4 hour/screen
- Min./Max. number of samples: 20/s; 100/s

System Requirements: IBM compatible PC, Windows® 98SE or later, SVGA display card, USB port

Includes: PC oscilloscope, 2 x 60MHz scope probes, USB cable and CD-ROM

Part No.	Mfr. Part No.	1	5
695017	PCSU1000	\$499.95	\$459.95

* Web Code: RCG

40MHz Multifunction Oscilloscopes w/ Built-In 5MHz Function Generator

Oscilloscope:

- 6" rectangle high resolution CRT
- Max signal input volt.: 400V (DC and AC peak)
- Input voltage: 100/120/220/240VAC @ 50-60Hz
- Size: 15.7"L x 12.8"W x 5.2"H • Weight: 26 lbs.
- Two-year manufacturer's warranty

1586200: With built-in 60MHz auto-detect counter

Function Generator:

- Frequency range: 0.5Hz to 5MHz (6 ranges)
- Output waveforms: sine, triangle, square
- Output impedance: 50Ω
- Output volt: 20Vp-p (no load), 10Vp-p (w/ 50Ω load)
- See www.jameco.com for additional specs.

Part No.	Mfr. Part No.	1	5
1536886	SK0404	\$599.95	\$539.95
1586200	SK0409	749.95	699.95

3MHz Function Generator with Positive and Negative Pulses

- 6 waveforms: sine, square, triangle, ramp, positive pulse and negative pulse
- Input voltage: 110VAC
- Output impedance: 50Ω ±2%
- Knob selector switches for waveforms and frequency ranges
- Frequency range: 0.5Hz to 3MHz in 6 ranges via rotary switch
- Size: 10.5"W x 11.2"D x 3.9"H
- Weight: 6.6 lbs.

Part No.	Mfr. Part No.	1	5
685329	SK3000	\$209.95	\$189.95

* Function Generators — Enter Web Code DEJ

* Frequency Counters — Enter Web Code VCG

5MHz Function Generator

- Waveforms: sine, square, triangle and ramp
- 0.5 to 5MHz
- 100% DC offset
- Variable duty cycle
- Output impedance: 50Ω
- Coarse and fine tuning
- Size: 10.4"W x 11.7"D x 3.4"H
- Weight: 6.2 lbs.
- Two-year warranty

Part No.	Mfr. Part No.	1	5
160469	BK4011A	\$369.95	\$349.95

2MHz & 3MHz Function Generators w/ Frequency Counter

Function Generator

- Waveforms: sine, triangle, square, TTL and CMOS output
- Output amplitude: >10Vp-p into 50Ω load
- Output impedance: 50Ω ±10%
- DC offset range: <-5V to >+5V into 50Ω load

Frequency Counter

- Input voltage: 115/230VAC @ 50-60Hz
- Weight: 4.4 lbs.
- Two-year warranty
- 229251: • 4-digit LCD display
- Ranges: 0.2Hz to 2MHz • Size: 9.1"W x 11.0"D x 3.7"H
- 229260: • 6-digit LCD display with ramp
- Ranges: INT/EXT switch, 0.3Hz to 3MHz internal and 5Hz to 150MHz external; resolution of 10Hz to 0.1Hz
- Size: 9.9"W x 11.5"D x 3.6"H

Includes: Power cord, operations manual and leads

Part No.	Mfr. Part No.	Description	1	5
229251	GFG-8020H	2MHz	\$249.95	\$229.95
229260	GFG-8216A	3MHz	299.95	269.95

150MHz 2-Channel Universal Frequency Counter

- 8-digit green LED display (0.56" digit height)
- Adjustable range & gate time
- Freq. range: 0.2Hz ~ 150MHz
- Gate time range 0.01s ~ 10s
- Impedance: 1MΩ, <40pF
- Channel A sensitivity ~ 25mVrms: 0.2Hz ~ 100MHz, 50mVrms: 100MHz ~ 150MHz; channel B ~ 25mVrms: 0.2Hz ~ 100MHz
- Count capacity: 0 ~ 99999999 (MHz)
- Input voltage: 100/220 @ 50/60Hz
- Size: 10.0"W x 3.2"H x 10.3"D

Part No.	Mfr. Part No.	1	5
2112840	FC-150U	\$299.95	\$279.95

2.4GHz 2-Channel Frequency Counter

- 8-digit green LED display with annunciators
- Adjustable range & gate time
- Frequency ranges: 0.01Hz to 2.4GHz
- Gate time: 100msec to 10sec
- Channel A: DC coupled ~ 0.01Hz to 100Hz; AC coupled ~ 100Hz to 50MHz, sensitivity ~ 80mVrms, 1MΩ impedance
- Channel B: frequency range: 50MHz to 2.4GHz, sensitivity ~ 50mVrms, 50Ω impedance
- Power supply: 120 to 220VAC
- Size: 10.6"W x 8.5"D x 3.9"H • Weight: 3.5 lbs.

Part No.	Mfr. Part No.	1	5
1955968	DVM13MFC2U	\$159.95	\$149.95

5MHz Sweep Function Generator with 60MHz Counter

Function Generator

- Waveforms: triangle, sine, square, ramp, positive pulse, negative pulse
- Frequency range and display: 0.05Hz ~ 5MHz, 5-digit LED display (0.001Hz resolution)
- 8 ranges controlled by rotary switch
- DC offset ±10V (no load), ±5V (50Ω load) continuously adjustable controlled by offset switch

Frequency Counter:

- 5-digit LED display (0.36" digit height)
- Resolution: 0.001Hz
- Display unit: Hz/kHz (auto) • 20MHz time base
- INT/EXT switch, 0.500Hz to 5000KHz internal with 4 res., 0.2Hz ~ 60MHz external
- Size: 11.8"W x 3.5"H x 10.8"D • Weight 5.5 lbs.
- Includes: power cord and operation manual

Part No.	Mfr. Part No.	1	5
2112831	SK5200	\$299.95	\$279.95

60/100/250MHz Modular Oscilloscope Probes



- Hook and pointed probes
- Maximum input volt.: 600V
- Length: 5'
- Alligator clip ground wire
- BNC male connector
- 216047/236777: With IC test ground cover and spring ground contact

* Web Code: RAC

Part No.	Bandwidth (±3dB)		Impedance (R/C) *	
	Attenuation		Attenuation	
	x1	x10	x1	x10
22892	6MHz	60MHz	1MΩ/180pF	10MΩ/22pF
216047	6MHz	100MHz	1MΩ/47pF	10MΩ/16pF
236777	6MHz	250MHz	1MΩ/47pF	10MΩ/14pF

* With 20pF oscilloscope input

Part No.	Product No.	1	5	25
22892	LF101E	\$24.95	\$22.49	\$19.95
216047	HF-9100	29.95	26.95	23.95
236777	HP-9250	39.95	35.95	31.95

150/250MHz Oscilloscope Probes

Designed for use with Tektronix and Hewlett Packard oscilloscopes.

- 3 position switch: x1, ref, x10
- Bandwidth @ 3dB: 10MHz (x1); 150MHz (x10)
- Loading: 57pF, 1MΩ (x1); 15pF, 10MΩ (x10)
- Low-resistance gold contacts
- Cord length: 5'

174473: 7-piece kit

212257: 25-piece kit

Part No.	Mfr. Part No.	1	5
174473	4901-02 (150MHz)	\$59.95	\$53.95
212257	4915A (250MHz)	159.95	144.95

* More Probes Available Online — Enter Web Code RAC

* For Complete Specs & Additional Product Listings Search www.jameco.com/More and Enter Web Code Listed Above

Probes, Testers & Benchtop Power Supplies

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Pomona 100MHz Probe Set

- Complete accessory kit included
- Compensation range: 10-60pF
- Bandwidth: 15/100MHz (-3dB)
- Attenuation: x1/x10 • 48" cable
- Rise time: 23.33/3.5ns
- Input resistance: 1/10MΩ • Capacitance: 64/10.5pF

Part No.	Mfr. Part No.	1	5
156451	4550B (100MHz)	\$56.95	\$53.95

PROBE MASTER 1000 Volt Probe Kit

- Rating: 1000V 10A
- Gold tips and contacts
- Electronic deluxe probe kit includes leads with shrouded right angle banana plug, probes, sprung hook probes, alligator clips, spade lugs, extender probes, minigator leads, .025" wire wrap leads, pico hooks and pincer hooks

Part No.	Description	1	5
212249	High voltage test probe	\$74.95	\$71.95

DV3100 Digital Logic Analyzer

From a new aluminum case to advanced triggering, adjustable threshold, more memory and a wider voltage range, the new DV3100 is the best value in a portable logic analyzer.

- 18 channels @ 100MHz (10ns)
- Automatic real time hardware compression (Tri-mode) • Eliminates res. vs. depth tradeoffs
- +0.5 to +2.8V adjust. threshold
- Ground current protection ±12V
- USB 2.0 & 1.1 compatible

Includes: All cables, clips (quantity 20) and software

Part No.	Mfr. Part No.	1	5
2115776	DV3100	\$499.95	\$469.95

High Voltage Test Probe

- Maximum voltages: DC:40kV, AC: 40kV peak, 28kVrms
- Accuracy: DC:±1.5%, AC:±5%
- 10MΩ meter input impedance required
- Input/output impedance: 1,000MΩ/1.1MΩ
- Probe length: 14" • Cable length: 39"

Part No.	Product No.	Weight	1	5	25
132290	HV-40	0.8 lbs.	\$79.95	\$73.95	\$69.95

17MHz Logic Pulser

- Compatible with TTL, DTL and CMOS ICs
- Pulse repetition rate: 0.5pps/400pps
- 1MΩ sync input impedance
- Pulse width output at 100mA load: 10µs
- Pulse mode output current: 10mA
- Square wave current output: 5mA
- "One shot" or continuous 5Hz pulse train

Part No.	Product No.	1	5	25
24601	LP540H	\$29.95	\$26.95	\$23.95

108-Watt Desktop Power Supply

- Load reg.: ±2%
- Input volt.: 88 132VAC/176-264VAC @ 47-63Hz (switch selectable)
- Ripple and noise max.: 120mVp-p
- Line regulation: ±5% • Efficiency (typical): 81%
- Vol. adjustment range: 12VDC to 15VDC
- Front panel on/off switch and 3 color LED loading indicator
- Short-circuit/overload/ overvoltage/overtemperature protection
- Back panel 3-prong AC receptacle and banana plugs

Part No.	Mfr. Part No.	1	5
673230	ESP-120-13.5	\$49.95	\$44.95

17MHz Logic Probe

- Max input freq.: 17MHz
- Minimum pulse width: 30ns
- Pulse flash time: 500ms
- Audible tones for high & low
- Input impedance: 1MΩ
- Power supply protection: ±20V
- TTL threshold: Lo = 0.8V ±0.2V, Hi = 2.3V ±0.2V
- CMOS threshold: Lo = 30% VCC, Hi = 70% VCC

Part No.	Product No.	1	5	25
149930	LP3500	\$39.95	\$35.95	\$32.95

PC Cable-Check® Pro

This powerful universal cable tester troubleshoots and maps 20 types of computer cables for opens, shorts, crosses, and good connections. Tests any combination of D-sub 9-pin, D-sub 15-pin, D-sub 25-pin, Centronics 36-pin printer, USB-A and USB-B, Mini USB, PS/2, RJ-11, RJ-45, BNC female-female cables and Firewire.

- Auto power off, auto & manual scan
- Includes:** 9V battery
- Paladin Tools®**

JAMECO BenchPro 90-Watt Digital DC Power Supply

- 30V @ 3A
- Input voltage: 110/220VAC @ 50-60Hz
- Resolution: 1% ±1 digit accuracy
- Constant volt. and current operation
- Size: 5.1"W x 10.1"D x 5.9"H

Part No.	Product No.	1	5
489184	DRP-303D	\$199.95	\$189.95

Single Output Benchtop Power Supplies

*Web Code: SAX

Part No.	Mfr.	Mfr. Part No.	Voltage (VDC)/ Current (A)	Power (W)	Displays (Digits)	Input Voltage (VAC)	Short Circuit Protection	Overload Protection	Size (W" x H" x D")	Weight (lbs.)	Pricing	
											1	5
301920	Mastech	HY1503C	15/3	45	2-Analog	115 ±10%	Y	N	3.8 x 6.3 x 9.1	9	\$99.95	\$89.95
175265	Various	DPS150A	15/10	150	2-Analog	110 @ 60Hz	Y	Y	6.2 x 4.0 x 5.7	12	149.95	129.95
175257	Various	SPS250A	15/15	225	2-Analog	110/220 @ 47-63Hz	Y	Y	6.2 x 4.0 x 5.6	3.8	149.95	129.95
681221	Extech	382202	18/3	54	2-Digital LCD (4)	120 @ 60 Hz	Y	Y	9.4 x 6.1 x 4.3	6.6	139.95	129.95
645600	Extech	382200	30/1	30	2-Digital LCD (4)	100/240 @ 47-63Hz	Y	Y	9.4 x 6.1 x 4.3	4.4	129.95	119.95
301971	Lascar	PSU130	30/1	30	2-Digital LCD (4)	100/240 @ 47-63Hz	Y	Y	5.5 x 1.6 x 5.2	1.2	89.95	84.95
301866	Mastech	HY3003D	30/3	90	2-Digital LCD (4)	115 ±10%	Y	N	5.4 x 6.2 x 11.5	10	159.95	135.95
207618	Mastech	HY3005C	30/5	150	2-Analog	115 ±10%	Y	N	5.4 x 6.2 x 11.5	14	159.95	135.95
301911	Mastech	HY3005D	30/5	150	2-Digital LCD (4)	115/230 ±10% (switchable)	Y	N	5.4 x 6.2 x 11.5	13	199.95	179.95
2112858	SKMI	LP-3010	30/10	300	1-Digital LED (3)	115 @ 50Hz	Y	Y	9.3 x 5.4 x 13.6	26.5	599.95	549.95
207626	Mastech	HY3010C	30/10	300	2-Analog	115 ±10%	Y	N	10.4 x 6.5 x 14.4	31	299.95	269.95
207635	Mastech	HY3010	30/10	300	2-Digital LED (4)	115/230 ±10% (switchable)	Y	N	10.4 x 6.5 x 14.4	31	319.95	289.95
207686	Mastech	HY3020	30/20	600	2-Digital LED (4)	115 ±10%	Y	N	10.4 x 6.5 x 14.4	42	499.95	449.95
207694	Mastech	HY5002	50/2	100	2-Digital LED (4)	115/230 ±10% (switchable)	Y	N	5.4 x 6.2 x 11.5	13	149.95	134.95
163723	Various	DPS-3050	50/3	150	2-Analog	110 @ 60Hz	Y	Y	4.8 x 7.5 x 9.0	12.3	129.95	115.95
207706	Mastech	HY5003	50/3	150	2-Digital LED (4)	115 ±10%	Y	N	5.4 x 6.2 x 11.5	13	199.95	179.95
207600	Mastech	HY5005	50/5	250	2-Digital LED (4)	115/230 ±10% (switchable)	Y	N	10.4 x 6.5 x 14.4	17	279.95	249.95
175249	Various	DPS5050	50/5	250	2-Analog	110 @ 50-60Hz	Y	Y	7.7 x 6.7 x 4.9	13.8	179.95	159.95

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

Multiple Output Benchtop Power Supplies

★ Web Code: **SAX**

211693



301962



301947



197991



197982



1939618



• Voltage and current adjustable

Part No.	Mfr.	Mfr. Part No.	Voltage (VDC)/ Current (A)	Power (W)	Input Voltage	Displays	Short Circuit Protection	Overload Protection	Size (W" x H" x D")	Weight (lbs.)	Pricing	
											1	5
211722	Mastech	HY3002-2 [Ⓐ]	0-30/2; 0-30/2	120	115/230 ±10%	2-Digital LED	Y	N	10.4 x 6.5 x 14.4	23	\$219.95	\$199.95
211705	Mastech	HY3002D-2	0-30/2; 0-30/2	120	115/230 ±10%	4-Digital LCD	Y	N	10.4 x 6.5 x 14.4	23	239.95	219.95
211693	Mastech	HY3003D-2 [Ⓐ]	0-30/3; 0-30/3	180	115/230 ±10%	4-Digital LCD	Y	N	10.4 x 6.5 x 14.4	28	299.95	269.95
211731	Mastech	HY3003-2 [Ⓐ]	0-30/3; 0-30/3	180	115/230 ±10%	2-Digital LED	Y	N	10.4 x 6.5 x 14.4	28	299.95	269.95
301962	Mastech	HY5003-2	0-50/3; 0-50/3	300	115/230 ±10%	2-Digital LED	Y	N	10.4 x 6.5 x 14.4	26	299.95	269.95
301947	Mastech	HY3005D-2 [Ⓐ]	0-30/5; 0-30/5	300	115/230 ±10%	4-Digital LCD	Y	N	10.4 x 6.5 x 14.4	26.5	299.95	269.95
211713	Mastech	HY3003-3	0-30/3; 0-30/3; 5/3	300	115/230 ±10%	2-Digital LED	Y	N	10.4 x 6.5 x 14.4	29	299.95	269.95
211684	Mastech	HY3003D-3	0-30/3; 0-30/3; 5/3	195	115/230 ±10%	4-Digital LCD	Y	N	10.4 x 6.5 x 14.4	29	299.95	269.95
301955	Mastech	HY3005D-3 [Ⓐ]	0-30/5; 0-30/5; 5/3	315	115/230 ±10%	4-Digital LCD	Y	N	10.4 x 6.5 x 14.4	29	379.95	339.95
201938	Mastech	HY3005	0-30/5; 0-30/5; 5/3	315	115/230 ±10%	2-Digital LED	Y	N	10.5 x 6.5 x 14.3	10	199.95	179.95
197991	Extech	382213	0-30/3; 5/0.5; 12/0.5	98.5	110/120 @ 50-60 Hz	2-Digital LCD (3)	Y	Y	6 x 5.6 x 9.5	11	199.95	179.95
197982	Extech	382203	0-30/3; 5/0.5; 12/0.5	98.5	110/120 @ 50-60 Hz	2-Analog	Y	Y	6 x 5.6 x 9.5	11	169.95	159.95
1939618	Extech	382270	0-30/5; 0-30/5; 3-6/3; 8-15/1	334.5	110/120 @ 50-60 Hz*	4-Digital LED (4)	Y	Y	10.2 x 6.3 x 14.5	26.5	449.95	429.95
2112866	SKMI	LP-303-TP	0-30/3; 0-60/3; 0-30/6	180	115 @ 50Hz	4-Digital LED (3)	Y	Y	9.3 x 5.4 x 14.6	21.6	599.95	549.95

* Selectable

13.8VDC Precision Regulated Power Supplies

★ Web Code: **YEH**

- Heavy duty 5'8" 3-prong power cord
- Illuminated rocker switch
- Short-circuit protected
- Output mating terminals: see pg 130 for cigarette plugs & pg 159 for banana terminal plugs
- Fuse protected



1918745 Cigarette plug



136581
Banana terminal



138668
Banana terminal (rear)

Part No.	Manufacturer	Mfr. Part No.	Power (W)	Output Volts @ Curr.	Input Voltage	Output Terminals	Size (L" x W" x H")	Wt. (lbs.)	1	5	25
1918745	Samlex	SPS-1204UL	46.2	13.8VDC @ 3.5A	120VAC @ 60Hz	Cigarette plug / terminals	5.2 x 4.0 x 2.0	2.0	\$39.95	\$35.95	\$32.95
136581	Samlex	RPS1207 [Ⓐ]	96.6	13.8VDC @ 7.0A	115VAC @ 60Hz	Banana terminals	8.7 x 5.7 x 3.6	8.5	69.95	59.95	54.95
138668	BenchPro	38-381 [Ⓐ]	138.0	13.8VDC @ 10A	115VAC @ 60Hz	Banana terminals (rear)	7.0 x 6.6 x 4.3	10.0	59.95	53.95	48.95
138676	BenchPro	52-192012 [Ⓐ]	276.0	13.8VDC @ 20A	115VAC @ 60Hz	Banana terminals	10.0 x 7.8 x 4.4	15.9	109.95	94.95	84.95

* P/N 136581 includes overheating protection

80-Watt Switching Mode DC Power Supply

3-in-1 DC Power Supply

- Input voltage: 90-264VAC @ 47-63Hz
- Constant voltage and current
- Ripple and noise: <30mVp-p
- Load regulation: <20mV
- Remote sensing for accurate applied voltage at load point
- 3 ranges: 0 - 16.4V @ 0-5.1A; 0 - 27.6V @ 0 - 3.1A; 0 - 36.8V @ 0 - 2.3A
- Basic accuracy: ±1%
- Line regulation: <4mV
- Dual 4-digit LED display
- Front and rear output terminals



Part No.	Mfr. Part No.	Weight	Size	1	5
1939600	382260	4.2 lbs.	13"H x 5"W x 2.1"D	\$279.95	\$239.95

ATX Power Supply Testers

- Tester for ATX power supply outputs to indicate pass or fail
- 24-pin ATX connector on one side of the tester
- 4-pin HDD/floppy drive connector, and 6-pin/8-pin P4 connector on the other side
- Tests +3.3V, ±5V, ±12V, +5VSB and PG



Part No.	Product No.	Description	Color	1	5
1928450	PST20	LED indicators	Blue	\$19.95	\$17.95
2119988	E77CECE38L	LED indicators with on/off switch	Black	21.95	19.95
2115514	E77CEBE80L	LCD display readout	Black	24.95	22.49

★ Benchtop Power Supplies — Enter Web Code **SAX**

Test Lead Starter Kit

This kit includes our top selling test leads at a reduced price.

Includes one of each:

- BNC female-to-pigtail cable (P/N 256832)
- BNC male-to-pigtail cable (P/N 2097555)
- BNC male-to-alligator clip (P/N 11384)
- BNC male-to-mini clip (P/N 11464)
- BNC female-to-micro clip (P/N 11422)
- Mini clip to stackable banana test leads (P/N 21857)
- Double banana plug to alligator clip test leads (P/N 107423)
- Protected multimeter test leads (P/N 1945962)
- Standard banana-style multimeter test leads (P/Ns 77738/77746)
- Anti-static wrist strap (P/N 34552)

Part No.	Product No.	1	5
2112336	Test Lead Starter kit	\$39.95	\$36.95

Test Leads and Cables

★ Web Code **TLC**



159871




2097125



176971



11384



11422



176954

Part No.	Mfr.	Product No.	Description	Size (L")	1	10	25
159871	Pomona	2249-C-36 [Ⓐ]	BNC male to male cable, RG58C/U, 50Ω, 20 AWG, black	36	\$14.95	\$14.49	\$13.95
159880	Pomona	2249-C-60 [Ⓐ]	BNC male to male cable, RG58C/U, 50Ω, 20 AWG, black	60	18.95	17.95	16.95
2097141	Pomona	2249-E-36 [Ⓐ]	BNC male to male cable, RG59B/U, 75Ω, 23 AWG, black	36	16.95	15.95	14.95
2097125	Pomona	2249-K-36 [Ⓐ]	BNC male to male cable, RG174/U, 50Ω, 26 AWG, black	36	22.95	21.95	20.49
176971	Pomona	4532-C-36 [Ⓐ]	BNC M to Mini alligator clips w/strain relief, RG58C/U, 50Ω, 20AWG, blk	36	18.95	17.95	16.95
11384	BenchPro	GCA26-R [Ⓐ]	BNC male to Alligator clip, RG58/U, black	23	4.65	3.95	2.95
11464	BenchPro	05-A-078-R [Ⓐ]	BNC male to Mini-clip test lead, RG174A/U, black	39	3.95	3.59	3.29
11422	BenchPro	05-A-081-R [Ⓐ]	BNC male to Micro-clip test lead, RG174A/U, black	39	3.75	3.19	2.59
2097150	Pomona	5187-C-36 [Ⓐ]	BNC male to MiniGrabber test leads, RG58C/U 50Ω, 20 AWG, blk	36	18.95	17.95	16.95
176954	Pomona	5187-K-36 [Ⓐ]	BNC male to MiniGrabber test leads, RG174/U 50Ω, 26 AWG, blk	36	24.95	23.95	22.95

Test Leads & Cables continued on next page

★ For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Test Leads, Cables, Plugs, Clips & Posts

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Pomona TEST EQUIPMENT	KEYSTONE	JAMECO BenchPro	PROBE MASTER
---------------------------------	-----------------	------------------------	---------------------

Test Leads and Cables (Continued)

*Web Code TLC

Part No.	Manufacturer	Product No.	Description	Size (L")	1	10	25
2113877	Pomona	3957	BNC male to Multi-Stacking banana plugs (2nd End)	1.55	\$13.95	\$13.49	\$12.95
256832	BenchPro	CBB-069-R	BNC female to pigtail, 20 AWG, 2 wire, 1 black, 1 red	7	5.49	4.95	4.49
2097555	BenchPro	CBB-070-R	BNC male to pigtail, 20 AWG, 2 wire, 1 black, 1 red	9	5.49	4.95	4.49
2113869	Pomona	3788	BNC female Minigrabber test clips (2nd end)	2.56	10.49	9.95	9.49
2113885	Pomona	5051	BNC female only to #8 spade lugs (2nd end)	8	8.95	8.49	7.95
1945962	Various	TP-1	Protected probes w/ rt. angle banana screw-on alligator clips, 1 blk, 1 red	40	7.95	6.95	6.25
212222	Probe Master	8043S	Softie test probe leads (w/10 pcs interchangeable tips) 18AWG, 1 blk, 1 red	39	26.95	25.95	24.95
174625	Probe Master	8150	Micro-tip test probe leads rt. angle (w/10 plunger type tips), 1 blk, 1 red	39	36.95	33.95	31.95
168516	BenchPro	GA-5010	Universal test lead kit w/ 12 interchangeable tips, 1 black, 1 red	36	8.95	6.95	5.95
155951	Pomona	5519A-R	Banana plug to rt. angle probe, insulated leads, 18 AWG 1 blk, 1 red	48	13.95	13.25	12.49
77738	BenchPro	GF19-R-R	Protected banana style multimeter test leads, 1 black, 1 red	40	5.95	5.49	4.95
77746	BenchPro	FC-15B-R-R	Standard banana style multimeter test probes, 1 black, 1 red	42	7.59	6.95	6.25
10444	BenchPro	GAL01	Alligator clip test leads, 24 AWG (19/36) 10-pc. assorted colors	15	4.95	4.49	3.95
159901	Pomona	B-24-02-R	Stackable banana patch cords, 18 AWG, 1 black, 1 red	24	9.95	8.95	8.29
159919	Pomona	B-36-02-R	Stackable banana patch cords, 18 AWG, 1 black, 1 red	36	10.95	9.95	8.95
77842	BenchPro	KLN-4-25/H-R-R	Stackable banana patch cords, 18 AWG, 2 ea. (blk,red,blue,white,yellow)	9.8	23.95	20.95	19.95
107423	BenchPro	GCA340-R-R	Stackable double banana plug to alligator clip test leads, 1 blk, 1 red	36	3.95	3.59	3.19
2113949	Pomona	72905-2	Micro SD Grabber test clip lead, attaches to 08mm/4mm female lead, red	3	5.49	4.95	4.69
159899	Pomona	3782-36-02-R	Mini-clip w/ stackable banana test leads, 20 AWG, 1 black, 1 red	36	11.49	10.95	10.49
21857	BenchPro	05-A-082-R-R	Mini-clip to stackable banana test leads, black	39	3.95	3.49	2.95
21865	BenchPro	05-A-079-R-R	Mini-clip to stackable banana test leads, red	39	3.95	3.49	2.95
135299	BenchPro	SF-207A-R-R	Mini-clip test leads, 26 AWG, 5 sets (blue, black, yellow, red, green)	14	10.95	9.95	8.95
571188	Pomona	3782-60-0	MiniGrabber™ test clip to stacking banana plug	60	5.95	5.49	4.95
156495	Pomona	5523-R-R	MiniGrabber™ test clip patch cord, 20 AWG 10-pc. assorted colors	24	39.95	37.95	36.95
2113906	Pomona	6341	Test probe set, precision electronic w/ complete set of 5 tips	39.4	35.95	34.95	33.95
2113914	Pomona	5953A	Test probes with retractable needle tips, right-angle for DMM	48	23.49	22.49	21.95
155985	Pomona	2708B-R	9 slot test lead holder, accepts RG213 & RG214 wire sizes (blue)	11	12.95	12.49	11.95
155977	Pomona	4408-R	10 slot test lead holder, accepts RG59 & RG108 wire sizes (black)	11	10.95	10.49	9.95
155969	Pomona	1508-R	14 slot test lead holder, accepts RG58 & RG142 wire sizes (orange)	11	11.95	11.49	10.95

Test Clips, Plugs and Posts

*Web Code TLC

Part No.	Manufacturer	Product No.	Description	Size (in.)	1	10	100
71240	BenchPro	GIP-003-R-R	Binding post, screw type, chassis mount 1 black, 1 red	1.0 L x .50 Dia.	\$1.29	\$1.15	\$.99
77691	BenchPro	GIP-001-R-R	Binding post, screw type, chassis mount 1 black, 1 red	1.8 L x .50 Dia.	1.59	1.45	1.29
2097264	Pomona	4995-0-R	Binding post, spring loaded, panel mount, black	2.0 L x .50 Dia.	20.95	19.95	18.95
2097272	Pomona	4995-2-R	Binding post, spring loaded, panel mount, red	2.0 L x .50 Dia.	20.95	19.95	18.95
2097192	Pomona	5165-0-R	Shorting bar, insulated double banana plug w/ binding post, blk	1.78 L x .48 Dia	12.95	11.95	10.95
1582188	Keystone	6092-R	Banana jack, chassis mount, 0.182" solder tab, black	.937 L x .433 Dia.	1.39	1.29	1.19
1582170	Keystone	6091-R	Banana jack, chassis mount, 0.182" solder tab, red	.937 L x .433 Dia.	1.39	1.29	1.19
256779	BenchPro	R1-17-BLK-R-R	Panel mount tip jack; 1/4"-32 thread, black (10 pc. pkg)	.988 L x .29 Dia.	7.95	6.95	5.95
263864	BenchPro	R1-17-RED-R-R	Panel mount tip jack; 1/4"-32 thread, red (10 pc. pkg)	.988 L x .29 Dia.	7.95	6.95	5.95
125197	BenchPro	GBRR2-R-R	Screw mount double binding/banana post, black/red	1.6 L x 1.4 W	3.95	3.49	2.95
72195	BenchPro	GBP205-R-R	Set screw banana plug, 1 black, 1 red	1.6 L x .40 Dia.	1.59	1.45	1.29
137526	BenchPro	HP-2234P-R-R	Set screw banana plug, 1 black, 1 red	2.3 L x .30 Dia.	2.99	2.49	1.99
159855	Pomona	1325-02-R	Solderless stackable banana plug w/ set screw, 1 black, 1 red	1.55 L x .44 Dia.	3.19	2.95	2.75
571145	Pomona	1325-2-R	Solderless stackable banana plug w/ set screw, red (set of 10)	1.55 L x .17 Dia.	13.95	13.49	12.95
159863	Pomona	1825-02-R	Solderless stackable banana plug w/ safety collar, 1 black, 1 red	4.59 L x .39 Dia.	3.19	2.95	2.75
125210	BenchPro	GBRR4-BLK-R-R	Solderless stackable double banana plug, w/ wire guide, black	1.59 L x 1.20 W	2.39	2.19	1.95
125218	BenchPro	GBRR4-RED-R-R	Solderless stackable double banana plug, w/ wire guide, red	1.59 L x 1.20 W	2.39	2.19	1.95
159927	Pomona	MDP-02-R	Solderless stackable dbl banana plug, w/ wire guide, red (set of 2)	1.55 L x 1.18 W	5.49	5.29	4.95
11440	BenchPro	03-701A-R-R	BNC female to standard double banana plug, black	2.03 L x 1.7 W	4.95	4.49	3.95

Test Clips, Plugs & Posts
continued on next page

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

Test Clips, Plugs and Posts (Continued)

*Web Code TLC

* Order in multiples of 10

Part No.	Manufacturer	Product No.	Description	Size (in.)	1	10	100
2113893	Pomona	3296	BNC male to mini stackable binding posts	1.93 L x .88 W	\$23.95	\$22.95	\$21.95
125225	BenchPro	GB2BR2	BNC male to standard double banana plug, black	2.21 L x 1.8 W	5.95	5.39	4.95
125233	BenchPro	GB1BN2	BNC female to double binding/banana posts, black	2.14 L x 1.8 W	4.95	4.45	3.95
99355	BenchPro	GB2BN2	BNC male to double binding/banana posts, black	2.35 L x 1.7 W	4.95	4.45	3.95
2113519	Fluke	AC220	Alligator clip, suregrip, opens to 13mm, 1 black, 1 red	5.5 L x .25 Dia.	29.95	28.95	27.95
2113527	Fluke	AC283	Pincer clips, suregrip, opens to 5mm, 1 black, 1 red	8.0 L x .25 Dia.	29.95	28.95	27.95
2113922	Pomona	5912B	Maxigripper test clip set with jaws, 1 red	0.5 D	24.49	23.49	22.49
114810	BenchPro	G2P004-R	Micro test clip, 1 red, 1 black	1.7 L	1.59	1.45	1.29
153163	BenchPro	SF-207-BL-R	Micro test clip, blue	1.7 L	.95	.85	.75
114818	BenchPro	G2P002-R	Mini test clip, 1 black, 1 red	3.5 L	2.25	1.95	1.75
684502	Pomona	6311	SMD micro grabber test clip, 8mm tip, 1 green, 1 yellow	1.5 L x .02 W	84.95	82.95	79.95
684545	Pomona	6313	SMD micro grabber test clip, 2mm tip, 1 green, 1 yellow	1.5 L x .02 W	69.95	67.95	65.95
248921	BenchPro	SF101CP-R	Mini alligator clip, solder/crimp (set of 2)	1.2 L x .30 W	.39	.36	.33
248939	BenchPro	SF-103CP-R	Mini alligator clip, solder/crimp (set of 2)	1.6 L x 0.3 Dia.	.35	.29	.25
256525	BenchPro	SF105B-R	Alligator clip, barrel/screw, 2" (set of 2)	2.0 L x .20 Dia.	.55	.49	.45
70991	BenchPro	GIP006-R	Insulated alligator clips, 1 black, 1 red	2.3 L x .50 W	.55	.49	.39
248962	BenchPro	SF-103SV-BK	Black insulator sleeve for PNs 248939 & 256525 (set of 2)	2.1 L x .20 Dia.	.55	.49	.45
248972	Various	SF103SV-RD-R	Red insulator sleeve for PNs 248939 & 256525 (set of 2)	2.1 L x .20 Dia.	.35	.29	.25
1581986	Keystone	5001	Looped color coded test point, mini, black	.3 L x .04 Dia.	*	.19	.15
1581994	Keystone	5002	Looped color coded test point, mini, white	.3 L x .04 Dia.	*	.19	.15
1582065	Keystone	5012	Looped color coded test point, white	.45 L x .063 Dia.	.29	.25	.19



12-Piece Lightweight Computer-Service Tool Kit

- Kit includes:
 - 2 nut drivers: 3/16", 1/4"
 - 3-claw parts holder
 - 1-pc hex key wrench
 - IC extractor
 - 4-pc screwdriver set
 - Tweezers
 - Clear components tube holder
- Size: 85"L x 6.0"W x 1.5"H • Weight: 1.1 lbs.



Part No.	Description	1	5	25
167206	12-piece tool kit	\$13.95	\$12.49	\$10.95

26-Piece SAE Hobby Tool Set

- 4-1/2" long nose pliers
- 4-1/2" diagonal cutting pliers
- #1 & #2 Phillips bits
- #1 & #2 pozi bits
- 3/16" & 1/4" slotted bits
- Hex to 1/4" driver adapter
- Compact carrying case
- T-10, T-15, and T-20 Torx bits
- Driver handle
- 3" extension bar for 1/4" drive
- Tweezers
- 3 slotted and 3 screw driver precision set
- 3/16", 1/4", 11/32" and 3/8" sockets for 1/4" drive
- Size: 12.0"L x 9.0"W x 2.0"H • Weight: 1.5 lbs.



Part No.	Description	1	5	25
170069	26-pc. SAE tool set	\$17.95	\$15.95	\$12.95

40-Piece Electronic Tech Tool Kit

- Kit includes:
 - Wire cutters/ stripper
 - Adapter bit for sockets
 - Pocket clip screwdriver
 - 10-pc screwdriver set
 - T10-T25 reversible
 - Torx screwdriver bits
 - Potentiometer alignment tools
 - 3/16"-1/2" S.A.E. nut driver sockets
 - 6mm-12mm metric nut driver sockets
 - Slotted and Phillips screwdriver bits
 - Extra long 3-claw parts holder
 - IC inserter with pin straightener
 - IC extractor
- Size: 9.5"L x 6.8"W x 1.4"H • Weight: 1.7 lbs.



Part No.	Description	1	5	25
119183	40-piece tool kit	\$21.95	\$19.95	\$17.95

51-Piece Tech Tool Kit

- Kit includes:
 - Storage box
 - 4 pliers
 - Tweezers
 - Scissors
 - 7-piece hex key set
 - PVC insulated tape
 - Multimeter
 - Brush
 - 10-piece screwdriver set
 - Utility knife (3 blades)
 - 3-piece soldering aid kit
 - Desoldering pump
 - 6-piece electronic screwdriver set
 - Soldering iron with stand and sponge
- Case features removable pallets, a combination lock and a cushioned black plastic handle
- Size: 12.5"L x 17.5"W x 3.5"H • Weight: 10.4 lbs.



Part No.	Description	1	5
26681	51-piece tool kit	\$99.95	\$89.95

*For Tool Kits — Enter Web Code CAA

69-Piece Tech Service Tool Kit

- Kit includes:
 - Storage box
 - 7 pliers
 - Tweezers
 - Spring hook
 - 3-piece soldering aid kit
 - Desoldering pump
 - 3-piece alignment tool set
 - Diagonal cutter
 - Soldering iron
 - Forceps
 - 9-piece screwdriver set
 - Wire stripper
 - 5-piece file set
 - Flashlight
 - 3-prong holder
 - PVC insulated tape
 - Heat sink
 - Measuring tape
 - 6-piece electronic screwdriver set
 - 40-piece socket & screwdriver set
 - 10-piece electronic wrench set
- Size: 18.5"L x 13.8"W x 6.7"H • Weight: 22.8 lbs.



Part No.	Description	1	5
149024	69-piece tool kit	\$299.95	\$269.95

52-Piece Master Electronics Tool Kit

Simply every tool needed for field repair or installation. All in a handsome lockable case, with room for spare parts or special equipment.

- Kit includes:
 - 7 pliers
 - Storage box
 - Wrench
 - 3-piece soldering aid kit
 - Soldering iron with stand and sponge
 - 10-piece screwdriver set
 - Desolder wick
 - Crimping tool
 - Oil can
 - Desolder pump
 - 5-piece file set
 - Testing screwdriver
 - Alignment tool
 - IC extractor
 - Flashlight
 - 7-piece hex set
 - 3-prong holder
 - 6-piece wrench set
 - Hammer
 - PVC insulated tape
 - Scissors
 - Solder core
 - Part tube
 - Heat sink
 - Utility knife (3 blades)
 - Measuring tape
 - Tweezers
- Carrying case has two removable pallets, adjustable compartments, and combination locks
- Size: 18.0"W x 13.0"D x 4.0"H
- Weight: 16.0 lbs.



Part No.	Description	1	5
218245	52-piece electronic tool kit	\$134.95	\$119.95

Aluminum Tool Case

Made of lightweight aluminum, this tool case is designed to take rough field use.

- Size: 19.0"L x 14.0"W x 6.0"
- Includes: Tool pallet, egg carton foam lid and 2.5" thick pre-cut foam bottom



Part No.	Description	1	5
261877	Tool/equipment case	\$44.95	\$39.95

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Tool Kits, Wrenches & Cable Strippers

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE



100-Piece Professional Electronics Tool Kit

Kit includes:

- Soldering iron
- 12 screwdrivers
- 7-piece hex key set
- Extractor
- 4 Pliers
- Adjustable wrench
- Crimper/Stripper
- 6-piece screwdriver set
- 3-piece soldering aid kit
- Desoldering pump
- Multimeter
- Tweezers
- 5-piece file set
- 10-piece wrench set
- Voltage tester
- 2 bottles cleaning liquid
- Blade cutters
- Cordless screwdriver kit (bits included)
- Aluminum case features removable pallets, surface-type locks, and black plastic handle
- Size: 18.0"L x 14.0"W x 6.0"H • Weight: 15.5 lbs.



Part No.	Description	1	5
242851	100-piece tool kit	\$199.95	\$159.95

R² RapidRench Adjustable Ratcheting Socket Wrench

- Fits hundreds of SAE and metric fasteners
- Tighten or loosen with a flip of a switch
- Dial adjusts jaws to the exact size of the fastener
- Jaw capacity: 1/4" to 7/8" (6.35mm to 22.2mm)
- Rubberized comfort grip for extra control



Part No.	Mfr. Part No.	1	5
1943131	FR28SWMP	\$29.95	\$26.95

*** Wrenches — Enter Web Code WEL**

RapidSlide Adjustable Wrench

- Slide/control button on handle for fast, easy and accurate jaw adjustment
- SAE/metric adjustment markings on head
- 1" maximum jaw opening allows each tool to work with more fastener sizes



Part No.	Mfr. Part No.	1	5
1943123	AC8NKWMP	\$19.95	\$17.95

Rotary Coax Cable Strippers

2 and 3 Blade

- 159119 (3 Blade):**
 2 settings RG58/59/62
 • For cable sizes 4-10mm
 • Size: 4.2"L x 1.3"W
 • Color: black



- 159185 (2 Blades):**
 4 settings RG58/59/62/174
 • For cable sizes 4-12mm
 • Size: 3.9"L x 0.7"W • Color: gray



Includes: Hex key wrench for adjusting blade

Part No.	Mfr. Part No.	1	5	25
159119	HT312B (3 blade)	\$9.95	\$9.49	\$8.95
159185	HT332D (2 blade)	12.95	11.95	10.95

For Electronic Starter Kit see page 149

Cabling Technician's Tool Belt Kit

Kit Includes:

- 66/110 blade punch down tool
- Probe pick and spudger
- Cable stripper
- Splicer's knife
- High quality nylon belt pouch
- Electrician's scissors
- Mini screwdriver



Part No.	Mfr. Part No.	1	5	25
2112250	TTK-5200	\$39.95	\$36.95	\$33.95



Automatic Wire Strippers

- Spring loaded handle
- Size: 7.0"L x 2.5"W
- Weight: 0.8 oz.
- Provide a clean strip without damaging conductor



Includes: Wire stopper for desired strip length

Part No.	Mfr.	Description	1	5	25
2112284	BenchPro	10-24 AWG	\$8.95	\$7.95	\$6.95
175098	BenchPro	8-22 AWG	16.95	15.49	13.95



Flat Cable Cutter

- Spring loaded handle
- Blade lock for safe storage
- Provides clean cut
- Size: 6.5" L x 2.0"W
- Weight: 5.6 oz.



Part No.	Description	1	5	25
2112241	Flat cable cutter	\$4.95	\$4.49	\$3.95



Heavy Duty Scissors

- Spring loaded handle
- Blade lock for safe storage
- Ergonomic handle
- Stainless steel tongs
- Suitable for fiber optic cable



Part No.	Description	1	5	25
2112313	Heavy duty scissors	\$4.95	\$4.59	\$4.29



UTP/STP Wire Stripper

- Quickly strips insulation without damaging wire
- Strips shielded and unshielded
- Strip 24 to 3 AWG (.5 - 6.2mm)
- Twisted pair cable
- Size: 3.5"L x 1.25"W



Part No.	Description	1	5	25
2112292	UTP/STP stripper	\$2.95	\$2.49	\$1.95

Hand Tools for Mini-Fit™ Jr.



304928: Accepts wire range from 14-24 AWG

Part No.	Mfr. Part No.	Description	1	5
304928	63811-1000	Crimp tool	\$49.95	\$44.95
304936	11-03-0044	Extraction tool	19.95	18.95

For all Your Wire and Cable needs see pages 58-61

5" Wire Cutter/Strippers

- Insulated handles
- Spring return
- Tempered steel cutting edge
- Size: 5.0"L x 3.0"W
- One-year warranty



78992: 10-30 AWG (screw adjustable)
215889: 10-24 AWG (dial to adjust for wire gauge)

Part No.	Product No.	1	5	25	100
78992	HT108	\$4.49	\$3.95	\$3.49	\$2.95
215889	JE-2022C	3.95	3.69	3.29	2.95

*** Cutters/Strippers — Enter Web Code BAK**



5" Wire Cutter/Stripper

- Strips and cuts 20-24 AWG wires
- Spring loaded for easy use
- Cutter angled at 45° for use in tight places
- Insulated grips
- Size: 5.0"L x 3.0"W



Part No.	Mfr. Part No.	1	5	25	100
159274	HT1091	\$4.95	\$4.49	\$3.95	\$3.49



6" Wire Cutter/Strippers

- Plier nose
- Wire size markings, in AWG and mm
- Size: 6.0"L x 2.0"W



161226: Premium

- 12-20 AWG stranded; 10-18 AWG solid

161234: Premium

- 16-26 AWG stranded; 14-24 AWG solid

161218: Standard

- 16-26 AWG stranded; 14-24 AWG solid
- Color: red

Part No.	Mfr. Part No.	Description	1	5
161226	ID45-215	Cushioned grips	\$15.95	\$14.95
161234	ID45-216	Cushioned grips	15.95	14.95
161218	ID45-121	Non-cushioned grips	14.49	12.95



6.6" Wire Stripper

- Wire stripper, cutter, steel wire cutter, and wire loop
- Scale: AWG and mm
- Strips and cuts wires from 20-30 AWG
- Size: 6.6"L x 2.0"W




Part No.	Mfr. Part No.	1	5	25
159291	HT5023	\$9.95	\$8.95	\$7.95

*** Wire Strippers — Enter Web Code HAY**



7-in-1 Wire-Handling Tools

- Wire stripper, wire cutter, steel wire cutter, pliers and wire loop
- Solderless crimping tool
- Scale: mm and inch
- Size: 6.6"L x 3.0"W



Part No.	Mfr. Part No.	Description	1	5	25
18797	HT1041	10-18AWG	\$4.95	\$4.49	\$3.95
127862	HT1042	16-26AWG	5.95	5.49	4.95
127871	HT1043	22-30AWG	5.95	5.49	4.95

Metal Modular Connector Crimping Tool

Crimps 6P and 8P Plugs (6P2C, 6P4C, 6P6C, 8P2C, 8P4C, 8P6C, 8P8C)

- Cable stripper/wire cutter
- Size: 8.0"L
- Weight: 1.8lbs.



Part No.	Description	1	5	25
114527	RJ11/RJ45	\$22.95	\$19.95	\$17.95

Ratcheted Modular Connector Crimping Tool

Crimps RJ45 (8P8C) and RJ11/12 (6P6C)

- Insulated grip
- Ratcheted type
- Metal • 7.5"L
- Weight: 0.7 lbs.



Part No.	Description	1	5	25
159312	RJ45/11/12	\$22.95	\$19.95	\$17.95

Modular Cut/Crimp/Strip Tools

For RJ11 (6P) and RJ45 (8P) Modular Plugs

- Repeatable crimp action for consistent high-quality connections

Includes: Cut and strip blade

174684: • Size: 8.0"L x 2.0"W
• Weight: 0.8 lbs.

174676: • Size: 8.5"L x 2.2"W
• Weight: 1.2 lbs.

161091: • Size: 6.0"L x 2.0"W • Weight: 0.8 lbs.



Part No.	Mfr.	Product No.	1	5
174684	Various	TTK071	\$21.95	\$19.95
174676	Various	TTK070	23.95	21.95
161091	Ideal	ID30-496	39.95	36.95

Half-Round Long Nose Pliers

- Drop forged steel
- Heat treated
- Spring return action • Vinyl grips
- Length: 4.5" • Knurled jaws




Part No.	Description	1	5	25
177608	Half-round pliers	\$4.95	\$4.49	\$3.95

Xcelite

General Purpose Pliers and Cutters

Needle Nose, Diagonal Pliers and Cutters

- Cushion grips • General purpose use • Positive gripping of wire & subminiature components
- Narrow and fine tips provide increased clearance and allows use in restricted areas



Needle Nose Pliers

Part No.	Mfr.	Part No.	Description	1	5
217891	L4	4" mini needle nose	\$17.95	\$16.49	
217998	LN54G	5" thin long nose	18.95	17.49	
146721	NN7776V	5" long nose flat	19.95	18.95	

Shearcutter Pliers Set

Part No.	Mfr.	Part No.	Description	1	5
152055	S2K	5.6" plier/5.2" cutter	\$16.95	\$15.95	

*** Xcelite Pliers & Cutters — Enter Web Code XPC**

Hex Crimp Tools

Use with RG-58 and RG-59

Connectors with up to a 3/8" Ferrule

261745: 1.7mm standard crimp for crimping center conductor on BNC and TNC connectors; up to 3/8" ferrule
261737: Ferrules up to 1/2"




Part No.	Description	Weight	1	5
261745	Hex crimp tool (3/8")	1.5 lbs.	\$17.95	\$15.95
261737	Hex crimp tool (1/2")	1.5 lbs.	17.95	15.95

Connector Compression

For F/BNC/RCA Ferrules

- Interchangeable die sockets
- Ratchet mechanism
- Integrated COAX cutter • Waterproof
- Black oxide steel frame • Size: 9.0"L x 2.5"W



Part No.	Description	1	5
261761	Compression multi-tool	\$29.95	\$27.95

Modular Connector Crimping Tool Set

Crimps RJ11 and RJ45 Plugs

- 8" metal modular crimping tool
- Cuts, strips and crimps
- Carrying case: blue hard plastic, 8.0"L x 10.5"W x 2.0"H

Includes: 90 modular plugs, 40 pcs. 4P4C, 30 pcs. 6P6C, 20 pcs. 8P8C



Part No.	Cross Ref. No.	Weight	1	5
73496	HT2000B	2.1 lbs.	\$69.95	\$64.95

6-Pcs. Steel Mini Plier & Cutter Set

- Spring return • Insulated handles

Includes:

- (1) 4.5"L diagonal cutting
- (1) 4.5"L end cutting plier
- (1) 5"L long nose plier
- (1) 5"L flat nose plier
- (1) 5"L bent nose plier, (1) 5.75"L needle nose plier



Part No.	Description	Weight	1	5
2120321	6-pcs set	0.7 lbs.	\$19.95	\$17.95

*** Crimping Tools — Enter Web Code PAL**

Ratcheted BNC Crimping Tool

Crimps RG58, RG59, RG62, RG174 and Fiber Optic

- Hex sizes: 0.043", 0.068", 0.100", 0.137", 0.213", 0.255" • All steel construction
- Size: 8.5"L x 2.5"W • Weight: 1.1 lbs.



Part No.	Mfr.	Part No.	1	5	25
114535	HT-336G		\$22.95	\$19.95	\$17.95

Non-Insulated Terminal D-Sub Crimping Tool

14-26 AWG

- With cutter and insulated handles
- For computer pins and sockets, D-sub 26-28 AWG wire
- For butt-insulated connectors, 22-26 AWG wire
- For telephone spade lugs, 22-26 AWG wire
- For non-insulated connectors, 20-22 AWG wire
- For non-insulated connectors, 14-18 AWG wire
- Coiled spring return • Size: 7.3"L x 1.5"W



Part No.	Mfr.	Part No.	1	5	25
99443	HT202A		\$8.95	\$7.95	\$6.95

D-Sub Crimping Tool

20-28 AWG

- Crimps D-sub pins and sockets
- For use w/ P/Ns 43377, 43369 pg 69 and 100766, pg 81
- Size: 7.0"L x 4.0"W • Weight: 9 oz.



Part No.	Mfr.	Part No.	1	5	25
159266	HT213		\$10.95	\$9.95	\$8.95

Precision 5-Piece Stainless Steel Pliers Set



- Spring return • Insulated handles

Includes: One 3.5"L micro cutting nippers and one each 4"L micro round nose pliers, long nose pliers, flat nose pliers and bent nose pliers

Part No.	Description	Wt. (lbs.)	1	5	25
73121	5-piece set	0.6	\$17.95	\$15.95	\$13.95

Cutting Pliers

- Side and flush cutting

179902: • Forged steel

• Cushion grip

2123320/261789:

• Carbon steel • Vinyl grip




Part No.	Description	1	10	50
179902	4" leaf spring	\$3.95	\$3.59	\$3.29
2123320	4.5" spring return	4.95	4.49	3.95
261789	5" leaf spring	4.95	4.49	3.95

5.3" Flat and Half-Round Long Nose Pliers

- Stainless steel • Spring return

• Durable rubber handles

• 5.3" length w/ 1.4" plier nose



35474/35491: Knurled jaws; **195531:** Smooth jaws

Part No.	Description	1	10	50	250
195531	Flat long nose	\$3.95	\$3.59	\$3.29	\$2.95
35474	Flat long nose	4.95	4.49	3.95	3.49
35491	Half round	4.95	4.49	3.95	3.49

*** For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above**

Pliers, Cutters, Drill Bits, Mini-Drill & Stand

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

EXIMCORP

Pliers and Cutters

Diagonal, Needle Nose, Nipper, Square, Bent Nose, Sportsmen & Electrician Pliers

- General purpose for picking-up, cutting and wire forming
- Forged steel
- Heat treated
- Insulated grips
- Blister packaged



Diagonal Flush Cutters

Part No.	Description	1	5	25
34622	4.5" spring loaded	\$4.95	\$4.49	\$3.95
34607	5" spring loaded	4.95	4.49	3.95
34658*	5.25" heavy duty	5.49	4.95	4.49

Needle Oval Nose Pliers with Serrated Jaws

Part No.	Description	1	5	25
42104*	5.25" standard	\$5.95	\$5.49	\$4.95

Needle Oval Nose Cutters with Serrated Jaws

Part No.	Description	1	5	25
34691	4.75" spring loaded	\$4.95	\$4.49	\$3.95
34712*	5.25" spring loaded	5.49	4.95	4.49

Bent Oval Nose Pliers with Serrated Jaws

Part No.	Description	1	5	25
34796	5" standard bend	\$4.95	\$4.49	\$3.95
34826	6" slim spring loaded	4.95	4.49	3.95
34851*	7" standard bend	4.95	4.49	3.95

Bent Oval Nose Cutters with Serrated Jaws

Part No.	Description	1	5	25
34746	5.25" standard bend	\$3.95	\$3.69	\$3.39
34762*	7" standard bend	4.95	4.49	3.95

Square Nose Cutters with Serrated Jaws

Part No.	Description	1	5	25
94512	5.5" standard w/o cutter	\$4.95	\$4.49	\$3.95
94530	4.75" spring loaded w/ cutter	3.95	3.69	3.39
94546*	5.25" standard straight	4.95	4.49	3.95

Nipper Nose Pliers Spring Loaded

Part No.	Description	1	5	25
94554*	4.25" standard	\$3.95	\$3.69	\$3.39
94562	5.25" slim	5.95	5.49	4.95

Sportsmen's Square Straight & Bent Nose Pliers

Part No.	Description	1	5	25
98976	6.25" standard straight	\$4.95	\$4.49	\$3.95
104257*	8" standard straight	5.95	4.95	4.49
98985	5.25" standard bent	5.95	5.49	4.95
98993*	7.5" standard bent	6.95	6.25	5.59

Electricians Pliers with Serrated Jaws

Part No.	Description	1	5	25
104125*	6.25" standard with cutter	\$5.95	\$5.49	\$4.95
104249	8.25" standard with cutter	5.95	4.95	4.49

* Part of kit 2100161 on right

***EXIMCORP Pliers & Cutters — Enter Web Code EXP**

Diagonal Wire Cutters

- Jaws are designed for flush cutting
- Cuts component wire up to 1.2mm thick
- 0.5" cutting blade

35482: 4.3" Cutter

- Stainless steel
- Durable rubber handles

161411: 5" Cutter

- Cuts 0.08mm fine wire
- Insulated handles

Part No.	Size	1	10	50
35482	4.3"L x 2.1"W	\$6.95	\$6.49	\$5.95
161411	5.0"L x 1.8"W	6.95	6.49	5.95



***Web Code: HAF**

Pliers & Cutters Tool Kit

Ten (10) most popular tools in a kit. See (*) to the left

- 1 each

EXIMCORP

Part No.	Description	1	5	25
2100161	10 pliers and cutters	\$29.95	\$26.95	\$23.95

Variable High-Speed Rotary Tool Kit

- Speed: 6000~32000rpm
- Motor power: 130W
- Collet capacity: 3.2mm
- 28 pcs. sanding/grinding bit set
- Case included, 2.2 lbs.
- Variable speed selector

Part No.	Description	1	5
2118977	Variable high-speed rotary tool kit	\$39.95	\$36.95

High-Speed Steel Step Drill Bit

Drill multiple holes in thin material with the same bit, faster and easier. Each bit does the work of many drill bit sizes. You can drill holes in most materials such as plastic, metal, and wood up to 1/8" thick.

- Shank size: 3/8"
- 2.4" long

Part No.	Description	1	10	50
229657	3/16" – 7/8" 13-step	\$14.95	\$13.49	\$11.95

***Drill Bits — Enter Web Code NEJ**

JAMECO BenchPro Pocket Screwdriver

Phillips & Flat head

***Web Code: CAQ**

- Pen clip for pocket storage

Part No.	Description	1	10	100
127271	6" long pocket screwdriver	\$1.95	\$1.59	\$1.39

Impact Punch-Down Tools

- Reversible clip-in blade
- Adjustable (HI-LO) spring-loaded impact mechanism
- Storage bin on handle for spare blade

175071: Tool with blade

- For 66-type terminals
- Size: 5.2"L x 1.5"W x 1.0"H



324014: Tool with blade

- For 110-type terminals
- Size: 5.8"L x 1.7"W x 1.2"H

175089: Punch-down blade 110-type terminals

324021: Punch-down blade 66-type terminals

Part No.	Description	1	5
175071	Tool with 66 blade	\$29.95	\$27.95
324014	Tool with 110 blade	29.95	27.95
175089	Punch-down blade 110	9.95	8.95
324021	Punch-down blade 66	7.95	6.95



JAMECO BenchPro Mini-Drill and Stand

This Mini-Drill is excellent for drilling through circuit boards and protoboards. The drill comes with an array of drilling, grinding and sanding attachments. Drill stand is designed to function like a drill press.



Part No.	Description	Wt. (lbs.)	1	5	25
26702	GTT-103A drill	0.8	\$34.95	\$31.95	\$27.95
26711	GTT-104 stand	1.8	25.95	23.95	21.95

PC Board Drill Bits

- Shaft diameter: .125"
- Use for drilling holes in glass PC boards

Part No.	Size	Dia.	1	10	100
1919537	1/8	.125"	\$.75	\$.59	\$.45
1919588	31	.120"	.75	.59	.45
1919300	32	.116"	.75	.59	.45
1919609	33	.113"	.75	.59	.45
1919553	35	.110"	.75	.59	.45
1919570	38	.102"	.75	.59	.45
1919502	45	.082"	.75	.59	.45
1919596	46	.081"	.75	.59	.45
1919561	48	.076"	.75	.59	.45
16580	59	.040"	1.75	1.49	.99
16619	75	.021"	1.75	1.49	.99

JAMECO BenchPro Mini-Drill Bit Kit

This kit is excellent for drilling through circuit and protoboards precisely.

- Mini drill (26702)
- Mini drill stand (26711)
- Drill bit sizes 48 & 59 (1919561/16580)

Part No.	Description	Price
2113252	Mini-Drill Bit kit	\$54.95

JAMECO BenchPro 34-Piece Security Bit Set

These bits match the security fasteners commonly used in today's electronic products.

Includes: Torx bits: #6, #8 and #10; Tri-wing bits: #1, #2, #3 and #4; Security hex bits: 5/64", 3/32", 7/64", 1/8", 9/64", 5/32" 3/16" and 1/4"; Security Torx bits: T8, T10, T15, T20, T25, T27, T30, T35 and T40; Spanner bits: 4, 6, 8 and 10mm; Phillips bits: #1, #2, #3 and #4; and 60mm magnetic bit extension that fits 1/4" hex driver

Part No.	Description	1	10
223829	32-piece security bit set	\$10.95	\$9.95

Our website offers thousands of data sheets and photos to assist you in finding the products you need.





Ball-End, Hex Key and Screwdriver Sets

Bondhus/Felo Products: Inferior tools cost money when something goes wrong. The cost of removing a stripped or broken screw head from a tight location, or replacing a damaged tool exceeds the cost of purchasing a superior tool in the first place.

- Material: Protanium high torque steel
- Ergonomically designed anti roll handle
- Bondhus: Made in USA; Felo: Made in Germany
- Ball-end inserts quickly into screw head up to 250
- Delivers perfect balance between tip strength and working angle
- Life time warranty

***Web Code: CAQ**

Part No.	Mfr.	Description	1	10
34041	BenchPro	6-pc. precision screwdriver set (slotted - 3/64", 1/16", 5/64", 5/32", 1/8", 9/64")	\$2.95	\$2.59
34059	BenchPro	6-pc. precision screwdriver set (Phillips #0 - 1/16", 5/64", 3/32", #1 - 1/8", 9/64")	2.95	2.59
2096229	Felo	6-pc. screwdriver set (slotted - 9/64", 5/32", 7/32", 1/4", Phillips - #1; #2)	37.95	35.95
99451	BenchPro	6-pc. long neck screwdriver set (slotted - (Dia. x L) 3/32" x 6 5/8", 1/8" x 7 5/8", 5/32" x 9 5/8", Phillips - #00 x 6 5/8"L, #0 x 7 5/8"L, #1 x 9 5/8")	8.95	7.95
226106	BenchPro	6-pc. precision 50 mm torx screwdriver set (Torx - T5, T6, torx hex - T7, T8, T9, T10)	13.95	11.95
2096350	Bondhus	8-pc. ball-end screwdriver set (.05", 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32")	21.95	19.95
2096499	Bondhus	16-pc. folding hex key set (5/64", 1/4", 2mm to 8mm)	13.95	12.49
2096173	Bondhus	12-pc. ball-end hex key set (.05", 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4", 5/16"	12.95	11.95
261999	BenchPro	7-pc. 1000V insulated magnetic screwdriver set (slotted - 2.5mm)	15.95	14.49
2096456	Felo	7-pc. 1000V insulated screwdriver set (slotted - 3/32", 1/8", 9/64", 5/32", 7/32", Phillips - #1; #2)	32.95	29.95
99565	BenchPro	6-pc. screwdriver & plier set (slotted - (Dia. x L) 0.09" x 7 5/8", 0.312 x 9 1/2", Phillips - #2 0.09" x 7 5/8", #0 0.12" x 9 1/2", pliers - micro nipper cutter, micro flat nose pliers)	12.95	11.95
261842	BenchPro	7-pc. SAE nut driver set w/ colored handles (sizes: 3/16", 1/4", 5/16", 11/32", 3/8", 7/16", 1/2")	6.95	5.95
226094	BenchPro	11-pc. magnetic AWL prec. screwdriver set (slotted - .9, 1.2, 1.4, 1.8, 2.4, 3 mm, Phillips - #00, #0, #1)	3.95	2.95
2119005	BenchPro	8-pc. ratcheting screwdriver bit set (3-slotted, 3 philips, 1 square)	7.95	6.95
2125077	BenchPro	8-pc. ratcheting screwdriver bit set (3-slotted, 3 philips, 1 square) 10 pack	49.95	44.95
2096165	Felo	12-pc. screwdriver bit set w/ screwdriver (slotted - 1/8", 5/32", 7/32", 9/32", POZI - #1; #2; Phillips - #0; #1; #2; Torx - #15; #20)	24.95	22.95



Automatic Center-Punch Tool

Adjustable

- Precision instrument
- Alloy steel point
- Knurled steel body



• Size: 5.0"L x 0.5"Dia.

Part No.	Description	1	10
160282	Center Punch Tool	\$5.95	\$5.49

30 AWG Wire Wrap/Strip Tools

Recommended for use on 0.025" (0.63mm) square posts on 0.100" (2.54mm) center grids. The first 1-1/2 loop on the modified tool has wire insulation while all loops on a regular tool have bare wires.



- Knurled handle for easy grip
- 5" long

Part No.	Description	1	5
242801	Tool (regular)	\$19.95	\$18.95
242798	Tool (modified)	22.95	21.95
242827	Replacement tip (242801)	7.95	7.29
242819	Replacement tip (242798)	7.95	7.29

Deluxe Precision Knife Set

- Three different knife handles - fine work, medium and heavy duty power grip
- Size: 6.3"L x 2.8"W x 1.4"H

Includes: 13 types of blades



Part No.	Description	1	10	100
72768	13 blade knife set	\$8.95	\$7.95	\$6.95

5" Steel Hemostats

- Grade 410 A.I.S.I. stainless steel
- Three locking positions



Part No.	Cross Ref. No.	Description	1	10	100
115107	HEM01	Straight	\$3.95	\$2.95	\$2.49
115115	HEM02	Curved	3.95	2.95	2.49

Strip-Wrap-Unwrap Tools

- Tool tip made of tempered steel
- Spring steel cutter
- Use with 30 AWG wire on .025" square posts
- No solder necessary, see pg 58 for wire
- Wrap 1 to 2 turns of insulated portion of wire for secure connections
- 4.5" long




***Web Code: BBC**

Part No.	Product No.	1	5
34585	HSM30 (Modified)	\$29.95	\$26.95
236785	HSR30 (Regular)	29.95	26.95

1/4-Watt & 1/2-Watt Resistor & Capacitor Lead Forming Tool

- Watt size indicates appropriate package size
- Bends lead length in 0.05" increments
- Lead spacing: 1/4W: 0.4"-1.5"; 1/2W: 0.5"-1.5"



Part No.	Description	Size (L" x W")	1	10
106884	1/4W & 1/2W	5.4 x 1.5	\$4.95	\$4.49

IC Pin Straightener

Straighten bent pins safely and easily w/ Jameco's IC pin straightener.

- Straightens 8/14/16/18/20/24/28/40/42-pin ICs
- Materials: black plastic
- Size: 3.3"L x 1.5"W x 0.4"H

Includes: Ground terminal

Part No.	Description	1	10	100
99363	IC straightener	\$7.95	\$6.95	\$5.95

24" Joubert Bungee Cord

- 2.75" steel hook height
- 0.81" steel hook opening
- 0.16" thick PVC coated steel hook
- Blue cord with black coated hook
- Braided jacket cover
- Stretches easily to 48"



Part No.	Product No.	1	10	100
2081668	JBC24	\$7.75	\$6.69	\$5.95

***Calipers — Enter Web Code PAQ**

Nibbling Tool

- Perfect for cutting, trimming, or notching sheet metal up to 18 AWG
- Time-saver when working on prototyping, chassis, and circuit boards
- Minimum .375" hole required
- Size: 7.8"L



Part No.	Mfr. P/N	Description	1	10
18810	HT204	Nibbling Tool	\$7.95	\$6.95
29331	HT204B	Replace. bit	3.95	3.55

Metal Dial Calipers

Choose Metric or Inches

- Measures outside, inside & depth
- Accurate measurements every time
- Easy-to-read dial gauge
- Color: silver
- Materials: metal
- Length: 6" (150mm)



Includes: Fitted plastic storage case

Part No.	Description (min. reading)	1	5	25
116134	Metric (.02 mm)	\$25.95	\$23.95	\$21.95
116126	Inches (.001 inch)	25.95	23.95	21.95
684449	Metric/Inches	27.95	25.95	23.95

Digital Display Caliper

Metric and Inches

- Hardened stainless steel
- Display: inches to 0.001; mm to 0.01
- Instructions for making internal, external, depth & step measurements
- One-year warranty
- Calipers measure to 6 inches/150mm



Includes: Fitted case and 1.5V silver oxide battery (replacement battery, P/N 140783, pg 149)

Part No.	Description	1	5
127482	Digital Display Caliper	\$39.95	\$36.95

Precision Caliper (Micrometer)

- Precision measur. to 0.0001"
- Measure 0 to 1"
- Sturdy steel construction



Part No.	Description	Weight	1	5
2118969	Micrometer	7.4 oz.	\$19.95	\$17.95

***For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above**

Tweezers, Magnifying Lamps & Anti-Static Products

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

T-Handle Reamer Tool

Excellent for aluminum chassis work

- For enlarging starter holes on panel mount components from 1/8" to 1/2" diameter
- T-handle for easy rotation of tool
- Handle: 3.3" long, tool: 5.3" long

Part No.	Description	1	10
151750	T-handle reamer	\$7.95	\$6.95

4-Piece Steel Tweezer Set



- 4 styles of stainless steel tweezers, one self-locking
- Ideal for picking up small components in hard-to-reach places

Part No.	Description	1	10	100
10735	4-piece tweezer set	\$5.95	\$5.49	\$4.95

***Tweezer Sets — Enter Web Code FAA**

Tweezers

- 252929: Straight round tapered, fine-point tip, stainless steel
- 253092: Curved fine-point tip
- 252938: Self-closing reverse-action tweezers; medium point tip; stainless steel
- 253113: Fine-point tip, insulated, anti-static
- 252912: Straight fine-point tip

Part No.	Length	Photo	Price	10	100
252929	4.75"	1	\$2.95	\$2.49	\$1.95
253092	4.6"	2	2.95	2.49	1.95
252938	4.30"	2	2.95	2.49	1.95
253113	4.75"	3	2.95	2.49	1.95
252912	4.75"	4	2.95	2.49	1.95

4-Pc. Conductive SMD Tweezer Set



- 4 types of tweezers: fine point, flat head for 4mm SMD chip device, flat head for 8mm SMD chip device, sharp angled tip
- Each is 4.5" long

Part No.	Description	1	10
172638	4-piece tweezer set	\$9.95	\$8.95

Vacuum Tweezers

Pick & place small parts of all kinds: glass slides, coins, optics, SMDs, film, etc.

- Size: 2.9"L x 0.6"W
- One-year warranty
- Includes: 5 pads sizes 0.14" to 0.4"; 5 straight tips and 2 pieces 45° angle tips

Part No.	Description	1	5
88268	Vacuum pick & place kit	\$39.95	\$36.95



PLCC & DIP IC Extractors

- Size: 4.0"L x 2.0"W


***Web Code: MAB**



Part No.	Mfr. Part No.	Description	1	10	100
16766	HT103B	PLCC	\$3.95	\$3.49	\$2.95
16838	HT103A	DIP	1.65	1.49	1.25

Anti-Static Heel Strap

- Discharges static without restricting your mobility
- Ground strap: 15.5"L



Part No.	Description	1	10	100
100328	Heel strap	\$5.95	\$5.49	\$4.95

Anti-Static Wrist Strap

- Comfortable, adjustable black Velcro wrist strap
- The coiled grounding cord has banana plug and alligator clips
- Extended cord: 9' long



Includes: 1MΩ resistor for added safety

Part No.	Description	1	10	100
34552	Wrist strap	\$6.95	\$6.49	\$5.95

Anti-Static Work Mats

Make your work environment safe from static discharge! These mats are made of attractive semi-conductive vinyl that provide adequate discharging, yet will not short leads or pins.



Part No.	Dimensions	Wt. (lbs.)	1	10	100
10576	11.3" x 22"	0.7	\$8.95	\$7.95	\$6.95
10584	19.5" x 23.5"	1.1	13.95	12.49	10.95
236541	23.5" x 27.5"	1.4	25.95	22.95	19.95

***Anti-Static — Enter Web Code XAA**

Field Service Static Kit

This mat folds easily to fit into a field service bag.

- 4 pocket for ESD safe storage
- 10' ground strap and 6' wrist strap share on one ground point
- Size: 2' x 3'



Part No.	Mfr. Part No.	1	5	25
2113720	8PK-AS07-1	\$17.95	\$16.49	\$14.95

Conductive Anti-Static Bags and Foam

Don't get zapped!

Protect your investment with these inexpensive bags and ensure a safe work area with our conductive anti-static foam.

Part No.	Description	1	10	100
249519	4" x 6" anti-static bags	*	\$15	\$10
249527	5" x 7" anti-static bags	*	.19	.12
78650	8" x 10" anti-static bags	.49	.39	.29
13864	Anti-static foam	11.95	10.95	9.95

22"L Anti-Static Plastic DIP IC Storage Rails & Rubber Rail Stops



29524 (ICs not included)			29583		
29516: .300" rail fits 8, 14, 16, 18, 20 and 22-pin ICs					
29524: .600" rail fits 24, 28, 36 and 40-pin ICs					
29583: Rubber stops used to plug plastic rail ends					
			* Order in multiples of 10		
Part No.	Cross Ref. No.	Description	1	10	100
29516	RIC20	.300"W rail	\$.25	\$.22	\$.19
29524	RIC220	.600"W rail	\$.29	\$.25	\$.19
29583	RRS	Rubber stop	*.07	\$.07	\$.05

Standard Adjustable 3X Magnifying Lamp

- 4" Diameter lens
- Maneuverable 30" arm extension
- Lamp tilts & turns in any direction
- Uses 60W incandescent bulb (not included)
- Power requirement: 110VAC/60Hz
- 3-diopter lens • Weight: 2.9 lbs.



Part No.	Description	1	5
22710	Magnifying lamp	\$26.95	\$23.59

3X, 3-Bulb Magnifying Lamp


- Three 9-watt fluorescent compact bulbs
- Adjustable 3-diopter lens
- 7" x 4.5" rectangular lens
- 47" long arm • 2 on/off buttons
- Color: beige • Weight: 8.15 lbs. • UL listed



Part No.	Description	1	5
217517	Adj. magnifying lamp	\$89.95	\$84.95

KLIP-ON Deluxe 3X Magnifying Lamps

- High quality 3.5" Dia. glass lens w/ dust cover
- Heavy duty 2" spring loaded clamp
- Super bright 13 watt fluorescent bulb (6400 Kelvin) included
- 16" gooseneck-directs light in any directions
- Weight: 2.0 lbs.



Part No.	Cross Ref. No.	Color	1	5
1955044	LUX250W	White	\$29.95	\$26.95
1955052	LUX250B	Black	29.95	26.95

Precision 5 Diopter Magnifying Lamp

- 40" arm extension • 5 diopter lens
- 5" diameter lens • Weight: 7.1 lbs.
- Power requirement: 110VAC/60Hz




Includes: 22W circuline fluorescent bulb

Part No.	Description	1	5
197456	Magnifying lamp	\$89.95	\$79.95

***Magnifying Lamps — Enter Web Code DAW**

3X Magnifying Lamps

- 5" Dia. lens • 45" extension arm
- Supplied w/ 22-watt circuline tube
- Extra strong, all-metal mounting base with electrical outlet
- Metal bulb holder for extra protection
- Power requirement: 110VAC/60Hz • 3-diopter lens



Part No.	Description	Wt. (lbs.)	1	5
100829	Black lamp	7.3	\$59.95	\$54.95
149981	White lamp	7.3	59.95	54.95

3 Diopter Magnifying Lamp

With Measurement Marking Base

- 30" arm extension
- 7" 3 diopter lens
- Adjustable plastic lens cover
- Weighted base for desktop use
- Bulb type: 4 x 3.4W LED
- On/off switch



Part No.	Description	Wt. (lbs.)	1	5
2120330	LUX-400	7.0	\$129.95	\$116.95

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

General Purpose Illuminated 3X Magnifier

- 3.5" Dia. x 7.5"L
- Great for magnifying fine print
- 90mm diameter lens
- Light requires 2 AA batteries (not included, recommend P/N 198707, pg 149)



Part No.	Description	1	5
149542	Illuminated magnifier	\$4.95	\$4.49

3X Flexible Neck Magnifier

- 3.5" diameter
- 3x diopter lens
- Flexible gooseneck with workbench clamp
- Arm length: 20"
- Weight: 1.8 lbs.



Part No.	Description	1	5
239548	Flexible neck magnifier	\$10.95	\$8.95

Glue Gun and Glue Sticks

- Adheres to PCBs, cardboard, wires, metal and cloth
- Silicon nozzle
- Electronic heating
- Trigger action
- Utilizes 100mm long gluesticks (2 sticks included) • Size: 7.3"L x 6.3"W



Part No.	Description	1	5	25
72696	Glue gun	\$7.95	\$7.29	\$6.49
78633	Glue sticks (6/pk)	2.95	2.49	1.95

Butane Powered Mini-Trigger Torch

- Adjustable gas flow up to 2500°F
- Self-igniting piezo electric ignition
- Meets child safety requirements
- Slide lock for continuous use
- 60 min. burn time



Part No.	Mfr.	Part No.	1	5
2097483	MT-70		\$17.95	\$16.49
2097491	5 1/8 oz. butane		5.49	4.95

Table-Top Micro Torch

- Flame temp. approx. 2500°F
- Self-igniting system w/ safety lock
- Safety lock to prevent unintentional ignition and for storage
- Wide stable base, perfect for lab use
- Educational lab burner applications
- Slide lock for continuous use • 60 min. burn time



Part No.	Mfr.	Part No.	1	5
2097467	MT-30		\$34.95	\$31.95
2097491	5 1/8 oz. butane		5.49	4.95

Magna-Lite Butane Table-Top Torch

- Flame temperature: 2500°F (1300°C)
- Waterproof piezo ignition
- Adjustable flame control
- Refills in 20 seconds with standard butane gas
- Run time: 60 minutes (@ middle flame setting)
- Child-resistant ignition for safety
- Uses: brazing, soldering, heat shrink tubing, industrial maintenance



Part No.	Mfr.	Part No.	1	5
1943001	ML200		\$29.95	\$26.95

Heat Guns and Strippers

Web Code: QAJ

All Master® products are made in the US from superior quality materials and the finest craftsmanship. Heat guns are ideally suited for drying, heating, welding, shrinking, soldering, desoldering, and many other applications where heat is required.



2076578: • CFM selectable • Weight: 1.0 lb.

2076501: • Includes 4 attachments & case

• No slip adjustable stand

• Weight: 4.0 lbs.

191943: • 3-pos. switch (hot/off/cool)



Part No.	Mfr.	Product No.	Description	Watts	Heat Setting (°F)	Temp. (°F max.)	1	5
2117413	NTE	HG300-D	Mini heat gun	350	482-662	662	\$19.95	\$18.95
254925	BenchPro	1001A	Economical heat gun	1000	600 & 1000	1000	39.95	35.95
76865	BenchPro	G1HG1	Heat gun/stripper	1500	600 & 1100	1100	39.95	35.95
2076578	Master	EC-100K	Economical heat gun (7 & 9 CFM)	1200	500 & 1000	1000	54.95	51.95
2076501	Master	HG-501A	Industrial heat gun (23 CFM)	1680	750	750	114.95	104.95
191943	Weller	6996C	Industrial heat gun	250	750-800	800	139.95	129.95
2007062	BenchPro	1004	Tool kit for 254925	—	—	—	12.95	11.95
217816	BenchPro	HG018-AO	Heat shrink attach for 76865	—	—	—	1.95	1.69
217832	BenchPro	HG018-CO	Air spreader for 76865	—	—	—	1.95	1.69

Butane Powered Cordless Soldering Iron

- Built-in on-off switch
- Can be used as a torch or hot blower
- Length: 8.5"
- Maximum temperature: 450°C (842°F)
- Average use of 40 minutes on a full load



Part No.	Mfr.	Part No.	1	5
645520	GASIRON2		\$29.95	\$26.95

16 to 30-Watt Variable Soldering Iron & Stand

116572: Length: 7.5"

36329:

- Black anodized steel base — 5.3"L x 3.3"W
- See below for replacement sponge (P/N 134631)
- Fits most soldering irons .85" dia.



Includes: Sponge

Part No.	Description	1	5	25
116572	25W soldering iron	\$19.95	\$17.95	\$15.95
36329	Soldering stand	4.95	4.45	3.95
134631	Sponge (for P/N 36329)	2.95	2.59	2.29

25-Watt Thermally Balanced Soldering Iron

The XY200GX is a thermally balanced soldering iron for the professional or hobbyist.

- 120VAC; 6' cord
- 25-watt power consumption
- Interchangeable tips (pg 168)
- UL listed
- Length: 8.0"
- One-year warranty

Includes: 1.6mm conical tip

Part No.	Mfr.	Part No.	1	5	25
129040	200GX-25W		\$13.95	\$11.95	\$9.95

Legacy Replacement Sponge

- Use with XY9-60 & 968D

Part No.	Mfr.	Part No.	1	5
236460	78-744615		\$2.95	\$2.59

40-60-Watt High-Performance, Economical Soldering Irons

High-quality soldering irons that are suitable for both professional & do-it-yourself applications.

- Length: 9"
- 120VAC; 6' cord with 3-prong plug
- Tips for P/N 224602: P/N 226018/226000
- Tip for P/N 195223: P/N 226026
- For additional tips see pg 168



Part No.	Mfr.	Part No.	1	5	25
224602	200PHG-40W		\$11.95	\$10.95	\$9.95
195223	200PHG-60W		12.95	11.49	10.49
226018	44-240513 conical tip		1.95	1.59	1.29
226000	44-240517 chisel tip		1.95	1.59	1.29
226026	44-240617 chisel tip		1.95	1.59	1.29

35-Watt SMD Tweezer Iron

- Max. temp.: 760°F
- 120VAC
- Max. efficiency ceramic heating elements insures rapid heat-up and instant heat recovery
- Heater insulation exceeds 100MΩ
- Heater power consumption: 35W ea.



Includes: 0.078" tip

Part No.	Description	1	5	25
168410	Tweezer iron	\$54.95	\$49.95	\$44.95
168583	Tip .078"	9.95	8.95	7.95
168591	Tip .590"	11.95	10.95	9.95

Weller® 25 & 35-Watt High-Quality Soldering Irons

- 120VAC @ 60Hz
- Interchangeable heater elements
- Lightweight handle with cushioned grip
- Quick change knurled collar
- Length: 9"



Includes: Power cord & ST3 tip (pg 166)

Part No.	Mfr.	Part No.	Description	1	5
170587	WP25		25W solder iron	\$39.95	\$37.95
192102	WP35		35W solder iron	47.95	45.95
146608	ST1		Screwdriver tip 1/16"	5.95	4.95
146616	ST3		Screwdriver tip 1/8"	5.95	4.95
192145	ST6		Screwdriver tip .031"	5.95	4.95
146624	ST7		Conical tip 1/32"	5.49	4.49

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Weller® 25 & 40-Watt Marksman Home Project Kits

Perfect for beginners and hobbyists. Includes stand.

- Stainless steel barrel and heat/impact resistant handle
- Ideal for kits, radios and electronics
- Indicator light shows iron is on

2094143

2094143 Includes: Knife and 2 tips

2094160 Includes: Soldering aid tool, 3 tips & solder

Part No.	Mfr. Part No.	Description	1	5
2094143	SP23LHPK	25W Iron kit	\$19.95	\$18.95
2094160	SP40LK	40W Iron kit	24.95	23.49

Weller® 100-Watt Soldering Iron

- "Closed loop" method of controlling max. tip temperature
- Nominal heat-up time with 700°F tip is 110 seconds
- 120VAC @ 60Hz input
- Length: 6" • Weight: 0.7 lbs.



192081

Includes: CT6F7 (0.375" screwdriver tip; 700°F)

Part No.	Mfr. Part No.	Description	1	5
192081	W100PG	Solder iron	\$64.95	\$59.95
192090	CT6F7	.375" screwdriver tip	6.95	6.29

Weller® 25 to 125-Watt Cordless Soldering Iron Kit

- Self-igniting & instant heat
- Adjustable temperature (25W to 125W)
- Auto switch off
- Visible gas level
- Additional tips can be special ordered
- 2 hours of heat on average tank setting



Includes: Soldering tool, hot blower tip, hot knife tip, 2.4mm and 4.8mm double flat tip, cleaning sponge, storage case and instruction manual

Part No.	Mfr. Part No.	1	5
152207	PSI-100K	\$89.95	\$79.95

Weller® 8/11-Watt Battery Powered Soldering Iron

- Heats to working temperature in less than 15 seconds
- White LED light illuminates working surface
- Dual heat settings: 8 watts on low setting (850°F) or 11 watts on high setting (950°F)
- Co-molded grip for comfort grip and protective safety cap turns off power when placed on tool
- Over 150 intermittent solder joints with fresh batteries



Includes: Iron, tip, 4 "AA" batteries, lead free solder, and tip/wrench stand

Part No.	Mfr. Part No.	1	5
1943060	BP860MP	\$23.95	\$19.95

30 to 100-Watt Soldering Kit

- Includes:** • 30W soldering iron
- 100W soldering gun w/ extra tip
- Manual desoldering pump
- Mini third-hand board/component holder
- Soldering aid tool



Part No.	Product No.	Weight	1	5
684596	GSR-600A	4.0 lbs.	\$35.95	\$29.95

WAHL® 25-Watt Cordless Soldering Iron

IsoTip® Power Pro Model #7904

- 900°F tip temperature
- LED indicator light
- Solders 200+ joints or up to 30 minutes of continuous soldering
- Iron performance equivalent to 25-watt iron • Weight: 1.1 lbs.



Includes: Iron, charging stand, battery pack and tips

Part No.	Description	1	5
132783	Power Pro cordless iron	\$69.95	\$64.95

***Soldering Irons — Enter Web Code QAS**

20 to 80-Watt Butane Soldering Iron Tool Kit

- Slide switch ignition system
- Adjustable temperature up to 1200°F
- 1.3 hrs of use per refill

Includes: Solder tip, heat tip, hot knife tip, shrink attachment, cap sponge, stand & case



Part No.	Description	1	5
2076615	Flameless heat soldering	\$74.95	\$69.95

Electric & Manual Desolder Pumps

- Easily disassembled for cleaning
- Replacement tips available
- 19255:** • UL listed
- One-hand operation
- Size: 10.5"L x 1.0"Dia.
- 19166:** Size: 7.8"L x 0.8"Dia.
- 1942139:** Size: 13.3"L x 1.0"Dia.



19255



19166



1942139

***Web Code: GAS**

Part No.	Description	1	5
19255	Electric desolder pump	\$26.95	\$23.95
19166	Manual desolder pump	4.95	4.49
1942139	Manual desolder pump	8.95	7.95
19262	1 tip for 19255	3.95	3.49
22091	2 tips for 19166	4.49	3.95
307782	1 tip for DP100	2.49	1.95

Weller® 40-Watt Soldering Station

- Lighted on/off switch
- Adjustable power from 5 watts to 40 watts
- 120V @ 60Hz
- Temp. is electronically controlled from 350° to 850°F
- Size: 5.5"L x 4.5"W x 3.5"H • Weight: 1.9 lbs.



***Web Code: GEJ**

Includes: ST3 1/8" screwdriver tip and manual

Part No.	Mfr. Part No.	1	5
146595	WLC100	\$59.95	\$54.95

Weller® Soldering Tips

Replacement Tips for WLC100, WP25 & WP23

***Web Code: NAB**



Part No.	Mfr. P/N	Description	1	5
146608	ST1	Screwdriver tip 1/16" ...	\$5.95	\$4.95
146616	ST3	Screwdriver tip 1/8" ...	5.95	4.95
192145	ST6	Screwdriver tip .031" ...	5.95	4.95
146624	ST7	Conical tip 1/32" ...	5.49	4.49

Weller® 42-Watt Controlled-Output Soldering Station

- Complete with macro style, low voltage, temp. controlled soldering iron
- Closed loop method of controlling maximum tip temperature for protection of temperature sensitive components
- 120VAC @ 60Hz input
- Power unit housing features impact resistant plastic for durability • Uses PT series tips
- Quick disconnect plug for soldering iron and lighted on/off switch • Weight: 4.0 lbs.
- Separate conductor grounds iron tip and terminates third pin of power cord • Size: 5.9"L x 4.5"W x 3.6"H



Includes: Soldering iron and PTA7 tip (below)

- Tips all .062"

Part No.	Mfr. P/N	Description	1	5
170552	WTCP	Solder station	\$144.95	\$136.95
192161	TC201T	Replacement iron	79.95	72.95
192170	PTA6	Screwdriver tip 600°F ...	3.95	3.49
192188	PTA7	Screwdriver tip 700°F ...	3.95	3.49
192196	PTA8	Screwdriver tip 800°F ...	3.95	3.49

***Soldering/Desoldering Stations — Enter Web Code GEJ**

45-Watt Digital Soldering Station

Grounded Soldering Tip

- 150°C to 480°C (302°F to 896°F)
- Fully grounded
- Insulated ceramic heating element for rapid heat-up and heat recovery
- Heater insulation exceeds 100MΩ
- Zero voltage circuitry eliminating high voltage spike and magnetic field generation
- Size: 4.1"L x 3.5"W x 3.5"H • Weight: 2.5 lbs.



Includes: Manual, soldering iron w/ 1/32" tip, stand, tip cleaner and sponge

156814: Sharp conical chisel tip

156822: Conical chisel tip

Part No.	Mfr. Part No.	Description	1	5
2114685	LF369D	45W station	\$59.95	\$54.95
156814	XYB01	1/32" tip	3.95	3.49
156822	XYB04	1/16" tip	3.95	3.49
134631	SP715	Sponge	2.95	2.59

Weller® 50-Watt Analog & Digital Display Soldering Stations

Innovative heater and sensor combination for quick heat-up and rapid temperature recovery.

- Tip temperature offset capability allows user to reset temperature readings to match tip size and style
- Wireless temp. lockout
- Auto power-down after 90 minutes of inactivity • Temp. accuracy: ±9.0°F
- Temperature range: 350°F to 850°F • ESD safe
- Size: 5.9"L x 4.5"W x 3.6"H • Weight: 4.0 lbs.



Includes: PES51 50W soldering iron with ETA tip, PH50 stand and sponge, and adjustment tool

Part No.	Mfr. Part No.	Description	1	5
217461	WES51	Analog	\$124.95	\$121.95
233533	WESD51	Digital	169.95	159.95
2082847	PES51	Soldering iron	38.95	37.95

70-80 Watt Soldering Stations

- Input: 110-120VAC @ 60Hz
- Nichrome heating element on soldering iron
- Soldering iron assembly w/ nichrome heating element & K-type thermocouple sensor
- Adjustable knob for temp. setting
- Weight: 5.3 lbs.
- Includes: soldering station, soldering stand with cleaning pad, soldering iron, manual



1950711

- 1950711: Analog 70-Watt** • Size: 8"L x 5.2"W x 3.8"H
- LED to indicate power (green), heater on (red)
 - Temp. acc.: $\pm 3^{\circ}\text{C}$
 - Uses model 209 soldering iron
 - Temp. range: 200°C to 450°C (329°F to 842°F)

2099180: Digital 80-Watt

- Temp. accuracy: $\pm 3^{\circ}\text{C}$
- Temp. range: 200°C to 480°C (392°F to 896°F)
- Size: 4.2"W x 3.6"H x 5.0"D
- ESD safe
- Uses 108ESD soldering iron assembly

*** Web Code: GEJ**

Part No.	Mfr. Part No.	Description	1	5
1950711	169	Analog	\$89.95	\$79.95
2099180	LF-1600	Digital	89.95	79.95

80-Watt High-Power Stained Glass Soldering Station

- 100-120VAC @ 60Hz or 220-240VAC @ 50Hz
- On/off switch with "power on" indicator light
- Temperature range: 482-923°F (250-500°C)
- Variable power control
- Safety guard iron holder
- Cushioned foam grip



Part No.	Mfr. Part No.	1	5
2118467	LT-80	\$49.95	\$44.95

Weller® 80-Watt Soldering Station

- 120V @ 60Hz
- Lighted on/off switch
- Adjustable power from 5 to 80 watts
- Temperature is electronically controlled from 350° to 900°F
- Size: 5.5"L x 4.5"W x 3.5"H
- Weight: 2.1 lbs.



2082775

*** Web Code: GEJ**

Includes: MTG21 1/4" chisel tip and manual

Part No.	Mfr. Part No.	Description	1	5
2082775	WLC200	Soldering station	\$69.95	\$65.95
2082812	MTG21	1/4" chisel tip	7.95	7.49
2082821	MTG22	3/8" cone tip	8.95	8.49
2082783	WCC104	Sponge	1.75	1.59

Weller® 85-Watt Digital Soldering Station

- Extensive special functions menu allows you to use setback, lockout, standby, auto-off time and more
- Heating element is contained in pencil rather than tip
- Micro pencil with short tip-to-grip (37mm) puts you close to the work
- Iron stand has adjustable tilt angle in 4 positions ranging from 30° to 80°
- Includes NT1 tip
- Uses WMP soldering pencil and WDH20 iron stand
- Size: 15.9"L x 10.9"W x 5.8"H
- Weight: 7.5 lbs.



*** Web Code: GEJ**

Part No.	Mfr. Part No.	1	5
684781	WD1001	\$299.95	\$289.95

Weller® 85-Watt Digital Soldering Station

- New WP80 soldering pencil with short tip-to-grip (52mm)
- Barrel can be exchanged with optional longer version to work at standard length (65mm)
- Unique silver heater allows fast, efficient soldering
- Uses WP80 soldering pencil and WDH10 soldering stand
- Size: 15.4"L x 10.2"W x 5.2"H
- Includes LTB tip
- Weight: 8.2 lbs.



*** Web Code: GEJ**

Part No.	Mfr. Part No.	1	5
684772	WD1002	\$309.95	\$299.95

90-Watt ESD Safe, Lead Free Soldering Station

- Specially designed for RoHS compliant soldering
- 90W, 115VAC/230VAC 50/60Hz
- Temp. set range: 200°C to 450°C (392°F to 842°F)
- Temp. correction range: $\pm 90^{\circ}\text{C}$ ($\pm 99^{\circ}\text{F}$)
- Alarm function for sensor circuit breaker and heater circuit breaker
- 20-minute non-usage suspend function and 40-minute suspend power off function
- Soldering temp. locked by password
- 32VAC low voltage ceramic heater
- Size: 4.4"W x 6.2"H x 5.4"D



NEW
MARKED IN PINK

Part No.	Mfr. Part No.	Wt. (lbs.)	1	5
2099201	LF-2000	3.1	\$135.95	\$119.95


*** Soldering/Desoldering Stations — Enter Web Code GEJ**

Weller® Soldering Tips

Replacement Tips for WES51 & WESD51

- Tip leakage: less than 2mV
- Tip to ground resist.: less than 2 Ω
- Additional tips can be special ordered

*** Web Code: NAB**



Part No.	Mfr. P/N	Description	1	5
16774	ETA	Screwdriver 1/16"	\$6.95	\$6.29
16782	ETJ	Long screwdriver 1/32"	6.95	6.29
16803	ETR	Narrow screwdriver 1/16"	6.95	6.29
16811	ETS	Long conical 1/64"	6.95	6.29
2082783	WCC104	Replacement sponge	1.75	1.59

Replacement Sponges for Legacy Model Soldering Stations

- 134640: For 138-3
134631: For XY-60D, XY-379 & XYT379-C

Part No.	Mfr. Part No.	1	5	25
134640	SP815	\$1.95	\$1.75	\$1.59
134631	SP715	2.95	2.59	2.29

Desoldering Tips

- Replacement tips for LF7000 P/N 1919107 and LF8000 P/N NM



2095496

Part No.	Description	1	5	25
2095496	Desolder tip 1mm	\$8.95	\$7.95	\$6.95
2095509	Desolder tip 1.2mm	8.95	7.95	6.95
2095517	Desolder tip 1.5mm	8.95	7.95	6.95

90-Watt Analog Soldering & Desoldering Station

- Soldering iron: 32VAC output, 90 watt, 200°C to 480°C (400°F to 900°F) temperature range with 1.6mm/1/16" tip
- Input voltage: 100 - 120VAC @ 60Hz
- Desoldering iron (DIA80): 32VAC output, 80 watt, 300°C to 450°C (570°F to 850°F) temp. range, with 1.2mm/0.048" tip
- Temp. stability: $\pm 3^{\circ}\text{C}$ (6°F)
- Pump controlled by a finger actuated thyristor on desoldering iron
- Automatic power down after 15 minutes of idle as indicated by pause LED
- Dials for temperature settings on both soldering and desoldering iron
- Analog readout for vacuum pressure
- Self-contained vacuum pump engineered to provide continuous, maintenance free operation
- Zero voltage switching and full grounded design
- Adjustable temperature without changing tips
- Size: 10.8"W x 12.5"D x 4.1"H



Includes: 104A/105A soldering stands, A-2000-1 soldering stand, DIA80 desoldering iron with #44-915412 tip, 210ESD soldering iron with #44-415404 tip, 5pc. 5" high precision tweezers, AX205 5" micro cutting pliers, steel brush/cotton/foam replacement filters, power cable, and instruction manual

Part No.	Mfr. Part No.	1	5
1919107	LF-7000	\$339.95	\$319.95

100-Watt High-Powered Soldering & Desoldering Station

- Input voltage: 110-120VAC @ 60Hz
- Soldering iron: 32VAC/100W 150°C to 480°C (302°F to 896°F)
- Desoldering iron: 32VAC/100W 300°C to 450°C (572°F to 842°F)
- Temp. stability: $\pm 3^{\circ}\text{C}$ (6°F)
- Temp. correction range: $\pm 99^{\circ}\text{C}$
- Default set temp.: soldering iron -150°C; desoldering iron -300°C
- Pump controlled by a finger actuated thyristor with built-in delayed suction operation (1.5 sec. delay)
- Zero voltage electronic design to protect voltage and current sensitive components
- Energy saver mode after 20 minutes of idle time and auto power down after 40 minutes idle time
- Heater and sensor failed detection and temp. lockout features
- Digital temp. readout
- Detachable soldering and desoldering wand
- Size: 4.2"W x 3.6"D x 5.0"H



Includes: 307A soldering iron, DIA100 desoldering iron, 105C, 104A & A-2000-1 soldering stand, fume extractor, AX205 micro cutting pliers, 5-piece high precision tweezers, filter and cleaning accessories for desoldering iron, AC power cord and manual

Part No.	Mfr. Part No.	1	5
2099198	LF-8000	\$399.95	\$379.95

Vacuum Pen Tools

- ESD safe body
- Picks up components with weight of 1.1 lbs. or less

Part No.	Description	1	5
207239	Handi vac tool (4 tips/cups)	\$19.95	\$17.95
207247	Pen vac tool (6 tips/cups)	39.95	33.95

*** For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above**

80-Watt Desoldering Station

- Input voltage: 100 – 120VAC @ 60Hz
- Heater: 32V, 80W
- Large digital temp. display
- Adjustable temperature without changing tips
- Tip temperature accurate to $\pm 3^{\circ}\text{C}$ (6°F)
- Zero voltage switching & fully grounded design makes this unit safe on electro-sensitive devices
- Suction controlled by a finger actuator thyristor located on the desoldering handle
- Self-contained diaphragm vacuum pump engineered to provide continuous, maintenance free operation
- Temperature range: 300°C to 450°C (572°F to 842°F)
- Size: 7.9"W x 9.3"D x 4.5"H

Includes: DIA80 desoldering iron, 2 soldering stands, foam filters, & cleaning brush

Part No.	Mfr. Part No.	1	5
1919094	LF-6000	\$299.95	\$284.95

Heat Sink & Soldering Aid Kit



100378: Heat sink absorbs and dissipates heat during soldering & desoldering of sensitive parts
100503 Includes: Soldering wick, 3 pc. scraper set, acid brush, clip-on heat sink and empty squirt bottle


Part No.	Description	1	10	100
100378	Heat sink	\$4.49	\$4.45	\$3.39
100503	7-piece soldering kit	6.95	6.29	5.49

CHIPQUICK SMD Removal Kit

- Quick and easy to use
- Potential damage to printed circuit boards is eliminated
- 2.5" of CHIPQUICK material removes 1250-1500 SMD pins
- Uses simple equipment and materials for application & clean-up

Part No.	Description	1	5
141305	SMD removal kit	\$15.95	\$14.49

40 & 80-Watt SMD Rework Stations

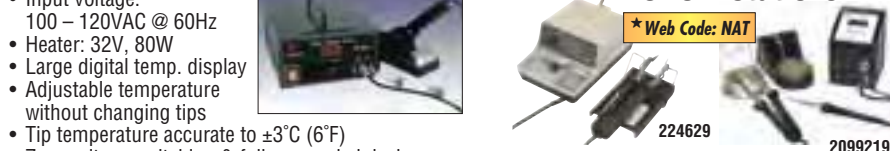

- Long-life ceramic heating element
 - High-performance, inexpensive, versatile
 - Thermocouple sensor for stable temperature
 - Rapid heat-up and recovery
- 224629: 40-Watt** • Size: 7.4"L x 5.0"W x 3.3"H
 • Adjustable temperature: 482°C to 842°C (250°F to 450°F)
 • 25-watt ceramic element • Weight: 2.6 lbs.
- 2099219: 80-Watt** • Size: 8.8"L x 6.0"W x 4.5"H
 • Adjustable temperature: 392°C to 896°C (200°F to 480°F)
 • 40-watt ceramic element • Weight: 4.2 lbs.

Includes: Base power unit, sponge, stand, surface mount tweezer iron, and stand for tweezers

Part No.	Description	1	5
224629	40-watt station	\$89.95	\$79.95
2099219	80-watt station	169.95	149.95
168583	.078" tip	9.95	8.95
168591	.590" tip	11.95	10.95
156814	.03125 conical	3.95	3.49

Solder Aid Tool Kit

Includes: 1 each of chip holder, spacer, reamer, lever, needle, knife, fork shaft, hook and brush

Part No.	Mfr. Part No.	1	5
2096000	GSR-107	\$5.95	\$5.49

30-Watt Solder Tool Kit

For Beginners
Includes: Soldering iron with stand, long nose pliers, wire strippers, side cutters & sponge

Part No.	Description	1	5
358598	7-piece tool soldering kit	\$15.95	\$13.95

420-Watt Hot Air SMD Rework Station with Digital Display

- Incorporates the largest pump in the industry
- Long life ceramic heater insures accurate and sufficient heat where you need it
- Automatic cooling mode protects the heating element
- Airflow capacity: 2.3L/min. (max.)
- 550W nichrome heating element
- Power supply: 100-120VAC or 220-240VAC
- Electronically controlled temperature system w/ digital readout in preset & actual temp.
- Hot air temp. range: 100°C - 480°C (212°F - 896°F)
- 25W diaphragm pump • Adjustable air-flow
- Size: 7.3"W x 5.3"H x 9.6"D • Weight: 10.8 lbs.

Includes: Precision 5-pc. non-magnetic tweezer set, 4 focus hood tips (single 2.5mm and 4.4mm pipes, P/N 2097547 and 262908)










Part No.	Mfr. Part No.	Description	1	5
2097547	852D	SMD rework	\$299.95	\$269.95
262959	A1136B	PLCC 20 x 20	45.95	39.95
262908	A1126B	QFP 14 x 14	29.95	25.95
262916	A1127B	QFP 17.5 x 17.5	29.95	25.95
262852	A1261B	QFP 20 x 20	45.95	39.95
262844	A1182B	BQFP 24 x 24	45.95	39.95
262801	A1129B	QFP 28 x 28	45.95	39.95
262975	A1259B	SOP 13 x 28	45.95	39.95

Soldering Starter Kit

Kit includes: Solder stand (P/N 36329, pg 165), solder pocket pack (P/N 170457, pg 170), replacement sponge (P/N 134631, pg 167), clip on heat sink (P/N 159126, pg 170), solder aid tool kit (P/N 100503, pg 168), 4" diagonal wire cutter (P/N 179902, pg 161), 5.3" flat long nose pliers (P/N 35474, pg 161), 10-30 AWG wire stripper (P/N 78992, pg 160)

Part No.	Description	1	5
2113228	Soldering starter kit	\$34.95	\$31.49

Tips & Replacement Parts for XYTronic Soldering and Desoldering Products

 35318			 35326			 35078			 35334			 35115			 35238			 207335			 207351			 140231		
* Web Code: NAB			For XYTronic Model Numbers (* Legacy Models)												Pricing											
Part No.	Mfr. P/N	Description	160V - JS235* 200V - JS235* 240V - JS235* LF-1000	370V - C, LF-1000	160V - JS235* 200V - JS235* 240V - JS235* LF-1000	160V - JS235* 200V - JS235* 240V - JS235* LF-1000	160V - JS235* 200V - JS235* 240V - JS235* LF-1000	160V - JS235* 200V - JS235* 240V - JS235* LF-1000	160V - JS235* 200V - JS235* 240V - JS235* LF-1000	160V - JS235* 200V - JS235* 240V - JS235* LF-1000	160V - JS235* 200V - JS235* 240V - JS235* LF-1000	160V - JS235* 200V - JS235* 240V - JS235* LF-1000	160V - JS235* 200V - JS235* 240V - JS235* LF-1000	160V - JS235* 200V - JS235* 240V - JS235* LF-1000	160V - JS235* 200V - JS235* 240V - JS235* LF-1000	160V - JS235* 200V - JS235* 240V - JS235* LF-1000	160V - JS235* 200V - JS235* 240V - JS235* LF-1000	1	10	25						
35318	XY48	Assembly - 60W w/ nichrome heater																\$29.95	\$26.95	\$23.95						
35326	XY401	Soldering tip - conical bevel 1/32"																4.49	3.95	3.59						
35078	XY402	Soldering tip - semi-chisel 1/32"																4.49	3.95	3.59						
35334	XY403	Soldering tip - conical sharp 1/64"																4.49	3.95	3.59						
35115	XY404	Soldering tip - conical chisel 1/16"																4.49	3.95	3.59						
35238	XY405	Soldering tip - semi-chisel wide 1/8"																4.49	3.95	2.95						
207335	XY406	Soldering tip - long conical chisel 3/64"																4.49	3.95	2.95						
207351	XY410	Soldering tip - chisel 3/16"																4.49	3.95	3.59						
140231	XY430	Soldering tip - SMD flat pack 7/32"																6.95	5.95	4.95						
156814	XYB01	Soldering tip - sharp conical chisel 1/32"																3.95	3.49	2.95						
207327	XYB03	Soldering tip - conical sharp 1/64"																5.95	5.49	4.95						
156822	XYB04	Soldering tip - conical sharp 1/16"																3.95	3.49	2.95						
207298	XYB05	Soldering tip - semi-wide chisel 1/8"																4.49	3.95	3.59						
127634	XYD10	Desoldering tip - 1.0mm (.0394")																8.95	7.95	6.95						
127642	XYD12	Desoldering tip - 1.2mm (.0472")																8.95	7.95	6.95						
127651	XYD15	Desoldering tip - 1.5mm (.0586")																8.95	7.95	6.95						
2095496	XY10	Desoldering tip - 1.0mm (.0394")																8.95	7.95	6.95						
2095509	XY12	Desoldering tip - 1.5mm (.0472")																8.95	7.95	6.95						
2095517	XY15	Desoldering tip - 1.5mm (.0586")																8.95	7.95	6.95						

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

Solder Spool & Iron Stand

- 4 pc. spool stand (some assembly required)
- Size: 6"L x 3.5"W x 3.1"H
- Sponge size: 1.6"W x 2.4"L
- Shaft diameter: 0.6"



Part No.	Description	Wt. (lbs.)	1	5	25
169551	Spool & iron stand	2.0 \$9.95	\$8.95	\$7.95

*** Solder Spool Stand — Enter Web Code YAU**

JAMECO
ValuePro

Solder Spool Stand

- 12 pc. solder spool stand (some assembly required)
- Size: 3.6"W x 3.9"D x 4.3"H
- Shaft dia.: 0.6"



Part No.	Description	Wt. (lbs.)	1	5	25
141761	Solder spool stand	1.6 \$10.95	\$9.95	\$8.95

Soldering Tip Cleaner with Stand

- For cleaning soldering iron tips without the use of water and sponge
- Metal wool for cleaning
- Rubberized base for stability



Part No.	Description	Wt. (lbs.)	1	5	25
156777	Tip cleaner & stand	0.5	... \$4.95	\$4.49	\$3.95
160004	Metal wool replacement	0.1 2.49	2.29	1.95

150-Watt Solder Pot

- On-off switch on handle
- Input voltage: 120VAC
- Maintains pot temp. of 450°C to 480°C (842°F to 896°F)
- 3-conductor power cord: 5' long
- Pot size: 30mm deep x 35mm Dia.



Part No.	Product No.	Wt. (lbs.)	1	5
2115418	RD-7339	1.2 \$49.95	\$44.95

300-Watt Solder Pot

Temperature Regulated Between 420°C and 450°C

- 2 conductor power cord: 5' 9" long
- Holds up to 1 bar of P/N 176057 or NM, pg 170
- Input voltage: 110VAC @ 2.7A; 50-60Hz
- Size: (unit) 4.8"H x 5.5" Dia. (base)
- Size: (tub) 2.4"Dia. x 1.6"D
- One-year warranty



Part No.	Description	Wt. (lbs.)	1	5
1951625	300W solder pot	5.9 \$89.95	\$79.95

600-Watt Solder Pot

Temperature Adjustable

- 2-wire power cord (5'5")
- Temperature: 0°C to 500°C
- Self-regulating temperature
- Input voltage: 110VAC @ 5.5A
- On-off power switch and LED indicator for heat
- Holds up to 3 bars of P/N 176057 pg 170
- Size (unit): 6.8"L x 5.5"W x 2.8"H
- Size (tub): 3.9"L x 1.6"D




Part No.	Description	Wt. (lbs.)	1	5
172276	600W solder pot	7.4	... \$249.95	\$225.95

*** Solder Pots — Enter Web Code HAW**

2000-Watt Solder Pot

- Thermostat control for setting temp. from 50°C to 300°C
- Holds up to 48 bars of P/N 176057 pg 170
- 3 conductor pigtail power cord: 5'L
- Input voltage: 110VAC @ 18A, 50-60Hz single phase
- Size (unit): 18.1"L x 11.5"W x 6.0"H
- Size (tub): 12.0"L x 8.0"W x 2.9"H
- One-year warranty



Power cord not included (recommend P/N 37997, pg 133)

Part No.	Description	Wt. (lbs.)	1	5
149876	2000W solder pot	23.1 \$329.95	\$299.95



22-Watt Fume Extractor

Absorbs noxious lead fumes using activated-carbon filter and a high-efficiency fan

- Operate continuously providing filtered air
- Static ground jack • Fuse protected
- Air flow: 115 CFM • Noise: 49dB fan
- 20VAC, 60Hz, 22 watts
- Aerodynamic hood design for effective removal of solder fumes
- Removable carbon-impregnated filter
- Size: 6.4"W x 4.6"D x 7.9"H
- Weight: 4.6 lbs. • One-year warranty



Includes: Detachable power cord

Part No.	Description	Wt. (lbs.)	1	5
120150	Fume extractor	4.6	... \$49.95	\$45.95
127183	Replace. filters (2/pk)	0.05 9.95	8.95

*** Fume Extractors — Enter Web Code HAR**

320-Watt Fume Extractor System Compact & Portable

The HV-2E replaces smaller less powerful counter top extractors and creates more work space in crowded labs & stations. The main unit features strong fan performance with both a pre-filter and standard filter. The internal pump system utilizes a brushless centrifugal fan motor that efficiently and quietly removes fumes.



- 7' long, 6.5" Dia. exhaust tubes
- Lockable metal casters
- Airflow: 175m³/hour • Noise level: <50dB
- Voltage: 110V/220V • Size: 13"W x 12"D x 17"H

Part No.	Mfr. Part. No.	Wt. (lbs.)	1	5
2099235	HV-2E	30.0 \$599.95	\$549.95

Weller® 20-Watt Fume Extractor

This fume extractor removes flux fumes from the soldering workbench by drawing smoke through an activated carbon filter. With its exceptionally quiet fan, it can process up to 1.37 cubic meters of air per minute and its stand is adjustable allowing it to be set-up in multiple positions.



- Voltage: 120VAC • Sound level: 45-50dB
- Air consumption: 87-107CFM • ESD safe
- Power consumption: 20W • UL/CUL listed
- Absorption capacity: 1.25 cubic meters to 1.37 cubic meter per minute
- Size: 10"L x 6.5"W x 11"H

Part No.	Mfr. Part. No.	Wt. (lbs.)	1	5
684810	WSA350	4.2	... \$54.95	\$52.95
684828	WSA350F (carbon filter)	0.02 7.95	6.95



42-Watt Combination Soldering Station and Fume Extractor

- Power consumption: 42W @ 650°F (soldering iron)
- Adjustable knob for temperature control: 500°F to 800°F
- Stability @ idle: ±9°F
- Max. air volume: 95/115CFM
- LED indicator for pilot light
- Electronic zero-voltage switching
- Input voltage: 100-120VAC @ 60Hz
- Size: 6.4"W x 7.8"H x 4.7"D



Includes: Soldering iron, iron holder, sponge, carbon activated filter, power cord and manual

Part No.	Mfr. Part. No.	Wt. (lbs.)	1	5
183169	456DLX	5.2 \$79.95	\$74.95

Vacuum Base Vise

- Features the patented "split ball" that tilts, turns and rotates through three planes
- Powerful suction pad for quick and easy set-up
- Nylon jaws open 2.25"
- Size: 5.0"L x 4.0"W x 6.3"H
- One-year warranty

262116



*** Web Code: TAD**

Part No.	Mfr.	Product No.	Wt. (lbs.)	1	5
262116	ValuePro	GV-300	3.3	... \$39.95	\$35.95
27131	PanaVise	M381	3.3 69.95	63.95

Third Hand Tools

- Two adjustable arms with alligator clip jaws
- Quick and easy rotation
- Sturdy, heavy base



681002



Part No.	Description	Size	Wt. (lbs.)	1	5
72865	With holder/sponge	2.0"	1.4	... \$8.95	\$7.95
681002	With holder/sponge	3.5"	1.7	... 9.95	8.95
26690	Third hand	2.0"	1.4	... 5.95	5.49

PANAVISE Multi-Purpose Work Center

- Jaws open to 9"
- Double action extra wide self-centering heads allow fast opening and closing; centered weight allows jaws to hold heavier objects; plates can be reversed to close together; reversible jaw pads feature ribbing on one side and a V groove on the other
- Base has three 1/4" countersunk mounting holes
- Overall base diameter is 8.5"



Part No.	Mfr. Part. No.	Wt. (lbs.)	1	5
684852	350	5.0 \$99.95	\$89.95

PANAVISE Electronic Work Center


- Circuit board holder, standard base, tray base mount, solder station, sponges and wire holder included
- Size: 8.5"W x 7.8"H
- One-year warranty



Part No.	Mfr. Part. No.	Wt. (lbs.)	1	5
27060	324	5.3 \$99.95	\$89.95

PANAVISE Vacuum Base Vise

- Head moves through three planes: 210° tilt, 360° turn and rotation
- Grooved jaws are made of reinforced thermal alloy and open up to 2.9"
- Fine/coarse adjustment • Base dia.: 3.4"
- Jaw size: 2"H x 1"W • Height: 7.5"H



Part No.	Mfr. Part. No.	Wt. (lbs.)	1	5
251791	209	0.8 \$39.95	\$35.95

*** For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above**

Vises, Soldering Accessories & Tape Products

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRRUN	DOLLAR SALE

PANAVISE PV Jr. Vise

- Jaw size: 1" wide x 2" long; opening: 2.8"
- Jaw heat tolerance: 350°F
- Vertical/horizontal jaw grooves
- Fine/course adjusting knob
- The vise neck tilts, turns and rotates
- Vise height: 6.8" • Weight: 1.4 lbs.
- Base bolt is 4.3" and fits all PanaVise base mounts



Part No.	Mfr. Part No.	1	5
134439	PVJR 201	\$26.95	\$24.95

Rapid Assembly Circuit Board Holder

- 8 positions rotating adjustment, six positive lock positions in the vertical plane and height adjustment for quick board rotation speeds
- Holds circuit boards from 1/8" (3.2mm) to 12" (304.8mm) wide and up to 5/32" (4mm) thick
- Arms move independently
- 10" high (from base to top of vertical shaft)



Part No.	Mfr. Part No.	Weight	1	5
684844	333	6.4 lbs.	\$79.95	\$75.95

Clamp Vise

- No tools needed — finger turn to tighten
- Ball cup allows vise to adjust to any angle
- Size: 10.0"L x 2.5"W



- Nylon jaws open 2"
- Weight: 2.1 lbs.

Part No.	Mfr. Part No.	1	5
127167	OR-307	\$19.95	\$17.95

Clear Plastic Vials with White Lid

- Crystal polystyrene vials
- White polyethylene snap-caps
- Uses: hobby, home, education and science/medical labs

2120858



Part No.	Volume (oz.)	Dia. (inch)	Inside Height (inch)	1	10	100
2120858	1.13	1	2-5/8	\$.35	\$.29	\$.25
2120866	2.50	1-1/2	2-11/16	\$.55	\$.45	\$.39
2120874	5.00	1-7/8	3-5/16	\$.65	\$.55	\$.49



Plastic Pump Bottle

- 6 oz. bottle
- ESD compliant
- Plastic bottle with dispenser cover



Part No.	Mfr. Part No.	1	10	100
158131	450	\$9.95	\$8.95	\$7.95



Tape Products

★ Web Code: TPS



285587



285464



652172



285907



645159



651882

Part No.	Description	Color	Width (in.)	Length (yards)	Thickness (in.)	Price		
						1	10	50
285587	Vinyl electrical tape, Tartan 1710, UL	Black	.75	20	.0070	\$1.19	\$1.09	\$.99
285464	Vinyl electrical tape, Super 33+, UL	Black	.75	20	.0070	4.95	4.79	4.49
652156	Vinyl electrical tape, Super 35, UL	Yellow	.75	22	.0070	4.95	4.79	4.49
652172	General purpose masking tape, Scotch	Tan	.95	60	.0060	4.95	4.49	3.95
285907	Double sided foam tape	White	1.0	4	.1250	15.95	14.95	13.95
645159	Vinyl tape, clean removal	Red	2.0	36	.0051	19.95	18.95	17.95
651882	Safety stripe tape	Yellow/Black	2.0	36	.0050	29.95	28.95	27.95

Solder Bars, Rolls and Pocket Packs

★ Web Code: ABD

Part No.	Manufacturer	% Composition					Dia. "	L"	Weight	Type†	Pricing	
		Tin	Lead	Silver	Copper	Gold					1	10
73576	Kester	60	40	—	—	—	0.031	—	0.5 oz.	2	\$2.79	\$2.55
32117	Kester	60	40	—	—	—	0.031	—	1.0 lb.	1	25.95	22.95
141786	Super	60	40	—	—	—	0.031	—	1.1 lbs.	1	19.95	17.95
176057	ValuePro	60	40	—	—	—	—	13	1.1 lbs.	4	26.95	25.49
94570	Kester	60	40	—	—	—	0.05	—	1.3 oz.	2	3.15	2.85
73605	Kester	62	36	2	—	—	0.02	—	0.35 oz.	2	2.85	2.59
2119101	ChipQuik	63	37	—	—	—	0.02	—	4.0 oz.	1	6.95	6.49
2119110	ChipQuik	63	37	—	—	—	0.031	—	4.0 oz.	1	6.25	5.49
151474	Kester	63	37	—	—	—	0.031	—	1.0 lb.	1	27.95	24.95
115433	Kester	63	37	—	—	—	0.039	—	0.14 oz.	3	.99	.75
668262	ValuePro	96.3	—	3.2	0.5	—	0.04	—	7.2 oz.	1	29.95	27.95
668297	ValuePro	96.3	—	3.2	0.5	—	0.04	—	1.1 lbs.	1	54.95	44.95
2119128	ChipQuik	96.5	—	3	0.5	—	0.02	—	4.0 oz.	1	7.75	6.95
1945858	Various	96.5	—	3.0	0.5	—	0.02	—	1.1 lbs.	1	27.95	25.95
2113172	Kester	96.5	—	3.0	0.5	—	0.031	—	0.43 oz.	2	2.49	2.29
2119136	ChipQuik	96.5	—	3	0.5	—	0.031	—	4.0 oz.	1	6.95	6.49
668271	ValuePro	96.5	—	3.5	—	—	0.04	—	9.6 oz.	1	34.95	31.95
668422	ValuePro	97.0	—	3.0	—	—	—	13	2.2 lbs.	4	49.95	44.95
170457	Various	99.3	—	—	0.7	—	0.031	—	0.8 oz.	2	2.49	2.25
668078	ValuePro	99.3	—	—	0.7	—	0.04	—	7.2 oz.	1	17.95	15.95
209075	Various	99.3	—	—	0.7	—	0.031	—	1.0 lb.	1	29.95	26.95
668406	ValuePro	99.3	—	—	0.7	—	—	13	2.2 lbs.	4	34.95	31.95

* Organic core † 1. Roll 2. Packet 3. Coil 4. Bar \$ 2.2% Rosin core



141786



115433



668297



2113172



170457



139951



263695



2113130



2113156

5' Desolder Braids

★ Web Code: DAG

Part No.	Manufacturer	Mfr. Part No.	Description	Width (ins.)	1	10
139951	Techspray	1814-5F	No-Clean, Military & NASA certified	.030	\$3.59	\$3.29
124126	Techspray	1815-5F	No-Clean, Military & NASA certified	.055	3.59	3.29
124118	Techspray	1816-5F	No-Clean, Military & NASA certified	.075	3.75	3.55
263708	Techspray	1817-5F	No-Clean, Military & NASA certified	.098	3.95	3.59
263695	Techspray	1803-5F	Pro wick, pure rosin	.075	2.95	2.59
263599	Techspray	1804-5F	Pro wick, pure rosin	.098	3.29	2.95
263581	Techspray	1511-5F	Pro wick, pure rosin with bobbin	.098	3.29	2.95
41082	ValuePro	GISW20	Desolder braid	.079	1.89	1.69
41100	ValuePro	GISW25	Desolder braid	.098	1.99	1.79
153462	ValuePro	GSR104D	Desolder braid	.120	2.25	1.95
2113130	Chemtronics	60-3-5	Soder-wick no clean size 3	0.08	3.75	3.49
2113148	Chemtronics	60-4-5	Soder-wick no clean size 4	0.11	4.49	3.95
2113156	Chemtronics	40-3-5	Soder-wick, lead free size 3	0.08	4.25	3.75
2113164	Chemtronics	40-4-5	Soder-wick, lead free size 4	0.11	4.75	4.25

Acid Brush

- Used for application of reactive solvents



Part No.	Description	1	10	100
153322	Metal handle, 6"	\$.65	\$.55	\$.45

JAMECO ValuePro

Clip-On Heat Sink

- Absorbs and dissipates heat during soldering and desoldering sensitive parts



Part No.	Product No.	Size	1	10	100
159126	HT156	2.7"L x 0.7"W	\$2.95	\$2.59	\$2.29



Over 5,000 SKUs
Over 15 Million Parts in Stock
In Lots of up to 1000 Pieces
Priced Below a Dollar.
Look for pricing shaded in blue throughout the catalog and for a larger selection go to:
Jameco.com/MakesCents

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

Workshop Chemicals & Heat Sink Compounds

NEW
MARKED IN PINK

* Shipped via UPS ground to continental U.S. only

Part No.	Manufacturer	Description	Vol. (oz.)	1	10
2120794	MG Chemicals	Adhesive epoxy, high temperature encapsulating and potting compound	12	\$44.95	\$42.95
615769	GC Electronics	Adhesive, sealant, silicon, one part, non corrosive, clear	3	5.95	5.49
645845	3M	Super adhesive, household glue #6004*	1	4.95	4.49
263530	Techspray	Air duster, Envi-Ro-Tech, acusol, 100% HCFC, non-flammable, w/ trigger*	12	14.69	13.49
2094207	Craig/DeoxIT	Air duster, non-flammable, moisture free, non-ozone depleting, no VOC*	10	6.95	6.49
2112524	ChipQuik	Cleaner & tinner, soldering tip for pre-tinning & tinning*	8†	6.49	5.95
2094231	Craig/DeoxIT	Cleaner wash, contact evaporates quickly, safe on plastics*	10	7.95	6.95
118033	Techspray	Cleaner, contact, ECONOLINE, CFC free, aerosol can*	13.5	11.95	10.95
2094223	Craig/DeoxIT	Cleaner, contact, quick dry, chemically improves metal electronic connections*	0.5	10.95	9.95
2110553	Craig/DeoxIT	Cleaner, contact, for gold, perfect for new surfaces, prevents corrosion from beginning*	4g†	12.95	11.95
2110545	Craig/DeoxIT	Cleaner, electrical contact wipes, 25 individually pkg. cleans lubricates & deoxidizes conn.	—	14.95	13.49
195004	Craig/DeoxIT	Cleaner, contact deoxidizer & preservative, improves electronic connections*	5	16.95	15.95
2110473	Craig/DeoxIT	Cleaner, screen, safe or CRT, DVD, TFTLCD, touch, plasma, includes micro fiber cloth	22	10.95	9.95
2094215	Craig/DeoxIT	Cleaner & conditioner, soldering tip	0.5	8.95	7.95
616331	GC Electronics	Conductive paint, silver print II*	0.5**	49.95	44.95
2110511	Craig/DeoxIT	Conductive pen, silver, works on rubber, epoxy, glass, plastic, repairs membrane buttons*	1g†	10.95	9.95
2110529	Craig/DeoxIT	Circuit writer pen, silver based, for drawing & repairing traces, works on rubb., epoxy, glass, plastic*	5g†	18.95	16.95
263716	Techspray	Conductive pen, silver ink*	0.17	26.95	23.95
2120559	MG Chemicals	Conformal coating, acrylic lacquer, protects from ESD*	2	10.95	9.95
2110481	Craig/DeoxIT	Degreaser wash, Val-U series, fast evaporating and safe on plastic	10	7.95	7.29
616411	GC Electronics	Developer, positive type, concentrate, dilute 9:1*	6	11.95	10.95
616438	GC Electronics	Etching solution, PC board, ferric chloride solution*	32	24.95	22.45
616446	GC Electronics	Etching solution, PC board, ferric chloride solution*	128	49.95	44.95
139934	Techspray	Freeze spray, Envi-Ro-Tech, circuit chiller, CFC and HFC free*	8	13.95	12.95
652210	3M	Glue tip, scotch-weld tapered mixer tip #4902 for 2 part glue	—	1.49	1.19
615347	GC Electronics	Heat sink compound, 100% synthetic base stocks type 44	1†	7.95	7.49
615355	GC Electronics	Heat sink compound, 100% synthetic base stocks type 44	16†	39.95	35.95
236823	ValuePro	Heat sink compound, silicon based grease	0.35†	4.95	4.49
167249	Aavid Thermalloy	Heat sink compound, silicon based grease	2†	8.95	7.95
169252	Techspray	Heat sink compound, silicon free	4†	23.95	21.95
259151	NTE	Heat sink compound, white gel, thermal grease 5 pack	0.35†	1.95	1.75
615304	GC Electronics	Heat sink compound, zinc oxide-filled silicon grease	16†	29.95	26.95
615312	GC Electronics	Heat sink compound, zinc oxide-filled silicon grease	0.23†	2.95	2.65
615321	GC Electronics	Heat sink compound, zinc oxide-filled silicon grease	1†	7.95	7.25
263572	Techspray	Isopropyl alcohol, plastic bottle*	16	12.95	10.95
2117157	Craig/DeoxIT	Lubricant, use with conductive plastic faders and controls*	0.5	11.95	10.95
2094240	Craig/DeoxIT	DeoxIT® SHIELD S95 spray lubricant & protectant, for electrical connections*	0.5	11.95	10.95
645968	3M	Mask, respirator, recommend for use w/ fiberglass insulation/drywall sanding	—	4.95	4.49
2113084	Chemtronics	Overcoat pen, green acylic coat,	0.16	17.95	16.49
2117131	Craig/DeoxIT	Shield, contact cleaner, for severe environments where pollutants are present, -59 to 410°F*	0.5	9.95	8.95
481730	Techspray	Smoke detector test spray*	2	2.95	2.49
615806	GC Electronics	Solder flux remover & cleaner II, non ODC, aerosol can*	16	9.95	8.95
118041	Techspray	Solder flux remover, ECONOLINE, CFC free, aerosol can*	13.5	12.95	11.75
1586015	Chipquik	Solder flux, tack for rework, no clean, 10cc w/ syringe	0.34	13.95	12.95
2098216	Chipquik	Solder flux, tack for rework, no clean, 10cc w/ syringe, water washable	0.34	15.95	14.95
481764	Techspray	Solder flux, dispensing pen, No-clean, resin & halide free leaves no residue*	0.38	6.95	6.49
615224	GC Electronics	Solder flux, liquid, non corrosive, solution of special rosin in alcohol*	2	8.95	7.95
615232	GC Electronics	Solder flux, liquid, non corrosive, solution of special rosin in alcohol*	16	24.95	22.45
615494	GC Electronics	Solder flux, paste, strong flux for soldering sheet metal & pipes, not for PCBs *	2.29	7.25	6.49
2113113	Chemtronics	Solder flux remover pen, precise control, fast drying, can be used with both organic & synthetic low solid no clean fluxes	0.32	10.49	9.49
2113121	Chemtronics	Solder flux remover pen, precise control, fast drying, can be used w/ lead free or leaded solder	0.32	10.49	9.49
2094258	Craig/DeoxIT	Solder flux, rosin paste for electronic applications including PCBs	2	8.95	7.95
2117190	Craig/DeoxIT	Solder flux, rosin paste for electronic applications including PCBs	8	29.95	26.95
2113092	Chemtronics	Solder flux, rosin dispensing pen, for electronic applications including PCBs*	0.32	9.95	8.95
2110490	Craig/DeoxIT	Solder flux wash, Val-U series, fast evaporating and safe on plastic	10	7.95	7.29
2098208	Chipquik	Solder paste, 63% SN, 37% PB, no clean 10cc w/ syringe	0.34	19.95	18.95
2098224	Chipquik	Solder paste, 63% SN, 37% PB, no clean 10cc w/ syringe, water washable	0.34	22.95	21.95
2097441	Chipquik	Solder paste, 96.5% SN, 3% AG, .5CU, no clean 10cc w/ syringe	0.34	21.95	20.95
2098232	Chipquik	Solder paste, 96.5% SN, 3% AG, .5CU, no clean 10cc w/ syringe, water washable	0.34	23.95	22.95
525835	Chemtronics	Solder mask, peelable, latex material, squeeze bottle*	8	12.95	11.95
525851	Chemtronics	Cotton swabs, double headed, 6" handle, 100-pack	—	4.95	4.49

**TroyOunces † Measured by weight



* Workshop Chemicals — Enter Web Code YAQ

* Heat Sink Compounds — Enter Web Code YBA

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

Solderless Breadboards & Digital Labs

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE




Solderless Breadboards



The screen-printed color coordinates are suitable for many types of digital and analog prototyping and circuit design. Larger models feature a heavy-duty aluminum backing with binding posts. Use Jameco's AC/DC breadboard power supply, P/N 77682 (below).

- Accepts most electronic components, including integrated circuits and transistors for digital and/or analog circuitry
- 0.1" hole spacing
- Pins are identified by numbered rows and columns
- Ideal for high frequency and low noise circuits
- One-year warranty

Attention Educators! Buy jumper wire on pg 173 in bulk and SAVE! (see Solid Hook-up Wire on page 58)



20670



20758



20812

WBU5 Series Key Features:

- Horizontal assembly corresponds to the operation flow design of the PC boards for handy operation
- Round hole design makes the electric connection better
- Formed with V-shaped cross-sectional groove, which allows DIP IC pins to be inserted across two parts and to increase the rate of utilization due to small pitch
- Dovetail protrusions and recesses designed to connect two adjacent parts tightly together

JE Series Key Features:

- Use to breadboard and debug circuit designs
- Low static, plastic body – CMOS safe
- Nickel-plated clips designed to withstand up to 5,000 insertion cycles
- Breadboard strips connect together to form larger working areas
- Components are easily interconnected using 20-28 AWG wire (P/N 19290 & 20080, pg 173)
- Some models feature heavy-duty aluminum backings (20758, 136901, 20812)

*** Web Code: HAC**

Part No.	Cross Ref. No.	Terminal Strips	Bus Strips	Contact Points	Binding Posts	Breadboard Size (L" x W")	Baseplate Size (L" x W")	Weight (lbs.)	Pricing			
									1	5	50	100
94457	JE19	0	1	100	0	6.5 x 0.4	—	0.04	\$3.49	\$3.19	\$2.89	\$2.65
20601	JE21	1	2	400	0	3.3 x 2.1	—	0.13	5.95	5.49	4.95	4.49
20670	JE22	1	0	630	0	6.5 x 1.4	—	0.20	6.95	6.29	5.49	4.95
194299	JE37	1	2	640	0	6.9 x 2.4	—	0.25	8.95	7.95	6.95	5.95
20723	JE23	1	2	830	0	6.5 x 4.0	6.5 x 2.1	0.30	9.95	8.95	7.95	6.95
194272	JE34	2	3	1,560	3	6.5 x 4.0	8.5 x 4.7	0.73	18.95	16.95	14.95	12.95
20758	JE24	2	1	1,360	2	6.5 x 3.1	8.5 x 4.0	0.60	14.95	13.49	11.95	10.95
136901	WBU504	2	3	1,855	4	5.5 x 5.5	7.4 x 6.3	0.90	19.95	17.95	15.95	13.95
20774	JE25	2	4	1,660	3	6.5 x 4.3	8.5 x 5.1	0.80	20.95	18.95	16.95	14.95
20791	JE26	3	5	2,390	4	6.9 x 5.8	9.1 x 6.9	1.10	27.95	24.95	21.95	19.95
20812	JE27	4	7	3,220	4	7.3 x 7.5	9.5 x 8.3	1.40	33.95	29.95	26.95	24.95

† WBU5 and JE series do not interconnect

Breadboard Pin to Breadboard Pin Test Leads

Part No.	Description	1	10	50
421315	Breadboard pin to breadboard pin test leads (20 pk), 4 each color-coded (red, yellow, blue, black, white), 24 AWG wire, 5.9" wire length (150mm)	\$9.95	\$8.95	\$7.95

Digital Design Lab

- 1580 tie points
- Fixed power supply: $\pm 5\text{VDC}$ @ 1.0A
- Two 7-segment displays (digit height: 0.3")
- DCV digital multimeter
- One-year warranty

Solderless Breadboard

- Interconnected nickel-plated tie points, fitting all DIP sizes and all components with AWG #22-30 (0.3-0.8mm) solid leads

DC Power Supplies

- DC supplies equipped with short-circuit protection
- Variable DC power: 0 to +15V & 0 to -15V @ 0.5A

Function Generator (5 ranges)

- Frequency ranges: 1Hz–10Hz, 10Hz–100Hz, 100Hz–1kHz, 1kHz–10kHz, 10kHz–100kHz
- Sine wave output: 0–8 Vp-p variable
- Triangle wave output: 6Vp-p fixed
- Square wave output: $\pm 5\text{V}$ fixed

Includes: Power cord and manual

Part No.	Description	Size (W" x D" x H")	Wt. (lbs.)	1	5
75839	Digital lab	10.6 x 13.3 x 5.0	8.1	\$379.95	\$359.95
1952599	Replacement breadboard	4.5 x 6.75 x 0.37	0.5	29.95	26.95

Our most popular digital lab!

*** Web Code: LAJ**



International 115/220VAC Switchable

Digital/Analog Design Labs

Solderless Breadboard

- 2712 interconnected nickel-plated tie points, fitting all DIP sizes and all components with AWG #22-30 (0.3-0.8mm) solid leads

DC Power Supplies

- Fixed DC output: +5VDC @ 1A; -5VDC @ 300mA
- Variable DC output: 0 to +15V & 0 to -15V @ 500mA (P/N 136267) 0 to +15V & 0 to -15V @ 1A (P/N 1919211)

- Input power: 110/220VAC @ 50-60Hz (switchable)

Function Generator (5 Ranges)

- Frequency ranges: 1Hz–10Hz, 10Hz–100Hz, 100Hz–1kHz, 1kHz–10kHz, 10kHz–100kHz
- Sine & square wave output: 0–8 Vpp variable
- Triangle wave output: 0–6 Vpp variable
- TTL mode output: 5Vpp (P/N 1919211 only)

Other Features

- 2.5" diameter, 8 Ω , 25W speaker
- 2 banana sockets, 2 BNC jacks
- 2 pulse switches (2 sets of outputs: A, A, B, B)
- Two 7-segment LED displays (digit height: 0.3")

- 136267: 2 variable resistors: VR1=1k Ω , VR2=100k
- 8 data switches
- 8-bit red LEDs with separate input terminals
- One-year warranty
- 1919211: 16 bit data switches w/ corresponding output points
- 16 red LEDs w/ separate input terminals

Includes: Power cord and manual (both P/Ns 136267 & 1919211); jumper wires (P/N 1919211 only)

Part No.	Description	Size (W" x D" x H")	Wt. (lbs.)	1	5
136267	Digital/analog lab	12.8 x 9.8 x 3.7	8.5	\$499.95	\$449.95
1919211	Digital/analog lab	13.0" x 10.5" x 3.5"	9.1	459.95	399.95
319214	Replacement for P/N 136267	6.7 x 6.5 x 0.4	0.5	39.95	35.95



136267

AC/DC Power Supply

Ideal for Breadboards on above

With built-in short-proof regulated power supplies.


- Input power: 120/220VAC @ 50-60Hz (switchable)
- Indicator lamps and power fuses
- Just plug in & start to use
- Compact & lightweight
- For both digital and analog circuits
- Compatible with test leads P/N 77842, pg 158
- Size: 7.4"W x 5.5"D x 2.6"H
- Color: beige
- Weight: 5.5 lbs.
- One-year warranty



International 120/220VAC Switchable

Part No.	Product No.	1	5
77682	Power supply	\$149.95	\$139.95

Output Specifications:
+5VDC @ 1A;
-5V @ 300mA fixed;
0 to +15VDC @ 500mA variable;
0 to -15VDC @ 300mA variable;
12-6-0-6-12 tapped VAC,
300mA fixed



www.Jameco.com/GotMail

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

Powered Project Breadboards

- Solderless breadboard with 2420 tie points
- Power switch with light
- Outputs are short-circuit protected

Includes: Power cord

136259:

- Fixed power: +5V @ 1A; variable power: 0 to ±15VDC @ 500mA
- Edge plate for non-DIP size components
- Input power: 120/220VAC @ 50-60Hz (switchable)
- Replacement fuse: P/N 103908, pg 41
- One-year warranty
- Breadboard size: 7.4"L x 6.8"W
- Back panel has ground terminal

1942163:

- Input power: 110VAC or 220VAC @ 50-60Hz (switch selectable)
- Triple output power supply: fixed 5VDC @ 1A; 0 to +16VDC @ 500mA (adjustable); 0 to -16VDC @ 500mA (adjustable)
- Grounded case
- Overload protection
- Fuse protection
- Lighted power switch

Part No.	Description	Overall Size	Wt. (lbs.)	1	5
136259	15VDC @ 500mA	9.8"L x 8.0"W x 2.6"H	6.8	\$149.95	\$135.95
1942163	5VDC @ 1A & 16VDC @ 500mA	10.3"L x 8.8"W x 3.3"H	6.0	99.95	89.95

* Web Code: XAT



136259



1942163



Resistance & Capacitance Decade Substitution Boxes

Wide-range decade substitution boxes for product design or calibration checks.

- Light durable construction
- Case may be grounded separately
- Three binding posts permit isolated substitutions
- Size: 4.7"W x 5.7"H x 1.4"D • Wt: 0.7 lbs.

- 211668:** 1% resistance substitution from 1Ω to 11.111110MΩ
- 7 decade ranges of resistance
- Values can be changed in 1Ω increments • @ 3 watts

- 211676:** 5% capacitance substitution from 100pF to 11.111μF
- 5 decade ranges of capacitance
- @ 50VDC



211668




211676

Part No.	Description	1	5
211668	Resistance	\$99.95	\$89.95
211676	Capacitance	129.95	119.95

Bug Boxes

- Anti-static plastic
- Box size: 4.9"L x 3.3"W x 0.6"H
- Designed to store all types of components




2120364

Part No.	Description	1	10	100
2115670	30 compartments (white)	\$4.95	\$4.49	\$3.95
2120364	Open/sliding lid (blue)	4.95	4.49	3.95
2120436	30 compartments (clear)	4.95	4.49	3.95

Bug Trays

- Tray size: 4.8"L x 3.6"W x 0.5"H
- 2120372:** 5 compartments (4.6"L x 0.58"W x 0.3"H ea.)



2120372

Part No.	Description	1	10	100
2120372	Divided bug tray	\$4.95	\$4.49	\$3.95
2120381	Open bug tray	4.95	4.49	3.95

Plastic Fliptop Case for SMDs

- 128 compartments
- 8 rows x 16 columns grid
- Fliptop openings on each bin
- Padded cover locks bins closed
- Perfect match to store P/N 156882 SMD resistor assortment, pg 53



Includes: Labels for each bin

Part No.	Size (L" x W" x H")	1	10
164267	11.0 x 8.3 x 1.7	\$49.95	\$44.95

Plastic Fliptop Boxes

- Clear plastic box with a clear plastic lid and removable dividers
- 100256:** Size: 8.4"L x 4.5"W x 1.4"H
- 148902:** Size: 10.2"L x 4.7"W x 1.6"H
- 2095955:** Size: 7.7"L x 5.3"W x 1.4"H
- 11 individual rounded compartments



100256

Part No.	Compartment	1	10	100
100256	18 (1.4" x 1.5" each)	\$2.29	\$1.95	\$1.79
148902	12 (1.7" x 2.3" each)	3.95	3.49	2.95
2095955	11 (10-1.75"x1.5", 1-3.5"x1.5")	1.95	1.75	1.69


Quick and Easy Search

Our website offers thousands of data sheets and photos to assist you in finding the products you need.

Component Cabinets



319600



Drawer (319601) Divider (319611)

319600:

- Drawer can be divided into 3 sections (clear)
- Wall mountable cabinet (ABS black)
- Cabinet size: 6.0"D x 14.7"W x 7.4"H

Includes: 20 clear plastic drawers, 20 dividers and 30 adhesive I.D. labels

319601: 5.5"L x 2.7"W x 1.5"H; **319611:** 2.5"W x 1.2"H

2108605:

- Counter-top design (ABS blue)
- Cabinet size: 7.0"D x 17.625"W x 9.75"H



2108605

Includes:

- 14 clear plastic drawers in 3 sizes: 10 ea. 6.375"L x 3.375"W x 1.5"H, 3 ea. 6.375"L x 8.75"W x 1.5"H, 1 ea. 6.375"L x 8.75"W x 3.25"H and 20 adhesive I.D. labels

Part No.	Description	1	10	100
319600	20-drawer cabinet	\$16.95	\$15.49	\$13.95
2108605	14-drawer cabinet	24.95	22.95	19.95
319601	Drawer for cabinet	.49	.45	.39
319611	Drawer divider for cabinet	* .12	.10	

* Order in multiples of 10



Aluminum and Black Phenolic Boxes with Cover




2113797

2113800

2113834

2113826

2114280



2113842

2113851

Die Cast Aluminum Phenolic Boxes w/ Cover (BBE)

* Web Code: PDC

Part No.	Mfr. Part No.	Type	Size (L" x W" x H")	Connector Types (A - B)	1	5	25
2113797	3751	Mini	1.13 x 1.50 x 0.88	BNC(F) - BNC(F)	\$29.95	\$28.95	\$27.95
2113800	2391	A	1.13 x 2.25 x 0.88	BNC(M) - BNC(F)	27.95	26.95	25.95
2113834	3230	B	1.38 x 2.25 x 1.13	BNC(F) - BNC(F)	24.95	23.95	22.95
2113826	3231	B	1.38 x 2.25 x 1.13	BNC(F) - BNC(M)	29.95	28.95	27.95
2114280	2902	C	4.25 x 2.64 x 1.71	BNC(F) - BNC(F)	39.95	38.49	36.95
2113842	3603	D	3.00 x 2.63 x 1.65	BNC(F) - BNC(M)	37.95	36.95	35.95

Black Phenolic Box w/ Cover

Part No.	Mfr. Part No.	Size (L" x W" x H")	Connector Type	1	5	25
2113851	2259	1.44 x 1.75 x 0.69	Post, double binding	\$27.95	\$26.95	\$25.95

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Enclosures & BusBoard Prototyping Kits

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

JAMECO ValuePro

Enclosures

The prototype builder boards on pg 175 are designed to fit into our ABS plastic and aluminum enclosures, metal cabinets and heavy-duty instrument cases. The pre-cut boards have 2 or 4 mounting holes compatible with the PC board mounting hardware listed on pg 175 (P/N 106551).

Board description: Laminated glass epoxy 1/16" thick fire retardant per FR-4 specs. Copper-clad and solder mask one side. Drilled holes: .035" diameter on .080" square pad. Pads spaced on .10" x .10" grid.

See page 55 for Knobs and 108 Hardware

JAMECO
EXCLUSIVE

*Web Code: UAL



ABS Plastic Enclosures

Lid for precision fit (adds 0.4" height). Complete with four screws and lid. All sizes below are interior dimensions.

Part No.	Cross Ref. No.	Size (L x W x D)	1	10	50	100
18922	H2855	3.1" x 2.0" x 0.9"	\$3.49	\$3.19	\$2.89	\$2.49
18914	H2853	4.9" x 2.5" x 1.5"	3.95	3.59	3.19	2.75
18893	H2851	6.0" x 3.5" x 1.9"	4.95	4.49	3.95	3.49
18906	H2852	7.5" x 4.3" x 2.3"	7.49	6.79	5.95	5.49

Die-Cast Aluminum Enclosures

Made from aluminum, an excellent heat-sink, these cases are great for high temp circuits (up to 600°C). Includes screws.

Part No.	Cross Ref. No.	Size (L x W x D)	1	10	50	100
11957	B5002	3.9" x 2.0" x 1.0"	\$5.95	\$5.49	\$4.95	\$4.49
11965	B5004	4.7" x 2.6" x 1.4"	8.95	8.29	7.49	6.59
11973	B5006	7.5" x 4.3" x 2.4"	15.95	14.49	12.95	11.49

Aluminum Enclosures

The enclosure comes in two pieces which slide together.

Part No.	Cross Ref. No.	Size (L x W x D)	1	10	50	100
11870	H2300	4.0" x 2.0" x 2.8"	\$5.95	\$5.49	\$4.95	\$3.95
11886	H2320	5.0" x 4.0" x 3.0"	8.95	7.95	6.95	5.95
11894	H2335	7.0" x 6.2" x 4.6"	10.95	9.95	8.95	7.95

Metal Enclosures

- Mounting screws and rubber feet included
- Glossy black textured steel top cover and ivory aluminum base

Part No.	Cross Ref. No.	Size (L x W x D)	1	10	50	100
208901	B2741A	4.0" x 3.3" x 2.2"	\$5.95	\$5.49	\$4.95	\$4.49
208911	B2743A	5.9" x 5.3" x 3.0"	8.95	7.95	6.95	6.25
209350	B2746A	6.3" x 7.8" x 2.5"	9.95	8.95	7.95	6.95
208929	B2744A	7.3" x 6.3" x 2.8"	9.95	8.95	7.95	6.95
209358	B2747A	7.5" x 9.8" x 3.2"	14.95	13.49	11.95	10.95

ABS Heavy-Duty Instrument Cases

P/N 18877 includes ventilation and speaker sound slots.

Part No.	Cross Ref. No.	Size (L x W x D)	1	10	50	100
18869	H2505	7.9" x 6.3" x 2.5"	\$7.95	\$7.29	\$6.59	\$5.95
18877	H2507	10.0" x 7.5" x 3.1"	8.95	7.95	7.49	6.95

ABS Enclosures w/ Clear Tops

Includes screws for mounting boards, rubber gasket for a tight seal on your equipment & drilled holes for mounting.

Part No.	Cross Ref. No.	Size (L x W x D)	1	10	50	100
141832	203C1	4.9" x 3.4" x 2.4"	\$8.95	\$7.95	\$7.49	\$6.95
141841	203D1	6.5" x 3.4" x 2.2"	9.95	8.95	8.49	7.95
141859	203F1	7.3" x 5.7" x 3.0"	11.95	10.95	9.95	8.95

BERPAC

Specialty Enclosures

*Web Code: TBY

A Series — with PCB Boss Mounts

- 4-piece design • Interchangeable end panel
- 4-insert areas for customized I-plates

Part No.	Mfr. Part No.	Color	Batt. Holder	Size (L" x W" x H")	1	10	100
373456	A-42-BK	Black	None	7.12 x 5.00 x 1.62	\$14.49	\$12.95	\$11.49
373608	A-42-9V-BK	Black	1-9V	7.12 x 5.00 x 1.62	9.95	9.49	8.95

C Series — with Pinch-Fit for PCBs

- Simple 2-piece design • 2-insert areas for customized I-plates

Part No.	Mfr. Part No.	Color	Size (L" x W" x H")	1	10	100
675331	C-4-BK	Black	2.13 x 1.38 x 0.58	\$2.95	\$2.69	\$2.39

H Series — Handheld with Built-in Battery Holder

- Ergonomic handheld design • 5-insert areas for customized I-plates

Part No.	Mfr. Part No.	Color	Batt. Holder	Size (L" x W" x H")	1	10	100
374635	H-65-9V-BK	Black	1-9V	4.94 x 2.75 x 0.94	\$9.95	\$8.95	\$7.95
374942	H-67-9V-BK	Black	1-9V	4.94 x 2.75 x 1.28	8.95	7.95	6.95
374601	H-75-4AA-BK	Black	4-AA	7.20 x 3.65 x 1.20	13.95	12.49	11.95

S Series — Two-piece Standard Enclosures

- 2-piece design • 2-insert areas for customized I-plates

† Insert on top is recessed 0.015" on all models designated with an "I"

Part No.	Mfr. Part No.	Color	Batt. Holder	Size (L" x W" x H")	1	10	100
675454	110-I-BK	Black	None	3.61 x 2.27 x 1.01	\$3.95	\$3.49	\$2.95
675462	111-BK	Black	None	3.61 x 2.27 x 1.51	4.49	3.95	3.49
675569	211-BK	Black	1-9V	4.10 x 2.60 x 1.51	3.95	3.69	3.39
675489	131-BK	Black	None	4.38 x 3.25 x 1.51	5.95	5.49	4.95
675577	231-BK	Black	1-9V	4.38 x 3.25 x 1.51	4.95	4.75	4.49
675500	151-BK	Black	None	5.63 x 3.25 x 1.51	6.95	6.29	5.59
675593	251-BK	Black	1-9V	5.63 x 3.25 x 1.51	7.95	7.29	6.49
675518	153-BK	Black	None	5.63 x 3.25 x 2.51	5.95	5.49	4.95
675526	171-BK	Black	None	6.88 x 4.88 x 1.51	9.95	8.95	7.95
675542	173-BK	Black	None	6.88 x 4.88 x 2.51	10.95	9.95	8.95
675551	193-BK	Black	None	9.50 x 6.34 x 2.51	15.95	13.49	11.95



Please Note: Images used are representative. Color and shapes may vary by model.

M Series — Handheld with Built-in Battery Holder

*Translucent

- Streamlined handheld design • 5-insert areas for customized I-plates

Part No.	Mfr. Part No.	Color	Size (L" x W" x H")	1	10	100
694815	M-6-TR-GY	Gray	4.15 x 2.40 x 0.85	\$9.95	\$8.95	\$8.49
694807	M-6-TR-GR	Green	4.15 x 2.40 x 0.85	11.95	10.95	9.95

R Series — Waterproof Cases to 30 Feet

- Dustproof, corrosion proof, airtight and UV protected with lifetime guarantee
- Auto pressure purge valve, secure lock holes, nut & bolt security & foam-filled


Part No.	Mfr. Part No.	Color	Size (L" x W" x H")	1	10	100
675614	R-120F	Black	7.6 x 5.0 x 2.2	\$15.95	\$14.95	\$13.95
675622	R-300F	Black	9.59 x 7.42 x 3.98	44.95	39.95	35.95

BusBoard Prototyping Kits

These all in one prototype kits are equipped with a PCB that is designed to fit the enclosure. No cutting or drilling required.

- Precision-drilled • Precision-etched
- Built-in standoffs
- Self tapping screws included
- Anti-tarnish protective coating for easy soldering
- High-quality FR4 glass epoxy PCBs for long life

NEW
MARKED IN PINK



Part No.	Description	Size (L" x W" x D")	1	5	25
2123872	Aluminum enclosure	4.67 x 3.68 x 1.18 ..	\$21.95	\$19.95	\$17.95
2123881	Plastic enclosure	2.20 x 2.60 x 1.10 ..	6.95	6.59	6.29
2123899	Plastic encl. w/ battery comp.	3.60 x 2.60 x 1.10 ..	8.39	7.89	7.39

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



General Purpose Prototyping Boards

Select the prototype board that fits your needs from our comprehensive product listing. Prototyping boards with punched holes are convenient, economical tools for assembling circuit components and trying cost-effective alternatives to custom designs.

- 0.062" board thickness
- 0.1" hole spacing
- 0.08" pad size
- PCB material epoxy glass
- Plated through pads are double-sided

See PCB enclosures on pg 174, and mounting hardware (recommnd P/N 106551) below



*Web Code: LAG



Board Outline



Circuit Patterns



Part No.	Cross Ref. No.	Size (W" x L")	Fits Enclosure(s) (see page 174)	Circuit Pattern	Hole Pads	# Holes x Dia. †	Power/Ground Buses	Connector I/O or Edge	# Mounting Holes x Dia.	Wt. (lbs.)	Pricing			
											1	10	50	100
105102	5002PCB	1.50 x 3.50	11957	C	Single-sided	365 x .038"	4	None	2 x .140"	.02	\$6.95	\$5.95	\$4.95	\$3.95
105100	2855PCB	1.60 x 2.70	18922	B	Single-sided	288 x .035"	None	None	2 x .115"	.02	5.49	4.95	4.49	3.95
105129	2853PCB	2.00 x 4.40	18914, 11965	C	Single-sided	669 x .038"	4	None	4 x .140"	.03	8.49	7.59	6.75	5.95
105111	2300PCB	2.40 x 3.40	11870	C	Single-sided	637 x .038"	4	None	2 x .140"	.03	7.95	7.19	6.49	5.95
263207	PCB-463	2.40 x 4.10	—	B	Plated through	640 x .042"	None	None	4 x .120"	.05	8.95	7.95	6.95	5.95
28178	PCB1	2.42 x 4.10	—	C	Plated through	674 x .040"	None	None	4 x .120"	.04	6.95	6.25	5.59	4.95
263215	PCB-858	2.50 x 4.20	18914	D	Plated through	640 x .042"	None	D-sub 25/USB/RJ45	4 x .120"	.05	8.95	7.95	6.95	5.95
105153	2851PCB	3.10 x 5.50	18893	C	Single-sided	1450 x .035"	7	None	4 x .140"	.07	9.95	8.95	7.95	6.95
263223	PCB-693	3.30 x 3.70	—	B	Single-sided	900 x .042"	None	None	4 x .120"	.05	8.95	7.95	6.95	5.95
105137	2320PCB	3.30 x 4.50	11886	C	Single-sided	1266 x .035"	4	None	4 x .140"	.06	8.95	7.95	6.95	5.95
105162	2852PCB	3.60 x 7.00	18906, 11973	B	Single-sided	2225 x .035"	4	None	4 x .140"	.10	13.95	12.49	10.95	9.95
21531	JE417	4.20 x 6.50	—	C	Plated through	2126 x .042"	2	D-sub 9/15/25/37	8 x .120"	.12	14.95	13.49	11.95	10.95
206587	2746APCB	4.30 x 6.80	209350	C	Single-sided	2550 x .042"	5	None	4 x .140"	.07	9.95	8.95	7.95	6.95
21435	JE401(8001)	4.50 x 6.50	18869	B/D	Single-sided	2360 x .042"	2	None	None	.12	16.95	15.49	13.95	11.95
21452	JE405(8003)	4.50 x 6.50	18869	C	Single-sided	2360 x .042"	1	None	None	.12	16.95	15.49	13.95	11.95
206579	2743APCB	4.60 x 4.30	208911	C	Single-sided	1684 x .042"	5	None	4 x .140"	.07	7.95	6.95	5.95	5.29
105180	2505PCB	5.00 x 6.50	18869	C	Single-sided	2829 x .035"	7	None	8 x .120"	.13	13.95	12.49	10.95	9.95
28194	PCB3	5.00 x 8.00	18877	C	Plated through	3705 x .042"	4	Mounting area-I/O	4 x .120"	.17	21.95	20.95	19.95	18.95
21478	JE407(8006)	5.00 x 13.25	—	B	Plated through	6063 x .038"	None	None	8 x .120"	.28	39.95	35.95	32.95	28.95
206594	2747APCB	5.50 x 8.00	209358	C	Single-sided	3906 x .042"	5	None	4 x .140"	1.0	11.95	10.95	9.95	8.95
105187	2507PCB	6.10 x 8.80	18877	C	Single-sided	4771 x .035"	7	None	8 x .140"	.21	16.95	15.49	13.95	11.95
263232	PCB-7038	8.30 x 11.9	—	B	Plated through	8819 x .042"	10	5	4 x .115"	.40	39.95	35.95	31.95	27.95



Vector Prototyping Boards

43140	64P44XXXP	4.50 x 6.50 #	18869	A	Drilled only	2860 x .042"	None	None	None	.09	\$8.95	\$8.49	\$7.95	\$7.49	
52943	84P44WE	4.50 x 8.50	18877	A	Drilled only	3740 x .042"	None	None	None	.15	12.95	12.45	11.95	11.49	
37612	169P44XXXP	4.50 x 17.0 #	—	A	Drilled only	7524 x .042"	None	None	None	.25	14.95	13.95	13.49	12.95	
37621	169P84WE	8.50 x 17.0	—	A	Drilled only	14,448 x .042"	None	None	None	.53	29.95	28.95	27.95	26.95	
106551	20 pieces; PC board mounting hardware (4 spacers, 8 screws and 8 washers) used with all above boards (manufacturer may vary)											2.95	2.59	2.29	1.95

* PC/XT 8-bit # PCB material: phenolic † All 0.042" Diameter hole boards use terminals P/Ns 34147, 34155 and 34163 (below left)



BusBoard Prototyping Boards

BPS prototyping boards have unique board patterns that help speed-up the construction of your electronic prototypes and circuits. The breadboards and protoboards have the same pin outs so you can transfer your design directly from the breadboard to the solderable protoboard.

- Precision-drilled
- Precision-etched

Plug-In Breadboards

These solderless "plug-in" breadboards provide a quick way to build and test circuits and can be transferred directly to the proto boards right.

Part No.	Product No.	Size (L" x W" x D")	Points	1	10	100
2125018	BB300	3.3 x 1.4 x 0.3	300	\$4.49	\$4.25	\$3.95
20601	BB400	3.3 x 2.1 x 0.3	400	5.95	5.49	4.95
2125026	BB830T	6.5 x 2.2 x 0.3	830	7.95	7.49	6.95



Wire Wrap and Push-In Terminals

For .042" Diameter Holes

- Material: copper alloy
- Prebagged 100 pcs.


34147: Push-In Micro-Klip Terminals

34155: Miniwrap Wiring Terminals

- Two-prong with square tail for wire wrapping
- Shoulder: .045"

34163: Klipwrap Wiring Terminals

- Three-prong with square tail for wire wrapping



Part No.	Mfr. Part No.	Height Above .062" Board	Length Below .062" Board	Post Size	Overall Length	100 pc. units	
						1	10
34147	T421-1/C	.200	.097	.032" x .045"	.36"	\$8.95	\$7.95
34155	T44/C	.065	.530	.025"Sq.	.69"	9.95	8.95
34163	T49/C	.200	.530	.025"Sq.	.83"	17.95	16.49

Solderable PC Protoboards

- High-quality FR4 glass epoxy PCBs for long life
- Anti-tarnish protective coating for easy soldering

Part No.	Product No.	Size (L" x W" x D")	Points	1	10	100
2125042	SB300	3.0 x 1.20 x 0.06	300	3.95	3.69	3.39
2125051	SB400	3.0 x 1.90 x 0.06	400	4.95	4.59	4.25
2125034	BR1	7.0 x 1.85 x 0.06	830	6.49	6.19	5.89



Re-Usable Prototyping Compound

"Shape-then-lock" Design Plastic

Build your invention now – without machine tools. Create super-strong custom parts, prototypes, molds, servo brackets, robot housings, sculptures, science projects, and more.

- Melts at 160°F
- Safely hand moldable
- Becomes rigid at room temperature
- Non-toxic, light weight and paintable



Part No.	Mfr. Part No.	Description	1	5
2112495	01-250	250 gram bag	\$14.95	\$13.49
2112508	01-500	500 gram bag	24.95	22.95

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

PT Series Prototyping Boards

★ Web Code: WCG

Accommodates any mixture of 0.3" to 0.6" wide ICs with any number of pins, and any combination of resistors, capacitors, diodes, transistors, etc.
• 4 power buses that connect to a power jack (recommended P/Ns 101178 & 101186, pg 130)

Part No.	Product No.	Size	Hole Pads	# Holes x Dia.	# Mntg Holes x Dia.	1	10	50
645677	PT-35X25	3.5"L x 2.5"W	Double-sided	456 x .036"	4 x .140"	\$18.95	\$16.49	\$14.95
262511	PT-5X37	5"L x 3.7"W	Double-sided	1135 x .036"	4 x .140"	25.95	23.95	21.95
262537	PT-6X49	6"L x 4.9"W	Double-sided	1931 x .036"	4 x .140"	36.95	33.95	29.95



262511



262537



645677

Positive Pre-Sensitized Circuit Boards

1 oz. copper on 1/16" epoxy glass board, UL94V-0 rated. The peel-off coating protects the board while handling or cutting prior to exposure.

Part No.	Mfr. Part No.	Description	Size	1	10	50
616251	21-334	Single-sided	4" x 6"	\$5.95	\$5.49	\$4.95
616260	21-336	Single-sided	6" x 6"	7.95	7.29	6.49
616307	21-353	Double-sided	6" x 9"	13.95	12.95	11.95

Prototype Boards

Export Design Phenolic Prototype Board

Accommodates all types of IC's, transistor packages and passive parts. Lands and bus bars are tin plated. 0.1" centers.

Part No.	Mfr. Part No.	Description	Size (W" x L" x Thick")	1	10	50
616631	22-504	3 1/8 x 5 1/16 x 1/16		\$5.95	\$5.49	\$4.95

Experimenter's Phenolic Prototype Boards

616649: • Copper plated with 94 five-point terminals and two 40-point bus strips

616673: • Single land pattern

Part No.	Mfr. Part No.	Description	Size (W" x L" x Thick")	1	10	50
616649	22-508	2.0 x 6.0 x 1/16"		\$13.95	\$12.95	\$11.95
616673	22-512	3 3/8 x 6.75 x 1/16		6.95	6.49	5.95

Perforated Bare Phenolic Prototype Boards

Unexcelled for prototypes, breadboards, hobby or science projects. Bare phenolic board with no copper clad.

616681: 0.1" spacing 616690: 0.265" spacing

Part No.	Mfr. Part No.	Description	Size (W" x L" x Thick")	Hole Dia.	1	10	50
616681	22-514	2.25 x 6.0 x 1/16"		.093	\$7.49	\$6.95	\$6.49
616690	22-516	4.50 x 6.0 x 1/16"		.042	5.95	5.49	4.95

Versa Strip Phenolic Prototype Board

• Alpha-numeric indexing • 0.035" diameter holes
• Silver-plated land patterns • 0.1" centers

Part No.	Mfr. Part No.	Description	Size (W" x L" x Thick")	1	10	50
616622	22-502	3.5 x 6.0 x 1/16"		\$11.95	\$10.95	\$9.95

Plug-In IC Phenolic Prototype Board

ICs plug directly into board. It's 0.1" spacing accepts 14-pin up to 20-pin ICs. Silver plated lands with 24-way card edge connector plug on one end. 0.035" diameter holes.

Part No.	Mfr. Part No.	Description	Size (W" x L" x Thick")	1	10	50
616614	22-500	2.38 x 4.0 x 1/16"		\$5.95	\$5.49	\$4.95

Copper-Plated Blank Circuit Boards

Ideal for hobbyists & students doing prototypes of circuits. Both single and double-sided boards are copper plated.
• 1.6mm (1/16") thick • PCB material: phenolic

Part No.	Cross Ref. No.	Description	Fig.	Size (L" x W")	1	10	50
169279	PCBS3X6	Single-sided	3	2.9 x 5.9	\$2.95	\$2.69	\$2.39
169288	PCBS6X6	Single-sided	2	5.9 x 5.9	3.95	3.49	2.95
169296	PCBS12X12	Single-sided	1	11.8 x 11.8	9.95	8.95	7.95
169309	PCBD3X6	Double-sided	3	2.9 x 5.9	3.49	2.95	2.49
169317	PCBD6X6	Double-sided	2	5.9 x 5.9	5.95	5.49	4.95
169325	PCBD12X12	Double-sided	1	11.8 x 11.8	19.95	17.95	15.95

Fig. 1

Fig. 2

Fig. 3

★ Web Code: CTB

Bare Copper Circuit Boards – Single Sided

1 oz. copper on base of either fiberglass or reinforced epoxy board.

Part No.	Mfr. Part No.	Size (W" x L" x T")	1	10	50
616471	22-250	3" x 5" x 1/16"	\$3.95	\$3.59	\$3.29
616489	22-260	4" x 6" x 1/16"	4.49	3.95	3.49
616497	22-261	6" x 6" x 1/16"	5.49	4.95	4.49
616500	22-263	6" x 9" x 1/16"	5.95	5.49	4.95
616518	22-264	8" x 10" x 1/16"	9.95	8.95	7.95
616534	22-268	11" x 14" x 1/16"	17.95	16.95	15.95



616518

Photofabrication, Exposure & Economy Etching Kit

The kits below allow you to produce professional printed circuit boards quickly and at a lower cost than a professional design house.

2121017: Photofabrication kit

★ Web Code: MGC

- 3 single sided presensitized PCB boards (3" x 5", 4" x 6" and 6" x 6")
- Instruction sheet 2121017
- Chemicals: developer and ferric chloride
- Foam brushes, development tray, rubber gloves

2121025: Exposure kit

- Fluorescent light fixture w/ stand
- Daylight fluorescent bulb
- Acrylic weight for artwork • Instruction sheet 2121025

2121033: Economy Etching kit

- 5 liter etching tank • Instruction sheet 2121033
- Air pump and tubing, spraying unit, vinyl gloves

Part No.	Description	1	5
2121017	416-K photofabrication kit	\$69.95	\$64.95
2121025	416-X exposure kit	69.95	64.95
2121033	416-ES economy etching kit	69.95	64.95

* Shipped via UPS ground – available continental U.S. only

JAMECO ValuePro

Prototyping Developer Kit

The Jameco Prototyping Developer Kit includes everything you need to get started with prototyping your own PCB.

- 2 precoated circuit boards, 3" x 4" x 1/16" (P/N 156751, pg 176)
- 4 oz. positive developer concentrate (P/N 156734, pg 176)
- 32 oz. etching solution (P/N 616438, pg 171)

Part No.	Description	1	5
2113244	Prototyping developer kit	\$46.95	\$42.49

DATA Pre-Sensitized Circuit Boards & Chemicals

- Pre-coated circuit board • 1/16" thick

Includes: Instructions

P/N 2097088 Includes:

ER-18 tinnit solution, 8" x 6" x 2" pan, 16 oz. bottle

156751

Part No.	Mfr. Part No.	Description	1	10	50
2097117	14-024	Single sided (2.0"L x 4.0"W)	\$4.49	\$3.95	\$3.49
156751	14-034	Single sided (3.0"L x 4.0"W)	4.95	4.49	3.95
156742	14-234	Double-sided (3.0"L x 4.0"W)	5.95	5.49	4.95
156734	12-404*	4 oz. positive developer	14.95	13.49	11.95
2097070	12-500	Clear copy sheets (8.5" x 11.5") 5 pk.	4.49	3.95	3.49
2097096	12-710	4 oz. developer/fixer concentrate	7.95	7.49	6.95
2097109	12-720	Neg. fast-acting film, 6 sheets, use w/ 2097096	7.95	7.49	6.95
2097088	12-800	Tin plating copper kit	16.95	15.49	13.95
70201	ER3*	Dry concentrated etchant (makes 1 pint)	5.95	5.49	4.95


* Shipped via UPS ground – available continental U.S. only



Prototyping Boards

* Web Code: ADS

SchmartBoard™ is the only prototyping system that makes it possible for anyone to hand solder surface mount components. Whether SOIC, QFP, QFN or even BGA you can easily, flawlessly and quickly hand solder it.

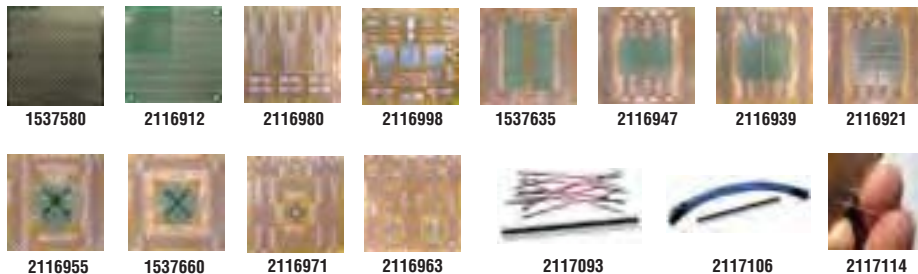

Thru Hole Boards

Part No.	Mfr. Part No.	Description	1	5
1537580	201-0001-01	2"x2", 0.1" center spacing w/ 0.05" offset, 12 ground holes	\$5.95	\$5.49
2116912	201-0302-01	4"x4", 0.1" center spacing w/ 0.05" offset, 2 columns, power & ground holes (75% w/ offset traced row of holes and 25% untraced holes)	14.95	13.95

Discrete Surface Mount Boards

2116980	202-0034-01	0201/0603/0805/1206/1210/1608/1812/2010/2512 discrete SMT in case size A/B/C	\$9.95	\$8.95
2116998	202-0035-01	SOT23-3/5/6/ SC70-5/6/ DPAK/ D2PAK/ SOT223/ TO-263-7/ SOT89/ 8085/1206 discrete in case size A/B/C/D/E	9.95	8.95

SO/SOP Boards

1537635	202-0004-01	2"x2", supports up to 56-pin SOIC w/ 0.05" pitch, 20 pcs. of 0603 package, 12 ground holes	\$9.95	\$9.49
2116947	202-0007-01	2"x2", supports up to 72-pin SO/ SOP/ QSOP/ SSOP/ TSSOP/ PSSOP ICs w/ 0.50mm pitch, 43 pcs. of 0603 & 8 pcs. of 0805 packages, 6 ground holes	9.95	8.95
2116939	202-0006-01	2"x2", supports up to 72-pin SO/ SOP/ QSOP/ SSOP/ TSSOP/ PSSOP ICs w/ 0.65mm pitch, 37 pcs. of 0603 package, 14 ground holes	9.95	8.95
2116921	202-0005-01	2"x2", supports up to 72-pin SO/ SOP/ QSOP/ SSOP/ TSSOP/ PSSOP ICs w/ 0.80mm pitch, 30 pcs. of 0603 package, 14 ground holes	9.95	8.95

QFP Boards

2116955	202-0009-02	2"x2", supports up to 64-pin QFP/ TQFP/ PQFP ICs w/ 0.80mm pitch, 38 pcs. of 0603 package, 22 ground holes	\$9.95	\$8.95
1537660	202-0011-01	2"x2", supports up to 100-pin QFP/ TQFP/ PQFP ICs w/ 0.50mm pitch, 20 pcs. of 0603 package, 6 ground holes	9.95	9.49

Chipscale (QFN) Boards

2116971	202-0017-01	2"x2", supports up to 32-pin QFN ICs w/ 0.50mm pitch, 168 pcs. of 0603 package, 12 ground holes	\$9.95	\$8.95
2116963	202-0016-01	2"x2", supports up to 24-pin QFN ICs w/ 0.50mm & 0.65mm pitches, 54 pcs. of 0603 package, 12 ground holes	9.95	8.95


Accessories

2117093	920-0005-01	22 AWG, 3" jumper wires & 20-pin headers, 10 pcs.	\$4.95	\$4.75
2117106	920-0007-01	22 AWG, 7" jumper wires & 20-pin headers, 10 pcs.	4.95	4.75
2117114	920-0021-01	SchmartSolder, 50 pcs., 50-lead capability, gauge: 0.020", solder rings	4.95	4.75



Surfboards®

Mini Breadboards for Surface Mount Devices.



Part No.	Mfr. Part No.		1	10
207360	9081 (For 8-pin SOIC)		\$1.49	\$1.19
207378	9082 (For 8-pin SOIC)		3.95	3.49
207386	9161 (For 14/16-pin SOIC; 0.1" pin spacing; 0.65"H)		1.95	1.75
207394	9163 (For 14/16-pin SOIC; 0.1" pin spacing; 0.65"H)		5.95	4.95

* Web Code: QBG

Application Specific Adapters

Part No.	Mfr. Part No.	Accepted Devices	Pins	1	10
207589	33205	SOT-23-5/SC59-5	5	\$1.75	\$1.59
207597	33206	SOT-23-6/SOT-23-L/SC-59-6/TSOP-6	6	1.95	1.55

Power & Development Modules

* Web Code: PDM

Populated Single Voltage Regulated Power Modules

- Highly stable linear-low-drop voltage regulators with 12VDC input
- Output peak: 800mA
- For negative voltage: reverse output and ground



Part No.	Mfr. Part No.	Output Volt.	1	5
2117018	710-0003-01	1.5	\$9.95	\$8.95
2117026	710-0003-02	1.8	9.95	8.95
2117034	710-0003-03	2.5	9.95	8.95
2117042	710-0003-04	3.3	9.95	8.95
2117051	710-0003-05	5.0	9.95	8.95
2117069	710-0003-06	9.0	9.95	8.95

Populated RS-232 SchmartModule

- Operates from a single 5V power source, ESD



Part No.	Mfr. Part No.	1	5
2117000	710-0001-01	\$14.95	\$13.49

Parallax Propeller SchmartModule Kit

This kit includes the board, voltage regulator ICs, capacitors, LEDs, headers, resistors and a pushbutton switch. You supply the Propeller chip, memory, and optional 5MHz crystal. The Propeller chip makes it easy to rapidly develop embedded applications, and this kit allows you to easily interface with the Propeller chip for programming.



- 2" x 2" PCB
- 6.5-12VDC
- For Parallax Propeller P8X32A-Q44 (use P/N 2007151, see web)
- For 5MHz crystal (use P/N 324929, pg 40)

Part No.	Mfr. Part No.	1	5
2117085	710-0005-01	\$14.95	\$13.49

PIC® Microcontroller Development SchmartModule

This board supports 116 different SOIC PIC® Microcontrollers. Simply solder on your PIC using the EZ technology and you are ready to go. This one board supports most of the 8-bit PICs available in SOIC package.



Part No.	Mfr. Part No.	1	5
2117077	710-0004-01	\$14.95	\$13.49

PLCC Prototype Adapters

- PLCC socket slotted for PLCC chip remover
- Tin-plated PLCC connector
- Gold-plated round pins
- PLCC socket identifies pin 1 and orientation key
- Silkscreen numbers identify pin numbers in groups of 5 and 10
- PCB construction



Part No.	Pins	Size (L x W)	1	5	25
73542	44	2.3" x 1.6"	\$13.95	\$12.49	\$11.95
73551	68	3.4" x 1.6"	13.95	12.95	11.95
73569	84	4.3" x 1.9"	15.95	14.95	13.95


Enter web codes online for additional product listings & specifications. Look for the web code box on the home page.

www.Jameco.com/More

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

BELLIN DYNAMIC SYSTEMS, INC. Surface Mount Proto Boards

Prototyping SMT circuit boards has been tedious and time-consuming. Now there is an easy, cost-effective and versatile Snap-Apart™ solution from Bellin Dynamic Systems.



- V-groove scoring between elements for smooth straight edges
- Compatible with .100" single or dual row male headers (see pg 74)
- Board thickness: 0.031" • Size: 7.6"L x 5.0"W
- Visit www.Jameco.com for additional specifications

★ Web Code: HDS

Small SMT

Part No.	Mfr. P/N	Board Description	1	10
215491	B502	160 SMT pattern, SOT/SOIC/TSOP/MSOP/DPAK & more	\$44.95	\$39.95
227344	B513	300 SMT pattern, SC90, SOT23-6, 323-6, TSOP, MSOP8, 10+	44.95	39.95

SOIC

215520	B505	60 SOIC SMT pattern, SOIC 8, 14, 16, 24, 32, 40 & more	\$44.95	\$39.95
227310	B510	140 SMT pattern, SOIC 8 to DIP .300" width	44.95	39.95
227328	B511	63 SMT pattern, SOIC n/wd 8, 14, 16, 18, 20 to DIP .300"	27.95	25.95
227352	B514	72 SMT pattern, SOIC narrow 8, 14, 16, 18, 20 to DIP .300"	44.95	39.95
227361	B515	30 SMT pattern, SOIC 24, 28, 32 to DIP .600" width	29.95	27.95

Fine Pitch Dual Row

215503	B503	34 SMT pattern, SOIC/QSOP/TSOP/MSOP/TSSOP & more	\$44.95	\$39.95
227281	B507	40 SMT pattern, SSOP/TSSOP 16, 20, 32, 40 & more	44.95	39.95
323889	B516	54 SMT pattern, 0.65mm TSSOP 14/16/20/28 to DIP 0.300/0.600	44.95	39.95
323900	B517	18 SMT pattern, 0.4mm/0.5mm/0.65mm TSSOP 48	29.95	27.95
681141	B536	4 SMT pattern, 0.5mm TSSOP 14/16/20/28	24.95	21.95
2097934	B537	54 SMT pattern, 0.4mm TVSOP 14/16 & TSSOP/TVSOP 20/28	24.95	22.95

Quad

323918	B518	2 SMT 0.65mm or 0.8mm pitch, universal QFT adapter for... QFP32/40/48/56/64 (by 8-pin increments to 256 pins)	\$24.95	\$21.95
336479	B530	8 SMT, 0.65/0.80mm QFP/MLF 8 - 80 pins (even # of pins/side)	24.95	21.95
336487	B531	8 SMT, 0.65/0.80mm QFP/MLF 4 - 76 pins (odd # of pins/side)	24.95	21.95
336508	B533	8 SMT, 0.40/0.50mm QFP/MLF 4 - 76 pins (odd # of pins/side)	24.95	21.95
681150	B535	8 SMT, 0.40/0.50/0.65/0.80mm QFP/TQFP/QFN/MLF/MLP 4/8/12/16/24/28/32 pins	24.95	21.95

PCB Connector (0.062" thick through-hole)

Part No.	Mfr. P/N	Description	Price
227272	B506	45 SMT pattern, USB A, B/1394/RJ11, 12, 45/DB9 PCB connector	\$24.95

PitchStick™

227299	B508	20 SMT pattern, 48 inline pads, metric/rare pitches	\$24.95
681133	B534	2 SMT pattern, 48 inline pads, 19.69/25.59 mil pitches	27.95

Kit

681205	KIT-302	1 each of B504, B505, B507, B508, B510, B513, B514, B515, B516, B517, B518, B519, B535, B536, B537 & 3 of B500	\$349.95
--------	---------	----------------------------------------------------------------------------------------------------------------	----------

Development Board

- Six slots for DC regulators • "Star Ground" points for non-isolated supplies
- Marked referencing: chassis, earth or circuit common

Part No.	Mfr. Part No.	1	10
2097942	B500	\$24.95	\$21.95

microEngineering Labs PICBasic & Pro Compilers

- Compatible w/ most PICmicro MCU programmers including EPIC plus
- Use in DOS or Windows® (includes Windows® editor/DE software)
- I²C instructions to access external serial EEPROMs

132661: PICBasic Compiler

- Expanded BASIC Stamp I compatible instruction set
- Supports PIC12C67x, 14Cxxx, 16C55x, 66x, 7xx, 84, 92x, and 16CF8xx microcontrollers
- Serial speeds to 9600 baud

150543: PICBasic Pro Compiler

- Direct and library routine access to any pin or register
- Automation page boundary handling past 2k • Built-in LCD support
- MPLAB/MPASM/ICE compatibility • Bit, byte, word arrays
- Supports PIC12C5xx, 12C67x, 12C67x, 14C000, 16C5x, 16C55x, 6xx, 7xx, 84, 92x, 16CE62x, 16F62x, 7x, 8x, 87x, 17Cxxx and 18Cxxx microcontrollers

Part No.	Mfr. Part No.	Description	1	5
132661	PBC	PICBasic compiler	\$65.95	\$59.95
150543	PBP	PICBasic Pro compiler	225.95	195.95

150543



ProtoFlex Flexible Prototyping System

ProtoFlex has devised a flexible, self-adhesive adapter system that makes it easier to integrate SOIC, TSSOP, SOT, D-Sub, and other small components into your prototyping design.



The precut adapters can be applied to virtually any surface.

★ Web Code: FPS

- 3 mil thick design keeps components low profile
- Large pads allow for easy surface mounting of wires
- Unique, dual, asymmetric hole pattern for multiple connection points
- Multiple silk-screen blocks for reference and pin identification

Part No.	Description	1	5
2121201	SOIC, 5 ea. of 8, 14, 16 & 20-pin adapters	\$59.95	\$56.95
2121210	TSSOP/SSOP, 5 ea. of 8, 14, 16 & 20-pin adapters, .65mm pitch	59.95	56.95
2121228	Variety of common SOT, SC-70, DD-PAK, 1206 & other SMT layouts	59.95	56.95
2121236	IDC ribbon, 4 ea. of 10, 20 & 34-pin configurations, 2.54mm pitch	59.95	56.95
2121244	D-Sub interface, 4 ea. 9, 15 & 25-pin configurations, 2.74mm pitch	559.95	56.95
2121252	Kapton insulators, 3 mil, for electrical & thermal insulation, pre-cut	19.95	18.95
2121261	Protoboard alignment tool, board must have 1.06mm dia. holes	59.95	54.95
2121279	Tool accessory kit, 4 alignment pins, 4 screws, foam pad, case	24.95	22.95
2121287	4 replacement pins for alignment tool, .13mm pin dia., fits 1.06mm board holes	1.29	1.15

microEngineering Labs "PICProto" Prototyping Boards

- Holds microcontroller, 5V regulator, oscillator, capacitors and DB9-25 connector
- Double-sided board with plated-through holes
- Large prototyping area
- Silkscreen legend
- Solder mask on both sides makes soldering easy

★ Web Code: DAT



132644

132636

132652

Includes: Documentation sheet with schematic, suggested parts and placement

Part No.	Mfr. Part No.	Description	Size (L" x W")	1	5
PICProto 18: All 18-pin PICs including PIC16C52, 54, 56, 58, 554, 558, 61, 620, 621, 622, 71, 710, 711, 712, 715, 716, 84, 16CE623, 624, 625, 16F627, 628, 83 and 84					
132644	PP18	PICProto 18	3.0 x 1.5	\$9.95	\$8.95
PPUSB: For the 28-pin PIC16C745, 765; PIC18F2450, 2455, 2550 For the 40-pin PIC18F4450, 4455, 4550					
1942180	PPUSB	PICProto USB	3.6 x 4.1	\$19.95	\$17.95
PICProto 3: For the 28-pin PIC16C62, 63, 642, 66, 72, 76, 773, 16F73, 76, 870, 872, 873, 876, 18C242 and 252					
132636	PP3	PICProto 3	3.0 x 3.0	\$14.95	\$12.49
PICProto 64: For the 40-pin PIC16C64, 65, 662, 67, 74, 77, 774, 16F74, 77, 871, 874, 18C422 and 452					
132652	PP64	PICProto 64	4.0 x 3.0	\$16.95	\$12.95

microEngineering Labs Experimenter's Module Board

Provides an assembled test bed containing most of the circuitry commonly used with PIC microcontrollers.

Many different projects may be created using the LAB-X1, including calculator, voltmeter, LCD backpack, tone dialer and RC servo controller.

- 40-pin ZIF socket for PIC MCU (P/N 104030, below) and PIC16F877-20/P (P/N 176882, below)
- Reset button • 16 switch keypad • 2 RC servo connectors
- LED bargraph • RS-232 interface • 3 potentiometers • Speaker
- 2 lines x 20 characters LCD module • Size: 5.5" x 5.6" • One-year warranty
- Socket for I²C & SPI serial EEPROM, RS-485 interface, Microwire serial EEPROM and real time clock/serial analog to digital converter (devices not included)
- EPIC in-circuit programming connector • Prototyping area for additional circuit

Requires: AC adapter (below)

Part No.	Description	1	5
169113	LAB-X1A experimenter board (assembled)	\$199.95	\$189.95
176882	PIC16F877-20/P microcontroller (pg 11)	5.65	5.45
127976	AC adapter (details on pg 124)	6.95	6.25
104030	40-pin ZIF socket (details on pg 84)	11.95	10.75



RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

microEngineering Labs EPIC Plus PICmicro Programmer

The EPIC Plus Programmer quickly and easily programs the PIC12Cxxx, 12CExxx, 16C505, 16C55x, 6xx, 7xx, 84, 9xx, 16CE62x, 16F62X, 7x, 8x, 87x, 14C000, 17C7xx, 18Cxxx microcontrollers from Microchip. The BASIC programmer includes an 18-pin socket for programming 8, 14 and 18-pin PICmicro MCUs. Devices available separately on page 11.

- Simple installation with parallel port (printer) interface
- Command line operation for automated, non-interactive programming

Requires: Two 9V batteries or AC adapter (below)

Part No.	Description	1	5
132679	EPIC Plus PICmicro programmer	\$54.95	\$49.95
136397	8/18/20-pin ZIF adapter	29.95	26.95
132610	40/28-pin ZIF adapter	29.95	26.95
162317	AC wall adapter (16VDC/500mA, details on pg 125)	9.95	8.95
67257	6' DB25 cable (details on pg 188)	7.95	6.95



PIC™ Programmer Board

- Regularly updated list of microcontrollers through Velleman's website (www.vellemanusa.com)
- On-board configurable 40-pin ZIF socket
- Easy to use programming PICprog2006 software included • Size: 5.3"L x 2.6"W
- On-board "In Circuit Programming" DSUB-9 connector
- Power supply: 15VDC @ 300mA adapter (recommend P/N 190001, pg 125)
- Supports over 50 PIC products. Visit www.vellemanusa.com for details

System Requirements: IBM compatible PC, Pentium or better, Windows® 98/ME/NT/XP/Vista, CDROM drive, RS-232 port

Part No.	Mfr. Part No.	Description	1	5
2006844	VM134	PIC™ programmer board	\$89.95	\$84.95



EPROM Eraser

- Erases 1 chip in 15 min. or 8 chips in 21 min.
- Conductive foam liner eliminates static build-up
- Maintains constant exposure distance of 1"
- Built-in safety lock to prevent UV exposure
- Complete with holding tray for 8 chips • UV intensity: 6.8mW/cm²

Part No.	Description	Size (L" x W" x H")	Weight	1	5
15712	8-chip eraser	9.0 x 3.7 x 2.6	2.3 lbs.	\$185.95	\$169.95
34382	Lamp for 15712	—	0.6 oz.	39.95	34.95



IC Programming Solutions

EE Tools' main goal is to develop and manufacture the most sophisticated, reliable, and fast stand-alone and PC based device programmers which will surpass those introduced by the manufacturers from the Far East. All products are CE approved, and design.

- All products made in the USA • Free software updates for life • CE approved • Over 100 adapters available @ www.Jameco.com



EeRom-8U USB Port 8-bit Rom Emulator

- 8-bit Rom Emulator
- Input voltage: 5V, 3.3V w/o adapter
- Supports: EPROM, Flash, SRAM

Part No.	Description	Price
2110203	Emulator	\$294.95
2110220	28-pin PLCC adapter	84.95
2110211	32-pin PLCC adapter	84.95



ChipMax Low Cost Universal Programmer

- USB interface • 40-pin ZIF socket
- Input voltage: 5V
- No. of devices supported: 8,000+
- Supports: Flash EPROM, EPROM, EEPROM, Microcontroller, PALCE, GAL

Part No.	Mfr. Part No.	Price
207731	CHIPMAX	\$294.95



ChipMax2 Low Cost Fast Universal Programmer

- USB interface
- 48-pin ZIF socket
- Input voltage: 5V, 3.3V, 2.7V, 1.8V
- No. of devices supported: 15,000+
- Supports: NAND Flash Memory, Standard Flash Memory, EPROM, EEPROM, Serial PROM, GAL, FPGA, MCU

Part No.	Mfr. Part No.	Price
694866	CHIPMAX2	\$544.95



TopMaxII High Speed Universal Programmer

- USB 2.0 PC interface
- 48-pin ZIF socket
- Input voltage: 5V, 3.3V, 1.8V
- No. of devices supported: 20,000+
- Supports: NAND Flash Memory, Standard Flash Memory, EPROM, EEPROM, Serial PROM, PAL, GAL, FPGA, MCU

Part No.	Mfr. Part No.	Price
2110158	TOPMAXII	\$794.95

Adapters for Universal Programmers

Part No.	Mfr. Part No.	Price	Part No.	Mfr. Part No.	Price
2110166	32-pin PLCC adapter	\$79.95	2110182	16-pin TSOP adapter	\$79.95
694840	44-pin PLCC adapter	114.95	2110174	48-pin TSOP adapter	134.95
2110191	20-pin SOIC adapter	79.95			

PIC, IC & Universal Programmers

microEngineering Labs

USB PIC Programmer

More than 300 PIC microcontrollers are supported and support for future devices can be added via FLASH firmware updates. Intelligent voltage regulation allows programming of the new, low voltage PIC® MCUs as well as standard 5V devices.



- Dual color indicator shows ready/busy states
- Full featured, command-line operation • Fast full speed USB data transfer
- Standard USB cable (Type A male to Type B male) • HID interface
- Automatic Vdd and Vpp adjustment for different PIC MCUs
- In-Circuit Serial Programming (ICSP) connector for interface to project board
- Compatible with microchip HEX format files & all programming adapters

Part No.	Mfr. Part No.	Description	1	5
1942382	U2	USB PIC programmer	\$89.95	\$84.95
1942606	840Z	ZIF adapter (8-40 pins)	39.95	37.95

***MicroEngineering Labs Programmers Available Online — Enter Web Code: EAT**



PICKit™ 2 Microcontroller Starter Kit

The PICKit™ 2 microcontroller programmer is a low cost development programmer. It is capable of programming most of Microchip's Flash microcontrollers. New device support can be added by updating the operating system. The latest firmware is available on Microchip's website. This kit includes PICKit™ 2 microcontroller programmer, USB cable and CD ROM.



Part No.	Mfr. Part No.	Description	1	5
697338	DV164120	Programmer starter kit	\$74.95	\$69.95

Flash Writer/Programmer with USB Interface

- Supports Flash EPROMs, EEPROMs & EPROMs
- Type, read, load, edit, checksum, erase, blank check, program, verify, protect functions
- Programs 8-bit Flash serial ICs via USB cable on Windows® 9x/2000/XP • High speed: only 22 seconds to blank check, program and verify MXIC MX29F040
- File formats supported: binary & machine code, Intel HEX, Motorola HEX, Tektronix

Includes: USB cable, 12V @ 500mA adapter, CD-ROM software and manual

Part No.	Description	1	5
225947	Leaper 3D	\$199.95	\$179.95

***Universal Programmers — Enter Web Code SUP**

***Web Code: EET**



Data sheets are available for most of the products we carry. Find them easily on the product specification page. www.Jameco.com

***For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above**

150 to 500-Watt PC Power Supplies



2081764



1955941



319994



1810136



2110254



308814



AT Power Supplies

* Web Code: HCA

Part No.	Mfr.	Mfr. Part No.	Power (W)	Output (VDC/Amps)	Input (VAC @ Hz)	Input Connector (Mating Connector/Cord)	Certification	Size (L" x W" x H")	Wt. (lbs)	Pricing		
										1	5	25
2081764	Magic	MPI-925A*	200	+5/20, +12/7.5, -12/1, -5/1	85-265 @ 50-60 switching	3-prong AC receptacle (P/N 38050, pg 133)	UL/CUL/TUV/CE	6.0 x 5.6 x 3.4	3.3	\$39.95	\$35.95	\$31.95
249754	Sparkle	SPI-300G	300	+5/30, -5/0.5A, +12V/12A, -12V/0.5A	100-240 @ 50-60 switchable	3-prong AC receptacle (P/N 38050, pg 133)	UL/CSA/TUV FCC	5.5 x 5.9 x 3.4	3.5	64.95	58.95	52.95
2081861	Pacific Power	KPP400-29	400	+5/42, +12/14, -5/1, -12/1	100-240 @ 50-60 switching	3-prong AC receptacle (P/N 38050, pg 133)	CUL/TUV/CE	5.5 x 6.0 x 3.5	4.6	64.95	57.95	49.95

ATX Power Supplies

Part No.	Mfr.	Mfr. Part No.	Power (W)	Output (VDC/A)	Input (VAC @ Hz)	Input Connector (Mating Connector/Cord)	Certification	Size (L" x W" x H")	Wt. (lbs)	Pricing		
										1	5	25
1955941	Magic Power Tech	MPI-806H*	60	+3.3/6, +5/8, +12/3, +5VSB/0.75, -12/0.5	90-264 @ 47-63	Connector, CN1-CN3	UL/CB/TUV	5.0 x 3.1 x 1.5	1.0	\$89.95	\$84.95	\$79.95
2081887	Enhance	ENP-0185T	150	+3.3/7, +5/12, +12/5, +5VSB/0.8, -5/0.2, -12/0.3	200-240 @ 50	3-prong AC receptacle (P/N 38050, pg 133)	CUL/TUV/CE	7.5 x 3.25 x 1.7	2.5	24.95	22.49	19.95
2081879	Pacific Power	KPT230C-4A	230	+3.3/15, +5/25, +12/9, +5VSB/1A, -5/1, -12/1	100-240 @ 50-60 switching	3-prong AC receptacle (P/N 38050, pg 133)	CUL/TUV/CE	8.0 x 4.0 x 1.6	3.0	19.95	18.49	16.95
319994	3Y Power Technology	AP-1250-1112*	250	+3.3/20, +5/25, +12/12 +5VSB/3, -5/0.5, -12/0.5	100-240 @ 50-60 switching	3-prong AC receptacle (P/N 38050, pg 133)	UL/CUL/TUV/CE	7.5 x 4.0 x 1.6 (1U)	2.9	19.95	17.95	15.95
2110422	Sparkle	SPI2501UH-B204*	250	+3.3/16 +5/18, +12v1/16, +12v2/16 -12/0.8, -5/0.3, +5VSB/2.5	90-264 @ 47-63 switching	3-prong AC receptacle (P/N 38050, pg 133)	UL/CSA/TUV/CE/CB††	7.5 x 3.9 x 1.6 (1U)	2.9	69.95	62.95	59.95
427928	Seasonic	SS-300SFD Active PFC†	300	+3.3/20, +5/20, +12/8, +12/14.5, -12/0.8, +5VSB/2	90-264 @ 47-63 switching	3-prong AC receptacle (P/N 38050, pg 133)	UL/CUL/TUV/CE	5.1 x 4.9 x 2.5	2.7	54.95	53.55	49.95
2110238	Sparkle	ATX-300PA-B204*	300	+3.3/20, +5/20, +12v1/16, +12v2/16 -12/0.3, +5VSB/2.5	115 @ 57-63, 230 @ 47-53	3-prong AC receptacle (P/N 38050, pg 133)	UL/CSA/TUV/CB	5.5 x 5.9 x 3.4	3.3	39.95	36.95	32.95
1810136	Sparkle	FSP300-601U*†	300	+3.3/20, +5/25, +12/16, -5/0.3, -12/0.8, +5VSB/2	100-240 @ 50-60 switchable	3-prong AC receptacle (P/N 38050, pg 133)	UL/CUL/VDE/CE	8.3 x 4.0 x 1.6 (1U)	3.3	24.95	23.95	22.95
2110254	Sparkle	ATX-400PA-B204*	400	+3.3/20, +5/14, +12v1/18, +12v2/18 -12/0.3, +5VSB/2.5	115 @ 57-63, 230 @ 47-53	3-prong AC receptacle (P/N 38050, pg 133)	UL/CSA/TUV/CB	5.5 x 5.9 x 3.4	3.8	44.95	42.95	41.95
308814	Powmax	LP6100D*	400	+3.3/28, +5/30, +12/25, -5/0.3, -12/0.8, +5VSB/2	115/230 @ 60 switching	3-prong AC receptacle w/ 6' power cord	UL/CUL/TUV/CE	5.9 x 5.6 x 3.4	3.5	49.95	44.95	39.95
2110449	Sparkle	SPI4601UG-B204*	460	+3.3/20, +5/20, +12v1/16, +12v2/16 +12/16, -12/0.5, +5VSB/2.5	90-264 @ 47-63 switching	3-prong AC receptacle (P/N 38050, pg 133)	UL/CSA/CUL/TUV/CE/CB††	8.7 x 3.9 x 1.6 (1U)	3.7	109.95	104.95	99.95
422094	Seasonic	SS-500HT Active PFC†	500	+3.3/30, +5/30, +12/17, +12/16, -12/0.8, +5VSB/2	90-264 @ 47-63 switching	3-prong AC receptacle (P/N 38050, pg 133)	UL/CUL/TUV/CE	5.9 x 5.5 x 3.4	5.0	89.95	84.95	79.95
2110457	Sparkle	SPI500ACH8-B204*	500	3.3/24, +5/214, +12v1/18, +12v2/18 -12/0.5, +5VSB/2.5	90-265 @ 47-63 switching	3-prong AC receptacle (P/N 38050, pg 133)	UL/CSA/TUV/CB	5.5 x 5.9 x 3.4	3.6	59.95	56.95	53.95

* See photo above † Comes with SATA ready connector †† 80 Plus energy efficient

Power Cable

Part No.	Description	Length	AWG	Pricing		
				1	5	25
1955950	20-pin ATX, 4-pin Molex type (for P/N 1955941)	11.5"	18	\$14.95	\$14.49	\$13.95

NEW
MARKED IN PINK



For other Power Cables and Adapters, see pages 186-187

Laptop Regulated Table-Top Power Supplies (3-Wire AC Input)

* Web Code: LRT

◆ Polarity 2 (center positive) Female(F)



148267



2099411

Part No.	Manufacturer	Mfr. Part No.	Volts (VDC) / Current (A)	ID x OD mm Female/Male; Polarity ◆	Input VAC@Hz	Power (W)	LED Ind.	Size (L" x W" x H")	Cords* (DC/AC)	Wt. (lbs.)	Agency Approvals	Pricing			
												1	10	50	100
148267	AcBel	AP13AD02	+19/3.42	2.5mm x 5.5mm rt. angle F 2	100-240@50-60	65	No	4.2 x 1.8 x 1.1	6' / 6'	0.8	UL/CUL/TUV/CE	\$36.95	\$32.95	\$29.95	\$26.95
2099411	Sparkle Power	FSP090-DMCBI	+19/4.74	7 ea. right angle plugs F 2	100-240@50-60	90	No	5.3 x 2.3 x 1.3	6' / 5'	0.7	UL/CUL/TUV/CEC	59.95	53.95	47.95	42.95
2099761	Hi-Capacity	AC-C10K	+19/8.0	2.5mm x 5.5mm F 2	100-240@50-60	120	Yes	6.6 x 2.4 x 1.5	4' / 6'	1.0	UL/CUL/TUV/CE	49.95	44.95	39.95	35.95

We're Listening to What You Need


Our goal is to provide you with more of what you want.
Let us know how we can better serve your electronic needs.
Send feedback to Management@Jameco.com.

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

Interface, Graphic & External Sound Cards

NEW
MARKED IN PINK

★ Web Code: VBB



172006




344903



2123080



364111



291901



2124939

Serial Interface Cards

Part No.	Manufacturer	Product No.	Bus Type	Ports	Connectors	Description	1	10
172006	Various	99467	PCI	2	DB9	32-byte FIFO, 921kb/sec transfer rate, supports IRQ sharing, dual 16C650 DB9 male	\$34.95	\$30.95
171548	ValuePro	99468	PCI	4	DB25	32-byte FIFO, standard RS-232 interface, 921kb/sec transfer rate, supports IRQ sharing 16C550	69.95	59.95
171661	ValuePro	99469	PCI	8	DB25	32-byte FIFO, standard RS-232 interface, 921kb/sec transfer rate, supports IRQ sharing 16C650	89.95	84.95
344903	SYBA	SD-PCI-1S	PCI	2	DB9	32-bit PCI bus, dual DB-9 male, Nm9835CV chipset.	27.95	24.95

Parallel Interface Card

2123080	ValuePro	U10-00075	PCI	1	DB25	16-byte FIFO, 2.7Mbps transfer rate, IEEE 1284-1994, supports ECP/EPP/SPP/BPP, Windows®/Linux	\$39.95	\$34.95
---------	----------	-----------	-----	---	------	-----------------------------------------------------------------------------------------------	---------	---------

Video Graphics Card

364111	ATI	109-54100-00	PCI	2	HDDB15	8MB graphics accelerator, Rage LT PRO AGP chipset, 7-pin TV-out and DFB connectors, Windows® 98 and NT4.0 compatible.	\$24.95	\$22.45
--------	-----	--------------	-----	---	--------	-----------------------------------------------------------------------------------------------------------------------	---------	---------

SCSI Cards

149294	ValuePro	CI-2020	ISA	—	50-pin F	DOS, Windows® NT/95, OS2 Netware, SCO UNIX compatible, internal and external SCSI-II connectors, fast SCSI II	\$24.95	\$22.95
191513	Adaptec	AHA-2940U2B	PCI	2	68-pin F	AIC-7890AB chipset, Windows® 95/NT, Netware, OS/2 compatible, Ultra II SCSI internal/external Ultra II SCSI 68-pin connectors, ultra SCSI II	39.95	34.95

I/O Controller Card

291901	—	MCT-IDEFH-2	ISA	—	Multiple	16-bit interface, supports 2 IDE hard drives up to 528MB and 2 floppy drives from 360kb to 1.44Mb, jumper selectable for enabling and disabling ports	\$4.95	\$4.49
--------	---	-------------	-----	---	----------	-------------------------------------------------------------------------------------------------------------------------------------------------------	--------	--------

External Sound Card

2124939	ValuePro	AA1570	USB	—	Multiple	7.1 ch. sound box, line/mic-in, record & playback, external audio control, S/PDIF-in/out	\$45.95	\$41.49
---------	----------	--------	-----	---	----------	------------------------------------------------------------------------------------------	---------	---------

Computer Switchboxes

★ Web Code: CAK



149391



132249



310834



134017



79126



20095



310818

KVM Switchboxes

Part No.	Mfr.	Product No.	Description	Connectors	Size (L" x W" x H")	Wt. (lbs.)	1	5
149391	ATEN	CS-114A	4-way KVM switchbox (4 PCs to one user)	DB9 serial female / PS/2 keyboard & mouse; recommend P/N 174908 (pg 187) for PS/2 cable. Includes manual and power supply	10.0 x 7.0 x 3.0	7.1	\$119.95	\$107.95
132249	ValuePro	40H1-25602	2-user switchbox (1 PC to 2 users)	Keyboard (5-pin DIN male); Monitor (DB15HD female); Mouse (DB9 male). P/N 66174 (DB15HD M-M cable); P/N 132346 (DB9 F-F cable) pg 188	7.5 x 5.3 x 2.8	1.6	12.95	11.95
310834	Various	KS-104	4-way KVM switchbox (4 PCs to 1 user)	PS/2 female for keyboard and mouse; HDDB15 for monitor, recommend P/N 202180 pg 124 for power supply	7.4 x 1.3 x 2.9	7.1	44.95	42.95
134017	ValuePro	40H1-25604	4-user switchbox (1 PC to 4 users)	5-pin DIN male for keyboard, HDDB15 female for monitor, DB9 male for mouse use P/N 66174 HDDB15 M-M cable for monitor; P/N 132346 pg 188 (BD9 F-F cable for mouse)	7.5 x 2.8 x 5.3	2.3	19.95	17.95

Miscellaneous Computer Switchboxes

79126	ValuePro	40D1-10602	2-serial port switchbox	DB9 female (2-ports to 1PC)	6.0 x 4.8 x 2.5	1.2	\$9.95	\$8.95
20095	ValuePro	40D3-17602	2-port switchbox	DB25 female (2PCs to 1 printer)	6.0 x 5.8 x 2.3	1.4	10.95	9.95
310818	Various	USB-2PORT	2-way USB switchbox	1 USB-B female; 2 USB-A female	5.1 x 3.7 x 1.8	2.5	7.95	7.49

More Information Online

Compare products online to quickly find the products you want with the specifications and real time product availability. Purchasing products has never been easier.
www.Jameco.com



Computer Cables on pages 185-188

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Mice, Keyboards, Keypads & PC Accessories

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

Mice & Mouse Pads

* Web Code: MCM



Part No.	Manufacturer	Mfr. Part No.	Type	Interface	Description	Size (L" x W" x H")	1	10	25
685943	Dell	OW7751	Mech. Ball	USB	3-button with scroll, black	4.8 x 2.5 x 1.5	\$6.95	\$6.49	\$5.95
687746	Cherry	M-5000	Optical	USB-PS/2	3-button with scroll with PS/2 to USB adapter, black	4.6 x 2.6 x 1.5	7.95	6.95	6.25
265471	Various	—	Optical	USB	Mini optical mouse	3.7 x 2.2 x 1.3	8.95	8.49	7.95
305082	IOne	Libra-90	Trackball	PS/2	PS/2 trackball with USB adapter, black	5.6 x 4.7 x 1.9	24.95	22.95	19.95
2006650	IOne	MSM9UP-BLK	Optical	USB-PS/2	3-button with scroll, black	4.5 x 2.3 x 1.5	8.95	7.95	6.95
265447	BenchPro	32022378	Optical	PS/2	Wireless, 5 button optical scrollpro w/ PS/2 to USB adapter	4.9 x 3.0 x 1.6	16.95	15.95	14.95
121363	—	KP-01	Mouse pad	—	Mini mouse pad, blue	7.0 x 5.5 x 1.0	.69	.59	.49
1951001	—	MP-ATT	Mouse pad	—	Mouse pad (2" x 3.5"; 2.75" x 5" window slots)	9.5 x 7.5 x 1.2	.49	.45	.39

* Web Code: LBU

Keyboards & Keypads



Part No.	Mfr.	Mfr. Part No.	Interface	Description	Size (L" x W" x H")	Wt. (lbs.)	1	10	25
455603	Powmax	KM-2501	PS/2	104-key soft touch w/ multimedia & 12 function keys.	17.5 x 6.0 x 1.2	1.8	\$7.95	\$6.95	\$5.95
319812	PC Concepts	iCIA	PS/2	107-key soft touch keyboard w/ programmable function keys, software included	17.5 x 5.7 x 0.8	1.8	7.95	6.95	6.25
639550	IOne	Scorpius-2KB	PS/2	103-key soft touch keyboard, Windows® 98SE/2000/ME/XP compatible (black)	15.9 x 6.5 x 1.3	2.1	39.95	35.95	31.95
681230	NMB	RT915CTW	PS/2	104-key tactile keyboard w/ 12 function keys w/ built-in speakers	18.5 x 10.0 x 3.2	2.5	9.95	8.95	7.95
454483	Powmax	HB5103	PS/2	Black 3-in-1 internet kit 104-key keyboard, optical mouse & speaker set	17.1 x 6.12 x 1.0	2.24	12.95	11.49	10.95
319661	IOne	Gemini-IM1	PS/2	104-key soft touch wireless keyboard w/ 12 multimedia function keys and 2-butt optical mouse, batteries included	17.6 x 7.5 x 1.6	2.2	12.95	11.49	9.95
308101	Labtech	967360-0403	PS/2	104-key wireless RF keyboard and 3-button optical scroll-mouse multimedia hot-keys	18.0 x 8.7 x 1.6	4.5	26.95	24.95	22.95
1537109	Arctic	25551	USB	18-key tactile keypad	4.3 x 3.0 x 0.5	0.2	11.95	10.95	9.95
265375	IOne	Scorpius-22RB	Serial	22-key tactile keypad w/ 2-key rollover and auto repeat function	6.2 x 4.2 x 1.3	0.8	39.95	35.95	31.95

CPU Heat Sinks with Fan

* Web Code: MBG

Part No.	Description	Size (H" x W" x D")	1	10
684748	Heat sink w/ fan, socket 7 Pentium®	1.02 x 2.60 x 2.30	\$2.95	\$2.65
319185	Heat sink w/ fan, socket 7 PIII	1.40 x 2.62 x 2.30	3.75	3.49
1945313	Heat sink w/ fan, Pentium® 75-133MHz	2.07 x 2.05 x 1.43	4.95	4.49
206244	Heat sink w/ dual fan, SECC II Pentium®	1.24 x 1.96 x 5.25	7.95	6.95
319951	Heat sink w/ dual fan, for PIII slot 1	2.00 x 4.90 x 8.50	5.95	5.49
661087	Heat sink w/ fan, socket 370 PIII	2.36 x 2.19 x 1.54	5.95	5.49
645482	Heat sink w/ fan, socket 370 PIII	1.30 x 2.05 x 1.97	11.95	10.95

Legacy 3.5" Hard Disk Drives

* Web Code: SAW

Part No.	Capacity	Description	Warranty	1	10
151036	3.2GB★	EIDE/Ultra DMA33	1 year	\$34.95	\$31.45
151044	4.3GB★	EIDE/Ultra DMA33	1 year	49.95	44.95
146333	2.5GB★	EIDE/FAST ATA-2	1 year	29.95	26.95
124978	1.27GB★	IDE	1 year	29.95	26.95

★ Pull = Extra Savings

Disk Drive Mounting Rails

- AT and compatibles
- 8 mounting holes
- Includes all necessary mounting hardware

Part No.	Description	Wt. (lbs.)	1	10
34323	Mounting rails (2)	0.04	\$1.95	\$1.49

3.5" Hard Drive Bracket Short

- Allows drive to be mounted in a 5.25" bay

Part No.	Product No.	Color	1	10
1950745	G/S435	Silver	\$4.95	\$4.49

* Video Text Modules Available Online — Enter Web Code RAJ

Monitor/Mouse/Keyboard Cable

HDDDB15 male/female for monitor, 5-pin DIN male/female for keyboard and DB9 male/female for mouse.

Part No.	Product No.	Length	1	5
141284	G/S(KVM062)	6'	\$9.95	\$8.95

Replacement Switches for AT-Style Computer Cases

PC Pushbutton Switch

- Contacts rated at 250VAC • Current: 8A
- Alternate action double pole switch
- UL/CSA/VDE approved • Size: 0.9"L x 0.7"W x 0.9"D

Part No.	Product No.	1	10	100
174238	PSD-1-2S8	\$1.49	\$1.25	\$0.95

PC Rocker Switch

- For mini-tower cases
- Contacts rated at 250VAC
- UL/CSA approved
- Current: 10A
- DPST
- Size: 0.9"L x 1.2"W x 1.4"D

Part No.	Product No.	1	10	100
127028	GRK-618A	\$1.49	\$1.25	\$0.95

Business Card CD-R Kit

Differentiate yourself or your business from others. This kit includes 12 50MB capacity CD-R and sleeves, 16 labels and label design software. A great way to promote your business in trade shows and exhibits. Easy to carry and cost-effective.

Part No.	Description	1	10
249308	Do-It-Yourself Business Card CD-R kit	\$2.49	\$2.25

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



2, 4, 6, 7, 8 & 12-Outlet Surge Protectors

Isobar Premium Surge Protectors

- Up to \$50,000 Ultimate Lifetime Insurance covers Isobar and connected equipment against surge damage for life!
- Diagnostic indicators on Ultra versions alert you to improper outlet wiring, loss of AC power, and damage to protection circuitry
- 4 & 6-outlet protectors: 6' cord;
- 8 & 12-outlet protectors: 12' cord
- UL 1449 and 1283 listed
- Lifetime warranty
- 2114669**: 2-line telephone/DSL protection
- 139686**: Fits 19" rack mount
- Size: **18981**: 5.8"L x 3.5"W x 2.5"H;
- 2114651**: 7.0"L x 3.5"W x 2.5"H;
- 2114669**: 7.0"L x 3.5"W x 2.5"H
- 19001**: 9.0"L x 3.5"W x 2.5"H;
- 139686**: 17.5"L x 4.0"W x 1.8"H

*Web Code: CAC

ULTIMATE
LIFETIME
INSURANCE



19001



139686

isobar®



Part No.	Mfr. Part No.	Joules	Description	Wt. (lbs.)	1	5
18981	ISOBAR4	2200	4 outlet, 2 isolated filters (6')	2.4	\$49.95	\$44.35
2114651	ISOBAR6U	2350	6 outlet, 3 isolated filters	2.9	69.95	64.95
2114669	ISOTEL6U	2850	6 outlet, 3 isolated filters	3.3	74.95	69.95
19001	ISOBAR8U	2350	8 outlet, 4 isolated filters (12')	3.5	74.95	66.95
139686	IBAR12RM	750	12 outlet, 2 isolated filters (15')	4.7	129.95	122.95

Super 7 Standard Surge Protectors – 7 Outlet

- \$75,000 Ultimate Lifetime Insurance
- Up to 42,000 amp spikes
- Effective spike and noise suppression w/ diagnostic LEDs
- 2114677**: 1-line telephone/DSL protection

Part No.	Mfr. Part No.	Joules	Size (L" x W" x H")	Wt. (lbs.)	1	5
124337	Super7	2350	10.5 x 2.5 x 1.5	1.6	\$19.95	\$17.95
2114677	Super7tel	2470	10.25 x 2.75 x 1.5	2.2	31.95	28.95

12-Outlet Power Strip

- No surge suppression
- Lighted/protected switch
- 15' cord
- Size: 36"L x 1.5"W x 1.5"D

Part No.	Mfr. Part No.	Electrical Rating	Outlet Spacing	Wt. (lbs.)	1	10
2114642	PS3612	1800W (15A)	2.63"	3.8	\$52.95	\$48.95

2-Outlet Travel Surge Protectors

- 2114618**: \$50,000 Ultimate Lifetime Insurance
- Retractable plug
- Modem/fax protection
- 2114626/2114634**: \$100,000 Ultimate Lifetime Insurance
- In-line connection for notebooks
- Modem/fax protection with splitter (1-line in/2-lines out)

Part No.	Mfr. Part No.	Joules	Description	Size (L"xW"xH")	Wt. (lbs.)	1	5
2114618	Traveler	1050	2 outlet w/ phone	1.75 x 2.5 x 3.5	0.3	\$17.95	\$15.95
2114626	TravelerC6	1130	3-prong, in-line	1.0 x 4.25 x 1.75	0.2	29.95	26.95
2114634	TravelerC8	1130	2-prong, in-line	1.0 x 4.25 x 1.75	0.2	22.95	19.95

HDD Removable Enclosures

319775: IDE

- For 3.5" drive bays
- Weight: 1.31 lbs.

2120444: SATA Hot Swappable

- For 5.25" drive bays
- For 3.5" SATA & SATA II hard disks

Part No.	Description	Size (W" x D" x H")	1	5
319775	IDE	5.8 x 8.9 x 1.6	\$7.95	\$6.95
2120444	SATA	5.9 x 7.8 x 1.7	19.95	17.95

PC Speakers

- 3.5mm male stereo plug
- Size: 4.7"H x 3.0"W x 4.0"D

Part No.	Mfr. Part No.	1	5	25
311079	5065-5746	\$4.95	\$4.49	\$3.95

polk audio



Hands-Free Condenser Microphone

- Cord length: 8'
- Connector: 3.5mm male stereo plug
- One-year warranty
- Size: 1.9"L x 1.2"W x 0.3"H

Part No.	Product No.	1	5	25
135248	MP-9108-R	\$4.95	\$4.49	\$3.95

Clip-On Lapel Microphone

- For Motorola cell phones and other applications
- 2.5mm male stereo plug
- Includes ear bud

Part No.	Cord Length	1	5	25
2078207	3'	\$1.95	\$1.79	\$1.59

*Web Code: GCP



6-Outlet Surge Protectors

20175: 6-outlet; 4' cord

- Metal power strip
- Size: 12.3"L x 2.4"W x 1.3"H

216485: 6-outlet; 4' cord

- Heavy-duty power cord (14AWG x 3)
- Size: 9.5"L x 1.7"W x 1.4"H
- Clamping voltage: 400V
- Max. surge volt.: 6500V
- RESET/OFF switch with built-in 15A circuit breaker


2075647: 6-outlet; 6' cord

- Rating: 15A/125VAC/1875W
- Clamping volt.: 330V
- Size: 13"L x 2.1"W x 2.3"H
- Expands from 13" to 18" to fit bulky adapters; each segment expands separately


*Web Code: XAR



20175



216485



2075647

Part No.	Mfr.	Product No.	Spike Current (Max.)	Wt. (lbs.)	1	10	25
20175	ValuePro	51W1-13206	4500A, 50 joules	1.5	\$11.95	\$10.95	\$9.95
216485	ValuePro	51W1-10206	4500A, 150 joules	0.9	12.95	11.49	9.95
2075647	Ideative	SS1650W-06	144,000A, 2160 joules	1.6	24.95	22.49	19.95

6-Outlet Power Tap Adapter w/ Surge Protection

- Right angle jacks
- Grounded outlets
- 180 joules
- Surge protection across line and neutral, line and ground
- Surge protection circuit good LED indicator
- 15A; 125VAC; 1875W
- TVSS: 330V

Part No.	Mfr. Part No.	Description	1	5	25
2082214	YE-08A	6-outlet wall surge protector	\$5.95	\$5.49	\$4.95

6-Outlet Power Strip w/ Personal Sensor

An energy saving control system that provides maximum surge and noise suppression while keeping plug load equipment off when there is no occupancy. Turns all controlled devices on when workspace is occupied, and off when the workspace is unoccupied with the user-defined time delay. 120° coverage up to 300'sq on sensor.

- 6-outlets by sensor
- Two LED indicators for correct wiring and surge protection function
- 15A dry contact relay
- Joule rating: 360 joules
- Initial clamping voltage: 200V
- Sensor can be mounted with double-backed tape to the bracket provided
- 4' power cord & 9' cable on sensor
- Size: 12.0"L x 2.2"W x 1.7"H
- Electrical rating: 120VAC, 15A, 60Hz
- UL1449 rating: 330V
- Maximum surge amperage: 27,000A
- UL/CUL approved

Includes: Double backing tape, cubicle divider-rail bracket

Part No.	Mfr. Part No.	Description	1	5	25
2100187	IDP-1000	6-outlet power strip w/ sensor	\$34.95	\$31.49	\$28.95

We Ship the Same Day!

Just place your order by 6PM EST.

10-Component 411-Piece Screw Kit

The perfect kit containing an assortment of the most common PC screws, washers, and caps used for building, repairing, and maintaining computer systems.

- 20 rubber washers
- 50 #6.5 x 4 to M3 metal jackscrews
- 20 rubber rivet washers
- 50 #6-32x 4mm Philips screws
- 50 case fan mounting screws F5 x 12 TP3
- 50 3 x 6 CD Rom screws
- 20 #6 x 8 tool-less screws
- 50 #6-32x 6" Philips screws
- 100 2.54mm jumper caps
- 1 precision Philips screwdriver

Part No.	Description	1	5
2120891	411-piece screw kit	\$19.95	\$17.95

*Web Code: PCS



Computer

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

ATEN RS-232 to RS-485/422 Bidirectional Converters

- Cable length: 4000' max.
 - Data rate: 1MB/second
 - Controlled by RTS signal
 - 4-wire full duplex or 2-wire half duplex
 - DCE and DTE selectable
 - Point-to-point and multidrop operations
 - RS-485: terminal block and RJ11 connections
 - RS-232: DB25 female connector • Input: 110VAC
 - Weight: 0.9 lbs. • One-year warranty
- 117701**
- 197931:** Port powered (power adapter not included)
• Data rate: 100kbps
- 122956:** Features RS-485SI; optical isolation: 2000V



Part No.	Mfr. Part No.	1	5
117701	RS-232-485/422	\$49.95	\$44.95
197931	RS-232-485/422	59.95	53.95
122956	RS-232-485/422 OPT ISO	89.95	80.95

ATEN RS-232 to RS-485/422 Bidirectional Converter

- Automatic internal RS-485 bus supervision
- No internal flow control for RS-485 required
- Point-to-point, multi drop, and simplex/duplex link selectable
- Supports transfer speeds of up to 115.2 Kbps
- Supports up to 32 receivers to be set in multi drop installations
- Extends up to 4000 feet through networking cables
- Maximum 2000V Isolation Protection



Part No.	Mfr. Part No.	1	5
2115733	IC485AI	\$99.95	\$89.95

ATEN Bidirectional Non-Buffered Serial-to-Parallel Converter

- Bidirectional conversion of parallel and serial signals
- Serial interface: hardware handshake RTS/CTS, software handshake Xon/Xoff; DCE/DTE selectable; parity: odd, even, or no parity; data bits: 7, 8
- Connectors: one DB25 female and one Centronics 36-pin male • One-year warranty
- Stop bits: 1 or 2 • Baud rate: 300 to 38,400bps
- Weight: 0.8 lbs. • Size: 4.0"L x 2.5"W x 1.0"H



Includes: AC adapter (9VAC @ 200mA) and manual

Part No.	Mfr. Part No.	1	5
116935	SXP320	\$34.95	\$32.95

*** Bidirectional Converters Online — Enter Web Code KEM**

AverKey Pro PC-to-TV Converter Box

- Converts VGA video or Macintosh® 640 x 480 to standard NTSC
- Built-in flicker filter
- Resolution: 800 x 600
- TV brightness control
- Compatible w/ Microsoft® Windows® 3.0 and higher
- Weight: 2.2 lbs. • Two-year warranty



System Requirements: VGA-based PC, DOS 3.0 or higher, 640kb RAM or larger

Includes: PC-to-TV converter, adapter, cables & manual

Part No.	Description	1	5
167193	Video signal pro	\$64.95	\$59.95

Serial ATA to IDE Converter

This serial ATA to IDE converter allows standard parallel ATA hard disk drives, CD-ROM, CD-RW, DVD-ROM, DVD + RW, to be used with serial ATA PCI cards or motherboards with serial ATA ports and meet the specification of serial ATA 1.0 interface.



- Compliance with Serial ATA Gen. 1.0
- Master/slave device emulation support
- Supports PIO mode 0 ~ 4, Ultra DMA mode 0 ~ 7, UDMA transfer rates of up to 150Mbps, ATAPI command set and 48-bit LBA addressing

System Requirements: PC with available Ultra ADA hard disk (IDE) and available Serial ATA host port

Part No.	Mfr. Part No.	1	5
1944661	AD3300	\$17.95	\$16.95

Compact Multi-Card Reader

This compact multi-card reader is designed for the mobile user for ease of travel and use. Access all types of memory cards without using adapters. Transfer files between your computer and digital devices. Plug and play compatible.



- High speed USB 2.1 (backwards compatible with USB 1.1)
- High transfer rates of up to 480Mbps
- LED power status and indicators
- Supports memory card formats including Compact Flash, Microdrive Extreme III, SmartMedia card, T-Flash, Micro SD, Secure Digital Cards, SD High Capacity, Mini SD card, Multimedia Card (MMC), Multimedia Card II, RS_MMC, memory sticks, Memory Stick PRO DUO, Memory Stick PRO DUO Extreme II, Memory Stick ROM, Memory Stick Select
- Size: 3.4"L x 2.1"W x 0.6"H
- Weight: 0.3 lbs.

NEW
MARKED IN PINK

Includes: Multi card reader and USB cable

Part No.	Mfr. Part No.	1	5
2124525	U10-00062	\$19.95	\$17.95

IBM® 8-Port Ethernet Hub

10 Base-T

Although designed to the exact standards of IBM for use in large corporate networks, its price and easy setup make it perfect for small office or home office use. Compatible with all standard STP, UTP, and FTP cables. Can be cascaded to support larger networks via the MDI (uplink) port.



- Size: 8.7"W x 5.3"D x 1.1"H • Weight: 1.7 lbs.

Part No.	Mfr. Part No.	1	5
226149	8242	\$19.95	\$17.95

Sign up for the Jameco e-newsletter & receive the latest in product news, projects & special offers.

www.Jameco.com/GotMail

USB 3.0 4-Port Hub

Expands a single USB port into four so that there are more ports available to connect devices to a host system.



- Power: 5VDC (2A)
- 5 Gbps
- Certificates: FCC
- SuperSpeed certified

System Requirements: Windows® 7, Vista, XP, 2003, 2000, ME/ Mac® OS 10.X/ various Linux Kernels

Part No.	Description	1	5
2119646	USB 3.0 4-port hub	\$69.95	\$59.95

USB 4-Port Squid Hub

Expands a single USB port into four so that there are more ports available to connect devices to a host system.



- Compatible with USB 1.1 & 2.0 interface
- Supports Plug-and-Play function
- Speed: 1.5 Mbps – 480 Mbps

System Requirements: Window® 98, ME, 2000, XP, 7, Vista/ Mac® OS 10.1 or higher

Part No.	Description	1	5
2119654	4-port USB squid hub	\$14.95	\$13.49

USB 2.0 4-Port Hubs

*** Web Code: NEM**

Add multiple high performance USB 2.0 peripheral devices to your PC. Fully compliant with USB specifications. Fully backwards compatible with USB 1.1 devices.

- Overcurrent detection & protection
- Compatible with USB specification Rev. 2.0 (data rate 1.5/12/480Mbps)
- 1 upstream & 4 downstream ports
- Connects up to 127 USB devices
- Supports Windows® 98SE/ME/2000/Server 2003/ XP/Vista; MAC® OS 8.6 or higher • Plug-and-play



1944687



1944695

1944687:

- Bus-power & self-power mode used
- Automatic connection & speed detection

1944695:

- 4 LED indicators for downstream port status
- Self-power mode used separate AC adaptor required P/N 252736, pg 121 • High speed

Part No.	Mfr. Part No.	1	5
1944687	HU2044	\$12.95	\$11.49
1944695	HU2542	14.95	13.49

USB 2.0 4-Port Hub with Clock and Mood Light

Enjoy high speed connectivity through each of the 4 USB ports. Plug in with a built-in USB and see the color changing mood lights emitted from the hub. There is also a 12-hour clock display for convenient time keeping.



- 4-port USB 2.0 (supports USB1.1)
- 12 hour clock display
- Color changing mood light (purple, blue, green, red)
- Built-in USB cable (approximately 3 ft.)
- Size: 3.5"W x 3.5"D x 2.0"H

NEW
MARKED IN PINK

Part No.	Description	1	5
2120399	4-port USB hub	\$10.95	\$9.95

USB 3.0 2-Port PCI Express Card

Can be inserted into an expansion slot of a computer motherboard to add functionality to a computer system.



- Supports high-speed data transfer rate up to 5 Gbps (10x faster than USB 2.0)
- Supports USB 3.0 hot-swapping and Plug-and-Play capability
- Dimensions: 3.2"L x 2.7"W x 1.6"H

System Requirements: Windows® 2000, XP, Vista, Windows® 7

Part No.	Description	1	10
2119620	USB 3.0 2-port PCI card	\$39.95	\$35.95

USB 3.0 2-Port PCMCIA Express Card

- Supports high-speed data transfer rate up to 5 Gbps
- Supports USB 3.0 hot-swapping and Plug-and-Play capability
- Dimensions: 4.6"L x 1.6"W x 0.6"H

System Requirements: Windows® XP, Vista, Windows® 7



Part No.	Description	1	10
2119638	USB 3.0 express card	\$34.95	\$32.95

USB 2.0 to SATA/IDE Combo Adapter

Keep the existing IDE drive while at the same time migrating to the new SATA technology, which provides a transfer rate of up to 150Mbps. Any SATA or IDE drives can be turned into an external USB 2.0 storage device.



- SATA 1.0a and USB 2.0 compliant
- Dual-headed IDE connector (4- and 44-pin) plus one SATA connector that supports 2.5"/3.5"/5.5"
- Operates one IDE and one SATA HDD simultaneously
- External power supply provided

System Requirements: IBM compatible Pentium® 233MHz, USB, Windows® 98SE/ME/XP, MAC OS 8.6 or later

Part No.	Mfr. Part No.	1	5
2075815	AS1200	\$49.95	\$44.95

USB 2.0 Ethernet Adapter

A high performance, highly integrated USB 2.0 bus Ethernet controller with embedded 7k x 16 bit SRAM.



- USB 2.0 and 1.1 compliant
- IEEE802.3 (10Base-T) & 802.3u (100Base-TX)
- Supports suspend mode and remote wake up via link-up
- Supports full-duplex and half-duplex operations
- Size: 2.8"L x 2.0"W x 1.3"H

*Web Code: SDR

System Requirements: IBM compatible Pentium® 233MHz or faster, 64MB or more, USB port available, Windows® XP/2000/Vista 32/64-bit, Mac® OS 10.x

Part No.	Mfr. Part No.	1	5
1944513	AE2201	\$19.95	\$17.95

USB 2.0 3-Port Hub with Ethernet

- Integrated 3-port hub with single uplink
- 10/100M Ethernet adapter, full/half duplex
- USB powered
- Plug-N-Play



Part No.	Product No.	1	5
2124921	HE2230	\$34.95	\$33.49

USB 2.0 Docking Station with Video and Ethernet

- 4 USB 2.0 ports
- 1 10/100M Ethernet adapter
- 1 DVI port, up to 1920 x 1080
- 1 stereo audio in
- 1 headphone/speaker out
- Hot-pluggable, Plug-N-Play



System Requirements: Windows® 2000, XP, Vista, Windows® 7

Part No.	Product No.	1	5
2124947	DU2791	\$119.95	\$113.95

USB 2.0 to DVI Display Adapter

- Add a monitor, LCD or projector using a USB 2.0 port
- Supports up to 6 USB display adapters simultaneously
- Bus powered
- Extend and mirror mode support
- Supports resolution up to 1920 x 1080
- Resumes from hibernate and suspend modes
- Size: 3.3"L x 2.2"W x 0.7"H



Part No.	Product No.	1	5
2124912	AN2465	\$79.95	\$75.95

USB Link Adapter

Premier file management and data search device with included Go! Suite software.

- Easy file transfer between two PCs
- No file size limitations
- USB 2.0, Plug-N-Play



System Requirements: Windows® 2000, XP (SP2), Vista, Windows® 7

Part No.	Product No.	1	5
2124963	AN2610	\$29.95	\$28.49

USB 2.0 Active Repeater Cable

This is an active repeater cable and not a passive extension cable for connecting USB devices to your computer. The repeater cable regenerates the USB signal for maximum reliability and performance over extended distances at maximum transfer rates of 480Mbps.



- Repeater cable length: 5m (16.4 ft.)
- Cascades up to 5 to extend distance to 25m (81 ft.) between USB device and computer
- Regenerates the USB signal for maximum reliability and performance over extended distances

Requirements: Desktop or laptop with available USB port, Windows® 98SE/ME/2000/XP or Mac OS X

Part No.	Cross Ref. No.	1	5
2075840	AR2500	\$13.95	\$12.55

JAMECO ValuePro

USB 2.0 Cables



- Higher transfer rate up to 480Mbps
- Backward compatible with USB 1.1 products

USB-A Male to USB-A Male

*Web Code: NAV

Part No.	Description	1	10	25
326474	3' cable beige	\$1.95	\$1.75	\$1.59
229682	6' cable beige	2.05	1.85	1.65
222033	6' cable black	2.05	1.85	1.65
229690	10' cable beige	2.25	1.95	1.75
229569	10' cable clear	2.19	1.95	1.79
222050	15' cable black	3.25	2.95	2.65
229577	15' cable clear	2.95	2.79	2.59

USB-A Male to USB-B Male

Part No.	Description	1	10	25
229711	3' cable beige	\$1.95	\$1.75	\$1.59
222608	3' cable black	1.95	1.75	1.59
229585	3' cable clear	1.95	1.75	1.59
229730	6' cable beige	2.05	1.85	1.65
222010	6' cable black	2.05	1.85	1.65
229594	6' cable clear	2.05	1.85	1.65
229738	10' cable beige	2.35	2.09	1.85
222018	10' cable black	2.35	2.09	1.85
229607	10' cable clear	2.35	2.09	1.85
229762	15' cable beige	3.25	2.95	2.65
222026	15' cable black	3.25	2.95	2.65
229614	15' cable clear	3.25	2.95	2.65

USB-A Male to USB-A Female

Part No.	Description	1	10	25
326482	3' cable beige	\$1.95	\$1.75	\$1.59
229771	6' cable beige	2.05	1.85	1.65
222068	6' cable black	2.05	1.85	1.65
229623	6' cable clear	2.25	1.95	1.75
229789	10' cable beige	2.25	1.95	1.79
222076	10' cable black	2.45	2.19	1.95
229631	10' cable clear	2.25	1.95	1.75
229797	15' cable beige	2.95	2.75	2.49
222084	15' cable black	3.25	2.95	2.65

USB-A Male

- For use w/ digital cameras, memory card readers, etc.
- Color: black



Part No.	Description	1	10	25
673715	6' mini 4-pin	\$3.55	\$3.25	\$2.95
2081481	5'6" mini 5-pin	2.25	1.95	1.65
673694	6' mini 5-pin	2.75	2.45	2.25

USB 3.0 Cables

USB-A Male to USB-B Male


- SuperSpeed with 5Gbps data transfer rate
- 10X performance increase over USB 2.0
- Hot syncing
- SuperSpeed USB is backwards compatible with USB 2.0



Part No.	Description	1	10	25
2095218	6' cable black	\$6.95	\$6.25	\$5.49
2095226	10' cable black	7.95	7.15	6.49

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

USB-A to Mini USB Adapters

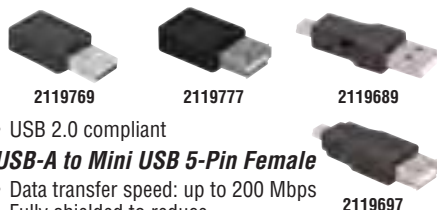

- USB 2.0 compliant

USB-A to Mini USB 5-Pin Female

- Data transfer speed: up to 200 Mbps
- Fully shielded to reduce EMI interference sources
- Dimensions: 1.4"L x 0.7"W x 0.4"H

Part No.	Description	1	10
2119769	A male to mini USB	\$2.69	\$2.55
2119777	A female to mini USB	2.69	2.55

USB-A to Mini USB 5-Pin Male

- Metal neck with nickel plating
- Dimensions: 2.0"L x 0.7"W x 0.4"H

Part No.	Description	1	10
2119689	A male to mini USB	\$1.95	\$1.75
2119697	A female to mini USB	1.95	1.75

USB Gender Adapter

- USB-A female to USB-A female
- Dimensions: 1.5"L x 0.7"W

Part No.	Description	1	10	25
316806	USB-A female	\$2.95	\$2.65	\$2.39

High Speed USB Extender Cable

An active device where the USB signals going in and out of the extension cable are buffered to assure signal quality and adherence to electrical and timing specs.

- Full compliance with USB spec Ver. 2.0/1.1
- Supports 480Mbit/s high speed 12Mbit/s full speed, and 1.5Mbit/s low speed serial data communication
- One upstream port and one downstream port
- Windows® 98 & higher or Mac® OS compatible
- Supports plug & play and hot-swap functions
- USB-A male to USB-A female
- Bus power mode • Length: 16 ft.

Part No.	Cross Ref. No.	1	5
1919174	10U2-24116	\$18.95	\$16.95

Serial Null Modem Cables

- Molded type connectors
- Color: gray

* Web Code: ABE

181404/180698 Pin outs:
1 & 6-4, 2-3, 3-2, 4-6 & 1, 5-5, 7-8, 8-7

181438 Pin outs: 2-2; 3-3;
5 & 6-4; 7-5; 8-7; 20-6 & 8
(Serial printer null modem)

180582 Pin outs: 2-2; 3-3;
4-5 & 6; 5-7; 6 & 8-20; 7-8;
(Serial printer null modem)

180742 Pin outs: 1-4 & 5;
2-2; 3-3; 4-6; 5-7; 6-20; 7-8; 8-8

Part No.	Mfr.	Description	1	10	50
181404	ValuePro	6' DB9 F to DB9 F	\$5.55	\$4.95	\$4.49
180698	ValuePro	10' DB9 F to DB9 F	6.75	5.95	5.45
181438	Various	6' DB25 M to DB9 F	5.55	4.95	4.49
180742	ValuePro	10' DB25 F to DB9 F	5.95	5.49	4.95
180582	ValuePro	10' DB25 M to DB9 F	5.95	5.35	4.75

19" Rack Mount Enclosures

- Ventilation holes on all sides
- Front and back panels are steel w/ aluminum, pre-punched face plates
- 0.12" thick black front panel
- Top, bottom and sides are durable 0.035" steel
- All enclosures have handles except P/N 132813



Includes: Mounting screws

Part No.	Dimensions (In.)			Wt. (lbs.)	Pricing	
	H1	H2	D		1	5
132813	1.73	1.25	9.75	6.2	\$39.95	\$34.95
132822	3.46	3.00	9.75	7.9	51.95	46.95
132840	3.46	2.88	11.75	9.1	54.95	49.95
132848	5.22	4.75	11.75	10.6	59.95	53.95
132864	8.56	8.00	13.50	15.4	109.95	99.95

* Rack Mounts Available Online — Enter Web Code GAT

19" Rack Mount Cat 5 Patch Panel

These Cat 5 patch panels feature 110D punch locks that are compatible with KRONE or 110D tools. UL and CUL listed and certified. Cat 5 certified and can be used with T568 A/B installations, color coded blocks for T568 color coding.

* Web Code: GBK

Part No.	Description	1	5
208785	24-port patch panel	\$24.95	\$22.49

Cabinet Mounting Plate for 19" Cabinet

- Use as industrial chassis mounting plate for servers, PCs or patch panels
- Size: 19.0"W x 15.8"D x 3.5"H
- Made of industrial grade steel and aluminum

Part No.	Product No.	1	10
149500	UP02	\$34.95	\$31.95

QuickNetwork Install Can

- Type: Install can for QuickNetwork panels
- Feature: 110V power supply and cover installed
- Size: 24"

FutureSmart

Part No.	Mfr. Part No.	1	5
636607	QN24	\$59.95	\$49.95

USB-to-DB25 Parallel Adapter

- Allows PC to print to most parallel printer devices through the USB port
- USB 1.1A type male connector
- IEEE 1284 bidirectional DB25 female connector
- IEEE-1284 1994 (bidirectional parallel interface) spec. compliant
- PnP & power via USB
- Unified 512-byte buffer • Input pins 5V tolerant

Part No.	Description	1	10
2125131	USB-to-DB25 adapter	\$13.95	\$12.49

Quick and Easy Search



USB-A Cables w/ Bracket

- Add additional USB ports to your PC
- Dual USB-A female connectors • 8"L cable
- Supports data transfer rates of 12Mbps



Part No.	Description	1	10	25
144813	(2) 1x5-pin connector	\$4.25	\$3.75	\$3.25
319652	(1) 2x5-pin connector	1.49	1.35	1.19

USB-to-DB9 Serial Adapters

- USB-A to DB9 male
- Length: 13"
- Supports automatic handshake mode
- Over 230Kbps data transfer rate
- 96 byte buffer each for upstream and downstream data flow
- Works with cellphones, PDA, digital cameras, modems and ISDN terminal adapters



Part No.	Description	1	5
387954	With jack screws	\$18.95	\$16.95
2115346	With thumbscrews	18.95	16.95

IEEE Firewire Cables



- IEEE 1394 compliant
- Length: 6'
- UL approved
- Male to male

* Web Code: FAE

Part No.	Cross Ref. No.	Description	1	5	25
1944134	10E4-991-06-C	9-pin/9-pin	\$12.95	\$11.95	\$10.95
175848	10E3-01106-R	6-pin/6-pin	5.95	5.35	4.75
175839	10E3-02106-R	4-pin/6-pin	3.49	2.95	2.65

IEEE 488 Cables

A variety of cable lengths are offered to ensure that IEEE system requirements are met (20 meters max. length with a maximum of 15 devices). These cables are standard IEEE 488 with stackable 24-pin GPIB connectors on both ends.



* Web Code: EAJ

Part No.	Description	Color	1	5	25
73155	1 meter	Gray	\$39.95	\$35.95	\$31.95
115782	2 meter	Gray	41.95	36.95	32.95
115802	4 meter	Gray	42.95	37.95	33.95

Ultra ATA Cable

- 11" 34-pin floppy cable
- 18" 39-pin hard drive cable



Part No.	Description	1	10	100
2125801	Ultra ATA cable	\$3.95	\$2.95	\$2.49

Our website offers thousands of data sheets and photos to assist you in finding the products you need.

JAMECO ValuePro

SCSI Cable

- 50-pin header socket ribbon cable SCSI-I

*Web Code: TAE




Part No.	Description	1	10	100
32715	18" ribbon cable	\$3.75	\$3.49	\$2.95

Ribbon Cable Assemblies

- Metal connector
- 28 AWG flat cable
- 105°C rating
- 300V rating
- Tin-plated contacts

*Web Code: VAA



Part No.	Description	1	10	100
12408	4' DB25 M-F	\$4.95	\$4.45	\$3.95
208582	6' DB9 M-F (ValuePro)	4.95	4.45	3.95

AT/ATX Power Supply Extension Cable

- For use with ATX power supplies
- 20-pin ATX male and female connectors
- Color coded to ATX power supply specifications

NEW
MARKED IN PINK



Part No.	Description	Length/AWG	1	10	100
170238	20-pin M-F	15.0'/18	\$8.95	\$7.95	\$6.95
1955950	20-pin ATX-4-pin	11.5'/18	14.95	14.49	13.95
2114589	4-pin M-F	13.5'/18	4.49	3.95	3.49

3.5" & 5.25" Disk Drive Power Splitters and Adapters

- IBM PC/XT and higher compatibles

28354/277528/72304:
Splits 4-line Molex male into 2 females

*Web Code: OAE



Part No.	Drive	AWG	Length	1	10	100
28354	5.25"	18	5'	\$2.75	\$2.49	\$1.95
277528	5.25"	20	6"	1.55	1.39	1.25
72304	3.5"	22	5'	3.75	3.49	2.95
28397	3.5"	22	3.5"	4.75	4.25	3.79

External Serial ATA Cables

These eSATA cables offer the fastest data-transfer speeds available, improving performance for internal PCs and external storage. Faster than USB 2.0 and 1394 external storage solutions.



Part No.	Length	Color	1	10	100
2115645	3'	Black	\$6.95	\$5.95	\$4.95
2115653	6'	Black	6.95	5.95	4.95

JAMECO ValuePro

SATA Data Cables

- 0.5m, 7-pin cable
- SATA-I & SATA-II compatible

2114407: eSATA (external)



Part No.	Connector A/B	Cable Color	1	10	100
2114327	Right angle/right angle	Transparent red	\$2.49	\$2.25	\$1.95
2114386	Right angle/straight	Red	2.65	2.39	2.15
2114301	Straight/straight	Transparent red	2.49	2.25	1.95
2114407	Straight latching/straight latching	Red	2.65	2.39	2.15

*Web Code: SAC

JAMECO ValuePro

SATA Disk Drive Power Adapters

- 4-pin Molex to 15-pin SATA



Part No.	Molex	SATA	Length	1	10	100
2114343	5.25 (M)	Straight (F)	6"	\$2.29	\$1.95	\$1.79
2114351	5.25 (M)	Dual straight (F)	6"	2.49	2.29	2.09
2114360	5.25 (F)	Straight (M)	7"	4.95	4.49	3.95
2114378	5.25 (M)	Right angle (F)	6"	2.29	1.95	1.79

*Web Code: SAD

JAMECO ValuePro

Printer and Keyboard Cables for Mac®



Part No.	Mfr.	Description	1	10	100
1944994	Various	40" DIN8M w/ EMI	\$2.95	\$2.49	\$2.25
10604	ValuePro	6' DIN8M	3.95	3.49	3.05
130025	ValuePro	10' DIN8M	4.95	4.45	3.95

Monitor/Mouse/Keyboard Cable

HDDB15 male/female for monitor, 5-pin DIN male/female for keyboard and DB9 male/female for mouse.



Part No.	Product No.	Length	1	5
141284	G/S(KVM062)	6'	\$9.95	\$8.95

JAMECO ValuePro

PS/2 & AT Cables

- Non-coiled cable

*Web Code: HAE

PS/2 6-Pin Mini DIN, Male to Male

- For use with switch box

Part No.	Length	Color	1	10	100
177261	2'	Gray	\$1.75	\$1.49	\$1.25
174772	6'	Black	3.95	2.95	2.49
174908	6'	Beige	3.49	2.95	2.49
112628	10'	Beige	7.95	7.25	5.95
205655	25'	Beige	6.95	5.95	5.25

PS/2 6-Pin Mini DIN, Male to Female

- For cable extension

Part No.	Length	Color	1	10	100
28549	6'	Beige	\$4.75	\$4.25	\$3.95
111053	10'	Beige	4.95	4.45	3.95

PC/XT/AT 5-Pin Mini DIN, Male to Female

Part No.	Length	Color	1	10	100
114981	6'	Beige	\$1.95	\$1.75	\$1.49

ADAM TECH

SATA Connectors

These SATA connectors combine hot plug capability with a combination of power and signal contacts in a blindmate design. They are ideal for connecting disk drives to backplanes in servers or networking equipment.

- 55°C to 125°C
- UL94V-0 approved
- Black insulator
- Gold flash over nickel plating



2113973

2113990

*Web Code: SAT

Part No.	Description	1	10	100
2113973	7-pin right angle, SMT	\$0.65	\$0.55	\$0.45
2113990	7 & 15-pin dual vert., SMT	1.49	1.29	1.09

Keyboard Adapter

- Connect AT type keyboards to PS/2
- 5-pin female DIN to 6-pin male mini DIN
- Material: plastic/metal
- Length: 1.7"



Part No.	Description	1	10	100
157930	Keyboard adapter	\$0.35	\$0.29	\$0.25

CD-ROM Audio Cables

Part No.	Connection from Sound Blaster to	Length	1	10	25
127546	Sony/MPC2	25"	\$1.95	\$1.75	\$1.49
168613	Universal	18"	.99	.95	.89

USB/DB25-to-Centronics Parallel Printer Cables

155352: USB-A Male to 36-pin Male Centronics

- Full compliance with USB spec Ver. 1.
- Applicable to standard and bidirectional printers



130067/28716/28708: DB25 M to 36-pin M Centronics

Part No.	Description	1	10
155352	6' 36-pin Centronics to USB	\$9.95	\$8.95
130067	6' 36-pin Centronics to DB25	2.49	2.39
28716	6' 36-pin Centronics to DB25	4.95	4.49
28708	15' 36-pin Centronics to DB25	.99	.89

DB9-to-DB25 AT-Adapter Serial Cables

- For DB9 serial ports which need to be converted to DB25 serial
- AT and compatibles
- Molded DB9 female to DB25 male connectors



Part No.	Description	1	10	100
109584	1' serial, beige	\$2.95	\$2.65	\$2.25
189333	3' serial, beige	3.25	2.95	2.49
31722	6' serial, beige	4.95	4.49	3.95
1945575	6' serial, gray	3.95	3.49	2.95
155522	10' serial, beige	5.95	5.35	4.79

DOLLAR SALE

Look for pricing shaded in blue

Jameco.com/MakesCents

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Computer Cables & Audio/Video Products

4 LEVELS OF SAVINGS			
NAME BRANDS	HOUSE BRANDS	FACTORY OVERRUN	DOLLAR SALE

JAMECO ValuePro

Computer Cables



Extension Cables

- All lines connected straight through

★ Web Code: CCS

Part No.	Description	Length (ft.)	Color	1	10	100
2075971	DB9 male-to-female w/ thumbscrews & filter, w/ green connectors	6	Black	\$4.49	\$3.95	\$3.49
199639	DB9 male-to-female w/ thumbscrews	6	Black	5.25	4.75	4.25
25701	DB9 male-to-female w/ thumbscrews	6	Beige	5.95	5.35	4.79
148516	DB9 male-to-female w/ thumbscrews	10	Beige	6.95	6.25	5.49
181666	DB9 male-to-male	10	Beige	6.95	6.25	5.49
181286	DB15 male-to-male	6	Gray	6.55	5.95	5.25
181359	DB15 male-to-female	6	Gray	5.49	4.95	4.45
134042	HDDB15 male w/ thumbscrews to female w/ hex nuts	6	Beige	4.95	4.45	3.95
66165	HDDB15 male-to-female w/ thumbscrews	6	Beige	7.95	6.95	6.25
148532	HDDB15 male-to-female w/ thumbscrews	10	Beige	8.95	7.95	6.95
66174	HDDB15 male-to-male	6	Beige	6.95	6.25	5.49
148523	HDDB15 male-to-male	10	Beige	5.95	5.35	4.79
224267	DB25 female-to-female w/ thumbscrews	6	Gray	7.95	6.95	5.95
164291	DB25 male-to-female w/ thumbscrews	3	Gray	3.95	3.55	3.05
175291	DB25 male-to-female w/ thumbscrews	3	Black	3.75	3.35	2.95
67257	DB25 male-to-female w/ thumbscrews	6	Gray	7.95	6.95	5.95
39511	DB25 male-to-female w/ thumbscrews	10	Gray	7.95	6.95	6.25
177279	DB25 male-to-female w/ thumbscrews	15	Gray	7.95	6.95	6.25
101996	DB25 male-to-female w/ thumbscrews	25	Gray	11.95	10.75	9.65
181201	DB25 male-to-female w/ thumbscrews	50	Gray	19.95	17.95	15.95
174001	DB25 male-to-male w/ thumbscrews	3	Black	4.95	4.45	3.95
65788	DB25 male-to-male w/ thumbscrews	6	Gray	7.75	6.95	6.25
39538	DB25 male-to-male w/ thumbscrews	10	Gray	6.95	6.25	5.49
179979	DB25 male-to-male w/ thumbscrews	15	Gray	5.95	5.25	4.75
67071	DB25 male-to-male w/ thumbscrews	25	Gray	8.95	7.95	6.95
181295	DC37 male-to-female	6	Gray	5.95	5.35	4.75

Serial Cables

132346	DB9 female-to-female w/ thumbscrews	6	Beige	\$4.95	\$4.45	\$3.95
196366	DB9 female-to-female w/ thumbscrews	10	Beige	6.95	6.25	5.49
161630	DB25 male-to-male serial w/ thumbscrews, IEEE-1284	10	Black	1.75	1.49	1.29

Monitor Cable

66157	DB9 male-to-male w/ thumbscrews	6	Beige	\$4.95	\$4.45	\$3.95
-------	---------------------------------	---	-------	--------	--------	--------

Audio/Video Adapter

- Converts impedance of video/audio signals to 100Ω for transmission over CAT 5 UTP cable
- Support both NTSC or PAL video signals
- Signal pairs: video (BNC), CAT pairs 4(RJ45); audio 1 (RCA), CAT pair 3 (RJ45); audio 2 (RCA), CAT pair 2 (RJ45)

Includes: Mounting hardware

Part No.	Description	1	5
220881	BNC/RJ45	\$22.95	\$20.95

Wireless FM Audio Transmitter

Connects to any audio output source (i.e. iPod, MP3 player, mobile phone, etc.) to play music through your car stereo system.

- Power: 12VDC
- Current: 150mA
- Earphone line: 1.5 meter w/ 3.5 meter phone jack
- Dimensions: 50mm x 30mm x 20mm

Part No.	Description	1	5
2119611	Wireless FM audio trans.	\$19.95	\$17.95

See pages 65-67 for Audio/Video Cables, Adapters, Plugs & Jacks



3.5" TFT LCD Test Monitor

This display monitor operates on a standard composite video signal. The unit is also wearable, leaving both hands free to work, and it features an OSD for brightness and contrast. Accessories for this LCD include the Armful Bag, BNC with cable, power cable and battery case.

Wearable



- High resolution (960W x 234H mm dots) flat screen
- Backlight: LED 6 type
- Video signal: NTSC/PAL auto switch
- Power consumption: 2W max.
- Input signal: 1Vp-p, 75Ω
- Power supply: (8) AA batteries or 12VDC adapter
- Outlook size: 96mmL x 98mmW x 25mmD
- Weight: 1.37 lbs. with accessories and package

Part No.	Product No.	1	5
2111898	15-MC04	\$194.95	\$189.95

2.4GHz Wireless Audio/Video Transmitter & Receiver

- 4-ch transmitter selectable/4-ch receiver viewable
- Video input/output: 1Vp-p composite @ 75Ω
- Audio input/output: 2Vp-p typical, 2.7Vp-p max. @ 600Ω
- RF impedance: 50Ω
- Size: 3.7"W x 2.5"D x 1.3"H

Includes: 12V wall adapter, antenna & mounting hardware

2115784: Transmitter

- Current consumption: 350mA typical; 650mA at start-up
- Alarm input: TTL/CMOS (level detection)
- Output power: 1 watt

2115709: Receiver

- Sensitivity: -82dBm typical
- Current consumption: 250mA typical

Part No.	Description	1	5
2115784	2.4GHz wireless trans.	\$149.95	\$134.95
2115709	2.4GHz wireless receiver	89.95	79.95
179864	2.4GHz SMA RF antenna	5.49	4.95
2081633	2.4GHz SMA antenna	1.75	1.49

USB Wireless Audio Adapter

Wirelessly transmit music from your PC or Notebook to any room or directly to your headphones. Instant wireless audio system in minutes!

★ Web Code: WLS



- No more wires or cables to connect
- Transmitter distance of 135 ft.
- Proprietary 2.4GHz wireless solution
- Easy system expansion with stereo sound support
- Supports Windows® 2000, XP, and Vista
- 35mm jack
- Plug and play, quick and convenient use, no driver/software installation required

Part No.	Mfr. Part No.	1	5
2120882	WA2200	\$49.95	\$44.95

Have A Large Volume Order That Requires Special Pricing? Call us at 1-800-831-4242

Mini DVR Camera

Sound Activated Recording

Compact and portable, this mini DVR camera provides crisp and vivid video as well as a sound activated recording feature. This camera records in AVI format with audio and stores to a MICRO SD card (included). Easily connect via USB port to you PC or laptop for charging the camera or retrieving files.



- Battery life: 115 minutes of continuous recording
- 90 minutes of available space for recorded video and audio files
- 30 FPS for 720 x 480 resolution
- Color CMOS camera, 1.0 lux
- FOV: 62° • Built-in lithium battery
- Compatible with Windows® ME, 2000, 2003, XP, Vista, Mac OS 10.4

Includes: Micro SD card, USB cable and mounting accessories

Part No.	Product No.	1	5
2124517	EC-MINIDVR	\$99.95	\$89.95

Mini Waterproof Color CCD Camera

This miniature weather-proof color camera is perfect for all wet area applications and can be mounted outdoors without the need for an additional housing or cover.



- 1/4" CCD imaging chip • 420 line resolution
- 3.6mm F2 lens • 0.5 lux @ F1.2
- Built-in electronic iris control

Requires: 12VDC @ 140mA power supply (recommend P/N 162996, pg 123)

Part No.	Product No.	1	5
2124891	EC-597	\$99.95	\$94.95

IR Illuminated Color Camera

This compact weatherproof camera provides high quality color images in daylight and converts to infrared illumination in low light to provide a clear B&W picture.



- IR illuminated low light/no light
- 1/4" image sensor chip • Built-in electronic iris
- Built-in 30 element IR illuminator
- 420 line resolution
- 1.0 lux sensitivity (0 lux with IR off)
- 6mm F2.0 lens • 45° IR range

Requires: 12VDC @ 200mA power supply (recommend P/N 162996, pg 123)

Part No.	Product No.	1	5
2124904	EC-264	\$119.95	\$109.95

Jump from catalog to web.
Quick Search by Web Code

Web Code

*** Web Code: EPS**

Enter web codes online for additional product listings and specifications. Look for the web code box on the home page.

www.Jameco.com/More

Color Camera with 8mm Lens

- 1/3" CCD image sensor
- Horizontal res: 420 lines
- Min. illumination: 0.5 lux
- Electronic shutter: 1/120,000 sec.
- 510(H) x 492(V) EIA signal format
- Auto iris lens: DC drive/AES/video drive
- Video output: 1Vp-p, 75Ω • Vertical freq.: 60Hz
- Audio output: 2Vp-p max., 50Ω
- Backlight, auto-gain, and mirror reverse picture switch selectable • S/N ratio: 52dB
- Auto-tracing white balance • 2X digital zoom




Power Requirements: 12VDC @ 150mA

Part No.	Product No.	1	5
395461	15-CC25	\$119.95	\$107.95

Waterproof Tube-Style IR Color Camera

NTSC Format

- Auto white balance and gain control
- 1/4" CCD image sensor
- Scanning system: 2:1 interlace
- 0 lux w/ 20 IR LEDs
- 880 ~ 940nm infrared wavelength
- 512(H) x 492(V) • 4.3mm lens with F1.8
- For indoor and outdoor use
- 59.94Hz vertical frequency
- 420 horizontal line resolution
- S/N ratio: >48dB • Internal synchronization
- Video output: 1Vp-p, 75Ω • Size: 2.1"Dia. x 3.8"L
- Up to 1/100,00 sec. electronic shutter



Requires: 12VDC @ 160mA power supply (recommend P/N 162996, pg 123)

Includes: Mounting hardware

Part No.	Product No.	1	5
319901	15-CM25WM	\$169.95	\$149.95

*** Outdoor Camera Enclosures — Enter Web Code LBB**

*** Video Accessories — Enter Web Code YBE**

CMU Camera

- Tracks the position and size of a colorful or bright object
- Measures the RGB or YUV statistics of an image region
- Dumps a bitmap showing the shape of the tracked object
- Automatically acquire and tracks the first object it sees
- Physically tracks using a directly connected servo
- Supports multiple CPU boards on one camera for parallel processing



Part No.	Description	1	5
358467	3.5" color LCD monitor	\$129.95	\$119.95

Mini Color Camera

- 1/3" Omnivision CMOS
- 510(H) x 492(V), NTSC
- 380 TV lines, 3 lux/F1.2
- Video output: 1Vp-p, 75Ω
- Electronic shutter: 1/50 sec. to 1/100,000 sec.



Includes: 8V @ 500mA power adapter, 9V battery clip with 2.1mm x 5.5mm female plug

Part No.	Product No.	1	5
2115362	CM203CA	\$29.95	\$26.95

*** Cameras — Enter Web Code MBB**

900MHz Mini Wireless Color Camera

With Built-In Microphone

- Receiving frequency: 902-928MHz
- Video output: 1Vp-p, 75Ω
- Audio output: 200mVp-p, 10kΩ
- Power consumption: <2W
- Tuning knob on receiver for fine tuning picture



Includes:

8VDC @ 500mA & 12VDC @ 500mA adapter, receiver with antenna, mounted color camera, 9V battery clip with 1.3mm x 3.5mm female plug

Part No.	Description	1	5
2081781	Mini wireless camera	\$59.95	\$53.95

Mini Dome Color Camera

- 1/4" CCD image sensor
- 512H x 492V
- Video output: 1Vp-p, 75Ω
- NTSC format
- 3.6mm lens with F2.0
- Horizontal line resolution: 330 lines
- Lux: 2



Part No.	Product No.	1	5
171037	15-CD25-1	\$99.95	\$89.95

SONY® Color CCD Camera

Sony Chipset

- 1/4" Sony super HAD CCD sensor
- 510(H) x 492(V), NTSC
- Furnished mini lens: 3.6mm
- Minimum illumination: 0.5 lux @ F2.0
- Supports these functions: auto electronic shutter (AES), auto iris control (AIC), auto gain control (AGC), auto white balance (AWB), back light compensation (BLC) and flicker less (FL)
- Video drive iris control; high/low switchable auto gain control; on/off backlight compensation
- Video output: 1Vp-p, 75Ω



Requires: 12VDC @ 120mA power supply (recommend P/N 100095, pg 124)

Includes: Power/signal cable & mounting hardware

Part No.	Description	1	5
213436	Enclosed color camera	\$154.95	\$139.95

Black & White Camera with Lens

EIA Format

- 1/3" CCD image sensor
- 510(H) x 492(V)
- Horizontal res.: >350 lines
- Sensitivity: 0.7 lux/F2.0
- Pwr. supply: 12VDC (recommend P/N 162996, pg 123)
- Video output: 1Vp-p, composite video 75Ω
- Power consumption: 110mA • FOV: 92°
- Electronic shutter: 1/125,000 sec. (linear)
- S/N ratio: 46dB • Size: 1.3"L x 1.3"W x 1.2"H



Part No.	Product No.	1	5
171029	15-BB13L-1	\$44.95	\$39.95

Mounting Bracket for Enclosed Camera

- Material: white plastic
- Swivel angle: 360° • Tilt angle: 90°
- For use with enclosed cameras



Part No.	Max Load	Height	1	5
170982	6.6 lbs.	2.0"	\$3.95	\$3.49

*** For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above**



Container Truck

2117368



Mobile Crane

2117376



Compact Excavator

2125712



Power Function Kit

2125721



Tyrannosaurus Kit

242923



Mouse Robot

358192



Running Micro Bug

200328



USB Relay Card

2123952



CYBUG Scarab

358045



The Spider

140821



iBotz PICO

404478



Robotic Arm


Controller

157366



RFID Proximity Card

2123936



Robotic Arm Interface

159345



Audio Amplifier Kit

151204



FM Radio Kit

211772



MP3 Player Kit

*** Educational & Robotic Kits — Enter Web Code ERK**

Create your own home audio system, juke box, jingle player, or play sound effects. This kit allows you to create a fully customized MP3 player with equalizer settings and presets.

- High-quality VLSI decoder
- Suitable for SD and SDHC cards up to 32GB
- Supports ID3 tagging (title, artist, album)
- On-board power amp, 2 x 5 Wrms @ 4Ω
- RCA pre-out, headphone and speaker output
- Supports 16 x 2 LCD screen (optional, recommend P/N 2118512, see web)
- Experience level: expert

NEW
MARKED IN PINK



Part No.	Mfr. Part No.	Description	1	5
2120823	K8095	MP3 player kit	\$89.95	84.95

Electronic Kits

Lego Technic Kits

Part No.	Mfr. P/N	Description	No. of Pieces	Exp. Level	Dimensions (L" x W" x H")	Price
2117368	8052	Container Truck or Tipper Trailer	686	INT	—	\$69.95
2117376	8053	Mobile Crane or Harbor Crane, 360° and extends 23.5"	1289	INT	—	99.95
2125712	8047	Compact excavator or material handler	252	BEG	—	29.95
2125721	8293	Power functions kit, add a motor to your legos	10	BEG	9.5 x 5.7 x 2.4	29.95

Robotic and Computer Control Kits

Part No.	Mfr. P/N	Description	No. of Pieces	Exp. Level	Dimensions (L" x W" x H")	Wt. (lbs.)	Pricing	
							1	5
242923	21-601	Mechanical Wooden Tyrannosaurus kit	—	BEG	1.5 x 3.0 x 6.5	0.9	\$14.95	\$13.45
357341	3-882	Sound-Activated Jungle Robot kit	87	BEG	—	—	22.95	21.95
358192	70068	Wall Hugging Mouse Robot kit	—	—	—	—	19.95	17.95
358272	70162	Design a robot w/ this RC Robot Construction set! Lift, scoop and drop all kinds of stuff.	144	BEG	—	1.0	52.95	47.95
200328	MK127	Light-Following Running Micro Bug kit	26	INT	4.0 x 2.4	0.2	18.95	16.95
200336	MK129	Light-Seeking Crawling Micro Bug kit	29	INT	4.0 x 2.4	0.2	19.95	17.95
239476	K2633	Relay Card kit (req. pwr supply P/N 133891 pg 124)	29	INT	3.0 x 2.7	0.4	19.95	17.95
357325	OWI-9727	Build this Spider 3 Walker Robot and watch it intelligently avoid any obstacle it faces.	110	INT	5.5 x 3.9 x 4.3	1.3	59.95	53.95
402077	OWI-9875	Binary Disk Player Robot	75	INT	—	1.9	27.95	26.95
386708	21-880	Line Tracking Robot Mouse (solder required)	—	INT	3 x 3 x 3	0.9	22.95	20.95
358352	75020	Line Tracing Snail Robot kit	—	INT	—	2.0	34.95	31.49
2123952	K8090	8-chan. USB relay card, up to 16A/relay, can use with iphone application	124	EXP	6.3 x 4.2 x 1.2	—	74.95	71.49
358045	CYBUG	The CYBUG Scarab kit uses touch and light sensors to find or avoid light. Requires soldering	83	EXP	4.5 x 4	0.4	49.95	47.95
386610	21-886	Terrain Escape Robot kit with infrared emitting diode and receiver module	—	EXP	5 x 5 x 5	0.9	19.95	17.95
140821	972K	Build the Spider 3 Walker Robot & watch it intelligently avoid any obstacle it faces. Requires soldering	158	EXP	12.0 x 7.0 x 3.5	1.2	59.95	56.95
404478	MR-1017	The PICO is a build-it-yourself programmable robot. Program it to do anything. The sky's the limit!	42	EXP	5.8 x 6.0 x 4.4	3.2	109.95	99.95
199603	769K	Rockit Robot advanced w/ sound-controlled navigation	96	EXP	4.5 x 5.5 x 3.3	1.0	29.95	27.95
157366	007	Unassembled Robotic Arm Trainer kit, Five axis motion and five switch wired controller	106	EXP	14.2 x 20.1	4.5	74.95	69.95
2123936	MK-179	RFID Proximity Card Reader kit, include 2 tags EM4100 Compatible	52	INT	2.6 x 2.4 x 0.8	—	36.95	34.95
159345	007/IBM	Robotic Arm Interface kit for P/N 157366 (above)	5	EXP	3 x 2 x 1	1.0	69.95	64.95

Audio Transmitters, Amplifier, Sound Generator and Detection Kits

Part No.	Mfr. P/N	Description	No. of Pieces	Exp. Level	Dimensions (L" x W" x H")	Wt. (lbs.)	Pricing	
							1	5
151204	AA-1	Super Snooper Big Ear Audio Amplifier kit	17	INT	1.8 x 1.0 x 0.6	—	\$10.95	\$9.95
151239	FMST-100	FM Stereo Transmitter Mini kit	37	INT	2.7 x 2.0	—	31.95	28.95
211772	MK118	FM Radio kit	65	INT	4.8 x 3.3	—	27.95	24.95
127562	K4401	Sound Generator kit with 10 unique sounds	61	INT	2.8 x 2.8	—	34.95	31.95
117612	K1803	Univ. Mono Pre-Amp kit (req. 10-30VDC pwr supply)	17	INT	1.2 x 1.8	—	9.95	8.95
127255	K4001	7-Watt Amplifier kit, Requires 15VDC @ 500mA Power Supply, Music Output Power: 7-Watts, 4	22	INT	2.2 x 1.4	—	17.95	15.95

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

NEW
MARKED IN PINK

Electronic Kits (Continued)

★ Web Code: **ERK**

Audio Transmitters, Amplifier, Sound Generator and Detection Kits (Continued)

Part No.	Mfr. P/N	Description	No. of Pieces	Exp. Level	Dimensions (L" x W" x H")	Wt. (lbs.)	Pricing	
							1	5
129138	K4003	30W Stereo Pwr Amp. (req. 2x 12VDC @ 2A pwr supplies)	38	INT	2.8 x 2.0	—	\$33.95	\$30.95
147571	MK103	Voice Activated kit, Requires 8-15VDC Power Supply or 9V battery, Sound Activates 4 Flashing LEDs	33	INT	2.5 x 1.6 x 1.4	0.1	8.95	7.95
662670	EBST-11	Audio Stereo Amplifier Kit	32	INT	2.8 x 2.3	—	9.95	8.95
2120823	K8095	MP3 Player Kit, create your own jukebox, sound effects, mp3 and more! SD card operation, Hi-quality VLSi decoder, vol. control up to 32GB, up to 1024 folders with 16,348 songs each	—	EXP	5.11 x 3.9	—	89.95	84.95
2120815	K8098	Audio Analyzer, display EMS/peak power, mean/peakdB, audio spectrum	—	EXP	5" x 2.5" LCD	—	74.95	69.95
2123944	MK-182	Digital Echo Chamber kit, echo effect, line-in & out, output 8Ω, 500mW	63	BEG	3.35 x 2.76 x 0.78	—	22.95	20.95

Test and Measurement Kits

662725	EBLOG-300A	Logic Probe kit	13	BEG	4.0"L x 0.75"Dia.	—	\$10.95	\$9.95
20665	JE2206	Function Generator kit	21	INT	4.1 x 1.5	0.1	27.95	24.95
129091	K7102	Metal Detector kit, sensitive within 8cm (req. 9V battery)	22	INT	2.1 x 2.1	0.4	17.95	15.95
2109173	28014	USB oscilloscope, 2-ch digital, 3 probes, 20V max. 200kHz	—	—	5 x 2.25 x 5.0	—	139.95	132.95
2119662	SL004	Electronics Discovery kit, 16+ projects work with LEDs, switches, buttons, sensors	130	BEG	10 x 6.7 x 3	1	49.95	47.49

Power Supply and Motor Kits

2115750	34020	Breadboard Vreg kit, 6-18Vin, 5V @ .5A out, 2.1mm plug	12	BEG	—	—	\$7.95	\$7.49
181833	VM-1	DC Voltage Monitor kit with 7 LED display	46	BEG	2.7 x 1.3	0.2	9.95	8.95
117621	K1823	1.5A @ 1.5-35VDC Power Supply kit	12	INT	2.1 x 2.1	0.3	14.95	13.45
20626	JE215	Dual Adjust Regulated Power Supply kit	48	INT	5.1 x 3.5 x 2.0	2.1	24.95	22.49
172829	GMC-1102	Motor Speed Control kit; powers up to 5A @ 100VDC	35	INT	3.6 x 2.3 x 1.2	—	24.95	22.49
160047	3-301	Mini-Dual H-Bridge Motor Driver kit	31	INT	1.13 x 1.0	0.1	24.95	22.49
120539	K8004	DC Pulse Width kit, Proportional DC to PWM	40	EXP	3.3 x 1.9 x 1.8	0.5	24.95	22.45
357851	3-773	Maxi-Dual H-Bridge Motor Driver kit	54	EXP	—	0.2	59.95	53.95
358248	70097	Twin Motor Gearbox kit	61	EXP	—	0.3	14.95	13.45
2119751	C-8051	Adjustable Gear Motor kit, 4k-14k rpm	22	BEG	4.3 x 4.9	—	11.95	11.49

Distance and Light Kits

157964	LED1007	Infrared Illuminator kit	41	BEG	2" Dia.	0.1	\$15.95	\$14.49
358580	3-337	Modulated Infrared Reflective Detector kit	—	—	0.9 x 0.8 x 0.4	—	19.95	17.95
236081	MK145	Flashing Pumpkin kit	71	BEG	3.2 x 4.0 x 1.3	—	11.95	10.95
147635	MK100	Flashing Christmas Tree kit	30	BEG	4.0 x 2.4 x 1.0	—	6.95	6.25
211781	MK130	3D Flashing Christmas Tree kit	36	INT	3.1 x 3.5 x 4.0	—	9.95	8.95
236072	MK117	Deluxe Christmas Tree kit	208	INT	3.2 x 5.6	—	19.95	18.95
200310	MK124	Scrolling Message kit	76	INT	3.5 x 2.6 x 1.8	0.2	22.95	20.95
147555	MK101	Flashing LED Sweetheart kit, Requires 9V battery, 25 T1 (3mm) Red LEDs	46	INT	1.3 x 2.3 x 1.3	0.1	9.95	8.95
2123928	MK149	Love tester kit, 10-LED "love level" indicator	44	BEG	4.1 x 3.1 x 0.98	—	15.95	14.95
147580	MK102	Flashing LED kit, Requires 9V battery, 2 T1 3/4 Red LEDs	23	INT	1.3 x 1.4 x 0.6	0.1	7.95	6.95
147643	K4304	10-LED Mono VU Meter kit	36	INT	2.7 x 1.4	—	24.95	22.45
129120	K3502	Parking Radar kit	55	INT	4.9 x 1.9	—	45.95	40.95
211764	MK116	Santa Sleigh and Reindeer kit	201	BEG	5.7 x 3.2	—	19.95	17.95
2119671	PAPERV1	Papertronics Vol. 1, makes 3 paper lunar modules that light up with LEDs	13	BEG	11 x 9 x 0.5	—	14.95	14.49
177092	IR-2	Infrared Transmitter & Receiver kit (req. 9V battery)	26	INT	1.0 x 0.8	—	24.95	22.45

Alternative Energy – No Batteries Required

2097521	MSK610	6-in-1 Educational Solar kit, create a solar car, airboat, windmill & more, no tools required	33	BEG	4.75 x 2.4 x 3.4	0.5	\$19.95	\$17.95
2111978	MSK613	3-in-1 Solar Station, peagusus, chariot	104	BEG	—	0.5	19.95	—
2111986	MSK614	T3 Transforming Solar Robot, create a solar tank, scorpion or robot	71	BEG	9.8"Dia. x 3.6"H	0.5	19.95	17.95
2112006	MSK670	Frightened Grasshopper kit	7	BEG	—	—	10.95	9.95
2112090	MSK679	The Solar System Solar kit, build, paint and watch the solar system come to life using solar energy	70	BEG	4.4 x 3.7 x 3.2	0.5	19.95	17.95
2114554	75021	This kit allows you to explore the wind as alternative energy featuring loop wing design	50	INT	—	1.1	66.95	63.95

30-Watt Stereo Amplifier



129138

MP3 Player Kit



2120823

Audio Analyzer



2120815

Digital Echo Chamber Kit



2123944

USB Oscilloscope



2109173

Electronics Discovery Kit



2119662

Breadboard Voltage Regulator



2115750

Christmas Tree Kit



236072

Scrolling Message Kit



200310

Flashing Sweetheart Kit



147555

Love Tester Kit



2123928

6-in-1 Solar Kit



2097521

3-in-1 Solar Station



2111978

Transforming Solar Robot



2111986

Frightened Grasshopper



2112006

Solar System



2112090

Continued on next page

★ For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Order by Phone 24/7 at 1-800-831-4242 or Online at www.Jameco.com

191

NEW
MARKED IN PINK

Electronic Kits (Continued)

* Web Code: ERK

Miscellaneous

Part No.	Mfr. P/N	Description	No. of Pieces	Exp. Level	Dimensions (L" x W" x H")	Wt. (lbs.)	Pricing	
							1	5
358299	70100	Tank and Track Wheel set	40	BEG	—	—	\$9.95	\$8.95
2114520	70108	Tracked Vehicle Chassis kit	57	INT	2.8 x 2.4 x 1.0	—	19.95	18.95
2114546	70168	Double Gearbox, 4-speed, independent left/right	116	EXP	—	—	12.95	11.95
358213	72001	Planetary Gearbox kit, 8 different ratios	—	INT	—	—	19.95	17.95
2114538	72004	Worm Gearbox, Hi-eff kit	58	INT	3.0 x 3.2 x 1.2	—	14.95	13.49
2114511	72102	Gearhead motor with 130 pin spike tire kit (2-unit)	57	INT	—	—	159.95	143.95
358336	70144	Ball Caster set	60	INT	—	0.6	5.95	5.49
127554	K6400	Code Lock kit	67	INT	1.7"L x 1.8"W	0.5	29.95	25.95
128910	K6714	Universal relay card kit, switch large currents using electronic control	37	INT	5.9 x 8.4	—	119.95	113.95
645263	VM110	Control your electronics from your computer w/ this USB Interface, 7 inputs and 10 outputs	1	EXP	5.7 x 3.0 x 0.8	—	89.95	79.95
2119734	C-9701	20 second voice recorder, assembled, 1 msg.	1	BEG	1.4 x 0.9 x 0.5	—	14.95	13.49
357683	3-203	Frankenserial Interface kit	25	—	—	—	39.95	35.95
358432	TELCMD-USB	Telecommander Software	1	BEG	—	0.2	19.95	17.95
404419	165441	Serve tea with this mechanical wind-up Tea Serving Robot	1	BEG	10.0"H x 4.0"W	2.1	79.95	69.95
2124200	MKEL8	This kit teaches the fundamentals of fiber optics. You can transmit your voice or a 1kHz signal through the cable	—	BEG	—	—	31.49	29.95
2124218	MKEL4	The learn to solder flashing siren kit teaches you the basics of soldering & includes 30W iron, wire cutters and solder, 9V battery not included	25	BEG	—	—	18.95	17.95



Double Gearbox

2114546



Gearhead Motor

2114511



Voice Recorder

2119734



USB Interface

645263



Voice Transmit

2124200



Flashing Siren kit

2124218

LEGO Technic Motorized Hauler
Motorized LEGO™ Power Functions including tipping trailer bed, working articulated steering, independent rear suspension and an opening engine cover. It can go anywhere and haul anything, no matter the obstacle or challenge.

- Rebuilds into a flatbed
- 16" (40cm) long
- Features tipping trailer bed and independent rear suspension
- Difficulty level: intermediate
- Ages: 9-16

Includes: Power functions motor and battery box

Requires: 6 AA batteries (not included, recommend P/N 198707, pg 149)



LEGO Mindstorms NXT 2.0

Create the smartest, strongest and most advanced LEGO robots with this new Lego Mindstorms NXT 2.0. Bigger and revised element assortment of 619 pieces, 16 building and programming challenges for 4 new fun and action packed robot models.

- 3 interactive servo motors with built-in rotation sensors
- NXT 32-bit microcontroller with 256k memory
- Support for Bluetooth, USB 2.0
- Color sensor with triple functionality: color sensor/light sensor/color lamp
- 1 ultrasonic sensor
- 2 touch sensors



* Web Code: ERK

Part No.	Mfr. Part No.	No. of Pieces	Price
2117392	8264	575	\$69.95

Part No.	Mfr. Part No.	No. of Pieces	Price
2082644	8547	619	\$279.95

Robotic Arm Edge & USB Interface

Create and take command of the Robotic Arm Edge, the new, incredibly flexible robotic arm you can build yourself. Find gadgets all around the base with its new search light and the enormous reach of the arm

- Five switch wired controller
- Base rotation of 270°
- Lifts 100 grams (3.5 ozs.)
- No soldering required
- Horizontal reach of 12.6"
- Extensive elbow range of 300°
- Difficulty level: intermediate
- 187-piece kit

Requires: 4 D batteries (not included, recommend P/N 215845, pg 149)

Part No.	Mfr. P/N	Description	1	5
2095023	OWI-535	Robotic arm edge kit ..	\$49.95	\$44.95
2111960	535-USB	USB arm controller	39.95	35.95



2095023

OWI

Horizon

Horizon Fuel Cell Technologies has become the world's largest volume producer of commercial fuel cell products, serving customers in over 40 countries. The launch of the "H-Racer" toy-scale fuel cell car in 2006 offered a first glimpse of the company's unique technology that won several consumer product design awards, including a Time Magazine "Best Invention" award. Presently, Horizon produces extremely compact, lightweight, and complex hydrogen generation solutions suitable for electronic hobbyists, including renewable energy science experiment sets and battery-free kits.

Part No.	Mfr. Part No.	Description	1	5
2095007	FCJJ-23	H-Racer 2.0 is the world's smallest hydrogen fuel cell car equipped with remote-control steering and light emitting features with the car	\$119.95	\$109.95
2112137	FCJJ-25	H2GO Hybrid Electric Hydrogen RC Vehicle runs on energy from the sun and water and combines fuel cells for cruise power	129.95	119.95
		Not even the remote control needs batteries		
2095015	FCJJ-27	Alternative Energy kit that combines solar, wind, and fuel cell technologies in a mini-renewable energy system	199.95	189.95
2112145	FCJJ-29	Wind Pitch is a miniature real-working wind turbine (wind power generator) designed to evaluate the pitch (setting angle)	89.95	82.95
		of the profiled blades. Up to 12 profile blades can be installed for evaluation		
2112153	FCJJ-26	Hydro-Wind Turbine kit invents clean energy applications using fuel cells and renewable hydrogen-harness the energy of the wind	99.95	89.95
2112188	FCJJ-22	Bio-Energy kit uses ethanol as fuel source. This fuel cell kit directly converts ethanol (alcohol) to electricity silently and without any combustion ..	99.95	89.95
2112161	FCJJ-11	Fuel Cell Car Science, reversible PEM fuel cell combines electrolysis & power conversion in an autonomous car	59.95	53.95
2112170	FCJJ-16	Solar Hydrogen Education, invent clean energy applications using fuel cells and renewable hydrogen	64.95	58.95
2112196	FCJJ-24	Renewable Energy Monitor with software, 2-line LCD screen displays real time voltage, current, power, joules, resistance and RPM speed	89.95	79.95
		Compatible with all horizon's clean energy education kits		

* Web Code: NRG

NEW
MARKED IN PINK



2095015



2112170

RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.

MONDO•TRONICS

Flexinol Muscle Wires®

These unique nickel-titanium alloy Muscle Wires® actually shorten in length when electrically powered, and can lift thousands of times their own weight.

How it works... Pressing the switch lets power flow from the batteries through the Muscle Wire®, heating it and causing it to contract, raise the lever and lift the weight. When power is removed, the Muscle Wire® cools and relaxes, and the weight helps it return to its starting position.

Includes: Instructions



* Web Code: **WAU**

Part No.	Mir. P/N	Length (meter)	Wire Dia. (microns)	Linear Resistance (Ω/m)	Typical Current (mA)	Deform Weight* (grams)	Recovery Weight* (grams)	Typical Rate**	Pricing	
									1	5
357561	025HT	5	25	1770	20	2	7	—	\$59.95	\$53.95
357456	025LT	1	25	1770	20	2	7	—	19.95	17.95
357931	075LT	1	75	200	100	815	80	40	17.95	15.95
357595	100HT	1	100	150	180	28	150	43	17.95	15.95
141321	100LT	1	100	150	180	28	150	33	17.95	15.95
357472	100LT	5	100	150	180	28	150	33	64.95	59.95
141874	150LT	1	150	50	400	62	330	20	17.95	15.95
160055	375LT	1	375	8	2750	393	2000	4	22.95	20.95
357712	375HT	1	375	8	2750	393	2000	5	22.95	20.95

* Multiply by 0.0098 to get force in Newtons

** Cycles per minute, in still air, at 20° Centigrade



Vector 2X Compass Module

- Pin selectable BCD or binary output format (compatible with Motorola SPI and National Microwire)
- 2° accuracy, 1° resolution
- 3-wire serial output format
- Raw uncalibrated magnetometer output optional
- Hard iron calibration
- Master or slave capability for data clock generation
- 5Hz sampling rate



Part No.	Description	1	5
126703	Compass module	\$39.95	\$34.95

PARALLAX 7 Compass Module

This compass module provides a direct heading angle and includes internal calibration algorithms within its firmware. Temperature compensation and calibration are built in, as well as protection against stray magnetic fields.

- Wide voltage supply range (2.7–5VDC) for use with most microcontrollers
- Digital output (I2C) to nearest 0.1°
- Built-in calibration for an average error of 2.5°
- Internally calculates heading, simplifying software demands
- Compact, breadboard-friendly 6-pin DIP module package
- Low current consumption (typically 1µA in standby mode, 1mA full operation at 3VDC)



NEW
MARKED IN PINK

Part No.	Description	1	5
211943	Compass module	\$33.59	\$31.95

For more Sensors & Modules, see pg 195

More Information Online



Compare products online to quickly find the products you want with the specifications and real time product availability. Purchasing products has never been easier.

www.Jameco.com

MONDO•TRONICS

Shape Memory Alloy Kits, Book and Accessories

A long time developer of Shape Memory Alloy products including the popular Muscle Wire® products and kits. What are Shape Memory Alloys? These unique metals are made from a combination of two or more elements that exhibit hardness and elasticity properties that change radically at distinct temperatures. After alloying and basic processing, SMAs can be formed into a shape (for example a coil spring) and then set to that shape by a high heat treatment. When cooled, they may be bent, stretched or deformed (within limits) and then with subsequent moderate heating (well below the heat setting temperature), they can recover some or all of the deformation – they move when heated!

Shape Memory Alloys have found use in everything from space missions to floral arrangement, to arterial stents for restoring blood flow to clogged arteries, to actuators for miniature robots, to cell phone antennas, orthodontic braces and even eyeglasses.

Muscle Wire Kits

Part No.	Product No.	Description	1	5
141313	3-001	Space Wings kit	\$19.95	\$17.95
357827	3-619	Solar Space Wings kit	23.95	21.95
357528	3-102	Muscle Wire R & D kit (5 meters each of 0.050µm, 100µm LT wire; 1 meter each of 250µm Flexinol LT wire)	225.95	199.95
357641	3-136	Muscle Wire Super Sampler kit (20cm each of 037µm, 050µm, 100µm, 150µm, 250µm)	35.95	32.35
357659	3-141	Project Book Sample kit (20cm of 50µm flexinol wire; 40cm of 100µm and 150µm LT wire)	34.95	31.45

Book

141330	3-133	Muscle Wire Project Book, 3rd Edition	\$19.95	\$17.95
--------	-------	---------------------------------------	---------	---------

Wires and Springs

357798	3-401	Nitinol SMA wire (1 meter L x 500µm Dia.)	\$16.95	\$15.25
357801	3-402	Nitinol SMA wire (1 meter L x 100µm Dia.)	27.95	25.95
357835	3-462	Nitinol tension springs (4pk.) 6mm OD x 750µm	39.95	37.95
357843	3-657	Nitinol compression springs (4pk.) 8mm OD x 950µm	39.95	37.95



141313



357528



357641



357798



357835




357843

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Thrust Washers

Use to reduce the friction that occurs in metal-to-metal contact, particularly where wheels join to axles.



Part No.	I.D.	O.D.	# of Balls	Load Rating @ 15 RPM	1	5
401197	1/8"	.434"	6	89 lbs.	\$2.49	\$2.25
401200	3/16"	.497"	7	104 lbs.	2.49	2.25
401226	5/16"	.622"	9	134 lbs.	2.95	2.75
401234	3/8"	.809"	6	149 lbs.	2.95	2.75
401242	1/2"	.934"	8	198 lbs.	3.49	2.95

***Lasers — Enter Web Code LAZ**

Spider Couplers

- Used with motors
- 1 set screw per hub
- Hub OD: 0.625" Dia.
- Hub length: 0.56"
- Parts sold individually



Part No.	Description	1	5	25
162288	.125" (3.18 mm) ID hub ...	\$1.49	\$1.35	\$1.19
161998	.197" (5.00 mm) ID hub ...	1.19	1.05	.95
162270	.250" (6.35 mm) ID hub ...	1.49	1.35	1.19
162000	Rubber spider	1.55	1.39	1.25

***Web Code: EBE**

PARALAX Roll-Flex Omni Wheel

- Multi-directional roller
- Supports up to 45 lbs.
- Open design eliminates lock-up
- Safe for all surfaces
- Compatible with Stingray Robot (P/N 2099673)
- 2120532: Aluminum axle for omni-wheel
- Tapped for two #4-40 1/4" screws

2120524

2120532

Part No.	Mfr. Part No.	1	5
2120524	Omni directional roller wheel ...	\$24.95	\$23.95
2120532	2" threaded aluminum axle	.89	.79

10-Piece Gear Assortment

- Polyethylene resin
- Gears are 0.147" bore size
- Bushings are 0.07" bore diameter
- T10, T20, T30, T40, T50 and bushing



Part No.	Description	1	5	25
1810072	Gear set — 10 pieces ...	\$7.95	\$6.95	\$6.25

***Gears — Enter Web Code PEF**

Hub and 48-Pitch Gear Set

- Low coefficient of friction requires little or no lubrication
- Residual stress removed by annealing process

168284 Includes:

1 each of the following: 10 teeth with 1/32" bore size; 14 and 16 teeth with 1/8" bore, 20, 24, 30, 36, 44, 54, 66, 84 and 100 teeth with 1/4" bore size


Part No.	Description	1	5	25
157104	1/4" bore aluminum mounting hub with set screws	\$7.95	\$6.95	\$6.25
168284	Gear set - 12 pieces (see description above)	39.95	34.95	31.95

157104

168284

16-Pitch Sprocket Set and Chain

- Operates in high humidity and corrosive environments
- Chain links can easily be added or removed to adjust total length
- Chain tension load: 2.0 lbs.



157075

157075

168276

Part No.	Description	1	5	25
157075	Drive chain (12" long)	\$10.95	\$9.95	\$8.95
168276	Sprocket set - 14 pieces (see description above)	29.95	26.95	23.95

Green Laser Pointer



Class IIIa Laser Product

Uses a wavelength closely matched to the highest sensitivity of the human eye and built w/ cutting-edge crystal technology. Projects a green beam so powerful you can see it against a clear night sky.

- Output wavelength: 532nm
- Output power: <5mW
- 90-day manufacturer's warranty

Includes: Metal gift box, clip and 2 AAA batteries

Part No.	Mfr. Part No.	Size (L" x Dia")	1	5
223731	5608	5.6 x 0.5	\$99.95	\$89.95

Red Laser Pointer Pen

Includes: 2 AAA batteries

- Range up to 500 yards
- 670nm output wave length
- Plastic gift box



Class IIIa Laser Product

Part No.	Mfr. Part No.	Size (L" x Dia")	1	5
153605	4012	5.2 x 0.4	\$21.95	\$19.75

Laser Diode Module

- Operates on 3VDC @ <5mW
- 650nm wavelength
- Beam diameter: 5 x 8mm
- Working dis.: over 50m (daylight), 200m (dark)
- Size: 0.9"L x 0.3"Dia
- One-year warranty



Class IIIa Laser Product

Part No.	Description	1	5
310519	Laser module, brass	\$44.95	\$39.95

Laser Diode

- 182932: Output power - 5mW max.; operating volt. & current: 2.6V max @ 30mA; wavelength - 650nm (typ); beam divergence - 11° from center
- 2120428: Output power - 5mW min.; oper. volt. & current: 2.6V max @ 70mA; wavelength - 650nm (typ); beam divergence - 8° from center



Class IIIa Laser Product

Part No.	Product No.	1	5	25
182932	ULD-6556	\$14.95	\$13.45	\$11.95
2120428	LTLTD505T	6.95	6.25	5.49

CLIMAX Spider Shaft Coupler

- 2 set screws (10-32 x 1/8)
- Size: 0.75"L x 0.5"OD



***Web Code: EBE**

Part No.	Description	1	5	25
138288	.250" ID sleeve coupler ...	\$5.95	\$5.35	\$4.79

650nm Line and Dot Laser Diodes

143845/173243:

- Focus adjustable with locking set screw
- Wattage: 5mW
- Oper. volt.: 3-5V
- Size: 3.3"L x 0.9"Dia.
- One-year warranty

***Web Code: LAZ**

JAMECO ValuePro



173243

143845: Line laser module

- Laser line width: 1mm
- Laser fan angle: 60°

Class IIIa Laser Product

173243: Cross hair laser diode module

- Laser fan angle: 60°
- Size: 3.0"L x 0.9"D
- Female 2.1mm power connector

143837: Module regulated power supply

- Output: 5VDC @ 100mA
- Short-circuit protection
- Input voltage: 95-125VAC or 190-250VAC switchable
- Size: 2.0"W x 1.7"D x 9.2"H
- Weight: 0.6 lbs.



143853: Laser module mount

- X-Y tilt, θ movement
- Built to hold laser diode on target
- Tightening screw for tilt adjustment

143853

Part No.	Description	1	5
143845	Line laser diode module	\$119.95	\$109.95
173243	Cross hair laser diode mod	124.95	114.95
143837	Regulated power supply	20.95	18.95
143853	Laser diode module mount	59.95	53.95

5-Speed Variable Fan Control with LCD Display and Power Supply

- Kit includes:** 12VDC fan (P/N 2099972), 12VDC @ 5.25A open frame power supply (P/N 2099981), membrane switch, power cable assembly, LCD display module and mounting brackets



LCD Graphic Display Module:

- On-board MC68HC90LJ12 Microcontroller
- Input voltage: 12VDC
- On/Off switch, fan speed control switch (1-5 speed), LED power indicator
- Graphic LCD digit height: 0.58"
- Optional second fan connector
- LCD module size: 4.8"W x 1.9"H

Fan:

- Input voltage: 12VDC @ 750mA (9W); CFM: 151.85; 55dBA; 120mm x 120mm x 38mm; 4-lead wires (tachometer and speed) 47.24"L

Open Frame Power Supply (SBU60-105):

- Input voltage: 90-264VAC @ 47-63Hz (5pos. 0.157" pitch connector)
- Output voltage: 12VDC @ 5.25A, 63W (6pos. 0.157" pitch connector)
- Size: 5.0"L x 3.0"W x 1.09"H

Part No.	Description	1	10
2100144	Fan kit	\$39.95	\$35.95

**Can't find the product you're looking for?
Call us at 1-800-831-4242.**

PARALLAX Parallax's mission is to provide the electronics industry with products that are technically innovative, unique and economical. Parallax designs and manufactures microcontroller development tools and small single-board computers. Parallax Inc. current product line consists of BASIC Stamp microcontrollers and development software, SX chips and programmers/debuggers, Propeller chips and tools, project boards, robotics kits, educational tools and sensors.

For Additional BASIC Stamp Modules, See Page 12

*Web Code: PAR

NEW
MARKED IN PINK



Sensors, Modules & Accessories

For more Sensors, see pg 102-104

Part No.	Mfr. Part No.	Description	1	5
2082855	27800	Modular 2-axis joystick, dual 10k pot with common ground, 1.64"x1.2"x1.1"	\$4.95	\$4.75
2124509	27904	C2H5OH (alcohol/benzene) gas sensor module, 4-pin SIP, TTL, 5VDC @ 60-250mA	34.95	32.95
2082901	27920	HS1101 Humidity Sensor, 5VDC to 10VDC, 0.25"x0.40" Dia., -40°F to 212°F	6.95	6.25
2082919	27922	Gyroscope Module, ±3000/s full scale, 3.4VDC to 6.5VDC @ 5.25mA	49.95	44.95
2110035	27925	µOLED display module, 1.5" diagonal, 128x128 pixel resolution	99.95	94.95
2082880	27930	CH4 gas sensor, 5VDC@165mA (sense mode) TTL compatible input and output	34.95	32.95
2082863	27931	CO gas sensor, 5VDC @ 165mA TTL compatible input and output	34.95	32.95
2082871	27932	LPG gas sensor, 5VDC @ 175mA (sense mode) TTL compatible input and output	34.95	32.95
2109499	28026	H48C 3-axis accelerometer, serial SPI, 5VDC, ±3g, free-fall detection	38.95	36.95
2007185	28028	Sensor Sampler kit, includes sensirion temp. and humidity sensor, flexiforce sensor ultrasonic sensor, PIR proximity sensor, Hitachi HM55B compass module	195.95	185.95
2109229	28146	GPS receiver module, 5VDC, 4800bps TTL, track 12 satellites, 4-pin header	89.95	85.95
2109667	28526	3-axis accelerometer, digital output, SPI or I2C, sensitive select ±2g/±4g/±8g	34.95	32.95
2123549	28560	Mouse Sensor kit, 2-wire serial, compatible w/ BS2, SX & Propeller microprocessors	21.95	20.95
653651	29123	HM55B compass module, compatible with most microcontrollers	29.95	26.95
2109747	29140	Introduction to sensor kit, includes distance, compass, proximity, multi-axis	99.95	89.95
2111943	29323	HMC6352 Compass module, 2-axis, 2-wire I2C, 6-pin DIP, 0.46" x 0.59" x 0.54"	33.59	31.95
2109149	30080	Say It voice recognition module, 32 user definable commands	89.95	85.95
2110060	32311	Propeller accessories kit (PS/2 keyboard and mouse, display)	149.95	142.95
		3.5" NTSC/PAL LCD compatible display, for P/N 2007126		
2082935	32313	SD card adapter, SPI communication	19.95	17.95
2109691	350-00014	Infrared receiver, 38kHz carrier freq. found in Boe-Bot and SumoBot kits	4.49	4.25
2109587	555-27401	QTI line sensor, IR emitter/detector, 5VDC, analog/digital output	7.95	7.49
2082927	555-28027	PIR Sensor kit, single bit high/low output	9.95	8.95
2109413	570-28015	PING Mounting Bracket kit, includes Parallax standard servo	29.95	26.95
282861	28015	Ping Ultrasonic Range/Distance Finder	29.95	27.95



Motor / Servo Controllers

For Servo Motors, refer to pg 114

2109659	27969	USB BiSTEP Motor Controller, up to 2 unipolar 4-pole stepper motors	\$134.95	\$129.95
2099104	28830	Propeller Servo Controller, P8X32A-M44 propeller chip on-board	49.95	47.95
2007193	29144	HB-25 Motor Controller, 6VDC min. to 16VDC max motor supply	49.95	44.95

Kits, Protoboards and Development Boards

387971	27807	BASIC Stamp USB discovery kit, includes Board of Education USB, BASIC Stamp 2 module	\$159.95	\$149.95
282829	27207	BS2 Educational Starter kit, includes BASIC Stamp 2 module, serial Board of Education	159.95	149.95
661116	27297	Stamp Works kit plus, includes Parallax Professional Development Board	289.95	259.95
2109368	28024	USB to serial development tool, 5VDC, FTDI chip in-circuit	22.49	21.49
1536907	28103	Board of Education full kit, serial version	99.95	89.95
282933	28132	Serial BOE-BOT full kit, complete reprogrammable robot kit	159.95	143.95
2109165	28803	Board of Education full kit, USB version	99.95	89.95
387997	28832	USB BOE-BOT full kit, complete reprogrammable robot kit in USB version	159.95	143.95
2113439	28975	Robot Base kit made of plywood, pre-drilled for motors and sensors	34.95	31.95
2099673	28980	Stingray Robot kit, multicore propeller chip based control board, 64kB EEPROM on-board 3.3V & 5V switching power supply	299.95	279.95
2109721	32100	Propeller Demo Board, USB to serial interface, P8X32A-Q44 chip	83.95	79.95
2110596	27112	BASIC Stamp 1 project board, DB-9 serial, 5.5-15VDC, incl. 1 3/8" x 2" solderless breadboard	39.95	35.95
130921	27120	BASIC Stamp 2 carrier board, 24-pin DIP socket, serial port, 9V batt and stamp not incl.	15.95	14.95

*For All Parallax Products — Enter Web Code PAR

Continued on next page

*For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

PARALLAX

Wireless Interface Devices & Embedded Networking Solutions

NEW
MARKED IN PINK

Kits, Protoboards and Development Boards (Continued)

★ Web Code: PAR

Part No.	Mfr. Part No.	Description	1	5
2007126	32111	Propeller Professional Development Board with built-in USB	\$169.95	\$152.95
2007097	32300	Propeller Starter kit, includes Propeller manual, Propeller demo board, Type A to mini B USB cable, 6VDC to 9VDC power requirement	99.95	89.95
2007100	32305	Propeller Education kit, includes Propeller Fundamental Book, Propeller DIP plus kit	124.95	114.95
2007118	32812	Propeller USB proto-board, P8X32A-Q44 Propeller chip. 64kB EEPROM for program and storage, LM1086 5V and 3.3V regulators	39.95	35.95
2109202	90005	BASIC Stamp activity kit, 40+ projects, 350pp guide, 48 pcs.	99.95	94.95
357270	27400	Mini SumoBot Programmable kit with surface mount BASIC Stamp 2 Microcontroller	189.95	169.95



RFID and Smart Card Read/Write Modules and Tags

Use these modules for a variety of hobbyist and commercial applications, including data storage, access control, user identification, robotics navigation, inventory tracking, payment systems, car immobilization, or security systems.

Part No.	Mfr. Part No.	Description	1	5
2123477	32320	Smart card R/W, dual-row SIP, compatible w/ Stamp® and Propeller™	\$9.95	\$9.49
2123485	32321	Smart card, 256 bytes serial EEPROM, 2.5ms write time	.95	.89
2123493	32322	Smart card, 2KB serial EEPROM, 5ms write time	1.25	1.19
2123506	32323	Smart card, 256 bytes serial EEPROM, 5ms write time	.95	.89
2123514	28440	RFID read/write module, serial, use card 2123522, supports passive tags	49.95	47.49
2123522	28441	RFID tag (R/W), 116 bytes user data to EEPROM, use only w/ 2123514	2.49	2.39
2007169	32390	RFID Reader kit, serial card reader, includes 4 different passive tags	49.95	46.95
2007177	32395	RFID Reader kit, USB card reader, includes 4 different passive tags	64.95	59.95
2109739	28141	RFID passive tag, 54mm x 85mm rectangle, EM-4100 family	.95	.85
2110887	28142	RFID passive tag, 25mm round, EM-4100 family	.95	.85
2110633	32397	RFID passive tag, 25mm round, EM-4100 family	.95	.85
2109851	28161	RFID passive tag, blue eye key fob, EM-4100 family	.95	.85



Wireless Interface Devices

Part No.	Mfr. Part No.	Description	1	5
2113421	32400	Xbee adapter board, USB interface, PCB mount, 0.1" spacing, soldering required	\$27.95	\$25.95
2113412	32403	Xbee adapter board, 0.1" spacing, PCB mount, soldering required	3.49	3.25
2113375	32404	Xbee chip antenna, 1mW, 2.4GHz, 300' line of sight, 802.15.4 network	26.95	24.95
2113391	32406	Xbee chip antenna, 60mW, 2.4GHz, <1 mile range line of sight, 802.15.4	46.95	43.95
2119961	SE1200A-DIP	DataBridge, I/O transceiver, 6 digital I/O, 2 analog I/O, UART Tx/Rx, 2.4GHz, 1mW, 0.625 mile, int. ceramic antenna	86.95	79.95
2119970	SE1200D-DIP	DataBridge, I/O transceiver, 6 digital I/O, 2 analog I/O, UART Tx/Rx, 2.4GHz, 100mW, 2.5 mile, SMA connector	99.95	94.95
2109384	27982	433MHz RF Transceiver module, 1200-9600bps transfer rate, 250 ft. line of sight range	39.95	37.95
2123573	32402	Xbee, adapter, 2 x 5 dual SIP, 3.3/5V, serial pass-through	29.95	28.49
2123581	32409	Xbee, zigbee series 2 1.25mW, wire antenna, <400 ft.	31.95	29.95
2123590	32408	Xbee, zigbee series 2 pro, 63mW, wire antenna, <2 mile	46.95	43.95
2123611	32401	Xbee adapter board, 3.3/5V, Vreg & Logic converter included	15.95	14.95
2123901	SE1200E-DIP	DataBridge, I/O transceiver, 6 digital I/O, 2 analog I/O, UART Tx/Rx, 2.4GHz, 100mW, <2.5 mile external UFL connector	99.95	94.95



Embedded Networking Solutions

Part No.	Mfr. Part No.	Description	1	5
2124365	WIZ810MJ	Plug-in network module having W5100, usable without H/W design for W5100 transformer and RJ-45, supports MCU BUS and SPI interface	\$27.95	\$25.95
2124322	WIA110SR	Serial to ethernet module, 10/100Mbps ethernet max 230Kbps serial	32.95	30.95
2124373	WIZ200WEB	Embedded web server module having Atmega128 & W5300, operates as HTTP server, supports 10/100Mbps ethernet	44.95	41.95
2124357	WIZ610WI	Ethernet to wireless bridging enable network, stand-alone typed 802.11b/g wireless LAN module, 54Mbps data rate and max. 20Mbps effective data	45.95	42.95
2124381	WIZ140SR	Connect with the serial device directly, supports 4 RS-232 serial ports, 10/100Mbps, ethernet interface, max. 115, 200bps serial interface	69.95	64.95
2124331	WIZ1000	Connects directly to serial device adding network functionality, 10/100Mbps ethernet max 230Kbps serial	89.95	84.95
2124349	WIZ6000	Serial to WiFi, ethernet to WiFi, 1RS 232, RJ-45 and standard 802.11b/g wireless interface, 54Mbps effective data transmission, eval boards available at www.Jameco.com	154.95	144.95



RoHS compliant product + This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 199.



Arduino Microcontrollers, Kits, Shields & Accessories

* Web Code: **ARD**

Arduino is an open-source physical computing platform based on a simple microcontroller board. Create interactive objects that can read inputs from a variety of switches, sensors, and computers to control lights, motors, and other physical outputs. The shields are expansion boards that sit atop an Arduino and broaden the functions, from motor control to prototyping.

NEW
MARKED IN PINK



Microcontroller Boards

Part No.	Mfr. Part No.	Description	Dimension (L" x W" x H")	Pricing	
				1	5
2121105	MKSP4	Uno ATmega328, 14 digital I/O, 6 analog I/O, USB, ICSP, 32KB flash, replaced duemilanove	2.7 x 2.1	\$29.95	\$28.49
2121113	MKSP5	Mega 2560, ATmega 2560, 54 digital I/O (14 PWM), 16 analog in, 4 UART, shield compatible	4.3 x 2.1 x 0.6	64.95	59.95
2121121	MSGSA	Getting Started kit w/ book, includes Arduino Duemilanove, no soldering required	—	69.95	66.49
2121148	MKGR1	Nano, ATmega328, 14 digital I/O (6 PWM), 8 analog in, USB mini-B, .7" x 1.7"	0.7 x 1.7	34.95	33.49
2124251	MKND01	Netduino, ATmega 32-bit micro, 128KB flash, 14 digital I/O, 6 analog in, GPIO	2.8 x 2.1 x 0.5	43.95	41.75
2115768	KARDW	Ardweeny microcontroller kit, Arduino-compatible, ATmega328, 7+ pieces, assembly/soldering req.	1.6 x 0.54	13.95	13.25

Shields for Arduino (Arduino sold separately)

2121130	MKAD7	MotorShield kit, control up to 4 DC motors, servos. 4 H-bridges, motors not included, soldering required	2.7 x 2.1	\$21.95	\$20.95
2124242	MKSP7	Ethernet shield, RJ45 conn., customizable MAC & PC, not-compatible with Arduino Mega	—	59.95	56.95
2124293	MKNTD1	EZ-Expander shield, 13 additional output pins, soldering required	—	17.49	16.75
2124314	MKAD6	ProtoShield, 0.1 x 0.1" grid, DIP ICs to 20-pins, upto 14 SOIC parts, ICSP header	—	18.95	17.95

Accessories, Chassis and Miscellaneous Kits


2124226	MKSKL5	Povard Kit, "Persistence of Vision", 8 bright LEDs, 24 char. msg., Arduino req. to program	—	\$37.95	\$35.95
2124277	MKSEED7	Aluminum Mobile Platform, 2WD Arduino compatible, 2 x 3-6VDC motors, 27.6"/sec	6.7" diameter	56.95	53.95
2124285	MKSEED8	Aluminum Mobile Platform, 4WD Arduino compatible, 4 x 3-12VDC motors, 35"/sec	7.9 x 6.7 x 4.1	62.95	59.95
2124234	MKPS01	Power cord switch, control outlet with microcontroller, 3-prong, 10A@125VAC, 5V ctrl. signal	—	23.95	22.75
2121156	MKSP8	Electronic Brick Starter kit, 16x2 LCD, 5 sensor/switches, LEDs, sensor chassis, Arduino not included	—	49.95	47.49
2117341	50512	Basic breakout board, 3.3/5V, FTDI mini USB-B to serial 6-pin, works w/ Arduino & clone 5V Arduino boards	1.4 x 0.65 x 0.25	19.95	18.95

PowerFilm. Flexible Thin Film Solar Modules

* Web Code: **QEM**

Wireless Electronics Series The Wireless Electronics Series offers a new opportunity to solve the old problem of limited power for wireless electronics in portable and remote applications. This module is lightweight, paper thin and durable.

228013



Part No.	Mfr. Part No.	Operating Voltage	Operating Current (mA)	Size (L x W x T)		Pricing		
				Inches	mm	1	5	25
227985	SP3-37	3.0	22	2.5 x 1.5 x .01	64 x 37 x 0.2	\$3.95	\$3.49	\$3.15
227993	TX3-25	3.0	25	4.5 x 1.0 x .01	114 x 25 x 0.2	3.95	3.49	3.15
171061	MP3-37	3.0	50	4.5 x 1.5 x .01	114 x 37 x 0.2	5.95	5.35	4.79
228013	MPT3.6-75	3.6	50	2.9 x 3.0 x .01	74 x 75 x 0.2	7.95	6.95	6.45
228030	SP4.2-37	4.2	22	3.3 x 1.5 x .01	84 x 37 x 0.2	5.95	5.35	4.79
228056	MPT4.8-150	4.8	100	3.7 x 5.9 x .01	94 x 150 x 0.2	17.95	16.95	15.25
228064	MPT6-75	6.0	50	4.5 x 3.0 x .01	114 x 75 x 0.2	12.95	10.95	9.95
228072	MPT6-150	6.0	100	4.5 x 5.9 x .01	114 x 150 x 0.2	19.95	17.95	15.95
228099	MP7.2-150	7.2	200	10 x 5.9 x .02	253 x 150 x 0.6	39.95	35.95	31.95
228101	MPT15-75	15.4	50	10 x 3.0 x .02	253 x 75 x 0.6	19.95	17.95	15.95
228110	MPT15-150	15.4	100	10 x 5.9 x .02	253 x 150 x 0.6	39.95	35.95	31.95

WeatherPro Series

The right choice for permanent outdoor applications that are directly exposed to the elements. These modules feature rugged construction, a UV-stabilized surface, an extra edge seal for weather protection, and tin-coated copper leads that extend from the module.

228161



Part No.	Mfr. Part No.	Operating Voltage	Operating Current (mA)	Size (L x W x T)		Pricing		
				Inches	mm	1	5	25
228161	P7.2-75	7.2	100	10.3 x 3.9 x .04	270 x 100 x 1.1	\$34.95	\$31.49	\$28.25
228179	P7.2-150	7.2	200	10.3 x 6.9 x .04	270 x 175 x 1.1	49.95	44.95	39.95
228195	PT15-150	15.4	100	10.3 x 6.9 x .04	270 x 175 x 1.1	54.95	49.45	44.49
228208	PT15-300	15.4	200	10.3 x 12.8 x .04	270 x 325 x 1.1	99.95	89.95	79.95

60mm Solar Panel

* Web Code: **AEK**

- Clear coat plastic
- Power output: 0.25W max.
- Volt. output: 4.7VDC to 5VDC
- Size: 2.36"L x 2.36"W x 0.1"Thick
- Material: copper indium diselenide

Photovoltaic Mini Module



Part No.	Description	1	5	25
1928142	Solar panel	\$7.95	\$6.95	\$6.25

Mini-Panel Solar Cells

Ready to Use! No Soldering 200221

Encapsulated mini-panels utilize solar cells similar to those that power our satellites in space, yet they are safe and simple to use. Mini-panels allow for handling without the normal breakage and cell damage associated with fragile solar cells. 6" red/black lead wires attached. Modules may be connected to create different outputs.

* Web Code: **MPS**



Part No.	Cross Ref.	VDC @ mA	Size (L x W)	1	5
2113658	4-800	0.5 @ 800	3.5" x 2.5" ..	\$8.95	\$7.95
2113631	4-1.5-200	1.5 @ 200	3.5" x 2.5"	9.95	8.95
200221	SOL4	2.0 @ 200	3.0" x 3.7" ..	10.95	9.95
215319	4-3.0-100	3.0 @ 100	3.8" x 2.5" ..	11.95	10.95
215327	4-6.0-50	6.0 @ 50	3.8" x 2.5" ..	14.95	13.49
2113666	SC-GRAB	Solar cell grab bag	(min. 40pcs/bag, sizes vary)	7.95	6.95

* For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

PowerFilm.

Ultra Compact, Ultra Lightweight, Easy-to-Use

PowerFilm develops and manufactures thin, flexible solar panels based on a proprietary low cost, high quality production process. PowerFilm encompasses the consumer part of today's solar markets and are used for recharging consumer electronics, such as laptops, cell phones, GPS, and mp3 players.

2114474/2114482: Charge batteries, cell & satellite phone, laptop, etc. Lightweight and portable (foldable)
2114491/2114503: Thin film on plastic, truly rollable, and does not suffer from wasted over-voltage (rollable)
2108621: Charges 2 AA batteries (folds up compactly to fit into pocket) **2097133:** Charges 2 AA batteries and most small USB devices (folds up compactly to fit into pocket)

Foldable Solar Chargers



* Web Code: FSC

2097133


Part No.	Mir. Part No.	Description	Operating Voltage @ Current	Charging Voltage	Folded/Unfolded Dimensions (in.)	1	5	25
2108621	AA Charger	Solar, foldable charger	3.6V @ 0.6A	—	5.5 x 3.3 x 1.4 / 5.5 x 31.5	\$89.95	\$79.95	\$69.95
2097133	UBS + AA Charger	USB + AA charger	3.6V @ 0.4A	5.0V	3.25 x 5.5 x 1.38 / 24 x 5.5	89.95	79.95	69.95
2114474	F15-300N	Solar, foldable charger, 5W	15.4V @ 0.3A	—	10.3 x 3.3 / 24.5 x 10.3	99.95	89.95	79.95
2114482	F15-600	Solar, foldable charger, 10W	15.4V @ 0.6A	—	10.5 x 3.5 / 23.7 x 21	249.95	224.95	195.95
2114491	R15-300	Solar, rollable charger, 5W	15.4V @ 0.3A	—	11.5 x 4 x 3.7 / 11.5 x 21	149.95	134.95	124.95
2114503	R15-600	Solar, rollable charger, 10W	15.4V @ 0.6A	—	11.5 x 4.25 / 11.5 x 38	249.95	224.95	195.95

Handbooks, Project Guides & Reference Books

* Web Code: FOR

Forrest M. Mims III Engineer's Guides

One of the most widely read electronics authors in the world. Forrest M. Mims, III has written over 60 books and has been honored twice for excellence by the Computer Press Association. "Getting Started in Electronics" has sold more copies than any other book on the subject. It is a complete electronics course in just 128 pages! Mims teaches the basics and takes you on a tour of analog and digital components. He explains how they work and shows how they can be combined for various applications. It also includes assembly tips and 100 electronic circuits and projects to build and test. If you're up for a challenge, see Forrest's Puzzler on page 83 or Forrest's Recipe on page 104.

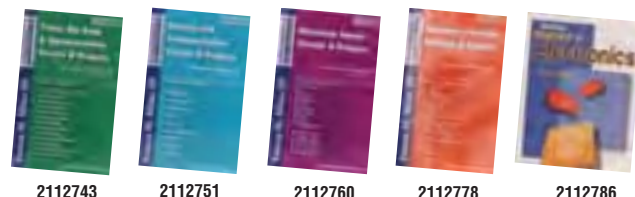

2112743

2112751

2112760

2112778

2112786

Part No.	Description	Pages	Price
2112743	Forrest M. Mims III Engineer's Guide to Electronics Volume I: Timer, OP Amp, Optoelectronic Circuits & Projects	124	\$12.95
2112751	Forrest M. Mims III Engineer's Guide to Electronics Volume II: Science & Communication Circuits & Projects	140	12.95
2112760	Forrest M. Mims III Engineer's Guide to Electronics Volume III: Electronic Sensor Circuit & Projects	144	12.95
2112778	Forrest M. Mims III Engineer's Guide to Electronics Volume IV: Electronic Formulas, Symbols & Circuits	192	12.95
2112786	Forrest M. Mims III Getting Started in Electronics, A Complete Electronics Course	128	19.95

Handbooks, Project & Reference Books

Whether you're an engineer or hobbyist Jameco has the book for you. Jameco offers a broad selection of reference books, project books and pocket handbooks to guide you through all of your projects A through Z! Don't see what you need below be sure to check out our website for our complete selection of reading material. Use Web Code BKS.

* Web Code: BKS



2112815

2112807

2112794

677951

357659

141330

2123258

305171

88225

2113447

Part No.	Description	Pages	Price
2112815	Basic Communication Electronics: Explains analog electronic devices and circuits, how they work and how they are used to build communication systems with an emphasis on semiconductor devices and integrated circuits (ICs)	224	\$21.95
2112807	Basic Digital Electronics: Explains digital system functions and how digital circuits are used to build them	192	21.95
2112794	Basic Electronics: Explains electronic devices and circuits, how they work and how they are used	224	21.95
677951	Modern Solder Technology, Competitive Electronics Manufacturing	622	49.95
357659	Mondotronic, Muscle Wire Project Book Sample kit	128	34.95
141330	Muscle Wire Project Book, 3rd Edition (for more muscle wire & kits, see page 193)	128	19.95
2123258	Pocket PC Reference Book, 14th Edition. This book covers troubleshooting error codes, Windows® Vista & 7, new processors and drive support	1088	14.49
305171	Rechargeable Batteries, Application Handbook. This book covers sealed nickel-cadmium and sealed lead-cells.	290	39.95
88225	Texas Instruments TTL Databook. Databook that contains Texas Instruments TTL logic	2140	34.95
2113447	Programming & Customizing the Multicore Propeller Microcontroller: Official Guide by Parallax	475	39.95



Sign up for Jameco e-newsletter & receive the latest in product news, projects & special offers.

www.Jameco.com/GotMail

PAYMENT OPTIONS

Credit Card/Check Cards

We accept VISA, MasterCard, American Express and Discover. Your account will not be charged until your order is shipped. When ordering, please advise name on card and credit card billing address.

Check or Money Order

You may pay by check or money order in U.S. funds, drawn on a U.S. bank.

Open Account

It is easy to open an account with Jameco. Contact us for obtaining open account status.

C.O.D.

Personal checks are accepted. Please add \$10.00 per C.O.D. order. Include the name and address of your bank and your account number.

International Orders

All foreign orders must be prepaid with a credit card (see approved credit cards above), wire transfer, traveler's check, cashier's check or money order drawn on a U.S. bank in U.S. funds only. Please do not send cash. Jameco cannot accept letters of credit as a form of payment. E-mail: International@Jameco.com.

5 EASY WAYS TO ORDER

Telephone: Toll-Free 24 hours a day!

1-800-831-4242

FAX: International orders, call 1-650-592-8097

US/Canada: 1-800-237-6948

Other Countries: 1-650-592-2503

Online: <http://www.Jameco.com>

On-line catalog! Our complete offering of products is searchable on the Jameco website!

E-Mail/Mail: E-Mail your order to:

Sales@Jameco.com or print and fill out the order form at www.Jameco.com then mail it to us at the address below.

In-Person: Visit Jameco at

1355 Shoreway Road

Belmont, CA. 94002.

Will-call office hours are

8:00a.m. – 5:00p.m. Monday–Friday.

CONTACT INFORMATION

The following services are available at 1-650-592-8097 Monday – Friday from 6:30 a.m. – 5:00 p.m. PST or via e-mail:

- International Sales (International@Jameco.com)
- Customer Service (Custservice@Jameco.com)
- Credit Department (Credit@Jameco.com)
- Technical Support (Tech@Jameco.com)

(Monday – Friday – 8:00 a.m. – 5:00 p.m. PST)

Toll-Free Hotline!

Please call us at 1-800-831-4242.

POLICIES

Confirming Orders

Please do not send confirming orders. If company policy necessitates a confirming order, please mark "CONFIRMING" boldly on the first page of the order.

Minimum Order

A \$5.00 processing fee will be added to telephone orders below \$25.00 and web orders less than \$10. All international orders below \$40.00 will incur a \$7.50 processing fee.

Order-Cancellation & Rescheduling

All cancellations and rescheduling are subject to the final approval of Jameco Electronics. visit us at www.Jameco.com/cancelling-rescheduling.

SERVICES

30-Day Money Back Guarantee

If for any reason you are not completely satisfied with your purchase, simply return the product, in its original packaging, within 30 days for a refund, credit or exchange. Parts returned due to customer ordering error and parts that are returned over 30 days are subject to a restocking fee. Call our customer service department at 1-800-536-4316 or visit www.Jameco.com to request an RMA#. It should appear clearly on the outside of the box. Returns without an RMA# will not be accepted, and no freight collect packages will be accepted. We're sorry, but books, kits, software, grab bags and special orders cannot be returned. Special orders consist of products sold at an OEM quantity discount or products not listed in the Jameco catalog.

Jameco Warranty

Jameco warrants all merchandise against defects in material or workmanship for a period of 90 days (One year for Jameco ValuePro, ReliaPro & BenchPro products) from the original purchase date unless otherwise stated in writing by Jameco. If Jameco receives the product considered to be defective within this warranty period and the product is determined to be defective, Jameco will, at its sole option and discretion, either repair or replace the product. The foregoing is your sole and exclusive remedy and states Jameco's entire liability arising out of this warranty. [However, Jameco will transfer to customer whatever transferable warranties and indemnities Jameco receives from the manufacturer of the products. Any claims arising from such manufacturer's warranties shall be the sole responsibility of the manufacturer and not of Jameco.] Moreover, Jameco's limited warranty is void if the damage or defect has resulted from improper customer assembly, failure by customer to follow instruction, product modification, negligent or improper operation, accident, abuse or misapplication. Products returned to Jameco pursuant to this warranty must be returned to Jameco prepaid.

No Other Warranties

The limited warranty above is exclusive and in lieu of all other conditions and warranties for the products and documentation. Jameco makes no other conditions or warranties, express, implied, statutory or otherwise, and expressly disclaims all other conditions and warranties, including but not limited to, implied conditions or warranties of merchantability, fitness for a particular purpose, and non-infringement of the products.

Limitation of Liability

Jameco shall not be liable for any incidental, special or consequential damages for breach of any warranty, expressed or implied, directly or indirectly arising out of Jameco's sale of merchandise, including any failure to deliver any merchandise, or arising out of customer's installation or use, whether proper or improper, of the product, separately or in combination with other equipment, or from any other cause. Products sold by Jameco are not authorized for use as critical components in life support devices or systems.

RoHS COMPLIANCE

Jameco obtains all RoHS compliance status information from its suppliers solely and does not verify or confirm such status. Products are coded with the following symbols throughout the catalog:


Ⓡ RoHS compliant product

+ Available in both RoHS and non-RoHS

PRICES

Prices are effective 1-3-10. In the unlikely event you find a lower price in a printed competitor catalog or magazine, simply call us with the details at the time of purchase. We'll beat any price by 10% as long as it's above our cost. Prices and discounts are subject to change without notice. Jameco is pleased to occasionally offer promotional discounts to our customers but these are to be applied to products and orders purchased at published prices and may not be combined with any other discounts. We are not responsible for any typographical errors in this catalog. Photos are representative; product appearance may vary.

SHIPPING INFORMATION

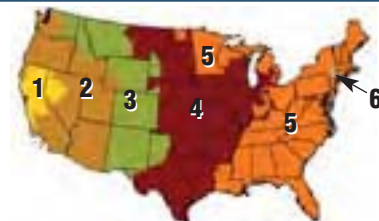

Guaranteed Delivery Time for UPS Ground (Business Days)

1 day 2 3 4 5 6 days

Orders placed on business days by 6pm Eastern Time will be shipped the same day. Orders placed on weekends and holidays will ship the following business day FOB California. Orders placed online for drop ship items may require an additional two business days to ship. Orders requiring special credit approval and orders for backordered products will require additional time to ship.

Options and Rates

Jameco offers shipping options with UPS, FedEx and USPS. Jameco offers the following shipping option:

- UPS/FedEx Ground Shipping
- UPS/FedEx 3-day Shipping
- UPS/FedEx 2-day Shipping
- UPS/FedEx Overnight AM
- UPS/FedEx Overnight PM
- USPS Delivery



Shipping charges are calculated based on actual weight and are charged at the time of shipment. Jameco offers its business customers the option of shipping on the customers' shipping account. Customers with orders that will likely be above 50 pounds should call Jameco to review other carrier options.

For a complete list of shipping charges by carrier, service and weight visit the web address: www.Jameco.com/shippingrates

Tracking Your Order

You can track your order by calling Jameco or by clicking the Track Orders link in the top right side of all www.Jameco.com web pages.

International Orders

Jameco's international rates are not published on our website at this time. For orders place on-line, Jameco will select the lowest price option and as long as the cost is less than 25% of the total order it will be automatically released. In the event that is more than 25% we will contact the customer with the shipping options. For customers who would like to select a specific carrier or estimate pricing before placing an order call us at 1-650-592-8097.

A-B

A/D CONVERTERS	14
ADAPTERS	
Audio/Video	65,67,84-85,188
BNC	86-87
Cables	186-187
Car	129
Cigarette Lighter	129
Couplers	62-63,88
D-Sub	83
DIP	84
Gender Changers	83
Keyboard	82,187
Modular Telephone	62-63
Network	62-63
Null Modem	83
PLCC	177,179
Power	129-130,187
PS/2	82
RF	84-85
SATA Disk Drive	187
SCSI	83
Serial	12,83,184,186
SMA	88
SOIC	179
Telephone	62-63
Terminators	85-86,88
TSOP	179
UHF	85
USB	82,129,185-186,188
Wall Transformers	121-125,129
ZIF	179
ALLIGATOR CLIPS/CONNECTORS	158-159
ANALOG PANEL METERS	153
ANNUNCIATORS	105
ANTI-STATIC EQUIPMENT	9,164
APPLE/MACINTOSH PRODUCTS	147,183-185,187
AUDIO/VIDEO	
Adapters	84,188
Audio Plugs/Jacks	65-67,130
Audio Transformers	132
Cables	65
Microphone (XLR)	67
Microphones	107,183
Power Plugs/Jacks	130
RCA Plugs/Jacks	65,67
Speakers	106-107,183
Transmitters	188
AUTOMOBILE PLUGS	130
BANANA PLUGS/JACKS	158-159
BASIC STAMP CONTROLLERS	12
BASIC SWITCHES	92
BATTERIES & ACCESSORIES	
Alkaline	149
Battery Pack	148
Chargers	147-148
Holders & Snaps	148
Lead Acid	147
Lithium	147
NiCd	147
NiMH	147
Rechargeable	147-149
Silver Oxide	149
Zinc Chloride	149
BINDING POSTS	158-159
BNC CABLES/CONNECTORS/ADAPTERS	65,84-88,157-159
BOOKS	3,193,198
BOTTLE	170
BOXES	173-174
BRACKETS/MOUNTING RAILS	83,109,142,182,186,189
BREADBOARDS	172-173,175,177
BRUSH	170
BRUSHLESS FANS	115-119
BUNGEE CORD	163
BUSINESS CARD KIT	182
BUZZERS	
Mechanical/Electromechanical	106
Piezo/Sirens	105-106
C	
CABINETS/ENCLOSURES	173-174,186
CABLE MARKERS	63
CABLE SLEEVES	64
CABLE TESTERS	154,156

CABLE TIES & CLAMPS	63-64
CABLE, ASSEMBLIES AND BULK	
Accessories	62-64,186
Adapter	65,186-187
Audio	58-60,65,187
BNC	65,88
Bungee	163
Category 5e	61
Category 5e UTP Network	61
Category 6 RJ45 Network	61
Coaxial	59,65,88
Communication	59
Computer	59-60,180,182,185-187
DVI	65
Extension	186-188
Fiber Optics	89
Firewire	186
Flat Ribbon	60,187
Floppy Drive	187
Hard Disk Drive	186-187
HDMI	66
Hook-up	58
IEEE 488/1284/1394 Cable	186
Keyboard	182,187
Management	63-64,186
Modem	186
Modular Telephone	58,61-62
Monitor	182,187-188
Mouse	182,187
Multi-Conductor	59
Network	61-62,88
Null Modem	186
Paired	58,60
Panel Bracket	83
Power Cords	119,133-134
Printer	61,187
Retractable	62
RGB	65
Ribbon	187
S-VHS	65
SATA	187
SCSI	187
Security	58
Serial	186-188
SMA/SMB	88
Speaker	61
Switch Box	187
Telephone	58,61-62
Testers	156
Tools	160-161
USB	129,185-186
Video	58,65,88
CALIPERS	163
CAMERAS AND ACCESSORIES	
Accessories	189
Antennas/Boosters	188
Board	189
CCD	189
CMU	189
DVR	189
Enclosed	189
Infrared	189
Mounts, Mounting Kits, Brackets	189
Surveillance	189
Transmitters/Receivers	188
Wireless	188-189
CAPACITORS	
Assortment/Kits/Grab Bags	42-43
Ceramic Chip, SMT	50-51
Ceramic Disc	47
Ceramic, Axial Leaded	47
Ceramic, Monolithic Radial	48
Ceramic, Trimmer	48
Dipped Silver Mica	49
Dipped Tantalum	46-47
Electrolytic	44-46,49
Grab Bag	43
Memory Back-Up	48
Metallized Polyester	49
Motor	49
Mylar, Metallized Polyester	48
Suppression	SNC
Surface Mount	49
Surface Mount (SMT)	48-51
Tantalum Chip, SMT	49-50
Tool	163
CAR POWER ADAPTER	129
CARD-EDGE CONNECTORS	81

CARDS, COMPUTER	
Camera Board	189
Controller	181
Input/Output	181
Interface	181
Network	185
Parallel	181
SCSI	181
Serial	181
Sound	181
Video Graphics	181
CASTER	109
CATEGORY 5e CABLE/WIRE	61
CATEGORY 6 CABLE	61
CD-ROM DRIVES & ACCESSORIES	187
CELL PHONE ACCESSORIES	183
CHEMICALS & ACCESS.	171,176
CHOKES	
Assortments	43
Axial RF	57
Conformal RF	57
Hash RF	57
Molded RF	57
CIGARETTE LIGHTER ADAPTER	129
CIRCUIT BOARD MOUNTING HARDWARE	107-109
CIRCUIT BOARDS	170,176-178
CIRCUIT BREAKERS	41
CLEANERS/DEGREASERS	171
CLIPS	
Alligator	158-159
Test	158-159
CLOCK CHIPS	7
COAX CABLES	88
COAXIAL CABLE/WIRE	59
COMPASS MODULES	193
COMPONENT ASSORTMENTS	3,6,16,21,23,42,52-53,107
COMPONENT CABINETS	173
COMPUTER	
Accessories	182-184,186
Adapter	82-83,185-188
Brackets	83,182,186
Business Card Kit	182
Cables	61,65-66,180,182,185-188
Cables, Int./Ext./Network	61-62,65,187
Cameras	189
Cards	181,185
Cases/Enclosures	183,186,205
CD Kit	182
CPU Fans	182
Drives	182-183
Hubs	184-185
Industrial Products	186
Keyboards	182
Mice/Trackballs	182
Monitor	188
Power Cords	133
Power Supplies	180
Signal Converter	184
Speakers	183
Switch Boxes	181
Switches	182
CONDUIT	63
CONNECTORS	
.800mm Connectors	SER
1.25mm Headers and Housings	71
1.27mm Headers	67
1.27mm Pitch Receptacle	69
1.57mm Power	70
2.00mm Socket Connectors	80
2.13mm Connectors	70
2.36mm Power	70-71
2.49mm Power	71
2.54mm AMPLATCH	80
2.54mm Converter	72,81
2.54mm Headers	74-75,79-80
2.54mm Housings	75-76,81
2.54mm IDC (MTA)	73
2.54mm IDC Wiremount	80
2.54mm KK Series	75-76
2.54mm Receptacles	72
2.00mm Headers and Housings	72
2.00mm Shorting Blocks	74
3.00mm Micro-Fit	76-77
3.00mm Power	71
3.96mm Headers and Housings	77
3.96mm IDC (MTA)	73

3.96mm KK Series	77
4.19mm Mini-Fit Jr.	78-79
5.00mm Housings	79
6.35mm Connectors	XER
10.00mm Connectors	TER
.031" Connectors	SER
.049" Headers and Housings	71
.050" Headers	67
.050" Pitch Receptacle	69
.062" Power	70
.079" Headers and Housings	72
.084" Connectors	70
.093" Power	70-71
.098" Power	71
.100" AMPLATCH	80
.100" Connectors	71-72,81
.100" Headers	74-75,79-80
.100" Housings	75-76,81
.100" IDC (MTA)	73
.100" IDC Wiremount	80
.100" KK Series	75-76
.100" Receptacles	72
.100" Shorting Blocks	74
.100" Socket Connectors	80
.118" Micro-Fit 3.0mm	76-77
.118" Power	71
.156" Headers and Housings	77
.156" IDC (MTA)	73
.156" JST Type	77
.156" KK Series	77
.165" Mini-Fit Jr.	78-79
.197" Housings	79
.200" Connectors	71
.250" Connectors	XER
.393" Connectors	TER
Assemblies	82
AT/ATX	71
Audio/Video	65-67,86-87,130
BNC	84-87
Card Edge	81
Centronics	81
Coax	84-87
Computer	71,73-74,82-83,187
Contacts	67,69-72,74,76-77,79,81
Couplers	87
CPC Circular	67
D-Sub	67-69,83
DIMM	20
DIN	82
Dust Covers	74
F Type	85
Firewire	82
Friction Lock Headers	75
Gender Changers	83,186
Hardware	69
Header Housings	71
Headers	43,67,70-72,74-80
Housings	72,75-77,79,81
IDC Connectors	68-69,72-74,80-81
IEEE	82
Jacks	86-87
Jones Plugs and Sockets	81
LED	30
Male Header Assortments	43,75
Mate-N-Lok	73-74
Micro-Fit	76-77
MMCX	85
Modular/Telephone	62-63
N-Type	85
Network	62-63
PCB	72
Pins	67,69-72,74,76-77,79,81
Plugs	76,78-79,81,83,85-86
Power	70-71,73-74,76-79
Receptacles	76,78,80-81,83
RF	84-85
Ribbon Cable	80
SATA	187
Shorting Blocks	74
Shrouded	79
SIMM	19
SMA/SMB	87
Sockets	18-20,80-81,84
Solderless Terminals	90-91
Spring	89
Strain Relief Covers	73
Strain Reliefs	79-80
Telecom Splice	89

Telephone.....	62-63
Terminal Blocks.....	89-90
Terminators.....	85-86
Tools.....	67,71,73,77,79-80,85,91,160-161
USB.....	82
Wire.....	80,89
XL R.....	67
CONTROL KNOBS.....	55
CONTROLLERS	
dsPIC.....	11
Micro.....	7,10-12
Motor.....	112
PIC.....	11-12
Robotics.....	12
Servo.....	114
CONVERTERS, DC-DC	
Encapsulated.....	145-146
Enclosed.....	144
Isolated.....	146
Open-Frame.....	146
Point-Of-Load.....	145
CONVERTERS, SIGNAL	184
CORDS, POWER.....	129,133-134
COUPLERS, SHAFT.....	194
CPUs.....	7
CRIMPING TOOLS.....	63,67,71,77, 79-80,85,91,160-161
CRYSTALS.....	40,43
CURRENT SENSING TRANSFORMERS	132

D-F

D-SUB CONNECTORS.....	68-69
D/A CONVERTERS.....	14
DATA BOOKS.....	3,198
DATA LOGGERS.....	149
DC MOTORS.....	110
DC-DC CONVERTERS.....	144-146
DESOLDER STATION & EQUIP.....	166-168
DIGITAL LABS.....	172
DIGITAL MULTIMETERS.....	150-151,153-154
DIGITAL PANEL METERS.....	1,153
DIMM SOCKETS.....	20
DIN CONNECTORS.....	82
DIN-RAIL PRODUCTS.....	89,143,205
DIODES	
Assortments.....	42
Germanium.....	22
Kits/Grab Bags.....	23,42-43
Laser.....	194
LEDs.....	33
Rectifiers, Bridge, SCR.....	22-23
Schottky.....	22
Small Signal.....	22
Switching.....	22
Triacs.....	22
Ultrafast.....	22
Voltage Suppressors.....	22
Zener.....	22
DIP RELAYS.....	98
DIP SOCKETS.....	18-19
DIP SWITCHES.....	97
DISPLAYS, LED & LCD.....	1,33-38,43,153
DRILL BITS.....	162
DRIVES, COMPUTER	
Accessories.....	182,187
Hard.....	182
DSL FILTER.....	62
DVI CABLES.....	65
EARPHONES.....	104
EDUCATION & HOBBY.....	1,144,190-193, 195-196,Back Cover
EDUCATIONAL ELECTRONIC LABS.....	172
EEPROMS.....	9
ELECTROLUMINESCENCE WIRE.....	36
ELECTRONIC KITS.....	144,149,191, 195-196,Back Cover
EMI SUPPRESSION CORE.....	132
ENCLOSURES	
D-Sub.....	69,173
Drive.....	183,205
Prototype Builder Board.....	174
Rack Mount.....	186
Storage.....	173
Wall Adapter.....	122
ENERGY METER.....	153
EPROM PROGRAMMERS/ERASERS.....	179
EPROMs.....	8
ERASERS.....	179

F CONNECTORS.....	85
FAN CONTROL KIT.....	194
FANS & ACCESSORIES	
AC Tubeaxial.....	120
Brushless DC.....	115-119,194
Cords.....	119,133
CPU Heat Sink w/ Fan.....	182
Filters.....	119
Guards.....	119
Kits/Grab Bags.....	43
FERRITE BEADS/CORES.....	57
FIBER OPTICS.....	88-89
FILTERS, PWR. ENTRY/LINE/AC PLUG.....	134-135
FLASH MEMORY.....	10
FLOUORESCENT LAMPS.....	31,39
FREQUENCY COUNTERS.....	155
FUME EXTRACTOR & ACCESS.....	169
FUNCTION GENERATORS.....	155
FUSES & ACCESSORIES	
Circuit Breakers.....	41
Clips.....	40
Fast Acting.....	41
Holders.....	40
Kits.....	41
Resettable Fuses.....	41
Slow Blow.....	41
Thermal.....	WEN

G-H

GALs.....	10
GEAR HEAD MOTORS.....	111
GEARS.....	43,192,194
GENDER CHANGERS/ADAPTERS.....	83,186
GIPB (IEEE-488).....	186
GLUE GUNS.....	165
GRAB BAGS.....	43,75
GROUNDING/STATIC CONTROL.....	164
HALL EFFECT SENSORS.....	16,102-103
HARD DISK DRIVES/ACCESS.....	182-183,186
HARDWARE	
Assortments.....	42
Brackets.....	142-143,182
Bumpers.....	43,109
Cable Mounting.....	63-64
Caster.....	109
Computer Brackets.....	83
Drive Mounting.....	182
Fan Guards.....	119
Handles.....	109
Heat Sink Mounting.....	24
Kit.....	42-43,107,183
Knobs.....	55
LED Mounting.....	30,42
Magnet.....	108
Miscellaneous.....	109,193-194
Mounting Brackets.....	109,143
PCB Mounting.....	109,175
Prototype Enclosures.....	174
Rubber Feet.....	43,109
Screws, Nuts, Washers.....	43,69,109, 175,183,194,205
Spacers.....	43,107,175
Standoffs.....	43,69,108
Thumbscrews.....	69,107
HDMI CABLES/SWITCH.....	66
HEADER PLUGS.....	81
HEADERS.....	43,67,71-72,74-80
HEAT GUNS.....	165
HEAT SHRINK TUBING.....	64
HEAT SINKS & ACCESSORIES.....	23-24,170
486/Pentium Heat Sink & Fan.....	182
Compound.....	24
CPU.....	182
Heat Sink w/ fan.....	182
HOODS, D-SUB.....	69
HOOK-UP WIRE.....	58
HOUSING.....	72,75-79,81
HUBS.....	184-185
HUMIDITY SENSORS.....	104

I-K

I/O CARDS.....	181
IDC CONNECTORS.....	72-73,80-81
IEEE CABLE/ACCESSORIES	
1394 (Firewire).....	186
488 (GIPB).....	186

INDUCTORS	
Assortments.....	43
Chip.....	56
Surface Mount.....	56
Toroid.....	56
INDUSTRIAL COMPUTING.....	186
INPUT DEVICES	
Accessories.....	187
Keyboards/Keypads.....	182
Mice/Pointing Devices.....	182
INTEGRATED CIRCUITS	Index on Page 2
INVERTERS, DC/AC.....	145
ISA CARDS.....	181
ISOLATION TRANSFORMER.....	132
JACK SCREWS/HEX NUTS.....	69,109
JUMPER LEADS.....	173
KEYBOARDS.....	182
KEYLOCK SWITCHES.....	97
KEYPADS.....	98,182
KITS, COMPONENTS	
Capacitors.....	42-43
CMOS, CD4000 Series.....	6,42
Diodes.....	23,42-43
Electrical Connectors.....	90
Fuses.....	41
Grab Bags.....	43,75
Hardware, Mounting.....	42-43,107
IC Kit, 7400 Series.....	3,42
IC Kit, 74LS00 Series.....	6,42
LED Hardware.....	30,42
LEDs.....	30,42-43
Linear ICs.....	16,42-43
Potentiometers.....	42-43
Resistors.....	42-43,52-53
SMD Resistors.....	53
Switches.....	42-43,94,96
Transistors.....	42-43
KITS, ELECTRONICS	
Alternative Energy.....	1,192
Audio.....	190-192
Automation.....	REQ
Computer Control.....	190,192
Distance.....	191
Educational.....	1,144,190-193, 195-196,Back Cover
Fiber Optics.....	89
Lego.....	1,190,192
Light.....	191,193
Microcontrollers.....	1,197
Mindstorms NXT.....	192
Modules.....	193,195-196,Back Cover
Motor.....	1,191-192,195
MP3 Player.....	190
Power Supply.....	144,191
Propeller.....	195-196
Robotic.....	1,190-192,195-196
Solar.....	191
Sound Generation and Detection.....	190-191
Test & Measurement.....	191
Wireless Devices.....	196,Back Cover
KNIFE SET.....	163
KNOBS.....	55

L-M

LAMPS AND ACCESSORIES.....	165
Ballast.....	39
Fluorescent.....	31-39
Incandescent.....	38-39
LED.....	36-39
Magnifier/Desktop.....	164-165
Neon.....	38-39
Panel Mount.....	39
Ultra-Violet.....	39
LASER	
Accessories.....	194
Diodes.....	194
Pointer.....	194
LCD DISPLAYS/MODULES.....	1,37-38,153
LEAD ACID BATTERIES/CHARGERS.....	147-148
LEAD FORMING TOOLS.....	163
LEADS, TEST.....	157-158
LED Accessories.....	32
LED Displays	
Alphanumeric.....	34-35
Bar Graph Arrays.....	35
Dot Matrix.....	35-36
Light Bars.....	35

Numeric.....	33-35
TFT Modules.....	37
LED HARDWARE.....	30-31
LED Modules.....	32
LED Strip.....	32
LEDs	
Assortments.....	42
Backlight.....	30
Displays.....	43
Drivers.....	30-31
Emitters.....	33
Grab Bags.....	43
High Output.....	28
High Power.....	31
Infrared Emitters.....	33
Interconnect.....	30
Kits/Grab Bags.....	30,42-43
Lamps.....	36,39
Lens.....	30
Light Strip.....	32
Litepipes.....	31
Medium Output.....	27
Module.....	30,32
Mounting Hardware.....	30-31
Optical Sensors.....	104
Panel Indicators.....	39
Phototransistor.....	33
Programmable.....	205
Replacement Lamps.....	36
Sockets.....	32,36
Standard Output.....	25-27
Standoffs.....	31
Strip.....	32
Subminiature.....	25
Surface Mount.....	29-30
Tester.....	30
Wedge Base.....	36
LIGHT BARS.....	35
LIGHT METER, DIGITAL.....	152
LINE FILTER.....	135
LIQUID LEVEL SENSORS.....	103
LOGIC ANALYZER.....	156
LOGIC PROBE AND PULSER.....	156
MACINTOSH PRODUCTS.....	147,183-185,187
MAGNET.....	108
MAGNETIC TRANSDUCERS.....	105
MAGNIFYING GLASSES/LAMPS.....	164-165
MEMORY	
Batteries.....	147
Capacitors.....	48
DRAM.....	10
EPROMs/EEPROMs.....	8-9
Flash.....	10
OTP/PROM.....	9
SIMM.....	10
SRAM.....	9
METERS	
Benchtop.....	154
DMM.....	150-151,154
LCR.....	153
MICE AND ACCESS.....	182
MICROCONTROLLERS.....	1,7,10-12,197
MICROPHONE	
Cartridge/Condenser.....	107
PC Desktop.....	183
MICROPROCESSORS.....	8,12
MODULAR CABLE/WIRE.....	58,61
MODULAR JACKS & PLUGS.....	62
MONITOR CABLES.....	188
MONITORS.....	188
MOSFETs.....	21-22
MOTOR CONTROLLERS.....	12-13, 112-114,195,Back Cover
MOTORS	
Controllers.....	12,112-113,Back Cover
DC.....	110
Gear Head.....	111
Geared.....	111
Grab Bag.....	43
Robotics.....	114
Servo.....	114
Stepper.....	113
Stepper Controllers.....	13,112-113,Back Cover
Vibrating.....	112
MULTIMEDIA.....	183
MULTIMETER TEST PROBES.....	158
MULTIMETERS.....	150-151,153-154
MUSCLE WIRE.....	193

N-Q

N CONNECTORS	85
NETWORK PRODUCTS	61-63, 184-186, 196, Back Cover
NIBBLING TOOL	163
NUTS	43, 69, 109
OPTICAL SENSORS	104
OPTICAL SWITCHES	24
OPTOCOUPERS	24
OPTOELECTRONICS	24
OPTOISOLATORS	24
ORDER INFORMATION	199
OSCILLATORS	39-40, 43
OSCILLOSCOPES/ACCESS.	154-156
OTP/PROMs	9
PALs	10
PANEL METERS	1, 153
PATCH CORDS	158
PATCH PANELS	186
PC BOARDS/EXTENDERS	175-178
PC PHOTO ETCH	176
PCB CONNECTORS	72, 81
PCB DEV. TOOLS/ACCESS.	176
PCI CARDS	181, 185
PHONE JACKS/PLUGS	62-63
PHONE LINE TESTERS	152
PHOTO TRANSISTORS	24, 33
PHOTOCELLS	43, 102
PIC MICROCONTROLLERS	11, 177, 179
PIEZO TRANSDUCERS	105
PLCC SOCKETS	19
PLUGS	
Audio	66, 130
Auto	130
DIN	82
DIP	81
Displayport	83
IDC	81
Jones	81
Modular	62
Power Entry	134
RCA	67
POTENTIOMETERS	
Adjustment Tool	54
Audio Taper	53
Cermet	54-55
Digital	17
Kits/Grab Bags	42-43
Linear	54
Linear Taper	53-54
Membrane	103
Multi-Turn	54-55
Single-Turn	55
Trimmer	54-55
Wirewound	54
POWER & DEVELOPMENT MODULES	177
POWER ADAPTERS	129-130, 183
POWER BASES/STRIPS	183
POWER CONNECTORS/PINS	
AC Plug	134
AT/ATX Motherboard	71
Disk Drive, Power Supply	71
Kits	71
Pins	70-72, 76-77, 79
Plugs/Receptacles	70-71, 73-74, 76, 78
POWER CONVERTERS	144-146
POWER CORDS, International	134
POWER CORDS/ADAPTERS	119, 129, 133
POWER ENTRY & LINE FILTERS	134-135
POWER INVERTERS	145
POWER JACKS/PLUGS	130
POWER PROTECTION	183
POWER RELAYS	101
POWER SUPPLIES	
AC Variable Transformers	132
AC/DC	126-129, 135-142, 156-157
Benchtop	154, 156-157
Brackets	142
Breadboard	172
Computer	180
Desktop	156
DIN-Rail	143
Encapsulated	144
Enclosed	137-142
Extension Cables	187
High Voltage	132
Interchangeable Plug	129

Kits	144
Laptop Regulated	180
LED	142
Linear	135
Medical	129, 135
Open Frame	135-137
Power Adapter	129
Power Cords	133
Precision Regulated DC	157
Rackmount	144
Regulated	129
Regulated Linear	126-127
Regulated Switching	126-129
Switching	129, 135-144, 156-157
Table-Top	126-129, 180
Tester	157
Ultraminiature	135
Unregulated Linear	126
Wall Adapters	121-125, 129
POWER TRANSFORMERS	131
PRESSURE SENSORS	103
PRINTED CIRCUIT BOARD SUPPLIES	
Printer Accessories	
Cables	187
Switch Boxes	181
Probes	155-156, 158
Programmeters	178-179
PROMs	9
PROTOTYPE ADAPTER	177
PROTOTYPING BOARDS/ACCESS.	58, 174-178, 195
PROTOTYPING DEVELOPER	176
PROXIMITY SENSORS	102-103
PUNCH DOWN TOOLS	162
PUSHBUTTON SWITCHES	93
PUZZLER	83

R-S

RACKS/RACK MOUNT EQUIP.	144, 186
RAM	10
RCA, JACKS/PLUGS/CABLES	65, 67
RECEPTACLES	
DIN	82
Displayport	83
RECIPE	104
RECTIFIERS	22-23
REED RELAYS	100
REED SWITCHES	92
RELAYS	
Circuit Breaker	41
Digital I/O Modules	180
DIP	98
Enclosed	100
General Purpose	101-102
OptoMos	100
PC Mount	99
Power	99, 101
Reed	100
Sockets	100-101
Solid State	100
Time-Delay	102
REPEATER CABLE	185
RESETTABLE FUSES	41
RESISTORS	
Arrays	53
Assortments	42-43, 52-53
Carbon Film	52
Chip	53
Kits/Grab Bags	42-43, 52-53
Metal Film	53
Network	43, 51
Surface Mount	53
Thick Film, SMD	53
Tool	163
Wirewound	51
RESONATOR, CERAMIC	41
RF CONNECTORS	84-85
RIBBON CABLE	60, 187
RIBBON CONNECTORS	80
ROBOTICS	1, 104, 190, 192, 194-196
ROCKER SWITCHES	96
ROTARY DIP	97
ROTARY SWITCHES	97
RUBBER FEET	43, 109
SCREWDRIVERS	162-163
SCREWS	43, 69, 107, 109, 205
SCRs	23

SECURITY	188-189
SENSORS	
Air Flow	104
Flex	104
Gas	195
Gear Tooth	103
Hall-Effect	16, 102-103
Humidity	104
Infrared	103
Liquid Level	103
Membrane Potentiometers	103
Motion	104
Optical	104
Pressure	103
Proximity	102-103
Reed	103
Solid State	103
Speed	102-103
Temperature	16
Ultrasonic	104
SERVO MOTORS	114
SERVOS & CONTROLLERS	12, 112
SHAFT COUPLERS	194
SHAPELOCK DESIGN PLASTIC	175
SHORTING BLOCKS	74
SIMM SOCKETS	19
SIREN	106
SLIDE SWITCHES	94
SMA/SMB CONNECTORS	84-85, 87-88
SOCKETS & ACCESSORIES	81
Adapters	84
Assortment, Kits/Grab Bags	43
Connectors	80
DIMM	20
DIN	82
DIP	18-19, 81, 84
Dual-In-Line	84
Grab Bag	43
Header Plugs	81
IC	18-19, 81, 84
Low Profile	18-19, 84
Machine Tooled	19, 84
Markers	19
Oscillators	40
PGA	19
PLCC	19
PLCC Prototype Adapter	177
Relay	100-101
SMT	19
Single-In-Line	84
Solder Tail	18-19
Strip	84
Vertisocket	84
Wire Wrap	18-19
Wire Wrap ID Labels	19
ZIF	84
SOFTWARE	178-179
SOLAR CHARGER	198
SOLAR PANELS	197
SOLDER/DESOLDERING EQUIPMENT	
Accessories	165-170
Bars	170
Fume Extractors	169
Pots	169
Pump	166
Solder	166, 170
Sponges	165-167
Stations/Irons/Kits	154, 165-169
Tips	165-168
Tools	165-170
SOLDERLESS BREADBOARDS	172-173
SOLDERLESS TERMINALS	90-91
SOLENOIDS	114
SOLID STATE RELAYS	100
SOLAR KITS	191
SOUND CARDS	181
SOUND DEVICES/BUZZERS	104-107
SOUND METER, DIGITAL	152
SPACERS	42-43, 107, 175
SPEAKER WIRE	61
SPEAKERS	105-106
Alnico	106
Computer	183
Ferrite	107
Flat Element	106
PCB	106
Round	106-107

Sirens	106
Square	106-107
Transducers	105
SPEED SENSORS	102-103
SPRING CONNECTORS	89
SPROCKETS	194
SRAMs	9
STANDOFFS	42-43, 69, 107-108
STATIC CONTROL	164
STATIC RAM	9
STEPPER MOTOR CONTROLLERS	13, 112, Back Cover
STEPPER MOTORS	113
STORAGE, CABINETS	173
SUBSTITUTION BOXES	173
SUPPRESSION CORE	132
SURFACE MOUNT	50
Breadboards	177
Capacitors	48-51
Case	173
Inductors	56
LEDs	29-30
Oscillator	40
Proto Boards	177-178
Resistors	53
Sockets	19, 84
Switches	97
Tools	164, 168
SURGE PROTECTORS	183
SWITCH BOXES/CABLES	181
SWITCHES	
Accessories	98
Basic	92
Binary	92
Caps	98
Computer	182
Cord	94
DIP	97
Keylock	97
Keypad	98
Kit/Grab Bag	42-43, 94, 96
Knife	96
Lever	100
Magnetic Proximity	96, 102-103
Magnetic Reed	92
Optical	24
Pull Chain	96
Pushbutton	92-93, 182
Rocker	96, 182
Rotary	97
Rotary DIP	97
Sensors	102-104
Slide	94
Snap	92
Specialty	96
Surface Mount	97
Tactile	98
Temperature	92
Thumbwheel	92
Toggle	94-96

T-U

TABLE-TOP POWER SUPPLIES	126-129, 180
TACTILE SWITCHES	98
TAPE	170
TELEPHONE ACCESSORIES	61, 63
TELEPHONE CABLE/WIRE	58, 61
TELEPHONE CONNECTORS	62-63
TELEPHONE LINE TESTERS	152
TEMPERATURE SENSORS	16
TEMPERATURE SWITCHES	92
TERMINALS	
Blocks	89-90
DIN Rail	89
European	89
Solderless	90-91
Wire Wrap	175
TEST EQUIPMENT	
Benchtop Power Supplies	154, 156-157
Cable/Interface	152, 154, 156-158
Camera Detector	149
Carbon Monoxide	152
Current Clamp Meter	151
Data Loggers	149
Desktop Power Supply	156
Digital Logic Analyzer	156
Electrical	152
Energy Meter	153

Environmental	152
Frequency Counter	155
Function Generator	155
Leads/Probes	155-158
LED	30
Light Meter, Digital	152
Logic Probe	156
Multimeter, Analog/Digital ..	150-151, 153-154
Multimeter, Benchtop	154
Oscilloscopes	154-155
Passive Component Meter	153
Power Supply	157
Power Supply Tester	157
Precision Regulated DC	157
Probes	155-156, 158
Programmers/Testers	179
Shunt	153
Substitution Boxes	173
Tachometer	152
Voltage Detector	152
TEST LEAD STARTER KIT	157
TEST LEADS/PROBES/CLIPS ..	155-157, 172
TFT MODULES	37
THERMISTORS	102
THERMOMETERS	152
TIE MOUNTS	63-64
TIME/TEMPERATURE METERS ..	152
TNC CONNECTORS	85
TOGGLE SWITCHES	94-96
TONE GENERATOR	152
TOOL KITS	159-162
TOOLS	
Anti-Static	164
Arbor Press	80
Bottle	170
Brush	170
Cable Cutter	80, 160
Calipers	163
Cases/Bags	159, 174
Center Punch	163
Compression	161
Crimping/Stripping/Cutting ..	63, 67, 71, 77,
.....	79-80, 85, 91, 160-161

Cutter/Stripper	79, 160-162
Drill Bits	162
Drills	162
Glue Gun/Glue Sticks	165
Hand Tools	85, 91
Heat Guns	165
Hemostat	163
IC	163-164
IDC Connector	80
IDC Kit	80
Insertion/Extraction	67, 71, 79, 160, 164
Kits/Sets	159-164
Lead Forming	163
Miscellaneous ..	54, 63, 73, 80, 164-165, 168-169
Nibbling	163
Pliers	161-162
Prototyping	178
Punch-down	162
Reamer	164
Scissor	160
Screw/Nut Drivers	162-163, 183
Soldering	154, 165-169
Torches	165
Tweezers	164
Vials	170
Vises	80, 169-170
Wire Wrap/Strip	163
Work Center	169
Wrench	160
TRANSDUCERS	105
TRANSFORMERS	
Audio	132
Current Sensing	132
Enclosures	122
International Step Up/Down ..	131-132
Isolated	132
Modem Coupling	132
PC Mount	132
Power/Split Bobbin	131
Quick Connect	131
Variable	132
Wall (AC and DC)	121-125, 129

TRANSISTORS	
Arrays	MER
Assortments	42
General Purpose	NER
Hexfet MOSFET	22
J-FETs	21
Kits/Grab Bags	21, 42
MOSFETs	21-22
N-Channel MOSFETs	21
NPN Bipolar	20
P-Channel MOSFETs	21
PNP Bipolar	20-21
Power	PER
Small Signal	QER
Switching	REER
TRANSMITTER, CAMERA	188
TRIACS	22
TUBEAXIAL FANS	115-120
TWEEZERS	164
UARTs	8
ULTRASONIC SENSORS	104
USB PRODUCTS	185
Adapters/Connectors	82, 185-186
Cable	129, 185-187
Data Loggers	149
Express Cards	185
Hubs	184-185
Keyboards	182
Mice	182
Stepper Controller/Driver	113, Back Cover
V-Z	
VACUUM TOOLS	164, 167
VARIABLE TRANSFORMERS	132
VARISTORS	41
VGA/VIDEO CARDS	181
VIALS	170
VIBRATING MOTORS	112
VIDEO CABLES	65
VIDEO CONVERTERS	184
VIDEO MONITORS	188
VOISE	169-170
VOICE CHIPS/MODULES	10

WALL ADAPTERS	
AC to AC	121
AC to DC	121-125
Enclosures	122
Interchangeable Plug	123, 129
Regulated Linear	123
Regulated Switching	121-123
Slim Line	121
Unregulated Linear	124-125
WALL JACKS/PLATES	62-63
WASHERS	43, 107, 109, 194
WIRE & CABLE MGMT	63-64
WIRE CONNECTORS	89
WIRE CUTTERS/STRIPPERS	160-162
WIRE JUMPERS	173
WIRE WRAP TOOLS	163
WIRE, MAGNET	58
WIRE/CABLE, BULK	
Bus Bar Hook-Up	58
Category 5e	61
Coaxial Cable	59
Electroluminescence	36
Flat Ribbon Cable	60
Flexinol	193
Hookup Wire, Solid/Stranded ..	58
Markers	63
Modular Telephone	58
Multi-Conductor	59
Muscle Wire	193
Network	61
Nickel Chromium Resistance ..	58
Paired	58, 60
Power/Speaker Wire	61
Speaker	61
Tools	160-163
Wire Wrap	58
WIRELESS PRODUCTS	188
Audio Adapters	188
Audio Transmitter	188
WORK CENTER	169
WRENCHES	160
ZENER DIODES	22
ZIF SOCKETS	84

Manufacturer Index

Blue indicates online only products.

A	
3M	63-64, 68-69, 80, 89-91, 170-171
3Y Power Technology	180
Aavid Thermalloy	23-24, 171
AcBel	128, 180
ACT Components	WEB
Adam Tech	82-83, 134-135, 148, 187
Adaptec	181
Adda	115-120
Advanced Micro Devices	7
Advanced Power	142
Advanced Transformer Company ..	WEB
Agilent	27-28
AIM Electronics	WEB
Alcoswitch	93, 95, 97
All Motion	113, Back Cover
Allegro	12, 16
Alliance Memory	9
Alpec Team, Inc	194
Alpha Electronics	53-54
Alpha & Omega	WEB
Alpha Wire	64
Altera	WEB
Ameba Technology	WEB
American Skynet	WEB
AMP	18-19, 62-63, 67, 69,
.....	73-75, 77, 80-82, 86, 91, 97
Amphenol	68
Amphenol Connex	84-88
Amphenol RF	85-87
Amprobe	151
Anachip/ICT	10
Analog Devices	10, 14-17
APD	122, 126
APEM	93
APS	123, 126-127, 140
Arctic	34, 93, 120, 182
Arduino	1, 197
Aries	81, 84
Arndt	121-122

Aromat	98-99
Artesyn	136-137, 145-146
Astec	16, 135
Astrodyne	135
Astron	68
ATEN	181, 184
ATI	181
Atlinks	121, 124
Atmel	9, 11
Augat	19
Ault	121-122, 125
Autec	137
Avago	22, 24-30, 33-35, 88, 104
AVC	117
AVerMedia	184
AVX	47, 50
Axicom	99
B-C	
B&K Precision	152, 155
Be-Well	127
Beckman	WEB
Belden/CDT	58-61
Belkin	61, 67, 187
Bellin Dynamic Systems, Inc	178
BenchPro	30, 150-152, 156-160,
.....	162-165, 182, 191
Bestar Electric	99
BESTEC	127
Beta	101-102
Bi-Sonic	120
Blue Max Technology	WEB
Boardworx	WEB
Bomar	62
Bondhus	163
Bourns	22, 54-55, 97
Buchanan	90
Bug Box	173
BusBoard Prototyping Systems ..	174-175
Bussmann	41
BV Optotech	26

C&K	93-97
Cable Connection	WEB
Cables To Go	WEB
Caig	171
Cal-Chip	WEB
CALogic	15-16
Canal Electronics	WEB
Canon	110
Capital Advanced Technologies, Inc.	177
Catalyst	WEB
CEBEK	191-192
Centurian Surplus Inc	WEB
Chemtronics	170, 171
Cherry	92, 96, 102-103, 182
Chicago Miniature (CML)	25, 39
China Semi	34
ChipQuik	168, 170-171
CIC	121
Cinch	68-69, 81, 87, 89
Circuit Assembly	18, 80-81
Cisco	62
Clare	24, 100
ClaroStat/Honeywell	WEB
Climax	194
Comair Rotron	23, 116-120
Common Wealth	118, 120
Condor	123
Cool Master	117
COP Security	WEB
Corcom/Tyco	134
Cornell Dubilier	WEB
Cosel	136
COSMO	100
Crescent	160
Crydom	100
Crystal FonZ	38
CTS	53
CUI Inc	124, 136
CW Industries	80, 94
Cybug	190
Cypress	9

D-E	
D-Link	122
Dallas Semiconductor	9-11, 16
Dantona	147
DataK	176
DB Products	105
Dee Van	122
Dell	118, 182
Delta	115-119, 126-127, 134, 137
Detto Technologies	WEB
Dialight	27
Digitron	32
DigiView	156
Dinkle	90
Diodes Inc	22-23
Duracell	147, 149
DVE	123, 125-127
Dynage	124
E-Lab	12
E-Switch Inc	98
Eaton Corp	93
EBM Pabst	117-119
ECE	41, 89
EDAC	126-128
EE Tools	179
EFD, Inc	WEB
Eico	WEB
Electronic Rainbow	190-191
Elina	115, 120
Elpac	127
Elsevier Science	WEB
Emerson	87
Energizer	149
Eng Electric	124
Enhance	180
Entone	128
EOS	135, 137
Epcos	WEB
Epson	WEB
ERNI	WEB

Evercool	116,118
Everflow	116
Everlight	WEB
Evergreen	147,149
Evertex Computer Products	WEB
Exar Corporation	16
Excel Cell Electronics (ECE)	97-98,100
Eximcorp	162
Extex	150-154,156-157,173
EZ Digital	154

F-H

Fairchild Semiconductor	3,6,12,17,20-22,24-28
Fairway	WEB
FCI, Inc.	WEB
Fairway	126
Felo	163
First Vision	127
Fisher Price	124
Floyd Bell	105
Fluke	150-152,154,159
Fonsan	116,118
Fox Electronics	40
Foxconn	68,85-86
Freeplay	124
Freescale Semiconductor	7,103
Friwo	122-123
Fuhua	124
Fujikura	103
Fujisoku	96
Fujitsu	97,99
Fulltech	120
FutureSmart	62,186
GC Electronics	24,41,62-63,66,92,94-96,171,176,183
General Instrument	22
Glenair	WEB
Globe	117
GlobTek	122-123,127,129
GoldTool	WEB
Go Forward	127
Golden Regent	124
Goldentek	37
Grayhill	97
Group West	122
GTE	124
Hamlin Breed	98,99
Hanlong	63,67,80,91,160-161,163-164
Hantronix	37
Hasco	99
Hi-Capacity	128,180
Highly Electric	92,103
HiPro	127
Hitachi	37
Hitec	114
Holtek	13
Honeywell	92-93,103-104
Honeywell/Clarostat	53-54
Horizon	121,126,128
Horizon Fuel Cell Technologies	1,192

I-L

IBM	184
Ideal	160
Ideative	183
Illinois Tool	96
Images SI	104,112
Industrial Fiber Optics	89
Infinion	24,100
Inspired LED	32
Instek	154-155
Integrated Devices	WEB
Intel	10
Interex	122
Intermec	126
International Power	136
International Rectifier	21-22
Intersil	13-14,16
IONE	182
ISD	10
Isocom Components	24
ITE Power Supply	123,127,136
ITI	121
Itron Technology	WEB
ITT Cannon	98
ITW	WEB
Jamicon	116-120
Japan Servo	113,116,118
JDV Products	19,163
JEC	126

Jency Motor	WEB
Jensen	129
Jentec	126-127
JKL Components	32,36,39
Johnson Electric	110
Judco	93
KAE	12,112
Kemet Electronics	WEB
Keport Electronics	WEB
KEST	98
Kester	170
Keystone	66,69,108-109,148,158-159
King Bright	34
Klixon	WEB
KOA	WEB
Kobiconn	WEB
Kobitone	82,104-105
Ktec	122
Kulka	89
Kycon	62,66,68
Kynar	58
Kyoto	100
Labtech	182
Lantronix	WEB
Lascar	1,149,153,156
Lattice	10
Leader	125
Leap	179
Ledex	114
Ledtech	25-28,30,32-36,39
Ledtronics	35
Legerity	WEB
Lego	1,190,192
Leoco	72,74-75
Lexcell	149
Ligitek	30-31,33-35
Linear Technology	13-15,17
Lishin Int.	126
LiteOn	24-30,33-36,136
Littelfuse	40-41
LKG Industries	65
Lynx Motion	WEB

M-O

Mabuchi Motor	110
Magic Power Tech	180
Magnecraft	101
Magtech	127
Marathon	WEB
Marktech	36,137
Mastech	150-151,156-157
Master	101,165-166
Matrix Orbital	38
Max Flow	117
Maxim Corporation	10,12-17
MCD	25,27,31,33
Mean Well	122-123,126-129,133,135-146,148,156
Mechatronics	115,118
MEI Int.	124
Metapo	137-140
MG Chemicals	171,176
Micrel Semiconductor	WEB
Micro Engineering Labs	178-179
Micro Power Electronics	WEB
Microchip	11-17,179
MicroMint	12
Micron	WEB
Microrobot	WEB
Microsemi	WEB
Microswitch	WEB
Ming Tak Electronics	WEB
Molex	19-20,62,69-72,75-79,89,91,160
Mondo-Tronics	191-193
Motorola	7,12,14,17,20
Mountain Switch (Xicon)	92-93
Murata	50,57
Nais (Aromat)	98-99
National Semiconductor	12-18
NEC	99
Newhaven	37-38
NIC	WEB
Nichia Corporation	27
Nichibo	110
Nichicon	WEB
Nidec	116-119
NiteRider	125
NKK Switches	WEB
NMB	117-118,120,182
NTE	17,20-21,24,165,171

NXP	4,11,16,20,22
OEM	121,127
OKAYA	134
Omron	92,97-101
On Semiconductor	12-23
On Shore	80,143
Optek	24
Optrex	33,37,103
Orient Motor	113
Orion	119
Osram Sylvania	WEB
OST	19,74-75,89-90
OWI Robots	190-192

P-S

P3 International	149,153
Pacific Power	180
Paladin Tools (ConnecTool)	156
Panasonic	20,49,98-99,105,117,147
Panavise	80,169-170
Panduit Corp	63
Parallax	11,12,114,191,193,194,195,196
PC Concepts	182
PEI	124
Pelonis	120
Phihong	122-123,126-129,136-137
Philips	30,39,122,124
PicVue	37
Plantraco	192
Polk Audio	183
Pomona	156-159,173
Pontech	112
Potrans	138,140
Potter & Brumfield	99,101-102
Power-Film	197-198
Power-One	135-136,140
PowerGenix	149
PowerLD	136,138,140
Powerline	124
PowerMate	145
Powmax	180,182
Precision Nav Inc	193
Probe Master	155-156,158
Prolinear	WEB
Pronic	96
Prosperity Dielectric Co.	48,50
Protek	150-151,154
ProtoFlex	178
QT Opto	33
Qualcomm	125
Qualtek Electronics	WEB
Radio Shack	121
RAF Electronic Hardware	107-108
Raychem	WEB
Rayex	99-101
Re Fac	34
Regal Electronics	107,126-127
ReliaPro	110-114,117,121-126,128,147,148,180,194
Renesas	WEB
Rip-Tie	63
RMV Electronics	112
Robotzone	WEB
Rohm	33-34
Samlex America	144-145,147,157
Samsung	14,37
Samwha	WEB
SanRex	22
Sanyo Denki	116-117
Sanyou	100
SchmartBoard	177
Schrack	WEB
Scott Edwards	38,114
Seagate	WEB
Seasonic	180
Seattle Robotics	WEB
Seiko	37
Serpac	174
SHAPELOCK	175
Sharp	100
Shicoh	117
Shin Chin	WEB
Shogyo	66,105
Siemens	24,26-27,99
Signetics	WEB
Sino-American	127
Sinotech	127
SK Marketing	154-157
Skyet	126,139
Sola	133

Solar World	197
Solarbotics	111,191
Sony	118,189
Spanson	WEB
Sparkle Labs	191
Sparkle Power Inc.	128,180
Spectra Symbol	103-104
Spectrum Control	WEB
Sprague	WEB
SR Components	126
ST Micro	8,13-17,20,22-23
Stackpole	WEB
Stanley Electric	25,33
Star	107
Star Motor	110
Starman Electric	196
Steward, Inc.	WEB
Sun Equipment	WEB
Sun Motor	110
Sunled Corporation	25,26
Sunon	115-120
Super	170
Switchcraft	66-67,94,130
SYBA	181
Sylvania	33

T-Z

T&T	118
Tadiran	147
Taitron	22-23
Tamiya America	190-192
TDK Corporation	WEB
Teccor	22-23
Tech Spray	24,170-171
Techflex, Inc.	64
Tech-Tools	WEB
Teledyne	WEB
Texas Instruments	3-6,11,13-18,35
Thames & Kosmos	190
ThingM Corporation	205
Thomson	124
Thornton	170
Tinsharp	37
TONT	124
Toshiba	126
Toyo	116
Transwitch	WEB
Triad	132
Tripp-Lite	183
Turbofan	118
Tyco Electronics	WEB
Tysonic	147
Uniq	124
Unity Opto Technology	25,29-30
UVP	179
ValuePro	18-19,23-30,32-36,38-41,44-51,53-89,91-98,101-102,105-108,130,133-134,144,149,157,161-163,169-176,181,183,185-188,194
Varitronix	37
Varta Batteries	WEB
Vastech	31-32,117,150-152
VCC	30-31
Vector	175
Velleman	31,36,39,41,66,82,99,105-106,129,150-151,153-155,165,179,190-191,192,197
Videx	124
Vishay	22,28,33
Volex	WEB
Volgen	137
Wagan Corp	130
Wahl	166
Wakefield Thermal Solutions	23-24
Waldom	71,79
WattStopper	183
Wavetek/Meterman	150
Weller	165-167,169
Western Digital	WEB
Winbond	WEB
Wisher	WEB
Wiznet	196,218
Xcelite	161
Xicon	51
Xytronic	164-170
Y.S. Tech	116-117
Yageo	51,53
Zilog	10
Zippy	92

Micro-Miniature Thread Rolling Screws

These Pan Head self-tapping screws have six-lobed star recess drives. Their low-torque installation is chip-free and they resist loosening from vibration. There are three types:

- Taptite (TT) has a tri-lobular body, which will produce machine screw threads when driven into soft metals
- PLAS has a tri-lobular body, which generates coarser threads when driven into thermoplastics
- TRS has a full-round body with a sharper thread profile that drives into thermoplastics with low torque, produces less heat, generates high clamp energy, and doesn't crack or distort thin-walled materials

Additional features: • Six lobed drive for maximum control and handling

- Hardened steel with RoHS compliant zinc and chromate finish
- Sold in bags of 10



Qty. (bag of 10)	1	10	100
Pricing	\$3.95	\$3.69	\$3.45

NEW
MARKED IN PINK

★ Web Code: PHS

Part No.	Manufacturer No.	Screw Type	Screw Dia.	Torx Recess	Hole Dia. (mm)	Screw Length (mm)	Thread Pitch	Head Dia. (mm)		Head Height (mm)	
								Min.	Max.	Min.	Max.
2124672	M1.6X6TX4TT	Taptite	M1.6	T4	1.45	6	0.35	2.6	3.4	0.9	1.1
2124681	M2X5TX5TT	Taptite	M2	T5	1.83	5	0.40	3.1	3.5	1.2	1.4
2124710	M2.5X6TX8TT	Taptite	M2.5	T8	2.29	6	0.45	4.1	4.5	1.6	1.8
2124736	M1.4X6TX3PLAS	Plastite	M1.4	T3	1.26	6	0.45	2.2	2.6	0.8	1.0
2124761	M1.6X6TX4PLAS	Plastite	M1.6	T4	1.45	5	0.79	2.6	3.4	0.9	1.1
2124787	M2X5TX6PLAS	Plastite	M2	T5	1.65	6	0.91	3.1	3.5	1.2	1.4
2124795	M2.5X5TX8PLAS	Plastite	M2.5	T8	1.93	5	1.06	4.1	4.5	1.6	1.8
2124824	TRS2	TRS	M2.2	T6	1.73	8	0.98	3.7	4.0	1.4	1.6
2124859	TRS8	TRS	M3.5	T10	2.76	6	1.57	5.6	5.9	2.2	2.5

More Hardware on pages 107-109

NEW
MARKED IN PINK

Analog DIN-Rail Timers

Jameco offers a variety of analog timers for your precision applications. Series 642 timers (17.5mm side) and series 800 timers (22.5mm wide) feature an interruption of power reset function with a reset time of less than 100ms. Series 642 includes LED indicators for power and relay, series 800 (800SD) relay LED indicator, (800XC/SQA) power and relay LED indicator, (800POD) power LED indicator.

- DIN rail/back panel mount
- Finger safe terminals
- Analog display
- LED status indicator: power on and relay on, except for P/N 2125093 - Star/Delta relay on and P/N 2125085 - power on
- For more detailed information and detailed specifications please proceed to our website at www.Jameco.com



2125069



2125106



2125114/2125093/2125085

★ Web Code: DRT

Part No.	Product No.	# of Functions	Time Range	Contact Ratings	Supply Voltage	Size (mm)	1	5	25
2125069	642UX	13 function and 8 ranges	3/10/30 (sec./min.) 3/10 (hrs.)	1 C/O (SPDT); 5A @ 230VAC; 24VDC resistive	20-240VAC 12-240VDC	17.5	\$34.95	\$31.49	\$28.95
2125106	800SQ-A-110	8 ranges, dual voltage	3/10/30/60 (sec./min.)	1 C/O (SPDT); 5A @ 230VAC; 24VDC resistive	110VAC 24VAC/DC	22.5	21.95	19.95	17.95
2125114	800XC	Cyclic with unequal on/off time	1/10 (sec./min./hr.) for both on/off time	2 C/O (DPDT); 5A @ 230VAC; 24VDC resistive	20 to 240VAC 12 to 240VDC	22.5	44.95	39.95	35.95
2125093	800SD-2-110	Star/Delta relay	30/60 seconds run up time; 50/100 msec. change over	1 C/O per relay, 5A @ 230VAC resistive	110VAC	22.5	32.95	29.95	26.95
2125085	800POD-60	True power off delay	60 seconds	2 C/O (DPDT); 2.5A @ 250VAC, 28VDC resistive	110 to 240 VAC/VDC	22.5	89.95	79.95	71.95

† For complete specs and additional functions search www.Jameco.com/More and enter web code listed above

More DIN-Rail products on page 143



BlinkM Smart LEDs

★ Web Code: SLS



2123629

2123645

2123637

2123653

These programmable LEDs can be customized using free open-source software. Create patterns, fades, or blink cycles, and choose any RGB color with 24-bit color control. Plug directly into an Arduino, BASIC Stamp, or LinkM USB programmer to configure.

- Daisy chain up to 127 BlinkM channels on a single two-wire network
- LEDs: 4-pin I2C interface
- Experience level: beginner
- Free downloadable configuration software

NEW
MARKED IN PINK

Part No.	Mfr. Part No.	Description	1	5
2123629	LinkM	USB Programmer, 4-pin 0.1" I2C, driverless ..	\$29.95	\$27.95
2123645	MinM	6000 mcd, 120° FOV, 3.6-5V, 60mA max	13.95	12.95
2123637	BlinkM	8000 mcd, 140° FOV, 3.6-5V, 60mA max	13.95	12.95
2123653	MaxM	445,000 mcd, 30° FOV, 5V-24V, 3A max	24.95	23.49

Complete section of LED on pages 24-32

SATA External Enclosure

This slick external enclosure is the perfect match for your computing and storage needs. With the SATA/eSATA connection, you can be sure nothing is impeding your external drive, ensuring the highest performance. Use as a fast external back-up solution, or add it to a compatible DVR to increase recording time and storage. Just add your 3.5" drive, plug to your external SATA port, and you're ready to go.

★ Web Code: HDD



- For SATA 3.5" and 2.5" drives
- Size: 7.9"L x 5.1"W x 1.9"H
- Internal fan for cooling drive
- SATA-II compatible
- Power switch on enclosure to turn power supply on and off

Includes: 20" external SATA cable, 42W dual output table-top power supply with a 4-pin DIN connector, power cable and hardware

Part No.	Description	1	5	25
2125211	SATA external enclosure	\$59.95	\$53.95	\$47.95

Additional Hard Drive Enclosures on page 183

★ For Complete Specs & Additional Product Listings Search www.Jameco.com/More and Enter Web Code Listed Above

Customer Number

VIP Code


Or Current Resident

Incorrect address? Receiving duplicates? No longer wish to receive the Jameco Catalog? Please fax, mail or email your preferences to us. Thanks!

Printed in USA

Great Products. Awesome Prices. Reach for Jameco First!

*** FEATURED PRODUCTS ***



Embedded Networking Solutions

NEW
MARKED IN PINK

Hot NEW Products!

WIZnet offers plug-in network modules, serial to ethernet gateway modules for wired and wireless applications, and embedded webserver modules. These modules allow you to connect to a serial device over the internet.

- Provides easy and user-friendly configuration program
- Hardwired TCP/IP protocol stack
- High performing Internet MCU
- High stability and reliability
- VSP (Virtual Serial Port) supported

* Web Code: **NTW**



2124322



2124373



2124331

More photos on pg 196

Part No.	Mfr. Part No.	Description	1	5
2124365	WIZ810MJ	Plug-in ethernet module with W5100 chip, usable without H/W design for W5100, transformer and RJ-45, supports MCU BUS and SPI interface	\$27.95	\$25.95
2124322	WIZ110SR	Serial to ethernet module, 10/100Mbps ethernet, 230Kbps max. serial	32.95	30.95
2124373	WIZ200WEB	Embedded web server module with Atmega128 & W5300, operates as HTTP server, supports 10/100Mbps ethernet	44.95	41.95
2124357	WIZ610WL	Stand-alone 802.11b/g wireless LAN module, ethernet to wireless bridge allows wired network device to have wireless communication, 54Mbps data rate and max. 20Mbps effective data transmission	45.95	42.95
2124381	WIZ140SR	Connect with serial devices directly. Supports 4 RS-232 serial ports, 10/100Mbps ethernet interface, 115,200bps max. serial interface	69.95	64.95
2124331	WIZ1000	Connects directly to serial devices adding network functionality, 10/100Mbps ethernet interface and max. 230Kbps serial interface. PPPoE support	89.95	84.95
2124349	WIZ6000	Serial to WiFi, ethernet to WiFi, 1 RS-232, RJ-45 and stand-alone 802.11b/g wireless interface, 54Mbps, max 20Mbps effective data transmission. Operates as AP, Station, or Gateway	154.95	144.95

More Networking Products on pages 184-186

Contact Information

Order Desk 24/7, 365 Days a Year

Phone: 1-800-831-4242

Fax: 1-800-237-6948

E-mail: Sales@Jameco.com

Technical Support

Phone: 1-800-831-4242

E-mail: Tech@Jameco.com

Customer Service

Phone: 1-800-536-4316

E-mail: CustService@Jameco.com

Credit Department

Phone: 650-592-8097

Fax: 650-802-1583

E-mail: Credit@Jameco.com

International Order Desk

Phone: 650-592-8097

Fax: 650-592-2503

E-mail: International@Jameco.com

The Jameco RobotStore

Website: www.RobotStore.com

Feedback E-mail:

Feedback@Jameco.com



Motor Solutions in Motion

- Easy to set up; easy to use
- Daisy chainable on a 4 wire bus
- USB/RS232/RS485 Inetface available

NEW
MARKED IN PINK

Get your motor running in less than 30 minutes!

4-Axis Stepper Controller & Driver

- Full-featured 4-axis 32-bit position controller with power drivers
- Four independent 1-Amp chopper (PWM) drives
- Operates from 9-30V
- RS-485 and USB communication via virtual comm port
- Dimensions: 2.25"L x 2.25"W x 0.7"H



USB Stepper Controller & Driver

- Full-featured 1-axis 32-bit position controller with power drive
- 0.5A power drive
- Operates from 9-30V or USB port
- USB communication via virtual comm port
- Dimensions: 2.0"L x 1.0"W x 0.5"D



Inch-Size Stepper Controller & Driver

- Go Left, Go Right upon switch closure
- 1 Amp chopper (PWM) drive
- Operates from 9-30V
- Potentiometer-settable speed and current
- Dimensions: 1.0"L x 1.0"W x 0.5"D



Part No.	Product No.	1	5	Part No.	Product No.	1	5	Part No.	Product No.	1	5
2123291	EZ4AXIS	\$389.95	\$369.95	2123303	STEPPER-STICK-CD	\$164.95	\$156.95	2123311	Intelli-Inch-LR	\$74.95	\$69.95

Detailed specifications on page 113